# API performance tradeoffs · harnesses shown separately

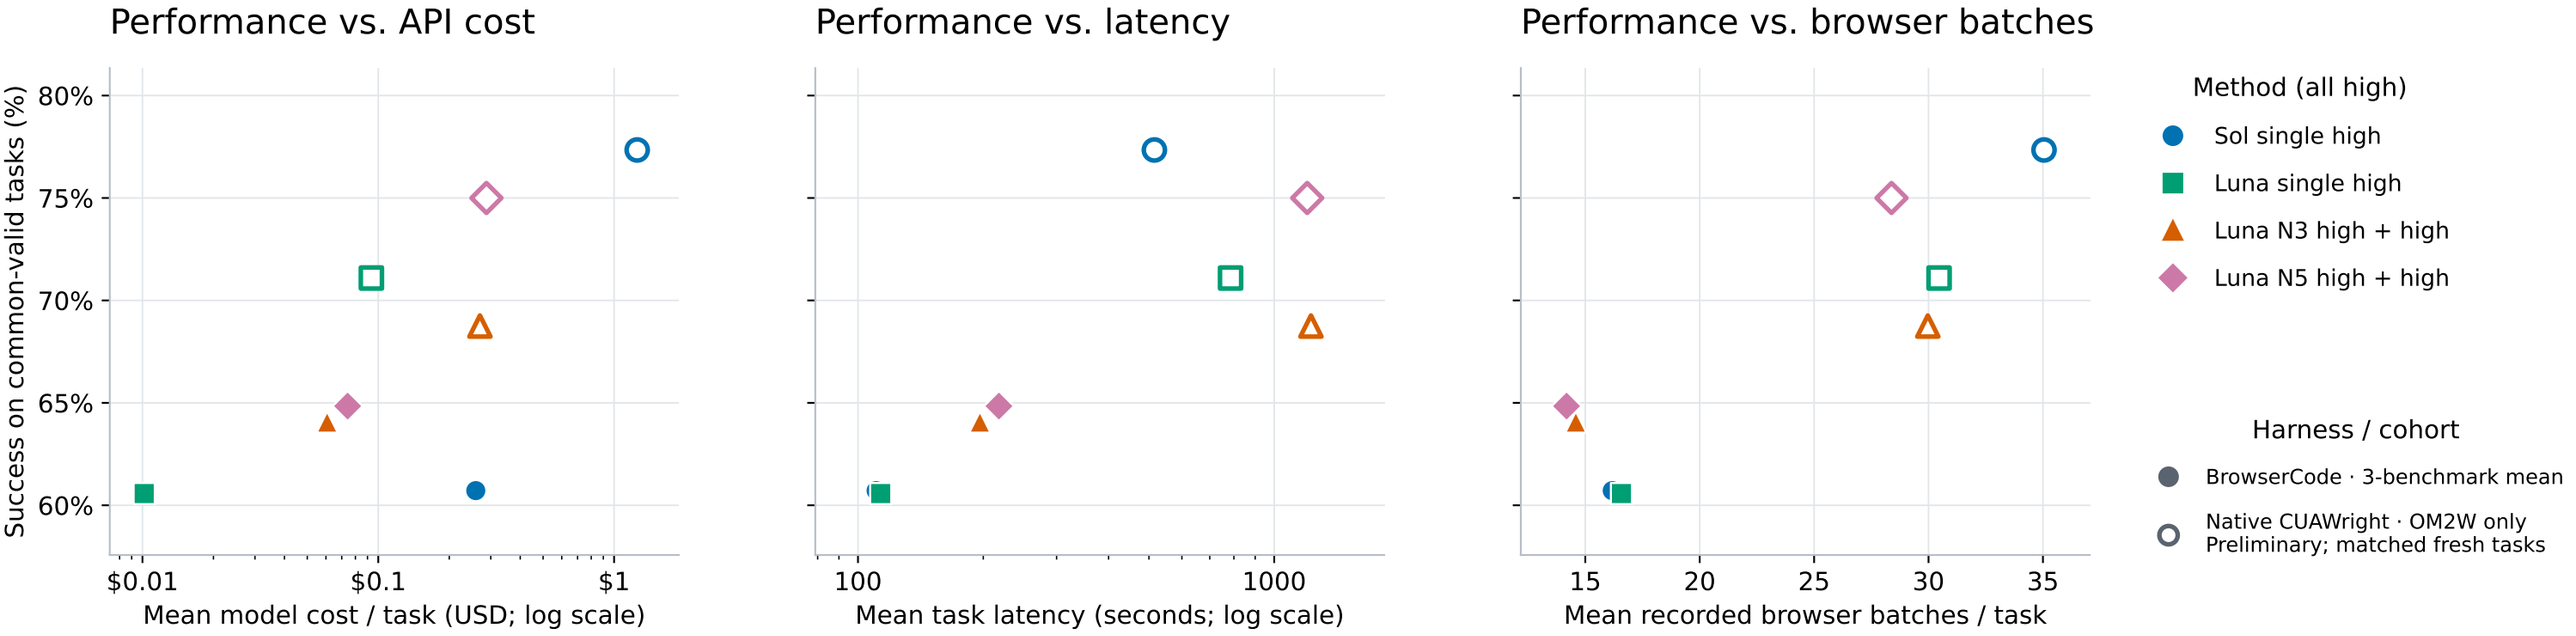


Latest native outcomes · invalids count as failures (separate from scatter cohort)

| Native CUAWright | Recorded | Successes | Overall success | Fresh successes | Same 185 fresh tasks |
|---|---|---|---|---|---|
| Sol single | 300 / 300 | 222 | 74.0% | 131 | 70.8% |
| Luna single | 300 / 300 | 189 | 63.0% | 112 | 60.5% |
| Luna N3 | 300 / 300 | 192 | 64.0% | 114 | 61.6% |
| Luna N5 | 277 / 300 | 183 | 66.1% | 119 | 64.3% |

BrowserCode: equal OM2W / WebVoyager / DeepShop means; common-valid within each benchmark. Native: same 128 fresh OM2W tasks valid in all four methods.
Model cost includes helpers, all attempts and conservative unknown reserves; external judging excluded. Harnesses, limits and collection windows differ; cross-harness gaps are descriptive.
Native snapshot: 2026-10-27T22:08:52.364258+00:00; N5 incomplete. Overall table includes historical100 for three methods. Invalids, including two OOM outcomes, remain failures.