Performance vs. API cost

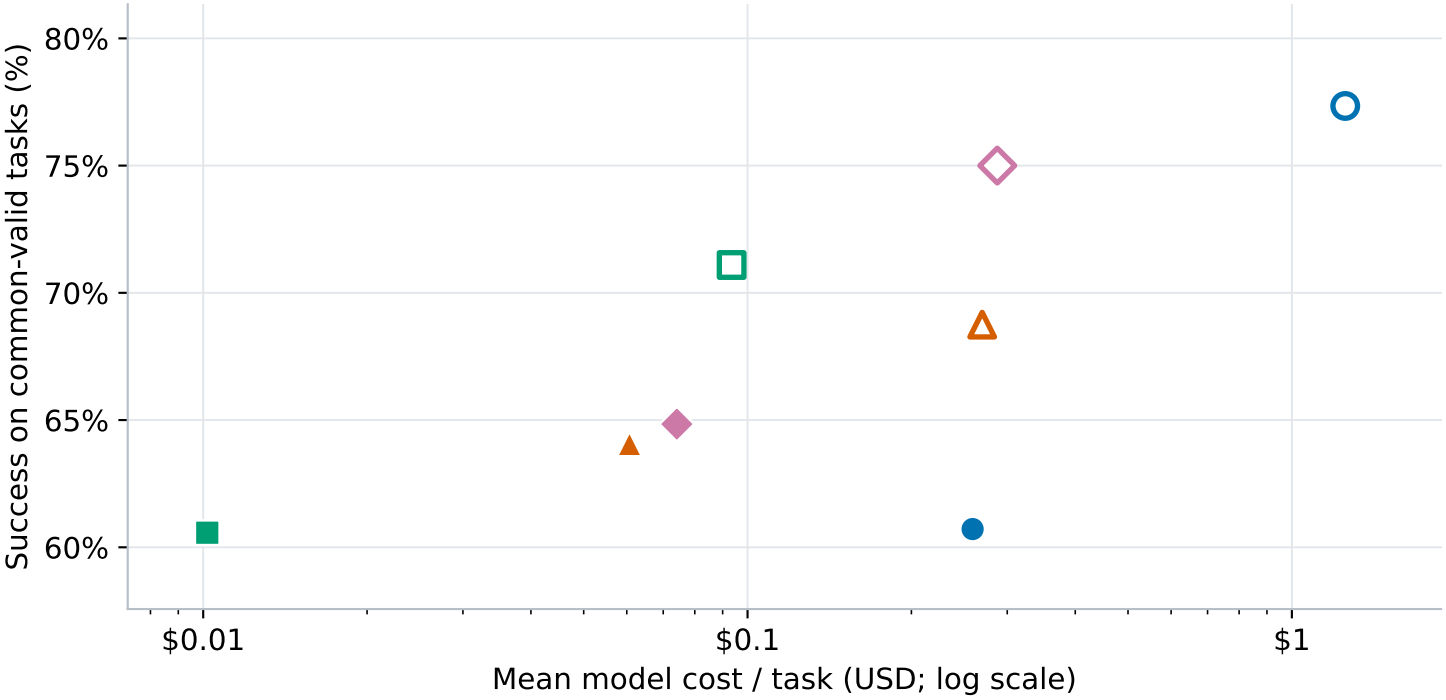

Method (all high)

- Sol single high
- Luna single high
- Luna N3 high + high
- Luna N5 high + high

Harness / cohort

- BrowserCode · 3-benchmark mean
- Native CUAWright · OM2W only
  Preliminary; matched fresh tasks

Latest native outcomes · invalids count as failures (separate from scatter cohort)

Native CUAWright	Recorded	Successes	Overall success	Fresh successes	Same 185 fresh tasks
Sol single	300 / 300	222	74.0%	131	70.8%
Luna single	300 / 300	189	63.0%	112	60.5%
Luna N3	300 / 300	192	64.0%	114	61.6%
Luna N5	277 / 300	183	66.1%	119	64.3%

BrowserCode: equal OM2W / WebVoyager / DeepShop means; common-valid within each benchmark. Native: same 128 fresh OM2W tasks valid in all four methods.
Model cost includes helpers, all attempts and conservative unknown reserves; external judging excluded.
Harnesses, limits and collection windows differ; cross-harness gaps are descriptive.
Native snapshot: 2026-10-27T22:08:52.364258+00:00; N5 incomplete. Overall table includes historical100 for three methods. Invalids, including two OOM outcomes, remain failures.