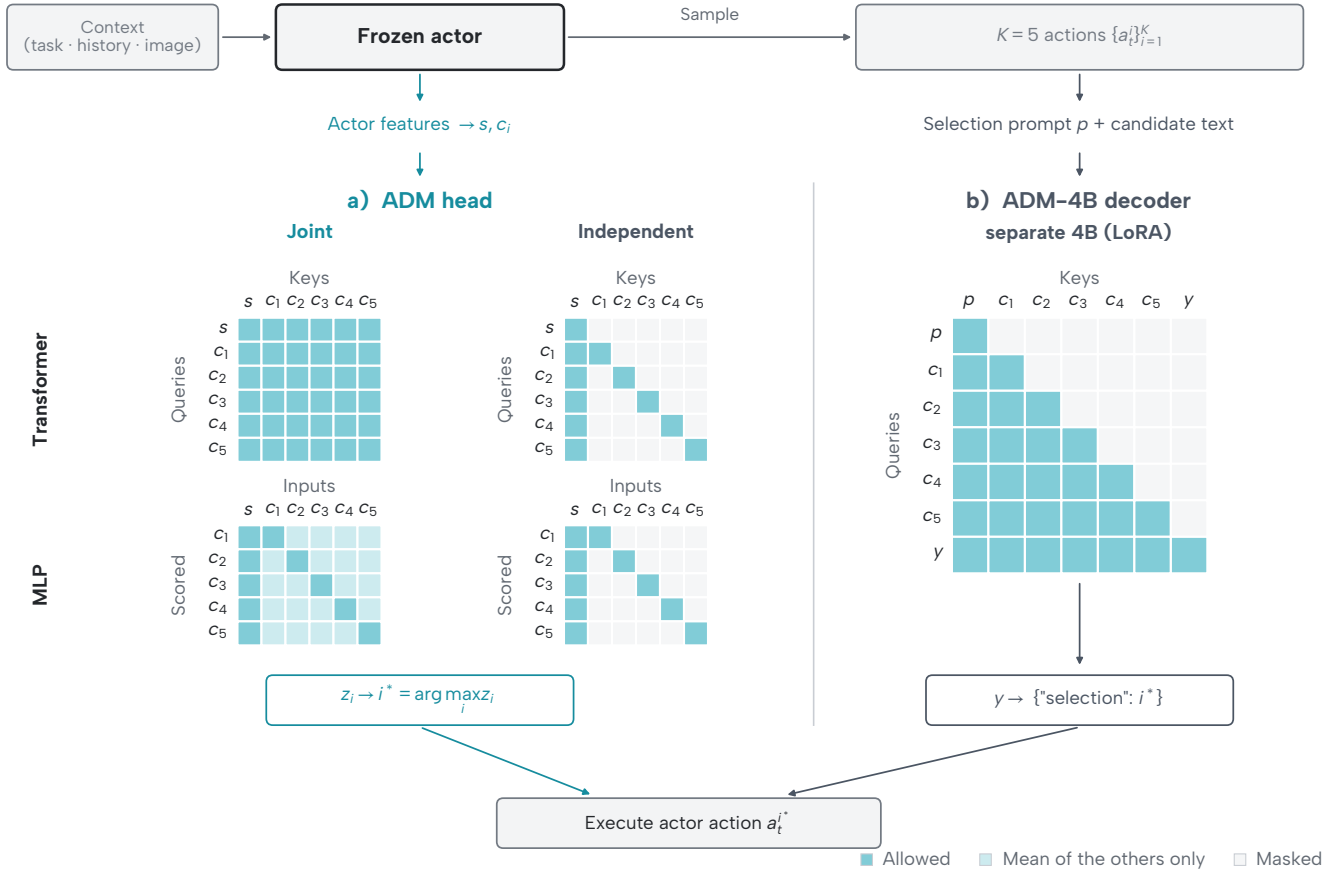
Context
(task · history · image)
Frozen actor
Sample
$K = 5$ actions $\{a_t^i\}_{i=1}^K$
Actor features $\rightarrow s, c_i$
Selection prompt p + candidate text
a) ADM head
Joint
Independent
b) ADM-4B decoder
separate 4B (LoRA)
Transformer
MLP
Keys
Queries
Inputs
Scored
s c_1 c_2 c_3 c_4 c_5
p c_1 c_2 c_3 c_4 c_5 y
$z_i \rightarrow i^* = \arg\max_i z_i$
$y \rightarrow$ {"selection": i^*}
Execute actor action $a_t^{i^*}$
Allowed
Mean of the others only
Masked