No-Winsorization after Ruleout in the 1.1 Quarterly Event Study

BoardPharma

November 10, 2026

1 Ruleout and Outcome-Transformation Design

For each saved cohort panel, observations are grouped by company and product (`BoardName` × `product`). Using all observed quarters in that cohort file, the ruleout score for company b, product p, and cohort c is

$$R_{bpc} = \frac{\max(\texttt{price1}_{bpc}) / \min(\texttt{price1}_{bpc})}{\max(\texttt{price0}_{bpc}) / \min(\texttt{price0}_{bpc})}.$$

For a threshold τ, every row of the company–product history is removed from that cohort when $R_{bpc} > \tau$; equality is retained. The score uses the original price levels. After removal, a cohort with no remaining treated observations is not stacked.

This report deliberately combines the original benchmark with the new no-winsorization runs. Ruleout 0 is the same benchmark used in the previous report: no ruleout deletion, followed by upper-p95 winsorization of `price1` and then the log transformation. For thresholds 50, 10, and 5, the retained original `price1` values are logged directly, with no winsorization or trimming. Thus, comparisons with ruleout 0 reflect both the ruleout deletion and the removal of winsorization. Comparisons among thresholds 50, 10, and 5 differ only in the threshold and its resulting sample.

Treatment status, control status, event timing, event cohort, and dynamic ATC3 sharing are read from the same saved cohort files and are not reconstructed by ruleout. All other settings are common: the `drop_sentinel_yearquarter` roster, `ever_board=1`, `ieoc_ref=1`, `late=3`, new requirement, stay, and sharing-time rules, dynamic ATC3 sharing, `price1`, req2, the Not control group, company–product–cohort fixed effects, cohort–calendar-quarter fixed effects, company clustering, horizons 0–7, three pre-event coefficients, and no Kappa, other-event, or ATC3 fixed-effect controls.


Table 1: Outcome treatment and estimation sample

Ruleout	Price treatment before log	Role	Observations
0	Upper-p95 winsorization	Original benchmark	583,584
50	None	New result	577,920
10	None	New result	568,884
5	None	New result	546,300

Notes. Counts sum the final estimation observations reported by the six output files and refer to stacked regression observations, not unique company–product records. Winsorization changes values but does not remove observations, so the counts match the corresponding threshold samples in the preceding report.


2 Interlock Dissolution — A-side Treatment

Ruleout = 0 (p95 winsor)

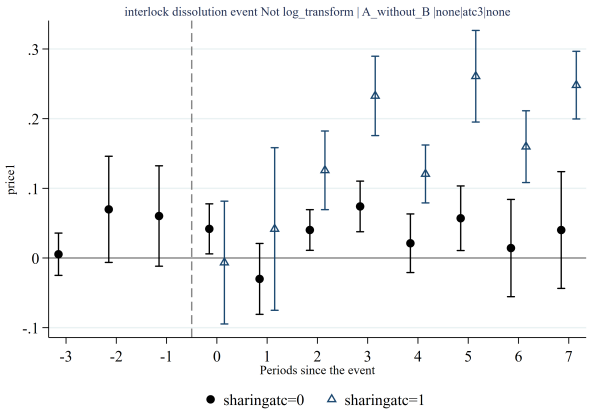


Estimation observations: 109,824

Ruleout = 50 (no winsor)

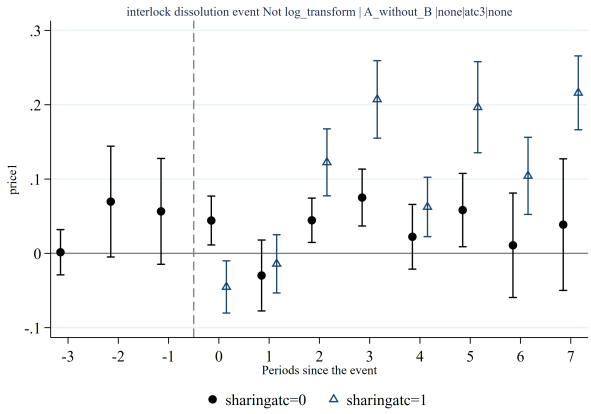


Estimation observations: 108,576

Ruleout = 10 (no winsor)

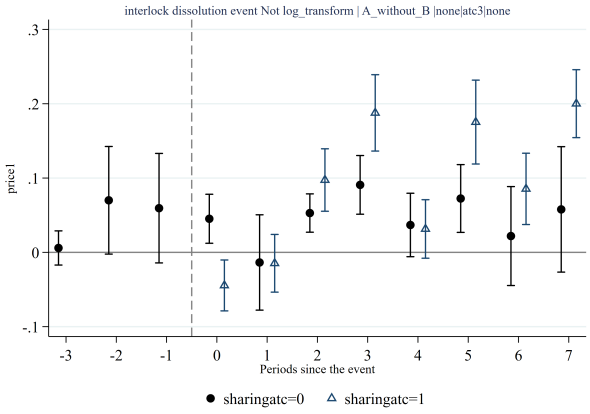

Estimation observations: 106,932

Ruleout = 5 (no winsor)

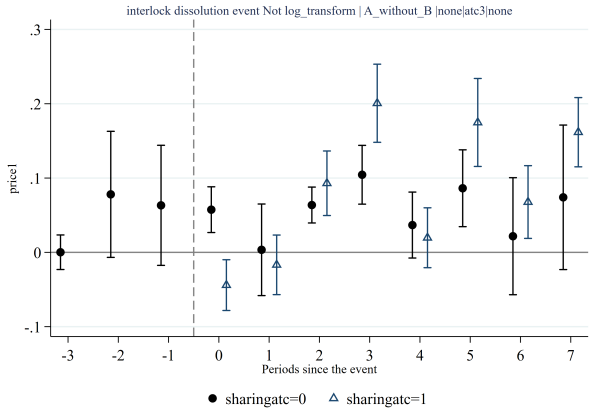


Estimation observations: 103,704

Notes. Black circles report estimates for `sharingatc=0`; hollow blue triangles report estimates for `sharingatc=1`. Error bars are 95% confidence intervals. Ruleout 0 is the original upper-p95-winsorized benchmark. Thresholds 50, 10, and 5 apply no winsorization before the log transformation.


3 Interlock Dissolution — B-side Treatment

Ruleout = 0 (p95 winsor)

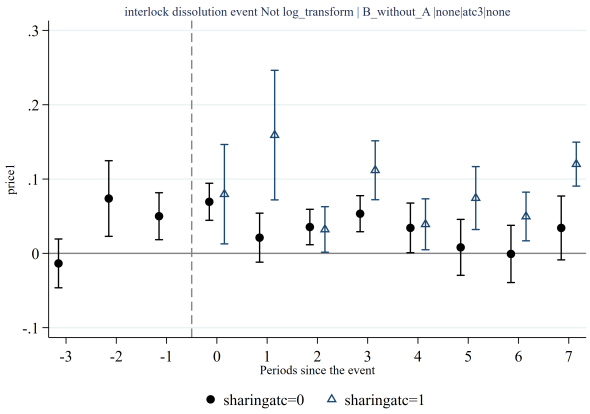


Estimation observations: 94,944

Ruleout = 50 (no winsor)

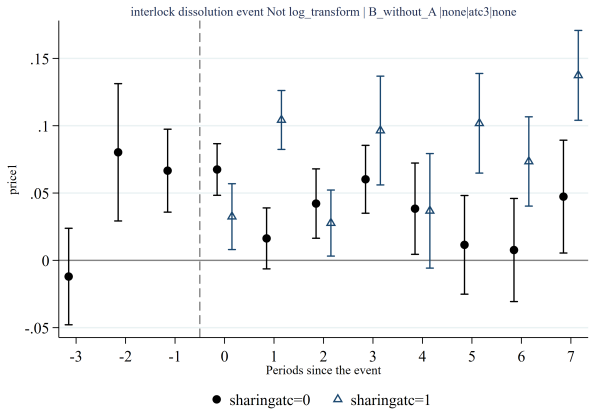


Estimation observations: 94,176

Ruleout = 10 (no winsor)

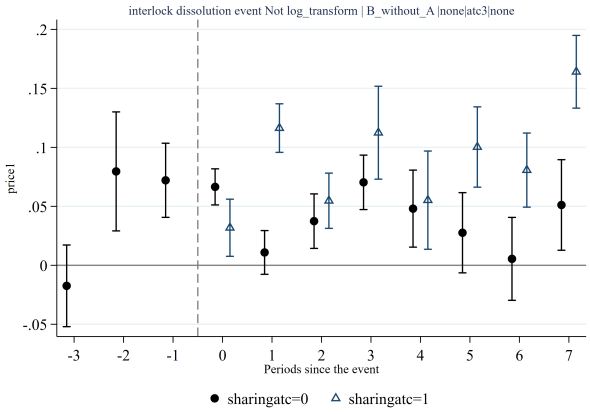

Estimation observations: 92,760

Ruleout = 5 (no winsor)

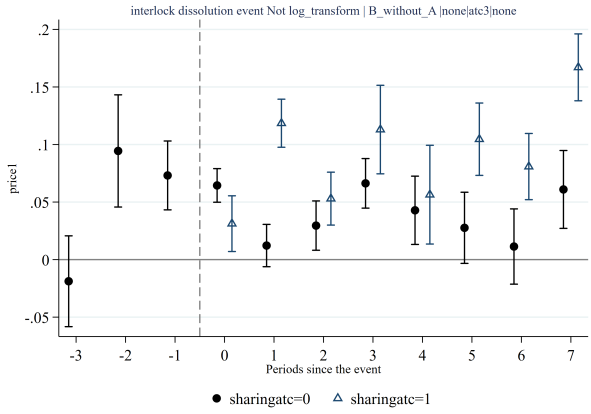


Estimation observations: 89,772

Notes. Black circles report estimates for `sharingatc=0`; hollow blue triangles report estimates for `sharingatc=1`. Error bars are 95% confidence intervals. Ruleout 0 is the original upper-p95-winsorized benchmark. Thresholds 50, 10, and 5 apply no winsorization before the log transformation.


4 To B, Still in A — A-side Treatment

Ruleout = 0 (p95 winsor)

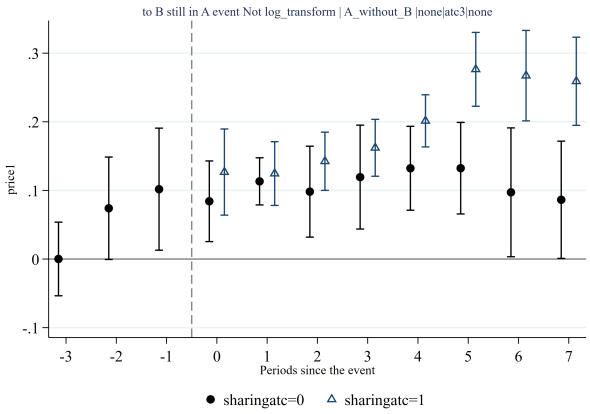


Estimation observations: 108,396

Ruleout = 50 (no winsor)

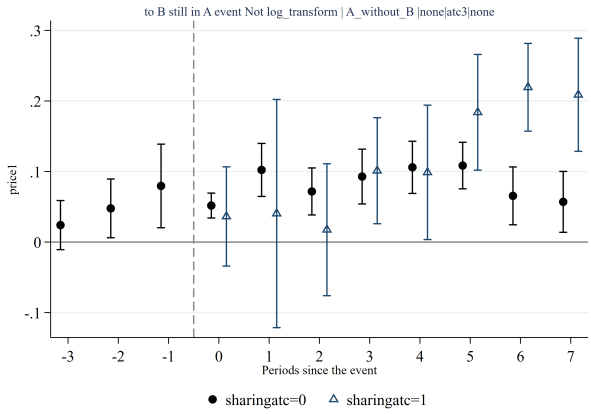


Estimation observations: 107,604

Ruleout = 10 (no winsor)

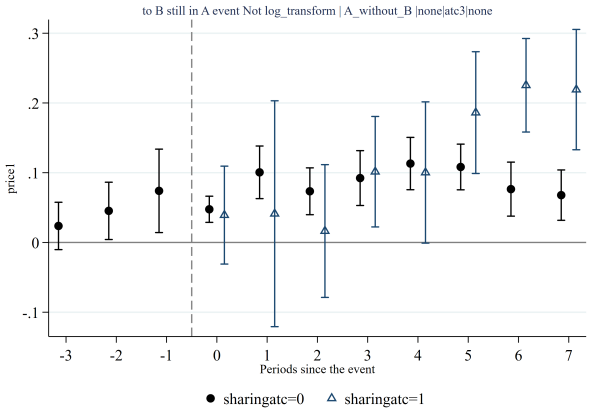

Estimation observations: 105,864

Ruleout = 5 (no winsor)

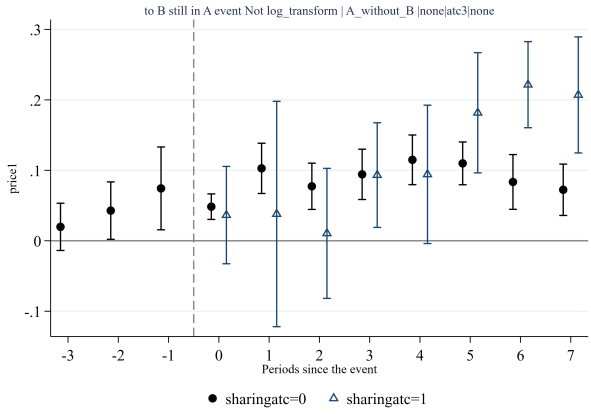


Estimation observations: 99,696

Notes. Black circles report estimates for `sharingatc=0`; hollow blue triangles report estimates for `sharingatc=1`. Error bars are 95% confidence intervals. Ruleout 0 is the original upper-p95-winsorized benchmark. Thresholds 50, 10, and 5 apply no winsorization before the log transformation.


5 To B, Still in A — B-side Treatment

Ruleout = 0 (p95 winsor)

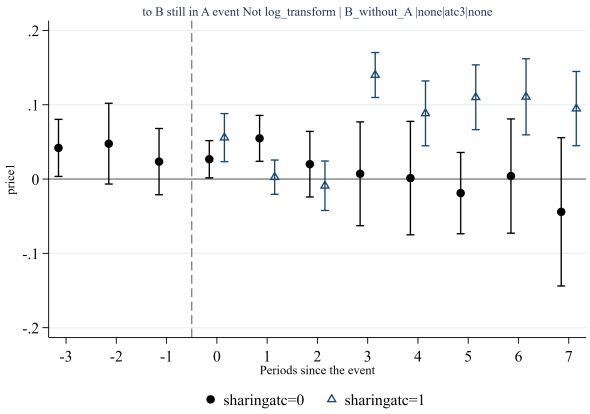


Estimation observations: 130,236

Ruleout = 50 (no winsor)

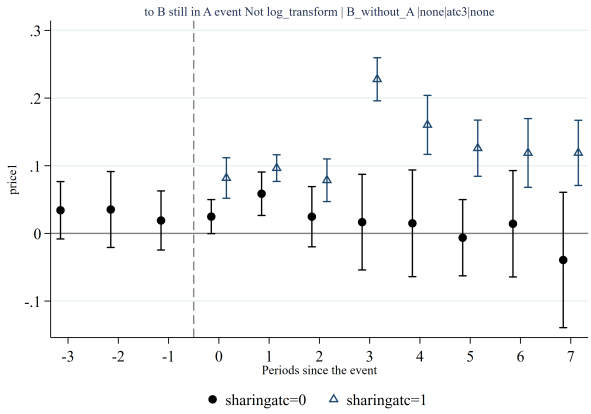


Estimation observations: 128,832

Ruleout = 10 (no winsor)

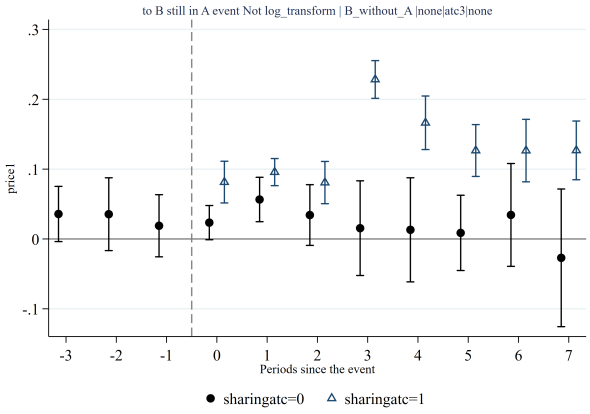

Estimation observations: 126,840

Ruleout = 5 (no winsor)

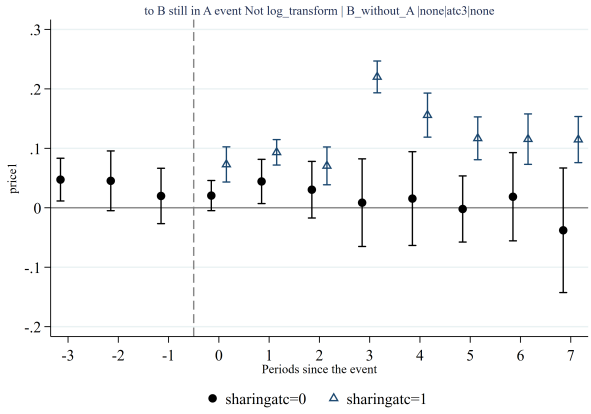


Estimation observations: 121,956

Notes. Black circles report estimates for `sharingatc=0`; hollow blue triangles report estimates for `sharingatc=1`. Error bars are 95% confidence intervals. Ruleout 0 is the original upper-p95-winsorized benchmark. Thresholds 50, 10, and 5 apply no winsorization before the log transformation.


6 To B, Not in A — A-side Treatment

Ruleout = 0 (p95 winsor)

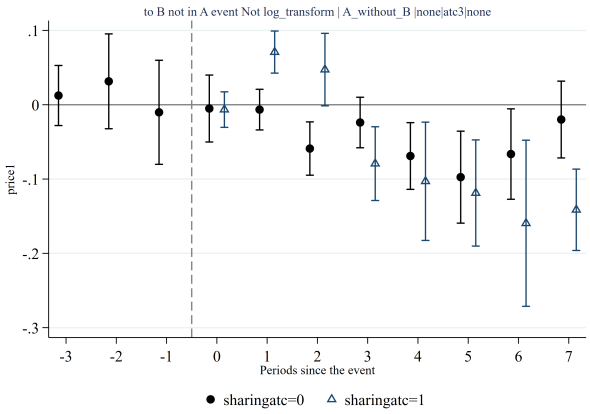


Estimation observations: 73,992

Ruleout = 50 (no winsor)

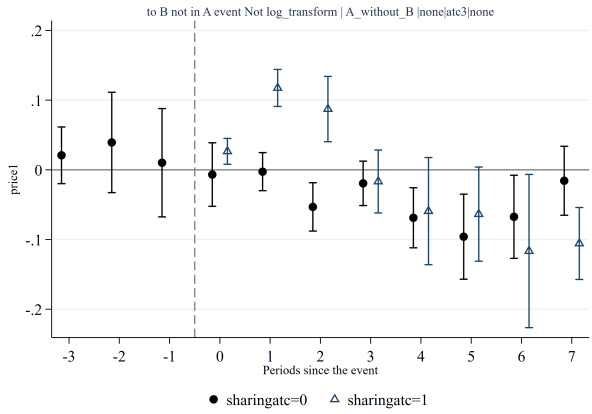


Estimation observations: 73,068

Ruleout = 10 (no winsor)

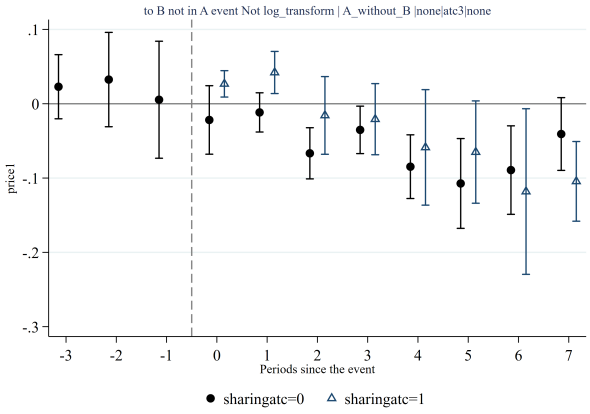

Estimation observations: 72,048

Ruleout = 5 (no winsor)

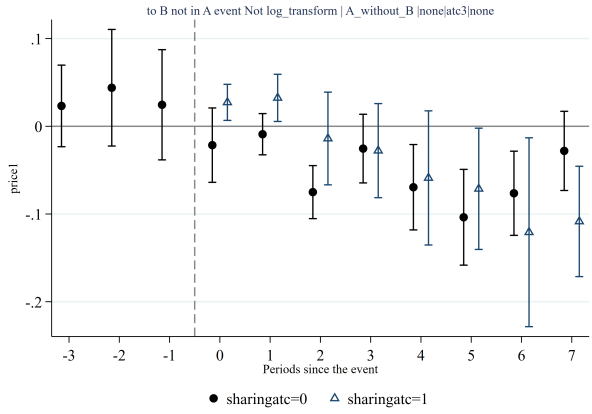


Estimation observations: 69,420

Notes. Black circles report estimates for `sharingatc=0`; hollow blue triangles report estimates for `sharingatc=1`. Error bars are 95% confidence intervals. Ruleout 0 is the original upper-p95-winsorized benchmark. Thresholds 50, 10, and 5 apply no winsorization before the log transformation.


7 To B, Not in A — B-side Treatment

Ruleout = 0 (p95 winsor)

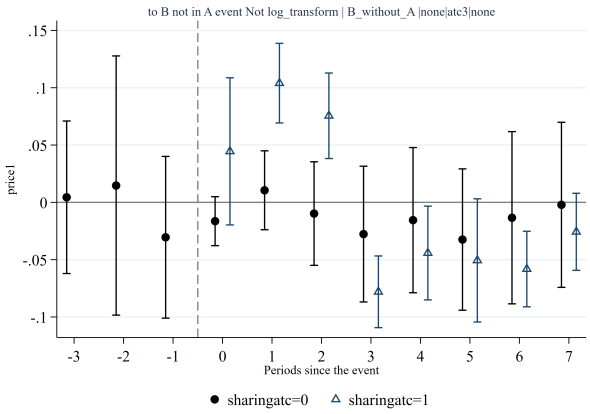


Estimation observations: 66,192

Ruleout = 50 (no winsor)

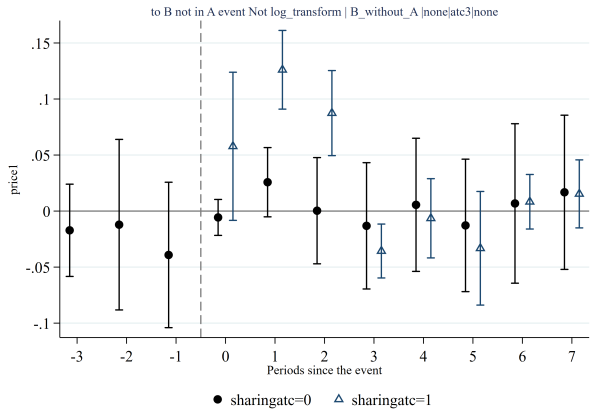


Estimation observations: 65,664

Ruleout = 10 (no winsor)

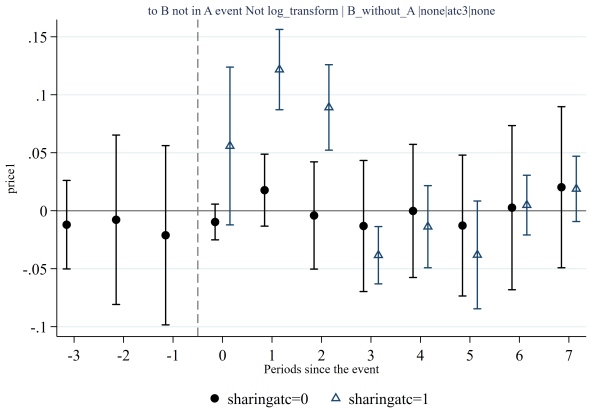

Estimation observations: 64,440

Ruleout = 5 (no winsor)

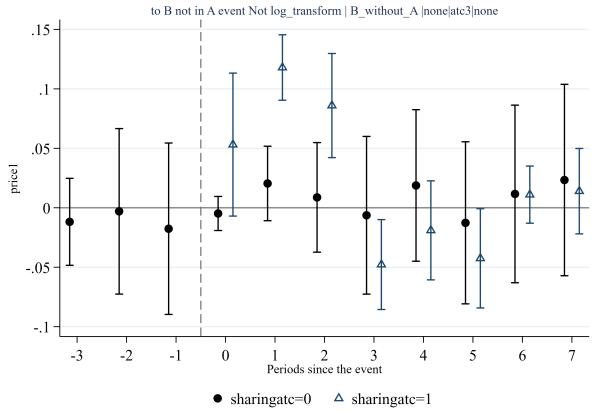

Estimation observations: 61,752

Notes. Black circles report estimates for `sharingatc=0`; hollow blue triangles report estimates for `sharingatc=1`. Error bars are 95% confidence intervals. Ruleout 0 is the original upper-p95-winsorized benchmark. Thresholds 50, 10, and 5 apply no winsorization before the log transformation.