Price1-Only Ruleout with CSDID
Dynamic versus Non-Dynamic Sharing

BoardPharma

November 11, 2026

1 Comparison Design

For company b, product p, and cohort c, the price1-only ruleout score uses the observed quarters in the saved cohort panel.

$$R_{bpc}^{\text{price1}} = \frac{\max(\text{price1}_{bpc})}{\min(\text{price1}_{bpc})}.$$

Ruleout 0 keeps the original histories. At thresholds 100 and 10, a company–product history is removed from its cohort if the score exceeds the threshold. Equality is retained. The score uses original price levels before the event-time restriction, upper-p95 winsorization, and log transformation. Cohorts with no remaining treated observations are omitted from the stack.

Pages 2–7 each show one event and treatment side. The upper row uses dynamic ATC3 sharing and the lower row uses non-dynamic sharing. Both rows show ruleout 0, 100, and 10 from left to right. Dynamic sharing assigns treated histories using the ATC3 sharing status in the quarter whose effect is being estimated. Non-dynamic sharing uses the status in the event quarter for all relative quarters.

All panels use the saved `csdid_fe2` results with `ever_board=1`, `ieoc_ref=1`, `late=3`, `req2`, the `Not` control group, and company-level clustering. The outcome is log `price1` after upper-p95 winsorization. CSDID fits each sharing group separately within cohort stacks and uses relative quarter -1 as the reference. The plotted estimates cover quarters -4 through -2 and 0 through 7. The regressions use no Kappa, other-event, or ATC3 fixed-effect controls.

Table 1: CSDID estimation observations across the six event–side regressions


	Dynamic sharing		Non-dynamic sharing	
Ruleout setting	Share 0	Share 1	Share 0	Share 1
0 (off)	575,580	204,252	575,220	159,384
100 (price1)	572,616	203,136	572,256	158,436
10 (price1)	543,696	194,832	543,336	151,632

Notes. Counts come from the saved CSDID CSVs and sum across the six event–side regressions within each column. Each count includes treated and control observations used for that sharing curve. For dynamic sharing, an observation used at multiple relative quarters is counted once within the curve. A control observation can contribute to both sharing curves. The report uses the original Stata graph exports and saved coefficient files.

2 Interlock Dissolution — A-side Treatment


Dynamic sharing

Ruleout = 0

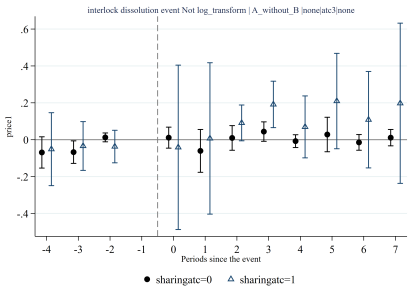


Share 0: 106,320 Share 1: 38,268

Ruleout = 100

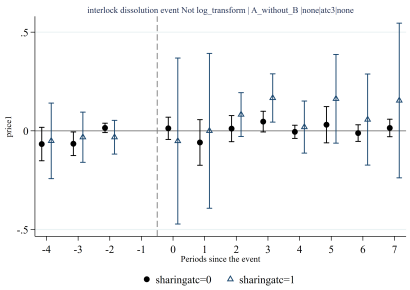

Share 0: 105,756 Share 1: 38,088


Ruleout = 10

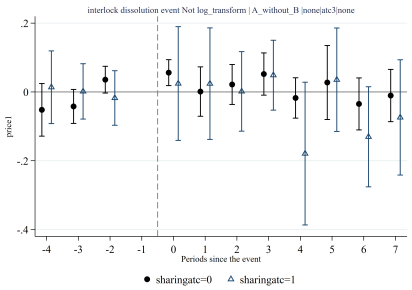

Share 0: 102,408 Share 1: 36,912


Non-dynamic sharing

Ruleout = 0

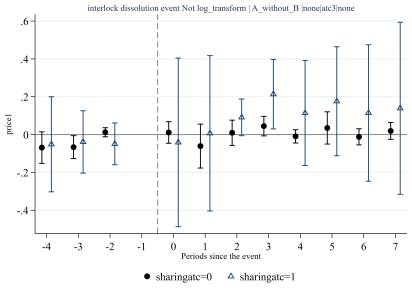


Share 0: 106,296 Share 1: 28,932

Ruleout = 100

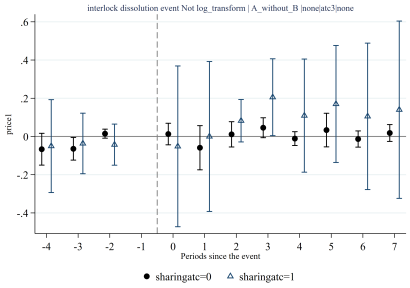

Share 0: 105,732 Share 1: 28,776

Ruleout = 10

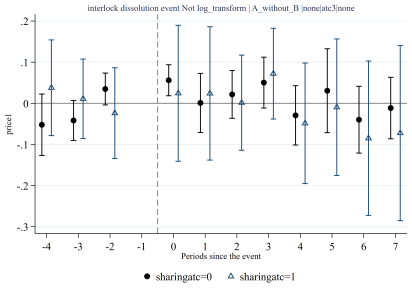


Share 0: 102,384 Share 1: 27,888

Notes. Black circles identify `sharingatc=0` and hollow blue triangles identify `sharingatc=1`. Bars show 95% confidence intervals. The panels use the original Stata plots and their original vertical scales. The counts below each panel are CSDID estimation observations for each sharing group.

3 Interlock Dissolution — B-side Treatment


Dynamic sharing

Ruleout = 0

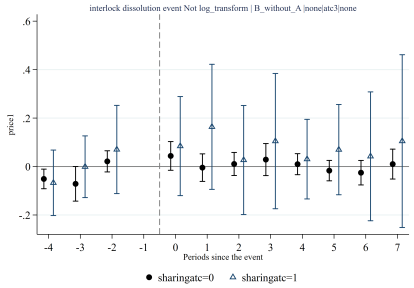


Share 0: 94,500 Share 1: 36,768

Ruleout = 100

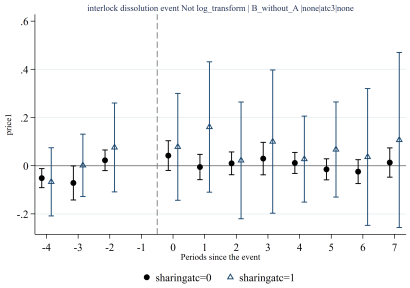

Share 0: 93,996 Share 1: 36,540


Ruleout = 10

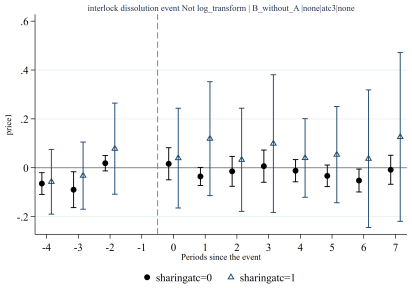

Share 0: 87,900 Share 1: 35,508


Non-dynamic sharing

Ruleout = 0

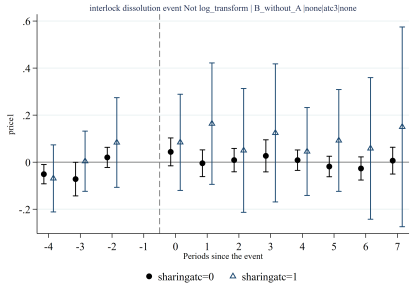


Share 0: 94,404 Share 1: 31,200

Ruleout = 100

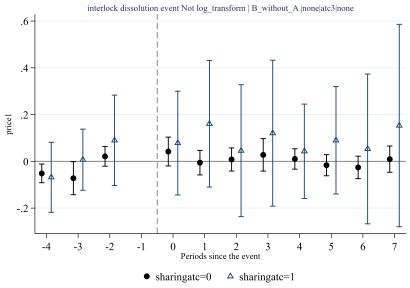

Share 0: 93,900 Share 1: 31,008

Ruleout = 10

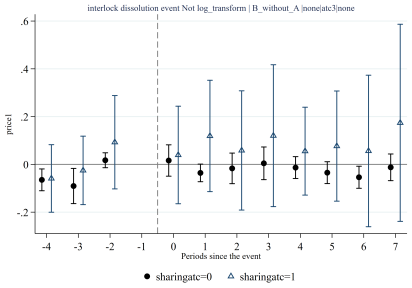


Share 0: 87,804 Share 1: 30,060

Notes. Black circles identify `sharingatc=0` and hollow blue triangles identify `sharingatc=1`. Bars show 95% confidence intervals. The panels use the original Stata plots and their original vertical scales. The counts below each panel are CSDID estimation observations for each sharing group.

4 To B, Still in A — A-side Treatment


Dynamic sharing

Ruleout = 0

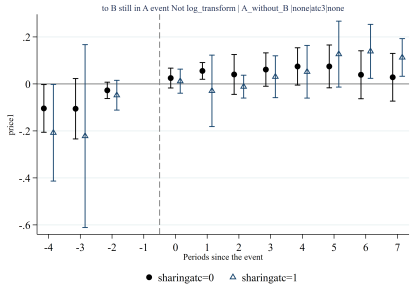


Share 0: 108,252 Share 1: 38,004

Ruleout = 100

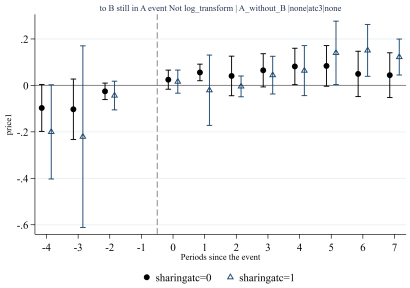

Share 0: 107,772 Share 1: 37,776


Ruleout = 10

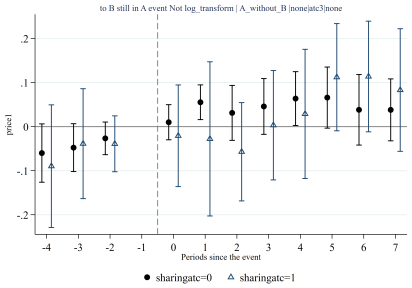

Share 0: 104,784 Share 1: 36,756


Non-dynamic sharing

Ruleout = 0

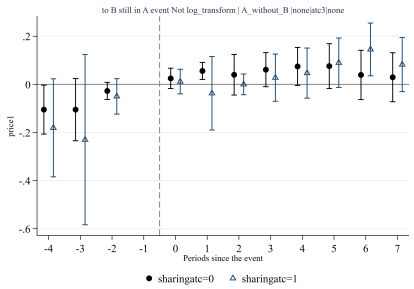


Share 0: 108,156 Share 1: 28,428

Ruleout = 100

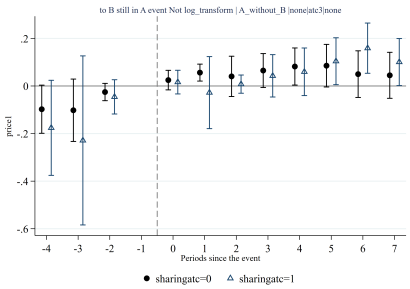

Share 0: 107,676 Share 1: 28,248

Ruleout = 10

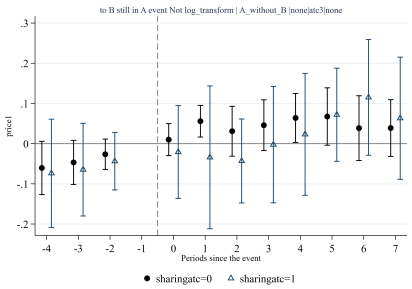


Share 0: 104,688 Share 1: 27,396

Notes. Black circles identify `sharingatc=0` and hollow blue triangles identify `sharingatc=1`. Bars show 95% confidence intervals. The panels use the original Stata plots and their original vertical scales. The counts below each panel are CSDID estimation observations for each sharing group.

5 To B, Still in A — B-side Treatment


Dynamic sharing

Ruleout = 0

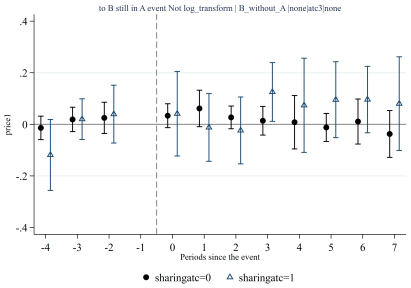


Share 0: 126,516 Share 1: 34,320

Ruleout = 100

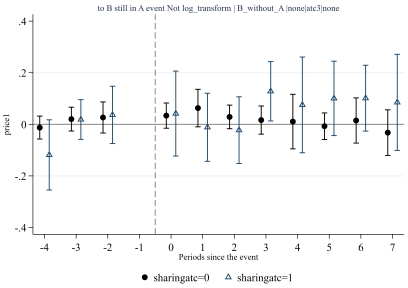

Share 0: 125,796 Share 1: 34,092


Ruleout = 10

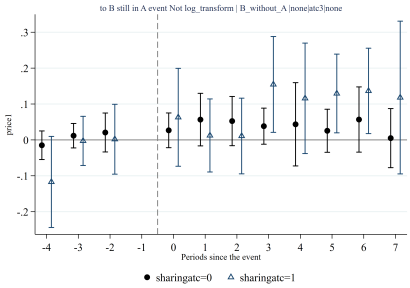

Share 0: 115,872 Share 1: 32,268


Non-dynamic sharing

Ruleout = 0

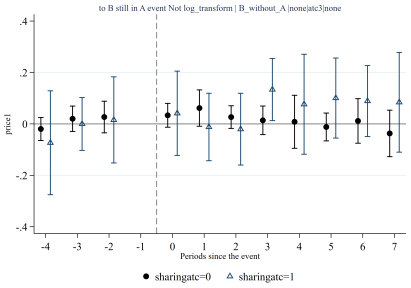


Share 0: 126,504 Share 1: 21,696

Ruleout = 100

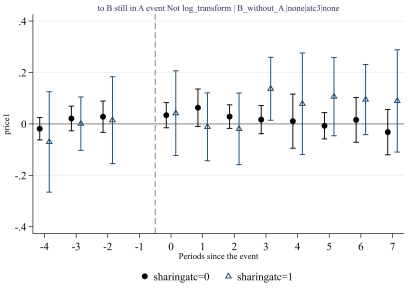

Share 0: 125,784 Share 1: 21,516

Ruleout = 10

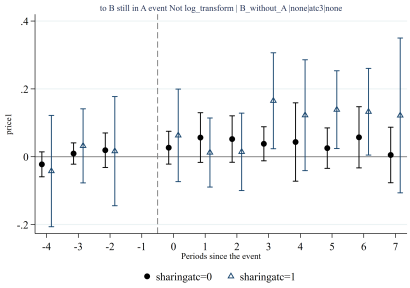


Share 0: 115,860 Share 1: 20,400

Notes. Black circles identify `sharingatc=0` and hollow blue triangles identify `sharingatc=1`. Bars show 95% confidence intervals. The panels use the original Stata plots and their original vertical scales. The counts below each panel are CSDID estimation observations for each sharing group.

6 To B, Not in A — A-side Treatment


Dynamic sharing

Ruleout = 0

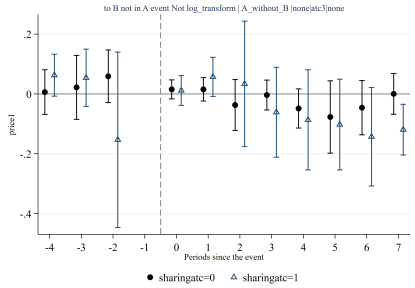


Share 0: 73,872 Share 1: 28,116

Ruleout = 100

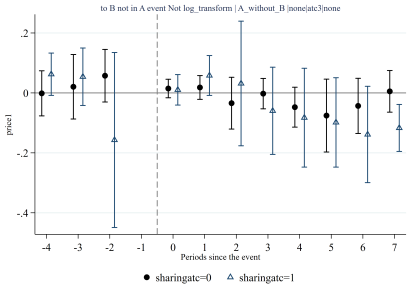

Share 0: 73,416 Share 1: 28,008


Ruleout = 10

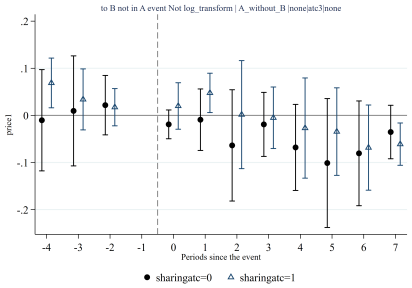

Share 0: 70,296 Share 1: 26,580


Non-dynamic sharing

Ruleout = 0

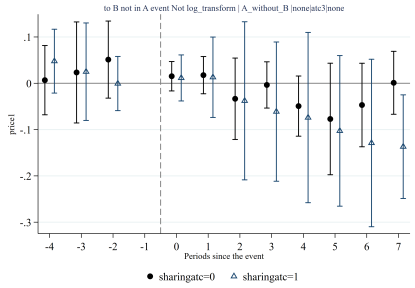


Share 0: 73,836 Share 1: 24,336

Ruleout = 100

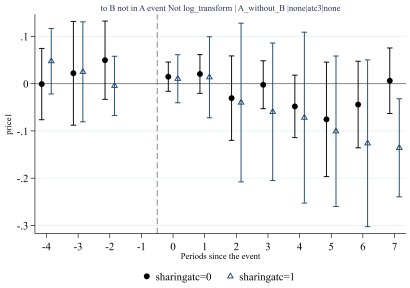

Share 0: 73,380 Share 1: 24,228

Ruleout = 10

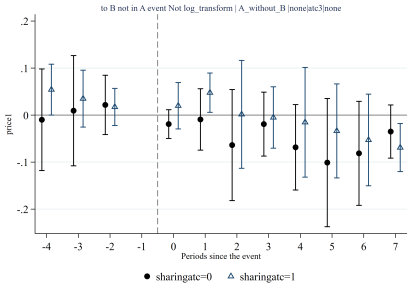


Share 0: 70,260 Share 1: 22,932

Notes. Black circles identify `sharingatc=0` and hollow blue triangles identify `sharingatc=1`. Bars show 95% confidence intervals. The panels use the original Stata plots and their original vertical scales. The counts below each panel are CSDID estimation observations for each sharing group.

7 To B, Not in A — B-side Treatment


Dynamic sharing

Ruleout = 0

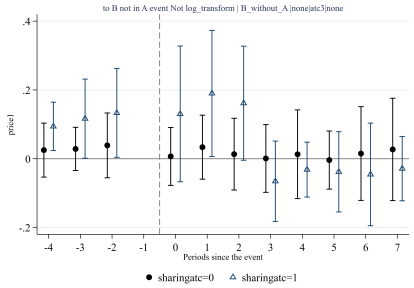


Share 0: 66,120 Share 1: 28,776

Ruleout = 100

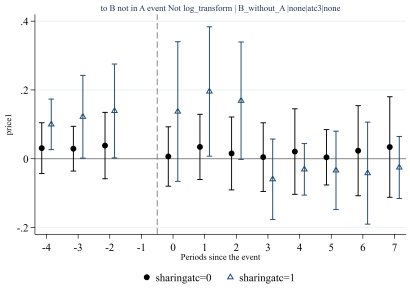

Share 0: 65,880 Share 1: 28,632


Ruleout = 10

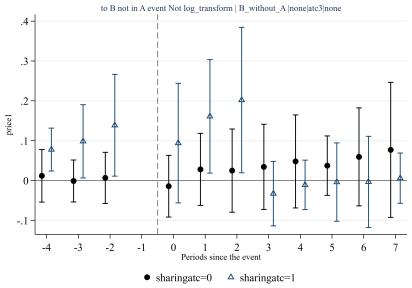

Share 0: 62,436 Share 1: 26,808


Non-dynamic sharing

Ruleout = 0

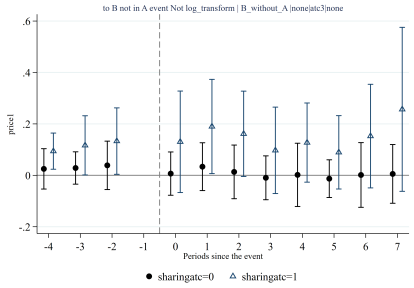


Share 0: 66,024 Share 1: 24,792

Ruleout = 100

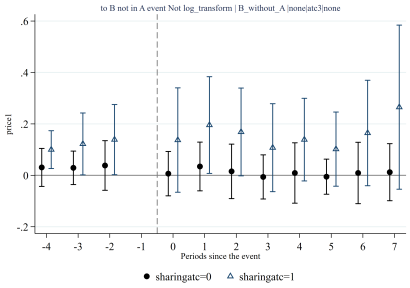

Share 0: 65,784 Share 1: 24,660

Ruleout = 10

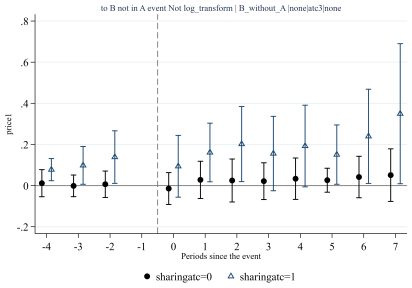

Share 0: 62,340 Share 1: 22,956

Notes. Black circles identify `sharingatc=0` and hollow blue triangles identify `sharingatc=1`. Bars show 95% confidence intervals. The panels use the original Stata plots and their original vertical scales. The counts below each panel are CSDID estimation observations for each sharing group.