(a) Output-only A12: one changed boundary



Only the back-mixing output resolution changes; weights, input indices and FP32 IFFT stay fixed.

(b) Independent confirmation

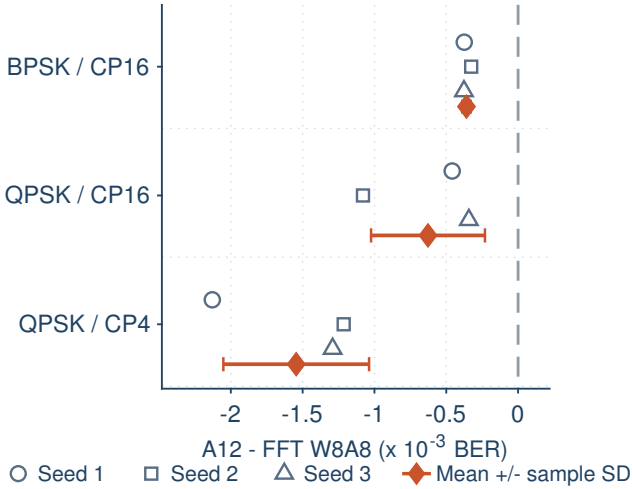

(c) Native-C transfer

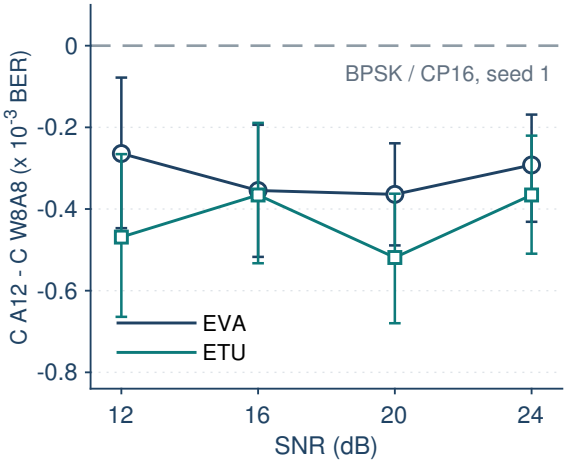

Whiskers: conditional 95% paired-slot bootstrap CI (2,000 draws)

Negative = fewer errors. (b) Independent confirmation; sample SD across 3 seeds.
(c) Reused BPSK/CP16 seed-1 subset; conditional intervals, not independent replication.