

Analysis - Simulating disease spread through Cellular Automata and the SIR model DRAFT

Zebedee Marsh

January 5, 2021

Contents

1	Introduction	3
2	Initial objectives	3
3	Potential user	3
4	How the problem was researched	4
4.1	The SIR model	4
4.1.1	Equations for the SIR model	4
4.2	The Cellular Automata model	5
4.2.1	My implementation of CA	5
5	Prototyping of code	6
5.1	The scientific models	6
5.1.1	Elementary cellular automata	6
5.1.2	Basic SIR model	7
5.2	External library testing TBD	7
5.2.1	Tkinter	7
5.2.2	Matplotlib - FuncAnimation	9
5.2.3	Pandas	10
5.2.4	Pygame	11
5.3	SQL database TDB	13
6	Interview with target user	14
7	Documented design NEEDS SQL AND UI DESIGN	15
7.1	Main function structure diagram	15
7.2	Main function flowchart	15
7.3	Cellular automata structure diagram	16
7.4	Cellular automata flowchart	16
7.5	SIR Model structure diagram	17
7.6	SIR model flowchart	17
7.7	Cellular automata and SIR model UML charts	18
7.8	SQL Entity relationship diagram	18
7.9	SQL queries used	19

7.10	UI design	22
8	The code	30
8.1	Main Function	30
8.2	SIR Model Function	41
8.3	CA Function	43
8.4	SQL Function	51

1 Introduction

Since 1999, there have been 11 major disease outbreaks across the globe, eight of which involved thousands of cases. To effectively control an outbreak and ultimately stop it in its tracks, it's current and past states must be analysed so it's spread can be predicted, which is essential in influencing how governments should deal with such a threat.

This is currently being seen in how the UK government is dealing with COVID-19, where a balance between a total lockdown and total freedom needs to be struck to control how the virus spreads. This balance is essential in allowing businesses to continue operating, keeping the economy afloat and allowing people their freedoms to do what they want.

My project aims to provide a starting point for where a disease outbreak can be modelled either by cellular automata or the SIR model, which can be used in an educational environment to teach people about the spread of diseases. A user will be able to input custom parameters according to the disease they are trying to simulate and be able to introduce special events such as a partial or permanent lockdown, to be able to see how the disease spread could change. A user should also be able to compare the two different ways of simulating a disease.

Source: <https://sundial.csun.edu/156361/news/a-timeline-of-outbreaks-from-2000-to-present/>

2 Initial objectives

These objects represent my initial aims of what this project should be able to do. These may change later on throughout this project.

- Simulate the spread of a disease using the SIR model
- Simulate the spread of a disease using the Cellular Automata model
- Input custom parameters or use default values (from a previous disease) including infection rate, incubation period and death rate for the SIR model
- Input custom parameters or use default values (from a previous disease) relating to the number and infectivity of cells for the CA model
- Set a quarantine period or introduce a vaccine (therefore limiting disease transmission)
- Click on a graph and show statistics from that point in time
- Export graphs produced as png
- Upload past simulation results into the program to generate a graph from that previous simulation
- Be able to compare graphs of two different diseases

3 Potential user

Mr Bliss - Biology teacher at Abingdon School As this model provides a starting point for modelling disease outbreak, it's most effective use would be in an education environment, where it is used to teach people about how disease can spread and how changes in parameters such as the infection rate, recovery rate, time of infection and immunity can affect how effectively a disease is transmitted throughout a cohort.

4 How the problem was researched

To first understand how I could make this project, I had to research the two main methods of modelling disease spread, the SIR model and Cellular Automata. Once I got the basic idea of how each model worked, I further researched how I could implement these in Python, as well as looking at how to use some Python libraries to help me.

- Find out how SIR and Cellular Automata work
- Research how to implement SIR and Cellular Automata in code
- Learn how to use the Matplotlib library to draw graphs for my disease models
- Learn how to use Pandas to export data to an external file
- Learn how to use Tkinter to create a GUI interface and multiple pages
- Learn how to create, use and modify an SQL database using Sqlite3

4.1 The SIR model

The SIR model is a simple disease spread model which uses differential equations to determine the number of people in three categories, the susceptible, the infected and the recovered. The susceptible population represent those who can become infected a disease, the infected population represent those currently infected with the disease who are able to spread it to other people and the recovered population represent those who are no longer infected. In some models, people in the recovered population can be infected again.

4.1.1 Equations for the SIR model

People in each group

$S = S(t)$ - number of susceptible individuals

$I = I(t)$ - number of infected individuals

$R = R(t)$ - number of recovered individuals

The Susceptible equation

$$\frac{dS}{dt} = \frac{-\beta S(t)I(t)}{N}$$

where β is the rate at which infections occur (a positive constant)

The Infected equation

$$\frac{dI}{dt} = \frac{\beta S(t)I(t)}{N} - \gamma I(t)$$

where γ is the rate at which people recover

The Recovered equation

$$\frac{dR}{dt} = \gamma I(t)$$

Model without vital dynamics

$$\frac{dS}{dt} + \frac{dI}{dt} + \frac{dR}{dt} = 0$$

As this model doesn't take into account vital dynamics ie. people aren't added through birth or removed through death, the sum of all the changes is constant and equal to 0

4.2 The Cellular Automata model

The basic idea of cellular automata is that there is a collection of cells with a finite set of states. Every new generation, the state of a cell can be changed depending on the state of its neighbouring cells.

4.2.1 My implementation of CA

- Cells move randomly within a grid. Most cells will be susceptible but some will be infected
- If a susceptible cell comes in close range to an infected cell, there is a chance that that susceptible cell will become infected
- Infected cells are only infected for a certain period of time, so after a certain number of generations the cell will no longer be infected and will be in the recovered category

5 Prototyping of code

5.1 The scientific models

5.1.1 Elementary cellular automata

My initial cellular automata model was very basic and only worked on a 1D line. The shape of each new line would be decided by looking at the previous line and applying a ruleset to it.

```
class CA:
    def __init__(self, width, generations):
        self.ruleset = [0, 1, 1, 1, 1, 0, 1, 1]
        self.width = width
        self.cells = [0] * width
        self.new_cells = [None] * width
        self.cells[int((width / 2) - 1)] = 1
        self.generations = generations
        self.cell_timeline = []


    def rules(self, a, b, c, i):
        index = int((a + b + c), 2)
        ruleset = [0, 1, 0, 1, 1, 0, 1, 0]
        self.new_cells[i] = ruleset[index]

    def draw(self):
        output = ""
        for cell_state in self.cell_timeline:
            for element in cell_state:
                if element == 0:
                    output += " " + " "
                else:
                    output += "X" + " "
            print(output)
            time.sleep(0.1)
            output = ""

    def ca(self):
        for gen in range(self.generations):
            for i in range(self.width):
                a = str(self.cells[((i - 1) % self.width)])
                b = str(self.cells[i])
                c = str(self.cells[((i + 1) % self.width)])
                # print(a,b,c)
                self.rules(a, b, c, i)
            self.cells = self.new_cells
            self.cell_timeline.append(self.cells)
            self.new_cells = [None] * self.width
        self.draw()

ca = CA(100, 100)
ca.ca()
```

The result of elementary cellular automata

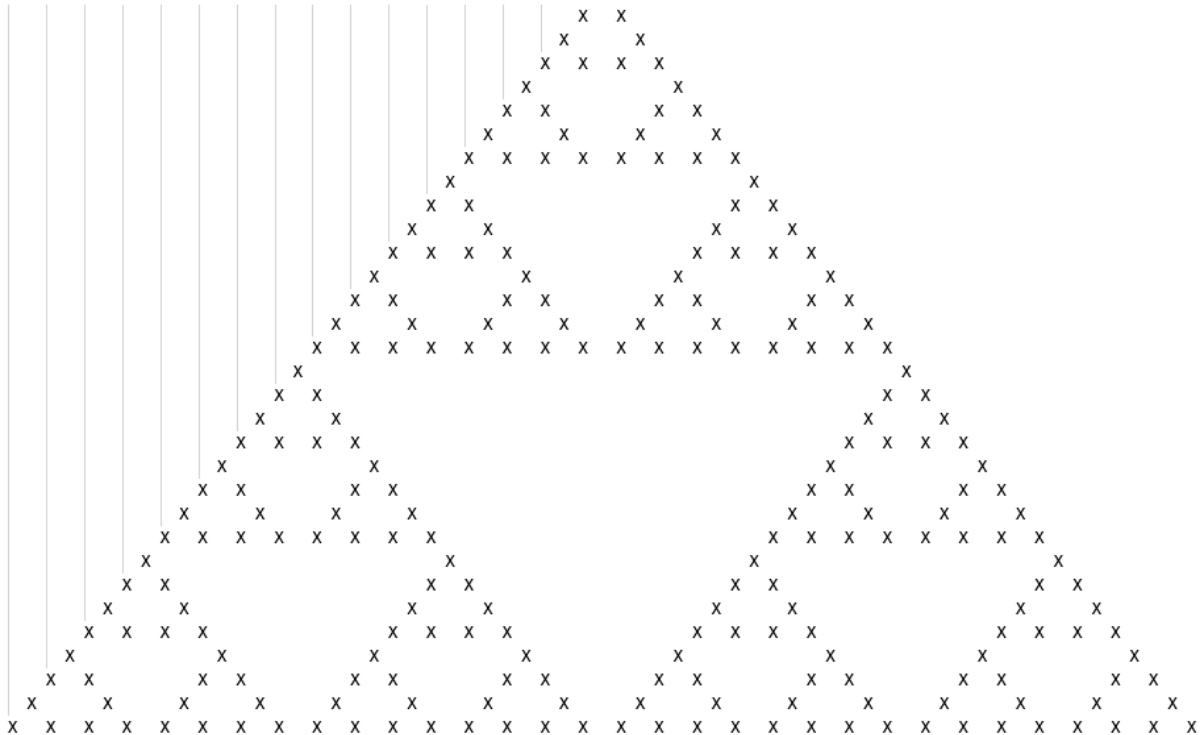

5.1.2 Basic SIR model

My starting block for the SIR model was a function which calculated the rate of change of the susceptible, infected and recovered population.

```
def eqns(y0, t, beta, gamma):
    S, I, R = y0
    dsdt = -(beta * S * I) / N # rate of change of susceptible individuals
    didt = ((beta * S * I) / N) - gamma * I # rate of change of infected individuals
    drdt = gamma * I # rate of change of recovered individuals
    return dsdt, didt, drdt
```

5.2 External library testing TBD

5.2.1 Tkinter

My initial prototyping for tkinter was done with the help of a YouTube video which focused on having multiple tkinter pages in a single file. Link: <https://youtu.be/jBUpjjYtCk>

This prototype allowed there to be multiple Tkinter windows which could be switched between by a button click. The way this method worked was by removing and adding widgets depending on which page should be shown. Although this method may have worked for me, in the final project I went with destroying a Tkinter window and starting a completely new one when a user wanted to switch, as the code for this was easier to understand and write.

```
import tkinter as tk
```

```
class Gui(tk.Tk):
```

```

def __init__(self, *args,
              **kwargs): # *args - pass through any number of variables; **kwargs
                        # - pass through dictionaries
    tk.Tk.__init__(self, *args, **kwargs) # initialising tkinter
    container = tk.Frame(self) # the frame of the window
    container.pack(side="top", fill="both", expand=True)
    container.grid_rowconfigure(0, weight=1) # 0 sets minimum size, weight shows
        priority
    container.grid_columnconfigure(0, weight=1)
    self.frames = {} # allows application to open different types of pages easily

    for F in (StartPage, PageOne): # all pages need to be listed here
        frame = F(container, self)
        self.frames[F] = frame # saving classes to dictionary, "loading it in"
        frame.grid(row=0, column=0, sticky="nsew")

    self.show_frame(StartPage) # start page is shown first

def show_frame(self, cont):
    frame = self.frames[cont] # looks for cont in dict
    frame.tkraise() # which is then raised

class StartPage(tk.Frame):

    def __init__(self, parent,
                  controller): # parent class is Gui, controller class is main class,
                              # allowing show_frame to be called
        tk.Frame.__init__(self, parent)

        label = tk.Label(self, text="Start Page")
        label.pack(pady=10, padx=10)
        button1 = tk.Button(self, text="Page 1", command=lambda:
                             controller.show_frame(PageOne))
        button1.pack()

class PageOne(tk.Frame):

    def __init__(self, parent, controller):
        tk.Frame.__init__(self, parent)

        label = tk.Label(self, text="This is page 1")
        label.pack(pady=10, padx=10)
        button2 = tk.Button(self, text="Start Page", command=lambda:
                             controller.show_frame(StartPage))
        button2.pack()

app = Gui()
app.mainloop()

```

The result

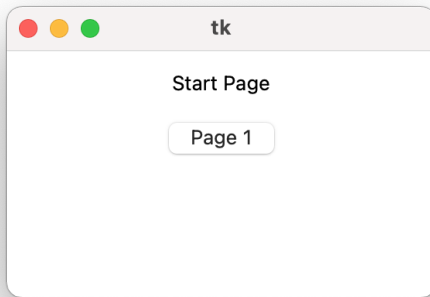


Figure 1: Start Tkinter window

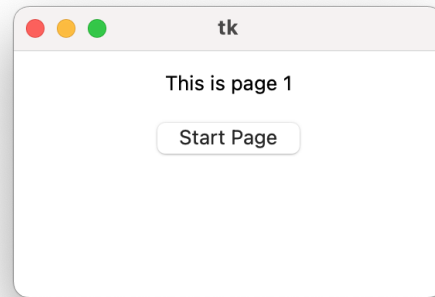


Figure 2: Page 1 Tkinter window

5.2.2 Matplotlib - FuncAnimation

The initial way I tried to update a graph with new values was by deleting the graph and plotting a new one. Funcanimation provided an easier way to do this, with the option of saving the animation as a video which was one of the objectives for my project. This prototype shows how a line graph works with funcanimate.

It works for both line graphs and scatter graphs

```
import matplotlib.pyplot as plt
from matplotlib.animation import FuncAnimation
from itertools import count
import random

x_full = [[229, 29, 52, 90, 78], [228, 29, 52, 90, 79], [229, 28, 53, 89, 79],
          [228, 27, 52, 90, 78], [227, 28, 51, 89, 79], [227, 27, 50, 88, 78], [226,
          28, 51, 88, 79], [227, 29, 51, 89, 79], [227, 30, 51, 90, 79], [228, 30, 51,
          90, 79], [229, 30, 50, 89, 78], [228, 30, 49, 90, 79], [228, 30, 50, 89, 78],
          [228, 31, 50, 88, 78], [229, 32, 49, 87, 78], [230, 33, 50, 87, 77], [230,
          34, 50, 88, 76], [231, 35, 51, 87, 75], [232, 36, 50, 87, 74], [232, 37, 51,
          86, 74]]

y_full = [[37, 23, 94, 195, 90], [37, 22, 93, 194, 89], [36, 22, 94, 195, 88],
          [36, 22, 95, 194, 88], [35, 22, 94, 195, 88], [36, 22, 95, 196, 89], [35, 21,
          94, 197, 90], [34, 20, 94, 196, 91], [34, 20, 94, 197, 90], [35, 19, 94, 196,
          90], [35, 18, 95, 197, 89], [35, 18, 94, 198, 88], [35, 19, 93, 197, 89],
          [35, 20, 94, 196, 90], [34, 20, 95, 196, 90], [33, 19, 95, 195, 90], [33, 19,
          96, 196, 91], [33, 20, 95, 196, 90], [32, 20, 94, 195, 90], [31, 19, 93, 194,
          91]]

x_vals = []
y_vals = []

index = count()

def animate(i):
    x_vals.append(next(index))
    y_vals.append(random.randint(0,5))
    plt.plot(x_vals, y_vals)
```

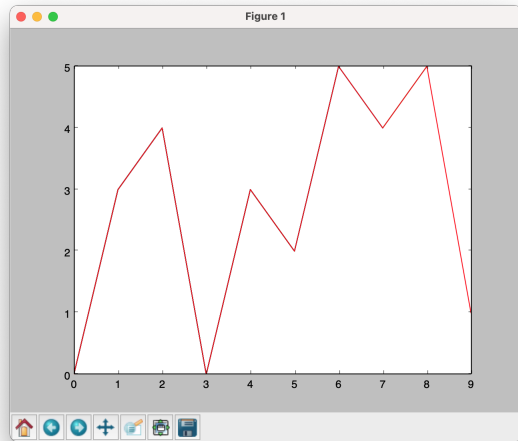


Figure 3: Graph 1

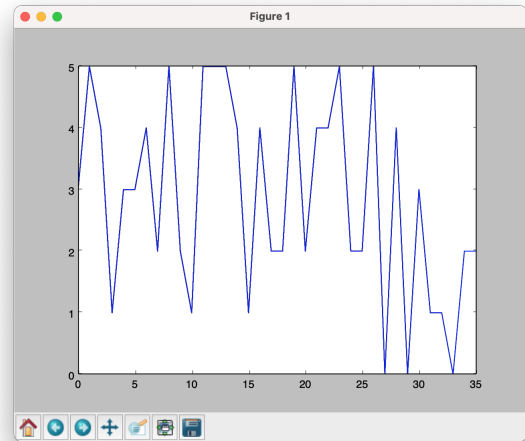


Figure 4: Graph 2

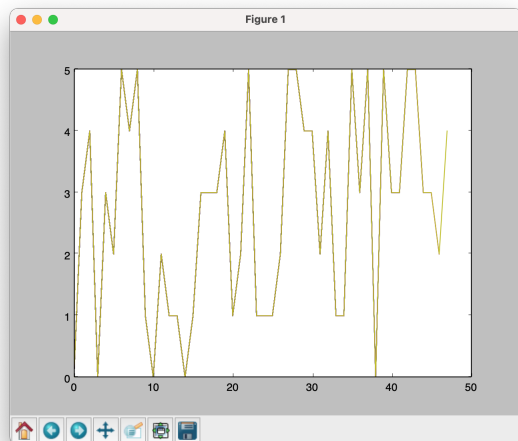


Figure 5: Graph 3

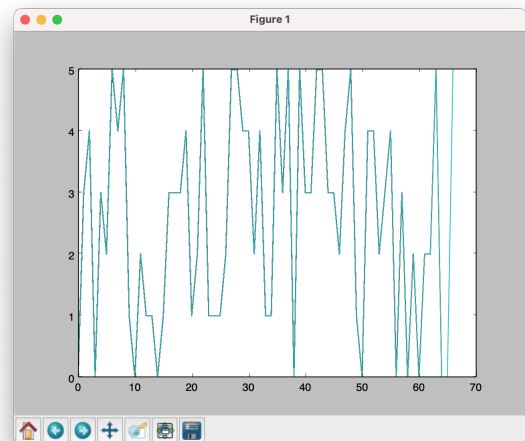


Figure 6: Graph 4

```
ani = FuncAnimation(plt.gcf(), animate, interval=10) # get current figure,
            function, interval
plt.show()
```

The result

5.2.3 Pandas

I used Pandas to help export the data generated using the SIR model. This allowed me to generate an excel file with appropriate column names, which could possibly be used later for data analysis

```
def export_to_excel():
    data = {'Time': timearray,
```

```

'S': solver_result[0],
'I': solver_result[1],
'R': solver_result[2]}

df = pd.DataFrame(data, columns=['Time', 'S', 'I', 'R'])
name = "output" + str(f) + ".xlsx"
df.to_excel(name, sheet_name='output')

```

	A	B	C	D	E	F
1		Time	S	I	R	
2	0	1	0.666667	0.333333		2
3	1	2	0.592593	0.074074	2.333333	
4	2	3	0.577961	0.014632	2.407407	
5	3	4	0.575142	0.002819	2.422039	
6	4	5	0.574601	0.00054	2.424858	
7	5	6	0.574498	0.000104	2.425399	
8	6	7	0.574478	1.98E-05	2.425502	
9	7	8	0.574474	3.8E-06	2.425522	
10	8	9	0.574474	7.27E-07	2.425526	
11	9	10	0.574473	1.39E-07	2.425526	
12	10	11	0.574473	2.67E-08	2.425527	
13	11	12	0.574473	5.1E-09	2.425527	
14	12	13	0.574473	9.77E-10	2.425527	
15	13	14	0.574473	1.87E-10	2.425527	
16	14	15	0.574473	3.58E-11	2.425527	
17	15	16	0.574473	6.86E-12	2.425527	
18	16	17	0.574473	1.31E-12	2.425527	
19	17	18	0.574473	2.52E-13	2.425527	
20	18	19	0.574473	4.82E-14	2.425527	
21	19	20	0.574473	9.23E-15	2.425527	

5.2.4 Pygame

One of the options I considered to simulate and show my Cellular Automata simulation was Pygame. With Pygame I would be able to easily create cells which could move randomly in a set space, and using Pygame's collision method I could detect if cells touched. In the end I decided against this method as although it may have been easier, using Matplotlib graphs would grant me extra flexibility, for example if I wanted to export position data of each cell I would already know how to do that with Matplotlib. The prototype I tested was made with the help of a YouTube video covering Pygame: <https://youtu.be/NjvIooRpuH4>

```

import pygame
import time

pygame.init()

black = (0,0,0)
white = (255,255,255)
red = (255,0,0)

gameDisplay = pygame.display.set_mode((800,600))
pygame.display.set_caption('Test')

```

```

clock = pygame.time.Clock()

carImg = pygame.image.load('unnamed.jpg')

def text_objects(text, font):
    textSurface = font.render(text, True, black) # what to render, anti-aliasing,
    colour
    return textSurface, textSurface

def message_display(text):
    largeText = pygame.font.Font('freesansbold.ttf', 115)
    TextSurf, TextRect = text_objects(text, largeText)
    TextRect.center = (800/2, 600/2)
    gameDisplay.blit(TextSurf, TextRect)

    time.sleep(2)

    game_loop()

def crash():
    message_display('You crashed')

def car(x,y): # car object
    gameDisplay.blit(carImg, (x,y)) # drawing carImg to x,y

def game_loop():

    x = (100)
    y = (100)
    x_change = 0

    gameExit = False

    while not gameExit: # user controls
        for event in pygame.event.get():
            if event.type == pygame.QUIT:
                gameExit = True

            if event.type == pygame.KEYDOWN:
                if event.key == pygame.K_LEFT:
                    x_change = -10
                elif event.key == pygame.K_RIGHT:
                    x_change = 10

            if event.type == pygame.KEYUP:
                if event.key == pygame.K_LEFT or event.key == pygame.K_RIGHT:
                    x_change = 0

        print(event)

        x += x_change

        gameDisplay.fill(white)
        car(x,y)

```

```
    if x > 800 or x < 0: # boundaries
        crash()

    pygame.display.update()
    clock.tick(60)

game_loop()
pygame.quit()
```

5.3 SQL database TDB

6 Interview with target user

Q1. How could such a tool like this be used in the classroom?

A1. As a comparator of diseases; To be able to decide the best method to restrict a disease; To possibly predict the start of a second spike

E1. I will try to implement a feature where the parameters of two diseases could be entered, and a graph could be calculated and shown for both, which would allow a user to compare the spread of the two diseases. I will also add features that a government may try and implement to restrict a disease. This could include a lockdown feature or a vaccine introduction which would allow a user to see how the spread of a disease could change.


Q1. How could such a tool like this be used in the classroom?

A1. As a comparator of diseases; To be able to decide the best method to restrict a disease; To possibly predict the start of a second spike


E1. I will try to implement a feature where the parameters of two diseases could be entered, and a graph could be calculated and shown for both, which would allow a user to compare the spread of the two diseases. I will also add features that a government may try and implement to restrict a disease. This could include a lockdown feature or a vaccine introduction which would allow a user to see how the spread of a disease could change.

7 Documented design NEEDS SQL AND UI DESIGN


7.1 Main function structure diagram

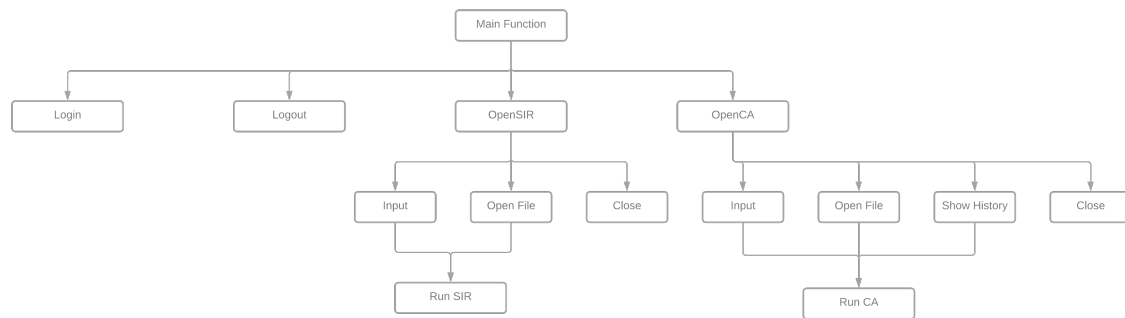


7.2 Main function flowchart

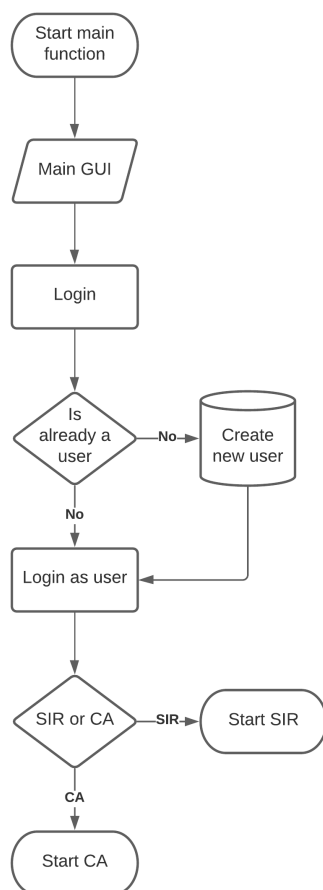


7.3 Cellular automata structure diagram

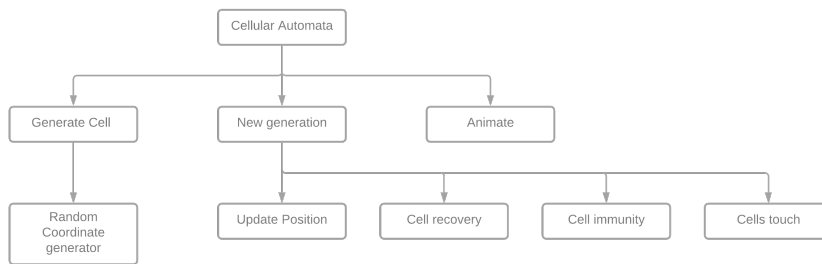


7.4 Cellular automata flowchart

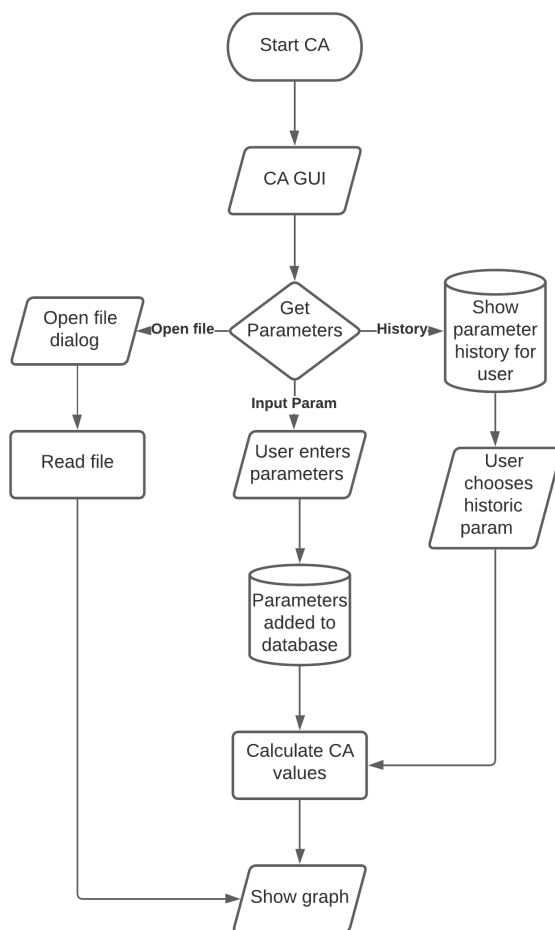




7.5 SIR Model structure diagram

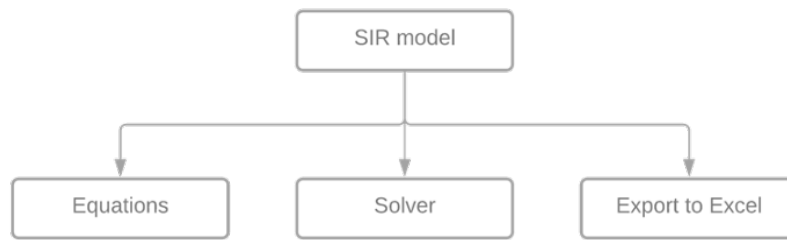


7.6 SIR model flowchart

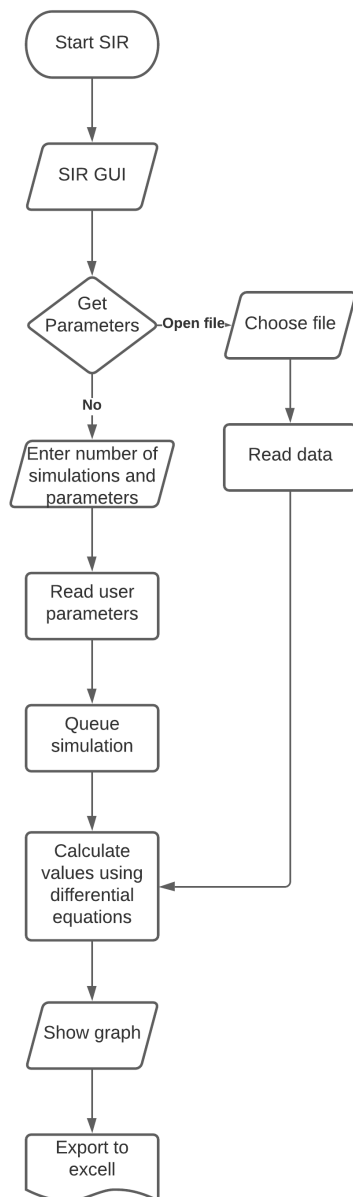

7.7 Cellular automata and SIR model UML charts

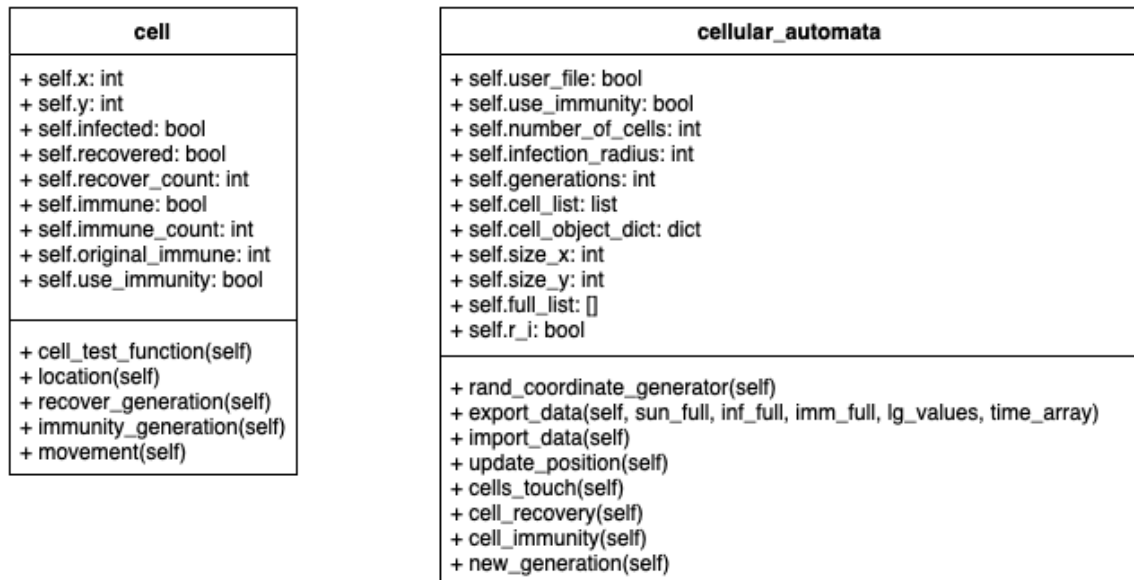

7.8 SQL Entity relationship diagram

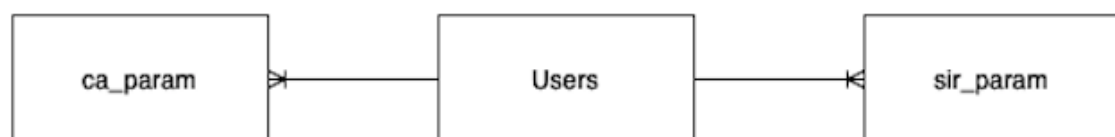

7.9 SQL queries used

Creating a new table

```
CREATE TABLE users (username text PRIMARY KEY, see_all integer)
```

```
CREATE TABLE ca_param (  
    user string,  
    no_cells integer,  
    generations integer,  
    size_x integer,  
    size_y integer,  
    infection_radius integer,  
    no_infected integer,  
    recovered_can_be_infected integer,  
    days_until_recovered integer,  
    use_immunity integer,  
    days_of_immunity integer  
)
```

```
CREATE TABLE sir_param (  
    user string,  
    sus0 integer,  
    inf0 integer,  
    rec0 integer,  
    beta integer,  
    gamma integer,  
    time integer  
)
```

```
INSERT INTO users VALUES (:username, :see_all), {'username': 'admin', 'see_all': 1}
```

This code sets up a clean database containing 3 tables, users, ca_param and sir_param. In the users table there are two columns, one containing the username and another containing a value to decide whether that user can see the history of all calculations performed and not just the calculations performed by that user. THIS WILL BE UPDATED. The ca_param and sir_param table contain columns to record the user doing the calculation and the parameters the user entered.

Inserting a new user into the user table

```
INSERT OR IGNORE INTO users VALUES (:username, :see_all), {'username': in_user,  
    'see_all': 0}
```

Entering parameters from the Cellular Automata model

```
INSERT INTO ca_param VALUES (  
    :user, :no_cells, :generations, :size_x, :size_y,  
    :infection_radius, :no_infected, :recovered_can_be_infected,  
    :days_until_recovered, :use_immunity, :days_of_immunity),  
    {'user': in_user, 'no_cells': up[0], 'generations': up[1], 'size_x': up[2],  
    'size_y': up[3],  
    'infection_radius': up[4], 'no_infected': up[5], 'recovered_can_be_infected':  
    up[6],  
    'days_until_recovered': up[7], 'use_immunity': up[8], 'days_of_immunity':
```

up[9]}}

This query will be passed the user, in_user, and a list of the parameters entered, up. This will be added into the ca_param table.

Entering parameters from the SIR model

```
INSERT INTO sir_param VALUES (:user, :sus0, :inf0, :rec0, :beta, :gamma,  
    :time),{'user': in_user, 'sus0': up[0], 'inf0': up[1], 'rec0': up[2], 'beta':  
    up[3], 'gamma': up[4], 'time': up[5]  
}
```

Similar to function above except for the SIR model

Return history from Cellular Automata model


```
SELECT * FROM ca_param WHERE user=:curr_user, {'curr_user': in_user}
```

Return history from SIR model


```
SELECT * FROM sir_param WHERE user=:curr_user, {'curr_user': in_user}
```

7.10 UI design


Main window

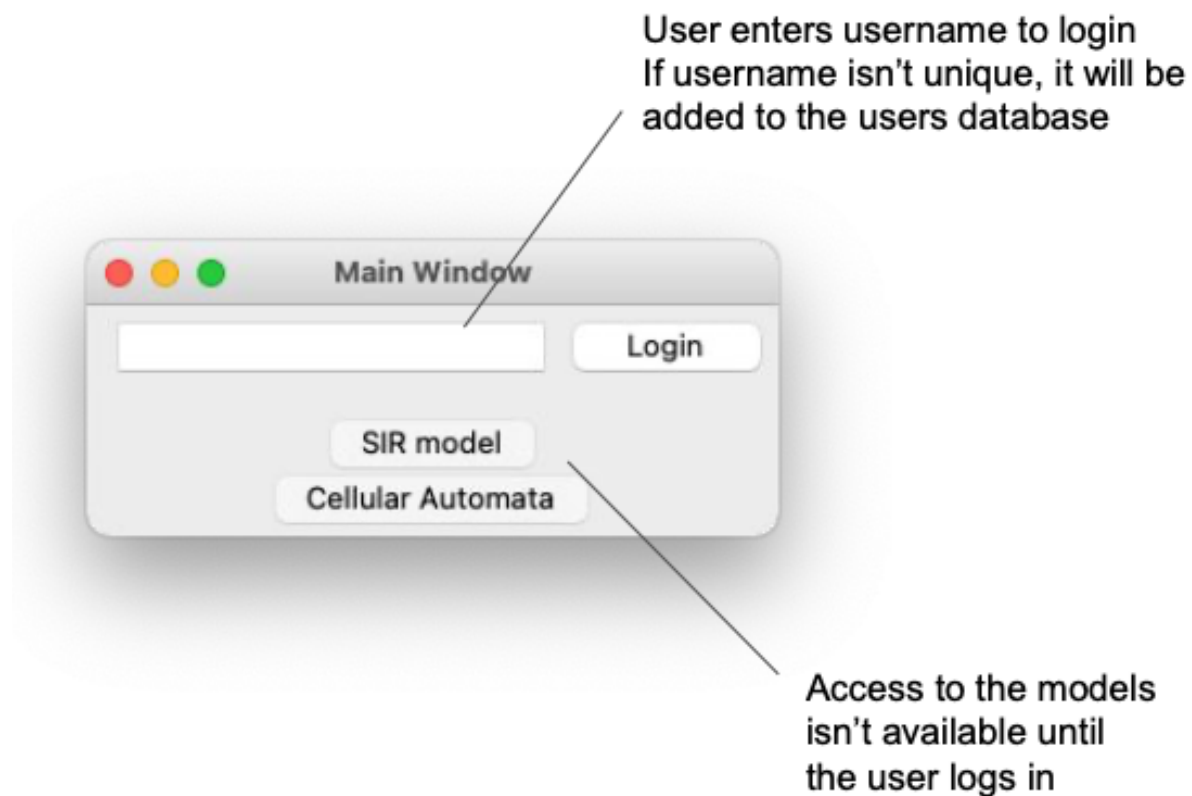

SIR Main Window

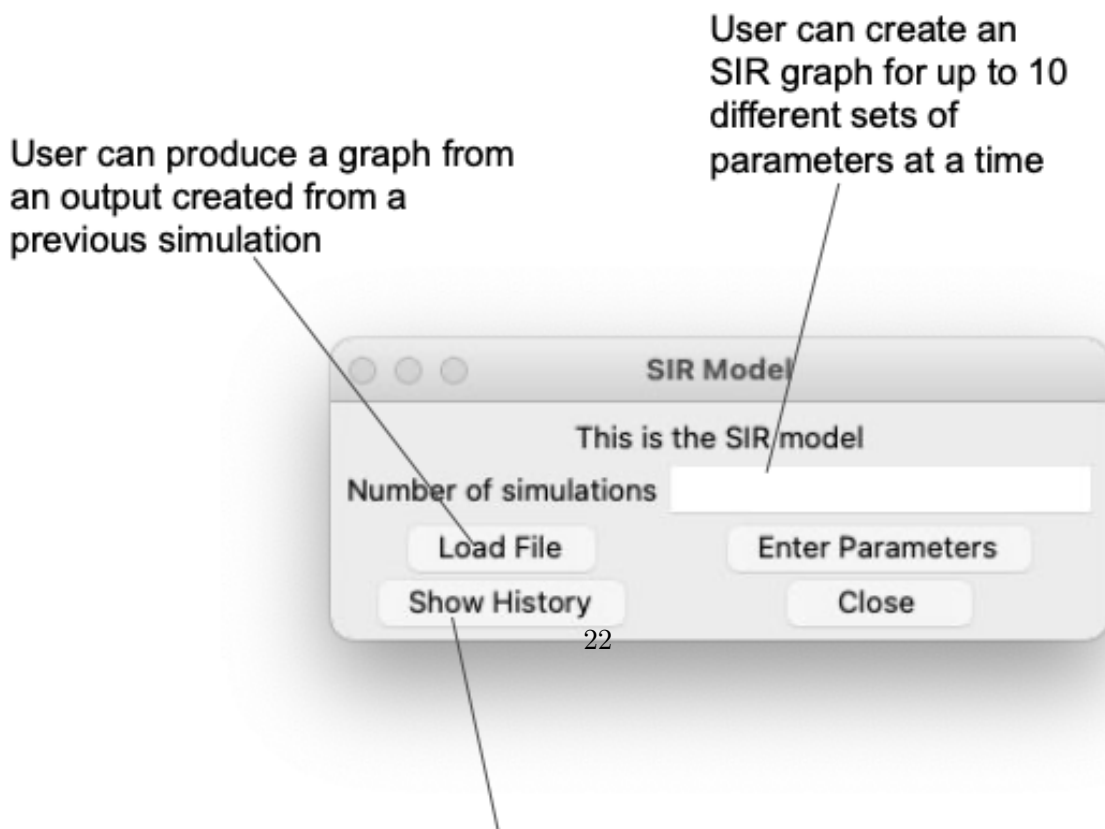

SIR Input Parameters Window

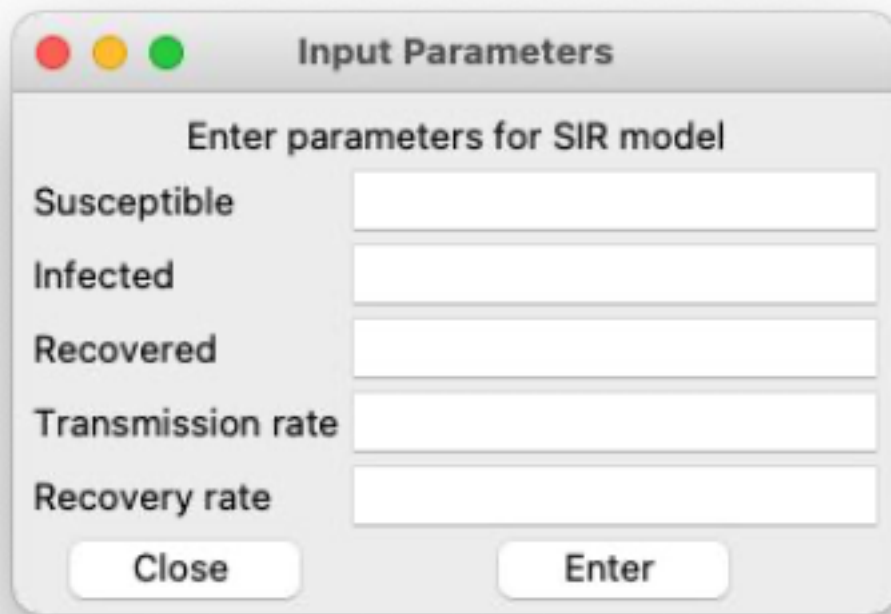


The window is titled "Input Parameters" and contains the instruction "Enter parameters for SIR model". It features five input fields for the following parameters:

- Susceptible
- Infected
- Recovered
- Transmission rate
- Recovery rate

At the bottom of the window are two buttons: "Close" and "Enter".

SIR History Window

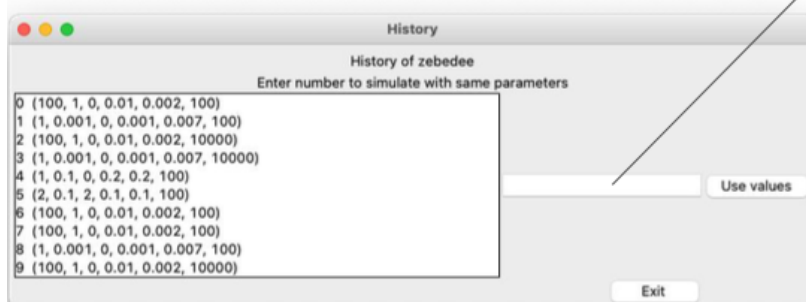


The window is titled "History" and contains the instruction "History of zebedee". It displays a list of 10 parameter sets, each preceded by an index number from 0 to 9. Below the list is a text input field and a "Use values" button. At the bottom right is an "Exit" button.

Index	Parameter Set (S, I, R, β , γ)
0	(100, 1, 0, 0.01, 0.002, 100)
1	(1, 0.001, 0, 0.001, 0.007, 100)
2	(100, 1, 0, 0.01, 0.002, 10000)
3	(1, 0.001, 0, 0.001, 0.007, 10000)
4	(1, 0.1, 0, 0.2, 0.2, 100)
5	(2, 0.1, 2, 0.1, 0.1, 100)
6	(100, 1, 0, 0.01, 0.002, 100)
7	(100, 1, 0, 0.01, 0.002, 100)
8	(1, 0.001, 0, 0.001, 0.007, 100)
9	(100, 1, 0, 0.01, 0.002, 10000)


User can scroll through the history of values used and choose a set to use

SIR Typical Output

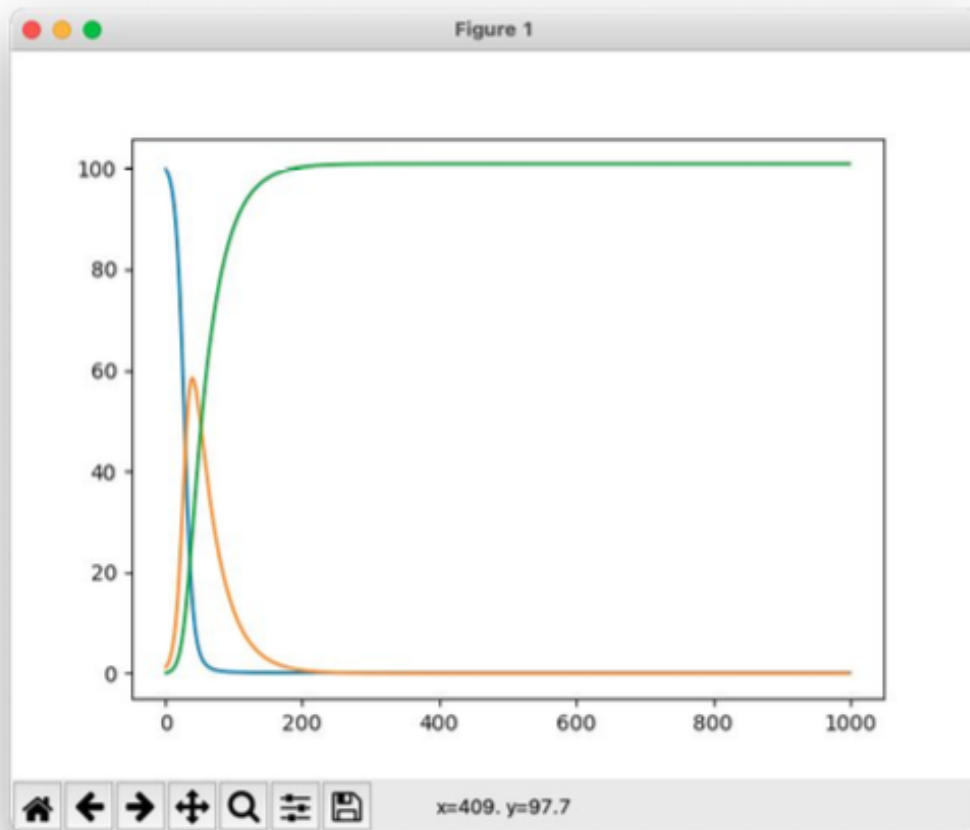


Main window

User enters username to login
If username isn't unique, it will be
added to the users database

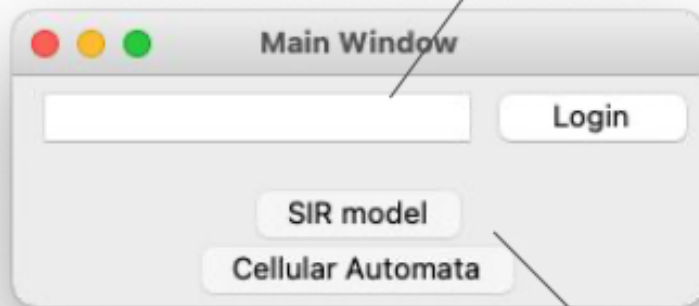


Access to the models
isn't available until
the user logs in

Cellular Automata Main Window

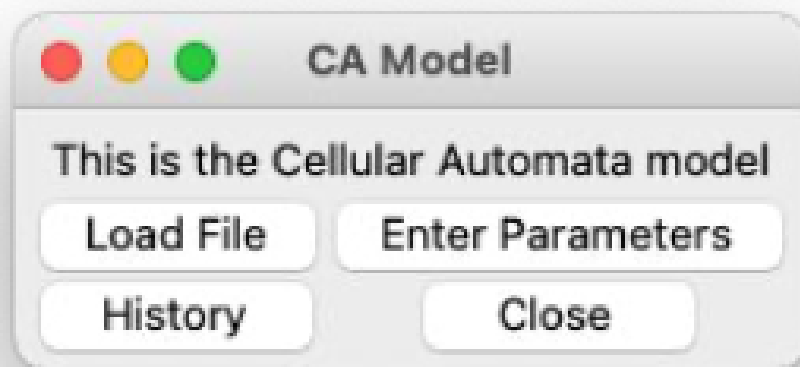

Cellular Automata Input Parameters Window

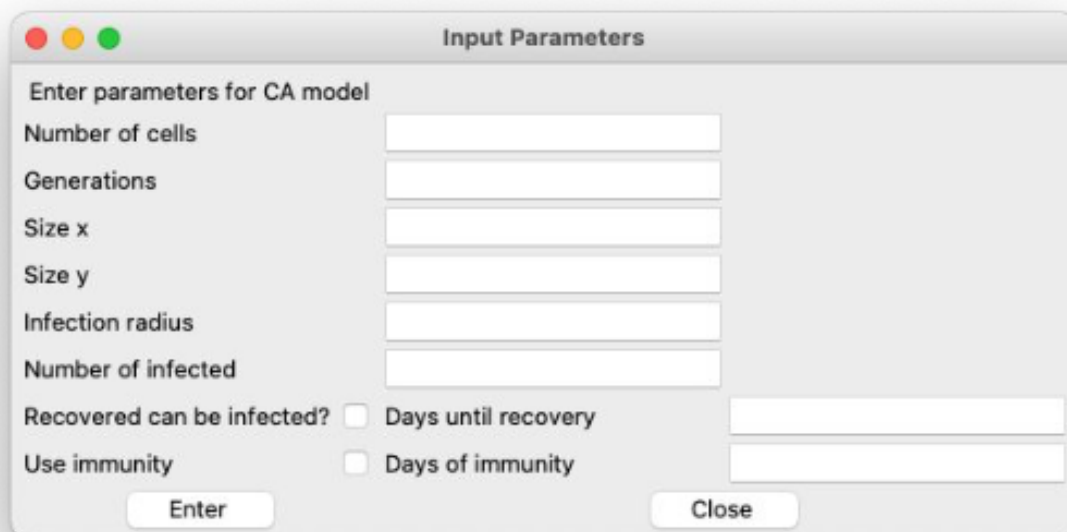


A screenshot of a macOS-style window titled "Input Parameters". The window has a title bar with red, yellow, and green window control buttons. The main content area contains the text "Enter parameters for CA model" and a list of input fields and checkboxes:


- Number of cells:
- Generations:
- Size x:
- Size y:
- Infection radius:
- Number of infected:
- Recovered can be infected? ☐ Days until recovery:
- Use immunity ☐ Days of immunity:

At the bottom of the window, there are two buttons: "Enter" and "Close".


Cellular Automata History Window

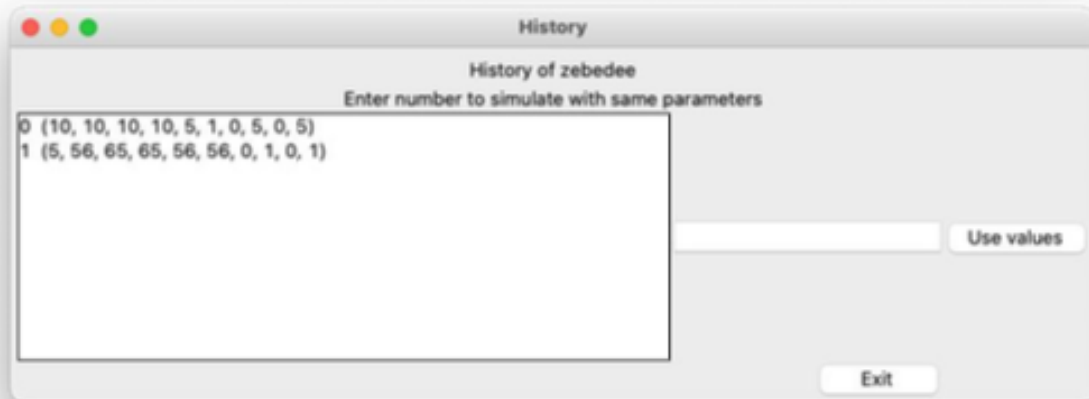

SIR Typical Output

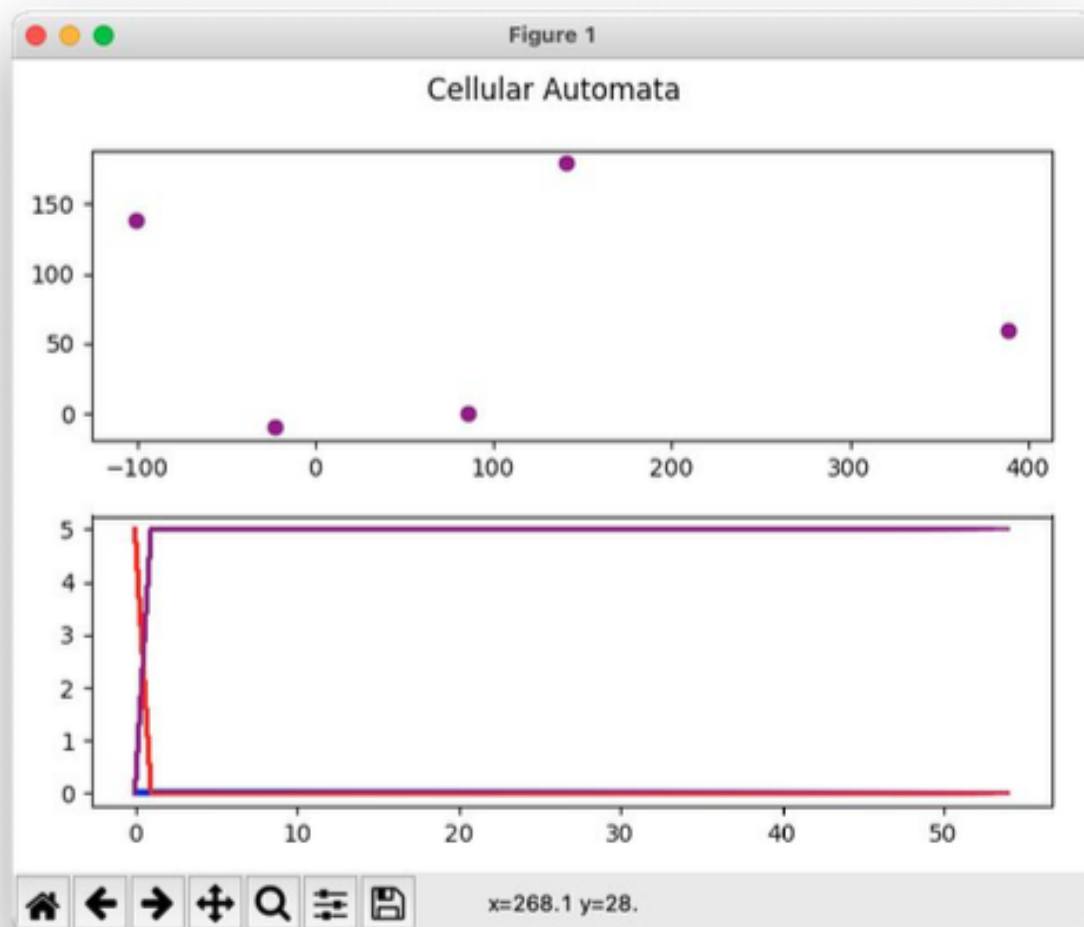

CA and SIR Open File Window

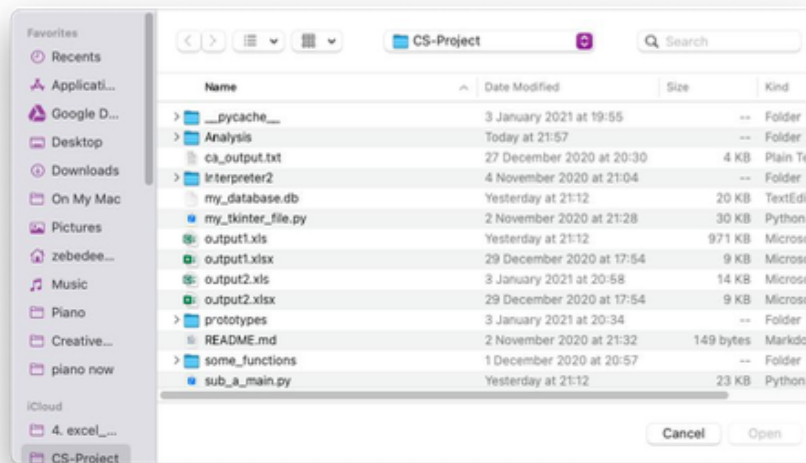

This uses the default open file window on Mac or Windows

8 The code

8.1 Main Function

```
# pylint: disable=unused-variable
import tkinter as tk
from tkinter import ttk
from scipy.integrate import odeint
import numpy as np
import matplotlib.pyplot as plt
import pandas as pd
import random
import time
from matplotlib.animation import FuncAnimation
import matplotlib
import csv
import json
from tkinter import filedialog
from tkinter import messagebox

import sub_SIR_model as my_sir
import sub_CA_model as my_ca
import sub_sql_functions as my_sql

current_user = "None"

class gui_Main_Window:
    """First window shown where user must login and can choose to simulate using
        either CA or openSIR
    """

    def __init__(self, master):
        self.master = master
        self.frame = ttk.Frame(master, padding=5)

        # self.lbl_name = ttk.Label(self.frame, text='This is the main page')
        self.e_user = ttk.Entry(self.frame)
        self.btn_login = ttk.Button(self.frame, text='Login', command=self.login)
        self.btn_SIR = ttk.Button(self.frame, text='SIR model', command=self.openSIR,
                                  state=tk.DISABLED)
        self.btn_CA = ttk.Button(self.frame, text='Cellular Automata',
                                  command=self.openCA, state=tk.DISABLED)

        self.frame.grid(row=0, column=0, sticky='nsew')

        # self.lbl_name.grid(column=1, row=0, columnspan=3, sticky='n')
        self.e_user.grid(column=1, row=0, sticky='n')
        self.btn_login.grid(column=2, row=0, sticky='n')
        self.btn_SIR.grid(column=1, row=1, columnspan=2, sticky='s')
        self.btn_CA.grid(column=1, row=2, columnspan=2, sticky='s')

        self.master.columnconfigure(0, weight=1)
        self.master.rowconfigure(0, weight=1)

        self.frame.columnconfigure(1, weight=1)
```

```

self.frame.rowconfigure(1, weight=1)

if current_user != "None":
    self.pers_login()

def pers_login(self):
    self.btn_SIR['state'] = tk.NORMAL
    self.btn_CA['state'] = tk.NORMAL
    self.e_user.destroy()
    self.btn_login.destroy()
    self.lbl_name = ttk.Label(self.frame, text=f'Hello {current_user}')
    self.lbl_name.grid(column=1, row=0)
    self.btn_logout = ttk.Button(self.frame, text='logout', command=self.logout)
    self.btn_logout.grid(column=2, row=0)

def openSIR(self):
    self.master.destroy()
    root2 = tk.Tk()
    root2.title('SIR Model')
    # root2.geometry('1400x900')
    new_window = gui_First_SIR_Window(root2)
    root2.mainloop()

def openCA(self):
    self.master.destroy()
    root2 = tk.Tk()
    root2.title('CA Model')
    new_window = gui_First_CA_Window(root2)
    root2.mainloop()

def login(self):
    """Gets username from user that was entered into username box, calls
        enter_username sql function with ti and assigns it to the current user
        global variable
    """
    username = str(self.e_user.get())
    my_sql.enter_username(username)
    global current_user
    current_user = username

    self.btn_SIR['state'] = tk.NORMAL
    self.btn_CA['state'] = tk.NORMAL
    self.e_user.destroy()
    self.btn_login.destroy()
    self.lbl_name = ttk.Label(self.frame, text=f'Hello {current_user}')
    self.lbl_name.grid(column=1, row=0)
    self.btn_logout = ttk.Button(self.frame, text='logout', command=self.logout)
    self.btn_logout.grid(column=2, row=0)

def logout(self):
    print('logout')
    self.e_user = ttk.Entry(self.frame)
    self.btn_login = ttk.Button(self.frame, text='Login', command=self.login)
    self.e_user.grid(column=1, row=0, sticky='n')
    self.btn_login.grid(column=2, row=0, sticky='n')

```

```

self.btn_SIR['state'] = tk.DISABLED
self.btn_CA['state'] = tk.DISABLED
current_user = "None"

class error:

    def __init__(self, err_type, message):
        tk.Tk().withdraw()
        title = err_type + " error"
        messagebox.showerror(title, message)

# -----

class gui_First_SIR_Window:
    """GUI where user can enter how many graphs they want to make, and whether they
        want to manually enter parameters, chose a file or use past parameters in
        history"""

    def __init__(self, master):
        self.master = master
        self.frame = ttk.Frame(master, padding=5)

        self.lbl_name = ttk.Label(self.frame, text='This is the SIR model')

        self.lbl_num_sim = ttk.Label(self.frame, text='Number of simulations')
        self.e_num_sim = ttk.Entry(self.frame)
        # self.num_sim.insert(0, 1)
        self.btn_open_file = ttk.Button(self.frame, text='Load File',
                                         command=self.open_file)
        self.btn_input_param = ttk.Button(self.frame, text='Enter Parameters',
                                           command=self.input)
        self.btn_history = ttk.Button(self.frame, text='Show History',
                                      command=self.show_history)
        self.btn_close = ttk.Button(self.frame, text='Close', command=self.close)

        self.frame.grid(row=0, column=0, sticky='nsew')

        self.lbl_name.grid(column=0, row=0, columnspan=2, sticky='n')
        self.lbl_num_sim.grid(column=0, row=1)
        self.e_num_sim.grid(column=1, row=1)
        # self.num_sim.grid(column=0, row=1)
        self.btn_open_file.grid(column=0, row=2)
        self.btn_input_param.grid(column=1, row=2)
        self.btn_history.grid(column=0, row=3)
        self.btn_close.grid(column=1, row=3, sticky='s')

        self.master.columnconfigure(0, weight=1)
        self.master.rowconfigure(0, weight=1)

        self.frame.columnconfigure(1, weight=1)
        self.frame.rowconfigure(1, weight=1)

    def close(self):

```



```

self.master.destroy()
main_win = tk.Tk()
main_win.title('Main Window')
new_window = gui_Main_Window(main_win)
main_win.mainloop()

def open_file(self):

    print("file dialog")
    filename = filedialog.askopenfilename()
    print(filename)
    df = pd.read_excel(filename)
    timearray = df['Time'].values.tolist()
    susceptible = df['S'].values.tolist()
    infected = df['I'].values.tolist()
    recovered = df['R'].values.tolist()

    self.master.destroy()

    plot = my_sir.plot_graph(timearray, susceptible, infected, recovered)
    plot.plot()

def input(self):
    # print(type(self.e_num_sim.get()))
    try:
        int(self.e_num_sim.get())
        if 1 <= int(self.e_num_sim.get()) <= 10:
            self.number_of_simulations = int(self.e_num_sim.get())
            print(self.number_of_simulations)

            # self.number_of_simulations = 1
            self.master.destroy()
            root3 = tk.Tk()
            root3.title('Input Parameters')
            input_window = gui_SIR_Param(root3, self.number_of_simulations)
            root3.mainloop()
        else:
            err = error("Entry", "Please enter an integer between 1 and 10")
    except ValueError:
        err = error("Entry", "Please enter an integer between 1 and 10")

def show_history(self):
    self.master.destroy()
    root3 = tk.Tk()
    root3.title('History')
    history_window = gui_SIR_history(root3)

class gui_SIR_Param:
    """Class for entering SIR parameters"""

    def __init__(self, master, num_sim):
        self.param_list = [[], [], [], [], []]

```

```

self.counter = 0

self.number_of_simulations = num_sim
self.master = master
self.frame = ttk.Frame(master, padding=5)
self.frame.grid(row=0, column=0, sticky='nsew')

# label variables
self.lbl_name = ttk.Label(self.frame, text='Enter parameters for SIR model')
self.s_name = ttk.Label(self.frame, text='Susceptible')
self.i_name = ttk.Label(self.frame, text='Infected')
self.r_name = ttk.Label(self.frame, text='Recovered')
self.tr_name = ttk.Label(self.frame, text='Transmission rate')
self.re_name = ttk.Label(self.frame, text='Recovery rate')
self.btn_enter = ttk.Button(self.frame, text='Enter', command=self.enter_param)
self.btn_close = ttk.Button(self.frame, text='Close', command=self.exit)

# button variables
self.e_s = ttk.Entry(self.frame)
self.e_i = ttk.Entry(self.frame)
self.e_r = ttk.Entry(self.frame)
self.e_tr = ttk.Entry(self.frame)
self.e_re = ttk.Entry(self.frame)

# gridding label variables
self.lbl_name.grid(column=0, row=0, columnspan=2, sticky='n')
self.s_name.grid(column=0, row=1, sticky='w')
self.i_name.grid(column=0, row=2, sticky='w')
self.r_name.grid(column=0, row=3, sticky='w')
self.tr_name.grid(column=0, row=4, sticky='w')
self.re_name.grid(column=0, row=5, sticky='w')

self.e_s.grid(column=1, row=1, sticky='w')
self.e_i.grid(column=1, row=2, sticky='w')
self.e_r.grid(column=1, row=3, sticky='w')
self.e_tr.grid(column=1, row=4, sticky='w')
self.e_re.grid(column=1, row=5, sticky='w')

self.btn_enter.grid(column=1, row=6, columnspan=1)
self.btn_close.grid(column=0, row=6, columnspan=1)

self.master.columnconfigure(0, weight=1)
self.master.rowconfigure(0, weight=1)

# weight elements for resizing
self.frame.columnconfigure(0, weight=1)
self.frame.rowconfigure(0, weight=1)
self.frame.rowconfigure(1, weight=1)
self.frame.rowconfigure(2, weight=1)
self.frame.rowconfigure(3, weight=1)
self.frame.rowconfigure(4, weight=1)
self.frame.rowconfigure(5, weight=1)
self.frame.rowconfigure(6, weight=1)

def enter_param(self):

```

```

self.counter += 1

self.param_list[0].append(float(self.e_s.get()))
self.param_list[1].append(float(self.e_i.get()))
self.param_list[2].append(float(self.e_r.get()))
self.param_list[3].append(float(self.e_tr.get()))
self.param_list[4].append(float(self.e_re.get()))

self.e_s.delete(0, 'end')
self.e_i.delete(0, 'end')
self.e_r.delete(0, 'end')
self.e_tr.delete(0, 'end')
self.e_re.delete(0, 'end')

if self.counter == self.number_of_simulations:
    self.submit_param()
    self.counter = 0

def submit_param(self):
    """Creates queue object from my_sir function and calls the run simulation
    function
    """
    # print(self.param_list)
    self.master.destroy()

    pass1 = True
    for sub_list in self.param_list:
        for value in sub_list:
            if value < 0:
                pass1 = False
                err = error("Value", "Negative numbers cannot be used for any of
                    these inputs")

    if not pass1:
        root3 = tk.Tk()
        root3.title('Input Parameters')
        input_window = gui_SIR_Param(root3, self.number_of_simulations)
        root3.mainloop()
    else:
        queue = my_sir.QueueSimulation(self.number_of_simulations,
            self.param_list[0], self.param_list[1],
            self.param_list[2],
            self.param_list[3], self.param_list[4],
            1000, current_user)

        queue.run_simulation()

def exit(self):
    self.master.destroy()
    sir_win = tk.Tk()
    sir_win.title('SIR')
    sir_main = gui_First_SIR_Window(sir_win)

class gui_SIR_history:

```

```

def __init__(self, master):
    self.master = master
    self.frame = ttk.Frame(master, padding=5)
    self.frame.grid(row=0, column=0, sticky='nsew')
    self.user_history = my_sql.sir_return_history(current_user) # user_history is
        a list of tuples
    print(self.user_history)
    # print(self.user_history[0][1:])

    self.lb_history = tk.Listbox(self.frame, width=50)
    for i in range(len(self.user_history)):
        to_insert = str(i) + " " + str(self.user_history[i][1:])
        self.lb_history.insert(i, to_insert)

    self.lbl_title = ttk.Label(self.frame, text=f"History of {current_user}")
    self.btn_exit = ttk.Button(self.frame, text="Exit", command=self.exit)
    self.lbl_text = ttk.Label(self.frame, text="Enter number to simulate with same
        parameters")
    self.e_sim_num = ttk.Entry(self.frame)
    self.btn_use = ttk.Button(self.frame, text="Use values", command=self.use)

    self.lbl_title.grid(column=1, row=1, columnspan=3)
    self.lbl_text.grid(column=1, row=2, columnspan=3)
    self.lb_history.grid(column=1, row=3)
    self.e_sim_num.grid(column=2, row=3)
    self.btn_use.grid(column=3, row=3)
    self.btn_exit.grid(column=2, row=4, columnspan=2)

def exit(self):
    self.master.destroy()
    sir_win = tk.Tk()
    sir_win.title('SIR')
    sir_main = gui_First_SIR_Window(sir_win)

def use(self):
    """User enter number and set of parameters are retrieved from the database"""
    sim_number = int(self.e_sim_num.get())
    sim_param = list(self.user_history[sim_number][1:])
    print(sim_param)

    queue = my_sir.QueueSimulation(1, [sim_param[0]], [sim_param[1]],
        [sim_param[2]], [sim_param[3]],
        [sim_param[4]], sim_param[5], current_user)

    queue.run_simulation()

# -----

class gui_First_CA_Window:
    """GUI window where user can enter parameters manually, load file generated or
        show history of previously used parameters and choose one for the cecular
        automata model
    """

```

```

def __init__(self, master):
    self.master = master
    self.frame = ttk.Frame(master, padding=5)

    self.lbl_name = ttk.Label(self.frame, text='This is the Cellular Automata
        model')
    # self.num_sim = ttk.Entry(self.frame)
    # self.num_sim.insert(0, 1)
    self.btn_open_file = ttk.Button(self.frame, text='Load File',
        command=self.open_file)
    self.btn_input_param = ttk.Button(self.frame, text='Enter Parameters',
        command=self.input)
    self.btn_show_history = ttk.Button(self.frame, text='History',
        command=self.show_history)
    self.btn_close = ttk.Button(self.frame, text='Close', command=self.close)

    self.frame.grid(row=0, column=0, sticky='nsew')

    self.lbl_name.grid(column=0, row=0, columnspan=2, sticky='n')
    # self.num_sim.grid(column=0, row=1)
    self.btn_open_file.grid(column=0, row=1)
    self.btn_input_param.grid(column=1, row=1)
    self.btn_show_history.grid(column=0, row=2)
    self.btn_close.grid(column=1, row=2, sticky='s')

    self.master.columnconfigure(0, weight=1)
    self.master.rowconfigure(0, weight=1)

    self.frame.columnconfigure(1, weight=1)
    self.frame.rowconfigure(1, weight=1)

def open_file(self):
    # enter file stuff
    print("Opening file dialog")
    file = filedialog.askopenfile(mode="r")
    lines = [line.rstrip('\n') for line in file]
    file.close()

    if lines[-1] == "":
        del lines[-1]

    # result = [json.loads(item) for item in lines]
    self.master.destroy()

    ca = my_ca.cellular_automata(0, 0, 0, 0, 0, 0, False, 0, False, 0, True, lines)
    ca.new_generation()
    self.master.destroy()

def input(self):
    # manual user input
    self.master.destroy()
    root3 = tk.Tk()
    root3.title('Input Parameters')
    input_window = gui_CA_Param(root3)

```

```

def show_history(self):
    self.master.destroy()
    root3 = tk.Tk()
    root3.title('History')
    history_window = gui_CA_history(root3)

def close(self):
    self.master.destroy()
    main_win = tk.Tk()
    main_win.title('Main Window')
    new_window = gui_Main_Window(main_win)
    main_win.mainloop()

class gui_CA_Param:
    """GUI interface for inputting cellular automata parameters manually
    Need to make some entry boxes dependent on checkboxes
    """

    def __init__(self, master):
        self.master = master
        self.frame = ttk.Frame(master, padding=5)
        self.frame.grid(row=0, column=0, sticky='nsew')

        # label variables
        self.l_lbl_name = ttk.Label(self.frame, text='Enter parameters for CA model')
        self.l_no_cells = ttk.Label(self.frame, text='Number of cells')
        self.l_gen = ttk.Label(self.frame, text='Generations')
        self.l_size_x = ttk.Label(self.frame, text='Size x')
        self.l_size_y = ttk.Label(self.frame, text='Size y')
        self.l_inf_rad = ttk.Label(self.frame, text='Infection radius')
        self.l_no_inf = ttk.Label(self.frame, text='Number of infected')
        self.l_r_i = ttk.Label(self.frame, text='Recovered can be infected?')
        self.l_d_r = ttk.Label(self.frame, text='Days until recovery')
        self.l_use_imm = ttk.Label(self.frame, text='Use immunity')
        self.l_d_i = ttk.Label(self.frame, text='Days of immunity')

        # bool values for checkboxes
        self.b_r_i = tk.BooleanVar()
        self.b_u_i = tk.BooleanVar()

        # entry and checkbox variables
        self.e_no_cells = ttk.Entry(self.frame)
        self.e_gen = ttk.Entry(self.frame)
        self.e_size_x = ttk.Entry(self.frame)
        self.e_size_y = ttk.Entry(self.frame)
        self.e_inf_rad = ttk.Entry(self.frame)
        self.e_no_inf = ttk.Entry(self.frame)
        self.cb_r_i = ttk.Checkbutton(self.frame, variable=self.b_r_i)
        self.e_d_r = ttk.Entry(self.frame)
        self.cb_use_imm = ttk.Checkbutton(self.frame, variable=self.b_u_i)
        self.e_d_i = ttk.Entry(self.frame)

        self.btn_enter = ttk.Button(self.frame, text='Enter', command=self.enter_param)

```

```

self.btn_close = ttk.Button(self.frame, text='Close', command=self.close)

# grid label variables
self.l_lbl_name.grid(column=0, row=0, columnspan=2, sticky='n')
self.l_no_cells.grid(column=0, row=1, sticky='w')
self.l_gen.grid(column=0, row=2, sticky='w')
self.l_size_x.grid(column=0, row=3, sticky='w')
self.l_size_y.grid(column=0, row=4, sticky='w')
self.l_inf_rad.grid(column=0, row=5, sticky='w')
self.l_no_inf.grid(column=0, row=6, sticky='w')
self.l_r_i.grid(column=0, row=7, sticky='w')
self.l_d_r.grid(column=2, row=7, sticky='w')
self.l_use_imm.grid(column=0, row=8, sticky='w')
self.l_d_i.grid(column=2, row=8, sticky='w')

# grid entry variables
self.e_no_cells.grid(column=2, row=1, sticky='w')
self.e_gen.grid(column=2, row=2, sticky='w')
self.e_size_x.grid(column=2, row=3, sticky='w')
self.e_size_y.grid(column=2, row=4, sticky='w')
self.e_inf_rad.grid(column=2, row=5, sticky='w')
self.e_no_inf.grid(column=2, row=6, sticky='w')
self.cb_r_i.grid(column=1, row=7, sticky='w')
self.e_d_r.grid(column=3, row=7, sticky='w')
self.cb_use_imm.grid(column=1, row=8, sticky='w')
self.e_d_i.grid(column=3, row=8, sticky='w')

self.btn_enter.grid(column=0, row=9, columnspan=2, sticky='s')
self.btn_close.grid(column=2, row=9, columnspan=2, sticky='s')

# grid main column and tow
self.master.columnconfigure(0, weight=1)
self.master.rowconfigure(0, weight=1)

# weight elements for resizing
self.frame.columnconfigure(0, weight=1)
self.frame.rowconfigure(0, weight=1)
self.frame.rowconfigure(1, weight=1)
self.frame.rowconfigure(2, weight=1)
self.frame.rowconfigure(3, weight=1)
self.frame.rowconfigure(4, weight=1)
self.frame.rowconfigure(5, weight=1)
self.frame.rowconfigure(6, weight=1)

def enter_param(self):
    """Gets values that were input, creates a cellular automata object and calls
        the new_generation function to start the cellular automata function
    """
    # should call CA function in this
    no_cells = int(self.e_no_cells.get())
    generations = int(self.e_gen.get())
    size_x = int(self.e_size_x.get())
    size_y = int(self.e_size_y.get())
    inf_rad = int(self.e_inf_rad.get())
    no_inf = int(self.e_no_inf.get())

```

```

rec_inf = self.b_r_i.get()
days_rec = int(self.e_d_r.get())
use_imm = self.b_u_i.get()
days_imm = int(self.e_d_i.get())

self.master.destroy()
# print(rec_inf)
# print(use_imm)

arguments = [no_cells, generations, size_x, size_y, inf_rad, no_inf, rec_inf,
             days_rec, use_imm,
             days_imm, False]

my_sql.ca_enter_param(current_user, arguments)

# ca = my_ca.cellular_automata(no_cells, generations, size_x, size_y, inf_rad,
#                               no_inf, rec_inf, days_rec, use_imm,
#                               days_imm, False)
ca = my_ca.cellular_automata(*arguments) # arguments sent as separate
parameters

ca.new_generation()

def close(self):
    self.master.destroy()
    main_ca = tk.Tk()
    main_ca.title('CA')
    new_window = gui_First_CA_Window(main_ca)
    main_ca.mainloop()

class gui_CA_history:

    def __init__(self, master):
        self.master = master
        self.frame = ttk.Frame(master, padding=5)
        self.frame.grid(row=0, column=0, sticky='nsew')
        self.user_history = my_sql.ca_return_history(current_user) # user_history is a
        list of tuples
        print(self.user_history)
        # print(self.user_history[0][1:])

        self.lb_history = tk.Listbox(self.frame, width=50)
        for i in range(len(self.user_history)):
            to_insert = str(i) + " " + str(self.user_history[i][1:])
            self.lb_history.insert(i, to_insert)

        self.lbl_title = ttk.Label(self.frame, text=f"History of {current_user}")
        self.btn_exit = ttk.Button(self.frame, text="Exit", command=self.exit)
        self.lbl_text = ttk.Label(self.frame, text="Enter number to simulate with same
        parameters")
        self.e_sim_num = ttk.Entry(self.frame)
        self.btn_use = ttk.Button(self.frame, text="Use values", command=self.use)

        self.lbl_title.grid(column=1, row=1, columnspan=3)

```



```

self.lbl_text.grid(column=1, row=2, columnspan=3)
self.lb_history.grid(column=1, row=3)
self.e_sim_num.grid(column=2, row=3)
self.btn_use.grid(column=3, row=3)
self.btn_exit.grid(column=2, row=4, columnspan=2)

def exit(self):
    self.master.destroy()
    main_ca = tk.Tk()
    main_ca.title('CA')
    new_window = gui_First_CA_Window(main_ca)
    main_ca.mainloop()

def use(self):
    """User enter number and set of parameters are retrieved from the database"""
    sim_number = int(self.e_sim_num.get())
    sim_param = list(self.user_history[sim_number][1:])
    print(sim_param)
    sim_param.append(False)
    ca = my_ca.cellular_automata(*sim_param)
    ca.new_generation()

# -----

root = tk.Tk()
root.title('Main Window')
root.geometry("300x100")

window = gui_Main_Window(root)
# window = gui_First_CA_Window(root)
current_user = "zebedee"

root.mainloop()

```

8.2 SIR Model Function

```

import matplotlib.pyplot as plt
import pandas as pd
import sub_sql_functions as my_sql

class QueueSimulation:

    def __init__(self, n, s_list, i_list, r_list, b_list, g_list, t, current_user):
        self.n = n # number of simulations to be run
        self.parameters = []
        for i in range(n):
            self.parameters.append([s_list[i], i_list[i], r_list[i], b_list[i],
                                   g_list[i], t, i + 1])
            my_sql.sir_enter_param(current_user, [s_list[i], i_list[i], r_list[i],
                                                  b_list[i], g_list[i], t])
        print(self.parameters)

```

```

def run_simulation(self):
    sir_model = SIR_model()
    for i in range(self.n):
        sir_model.SIR_model(*self.parameters[i])
    plt.show()

class SIR_model:

    def __init__(self):
        pass

    def SIR_model(self, s0, i0, r0, beta, gamma, t, f, *args, **kwargs):
        """
        :param s0: number of susceptible people
        :param i0: number of infected people
        :param r0: number of recovered people
        :param beta: transmission rate of an individual
        :param gamma: recovery rate of an individual
        :param t: how long the simulation should run for
        :param f: how many graphs should be calculated simultaneously
        """

        plt.figure(f) # names the graph
        N = s0 + i0 + r0 # total population

        timearray = list(range(1, int(t))) # creates time array

    def eqns(param):
        # e = random.uniform(0, 1)
        e = 0
        S, I, R = param
        dsdt = (-(beta * S * I) / N) + (e * R) # rate of change of susceptible
            individuals
        didt = ((beta * S * I) / N) - gamma * I # rate of change of infected
            individuals
        drdt = (gamma * I) - (e * R) # rate of change of recovered individuals
        return dsdt, didt, drdt

    def solver(): # solves differential equations in eqns
        param = (s0, i0, r0)
        solver_result = [[], [], []]
        for time in timearray:
            eqns_results = eqns(param)
            x, y, z = (param[0] + eqns_results[0]), (param[1] +
                eqns_results[1]), (param[2] + eqns_results[2])
            solver_result[0].append(x)
            solver_result[1].append(y)
            solver_result[2].append(z)
            param = (x, y, z)
        return solver_result

    solver_result = solver()

```

```

# print(solver_result)

def export_to_excel(): # exports calculated results to excel
    data = {'Time': timearray,
            'S': solver_result[0],
            'I': solver_result[1],
            'R': solver_result[2]}

    df = pd.DataFrame(data, columns=['Time', 'S', 'I', 'R'])
    name = "output" + str(f) + ".xls"
    df.to_excel(name, sheet_name='output')

export_to_excel()
plt.plot(timearray, solver_result[0], label="S(t)")
plt.plot(timearray, solver_result[1], label="I(t)")
plt.plot(timearray, solver_result[2], label="R(t)")

class plot_graph:

    def __init__(self, ta, s, i, r):
        # deconstruct file here
        self.timearray = ta
        self.sus = s
        self.inf = i
        self.rec = r

    def plot(self):
        plt.plot(self.timearray, self.sus, label="S(t)")
        plt.plot(self.timearray, self.inf, label="I(t)")
        plt.plot(self.timearray, self.rec, label="R(t)")
        plt.show()

```

8.3 CA Function

```

# pylint: disable=unused-variable
# pylint: enable=too-many-lines

import matplotlib.pyplot as plt
import random
from matplotlib.animation import FuncAnimation
import json

class cell:
    """Each cell will be a class instance of this class"""

    def __init__(self, x, y, infected, d_r, d_i, u_i):
        self.x = x
        self.y = y
        self.infected = infected
        self.recovered = False
        self.recover_count = d_r # default - can be changed - time until infected
                                # cell recovers

```

```

        self.immune = False
        self.immune_count = d_i
        self.original_immune = d_i
        self.use_immunity = u_i
        # self.infection_rate = i

def cell_test_function(self):
    return self.x, self.y, self.infected

def location(self):
    # print(self.x, self.y)
    return self.x, self.y

def recover_generation(self):
    self.recover_count -= 1
    if self.recover_count <= 0:
        self.recovered = True
        self.infected = False
        self.recover_count = 10
        if self.use_immunity:
            self.immune = True

def immunity_generation(self):
    if self.immune:
        self.immune_count -= 1
        if self.immune_count <= 0:
            self.immune = False
            self.immune_count = self.original_immune

def movement(self):
    def nothing():
        pass

    # mvmt = 5
    mvmt = random.randint(0, 50)

    def north():
        self.y -= mvmt

    def northeast():
        self.x += mvmt
        self.y -= mvmt

    def east():
        self.x += mvmt

    def southeast():
        self.x += mvmt
        self.y += mvmt

    def south():
        self.y += mvmt

    def southwest():
        self.x -= mvmt

```

```

        self.y += mvmt

def west():
    self.x -= mvmt

def northwest():
    self.x -= mvmt
    self.y -= mvmt

instructions = {
    0: nothing,
    1: north,
    2: northeast,
    3: east,
    4: southeast,
    5: south,
    6: southwest,
    7: west,
    8: northwest
}

rand = random.randint(0, 8)
instructions[rand]() # like a switch case condition - for constant time
                    complexity
# print(self.x, self.y)

class cellular_automata:
    """Main class to run function"""

    def __init__(self, no_cells, generations, size_x, size_y, infection_radius,
                  infected, r_i, d_r, immunity, d_i,
                  user_file, *uf_param):
        """Creates list of how every many cells the user inputs so a list will
        look like ['cell1','cell2','cell3...']. Each
        element in that list will then be used as a dictionary key where the
        definition will be a class instance of cell. Each
        class instance will be created with a random x and y coordinate, and an
        infected status.
        r_i : recovered can be infected
        d_r : days until recovery
        """
        self.user_file = user_file
        self.use_immunity = immunity
        self.number_of_cells = no_cells
        self.number_of_infected = infected
        self.infection_radius = infection_radius
        self.generations = generations
        self.cell_list = []
        self.cell_object_dict = {}
        self.size_x = size_x
        self.size_y = size_y
        self.full_list = []
        self.r_i = r_i # recovered can be infected

```

```

if len(uf_param) != 0:
    self.uf_param = uf_param
    self.lines = list(uf_param)[0]

for i in range(no_cells):
    self.cell_list.append(("cell" + str(i)))

infected_counter = 0
for element in self.cell_list: # creates user inputted number of infected
    cells first, then creates normal cells
    infected_counter += 1
    infected_status = False
    if infected_counter < self.number_of_infected:
        infected_status = True
    rand_x, rand_y = self.rand_coordinate_generator()
    self.cell_object_dict[element] = cell(rand_x, rand_y,
                                           infected_status, d_r, d_i,
                                           self.use_immunity) # creates a
                                                                dictionary of cell objects

def rand_coordinate_generator(self):
    """Generates random coordinates for cells being generated"""
    rand_x = random.randint(0, self.size_x)
    rand_y = random.randint(0, self.size_y)
    return rand_x, rand_y

def export_data(self, sus_full, inf_full, rec_full, imm_full, lg_values,
time_array):
    """Should export data in a format that it can be analysed and reused
    gen_imm empty when not using immunity, but shouldn't be a problem"""

    filename = "ca_output.txt"
    with open(filename, 'w') as file:
        file.write(str(sus_full) + "\n")
        file.write(str(inf_full) + "\n")
        file.write(str(rec_full) + "\n")
        file.write(str(imm_full) + "\n")
        file.write(str(lg_values) + "\n")
        file.write(str(time_array) + "\n")

def import_data(self):

    if self.lines[-1] == "":
        del self.lines[-1]

    result = [json.loads(item) for item in self.lines]
    # print(result)
    return result

def update_position(self):
    """For each cell object, movement function will be called to see where the
    cell will move, and the x coordinate list and y coordinate list will
    be returned of the new generation"""
    loc_x = []
    loc_y = []

```

```

infected = []
recovered = []
immune = []

for cell_obj_name in self.cell_list: # for each cell object name ie.
    'cell1', 'cell2' etc, use the name as a dictionary key and run
    movement function and get location
    self.cell_object_dict[cell_obj_name].movement()
    loc_x.append(self.cell_object_dict[cell_obj_name].location()[0])
    loc_y.append(self.cell_object_dict[cell_obj_name].location()[1])
    infected.append(self.cell_object_dict[cell_obj_name].infected)
    recovered.append(self.cell_object_dict[cell_obj_name].recovered)
    immune.append(self.cell_object_dict[cell_obj_name].immune)

# print(infected)
# print(recovered)
# print(immune)
# print("-----")

# self.collect_data() # this function could be moved into the new
# generation class function

return loc_x, loc_y, infected, recovered, immune

def cells_touch(
    self): # need to change to put all infected in a list, THEN compare
    susceptible otherwise not proper
    """If another cell in in a certain radius of an infected cell, it will
    become infected. To be changed"""
    infected_locations = [] # list of tuples of infected cells
    recovered_obj = []
    susceptible_obj = []
    for cell_name in self.cell_list:
        if self.cell_object_dict[cell_name].infected:
            infected_locations.append(self.cell_object_dict[cell_name].location())
        elif self.cell_object_dict[cell_name].recovered:
            recovered_obj.append(self.cell_object_dict[cell_name]) # holds
            recovered both with and without immunity
        else:
            susceptible_obj.append(self.cell_object_dict[cell_name])

def touch(cell_obj):
    sus_x, sus_y = cell_obj.location()
    for infected_tuple in infected_locations:
        if (sus_x - infected_tuple[0])**2 + (
            sus_y - infected_tuple[1])**2 <= self.infection_radius**2: #
            equation of a circle
            # self.cell_object_dict[cell_name].infected = True # need to
            chance for chance
            # PROBLEM
            cell_obj.infected = True
            # print(f'{cell_obj} has been infected')
            # cell is infected, LISTS ARE NOT UPDATED

```

```

    if self.r_i: # if recovered can be infected - doesn't change immunity
        status but is currently dependent on it - CHANGE
        for recovered in recovered_obj:
            if not recovered.immune:
                touch(recovered)
        for susceptible in susceptible_obj:
            if not susceptible.immune:
                touch(susceptible)

def cell_recovery(self):
    """Cells automatically recover after a certain period of time"""
    for cell_name in self.cell_list:
        cell_obj = self.cell_object_dict[cell_name]
        if cell_obj.recovered == False and cell_obj.infected == True:
            cell_obj.recover_generation()
        elif cell_obj.recovered == True and cell_obj.infected:
            cell_obj.recover_generation()

def cell_immunity(self):
    for cell_name in self.cell_list:
        cell_obj = self.cell_object_dict[cell_name]
        if cell_obj.recovered == True and cell_obj.immune == True:
            cell_obj.immunity_generation()

def new_generation(self):
    """Main definition for running program. For the number of generations to
    simulate, call self.update_position() to get new coordinate lists"""

    # coordinates = []

    sus_full = []
    inf_full = []
    rec_full = []
    imm_full = []

    lg_values = [[], [], []]

    time_array = list(range(0, self.generations))

    if not self.user_file:
        # if user choosing own file will not need - put in function later
        for i in range(
            self.generations):

            if i % 50 == 0:
                print("Generating generation " + str(i))

            x_list, y_list, infected, recovered, immune = self.update_position()

            # check if cells touch here, then can adjust objects if need
            self.cells_touch() # adjusts the objects, not any list

            # recovery function
            self.cell_recovery()

```



```

# immunity function
if self.use_immunity:
    self.cell_immunity()

gen_sus = []
gen_inf = []
gen_rec = []
gen_imm = []

# puts cells in list depending on their status and whether immunity
# is used
if self.use_immunity:
    for inf in range(len(self.cell_list)):
        if infected[inf]: # if True
            gen_inf.append([x_list[inf], y_list[inf]])
        elif immune[inf]:
            gen_imm.append([x_list[inf], y_list[inf]])
        elif recovered[inf]:
            gen_rec.append([x_list[inf], y_list[inf]])
        else:
            gen_sus.append([x_list[inf], y_list[inf]])
    else:
        for inf in range(len(self.cell_list)):
            if infected[inf]: # if True
                gen_inf.append([x_list[inf], y_list[inf]])
            elif recovered[inf]:
                gen_rec.append([x_list[inf], y_list[inf]])
            else:
                gen_sus.append([x_list[inf], y_list[inf]])

# print(gen_inf)
# print(gen_rec)
# print(gen_sus)
# print("-----")

sus_full.append(gen_sus)
inf_full.append(gen_inf)
rec_full.append(gen_rec)
if self.use_immunity:
    imm_full.append(gen_imm)

lg_values[0].append(len(gen_sus))
lg_values[1].append(len(gen_inf))
lg_values[2].append((len(gen_rec) + len(gen_imm)))

# coordinates.append([x_list, y_list])

# print(sus_full)

# self.export_to_excel() # will soon be redundant
if not self.user_file:
    self.export_data(sus_full, inf_full, rec_full, imm_full, lg_values,
                    time_array) # WORKING NOW

# if using own values, assign them here

```

```

if self.user_file:
    sus_full, inf_full, rec_full, imm_full, lg_values, time_array =
        self.import_data()
    self.generations = len(time_array)
    print("Imported data!")
    # print(sus_full)
    # print(inf_full)
    # print(rec_full)
    # print(imm_full)
    # print(lg_values)
    # print(time_array)

fig, axs = plt.subplots(2)
fig.suptitle('Cellular Automata')

# animate_graph = Anim(self.generations, sus_full, inf_full, rec_full,
    imm_full, self.use_immunity, time_array, lg_values)

def animate(i): # need to adjust to work with two graphs
    #
        https://stackoverflow.com/questions/42621036/how-to-use-funcanimation-to-update-an

    axs[0].cla()

    x_sus_full = [cell[0] for cell in sus_full[i]]
    y_sus_full = [cell[1] for cell in sus_full[i]]
    x_inf_full = [cell[0] for cell in inf_full[i]]
    y_inf_full = [cell[1] for cell in inf_full[i]]
    x_rec_full = [cell[0] for cell in rec_full[i]]
    y_rec_full = [cell[1] for cell in rec_full[i]]

    axs[0].scatter(x_sus_full, y_sus_full, color='blue')
    axs[0].scatter(x_inf_full, y_inf_full, color='red')
    axs[0].scatter(x_rec_full, y_rec_full, color='purple')
    if self.use_immunity:
        axs[0].scatter([cell[0] for cell in imm_full[i]], [cell[1] for cell
            in imm_full[i]], color='gray')

    # plots line graph
    axs[1].plot(time_array[0:i], lg_values[0][0:i], label="Susceptible",
        color="blue")
    axs[1].plot(time_array[0:i], lg_values[1][0:i], label="Infected",
        color="red")
    axs[1].plot(time_array[0:i], lg_values[2][0:i], label="recovered",
        color="purple")

    # plt.xlim(0, self.size_x)
    # plt.ylim(0, self.size_y)

ani = FuncAnimation(plt.gcf(), animate, frames=self.generations,
    interval=100, repeat=False)

# ani.save('video.mp4', writer='ffmpeg', fps=30, dpi=250)

plt.tight_layout()

```

```
plt.show()
```

8.4 SQL Function

```
import sqlite3
import os.path

def initial_setup():
    """Sets up clean database with users table and ca_param table. Users table
    contains username and
    whether user can see all parameters previously used, and ca_param table
    contains the history of
    parameters used as well as the user who executed them"""
    conn = sqlite3.connect('my_database.db')
    c = conn.cursor()
    # c.execute("DROP TABLE users")
    # c.execute("DROP TABLE ca_param")
    c.execute("CREATE TABLE users (username text PRIMARY KEY, see_all integer)")

    c.execute("""CREATE TABLE ca_param (
        user string,
        no_cells integer,
        generations integer,
        size_x integer,
        size_y integer,
        infection_radius integer,
        no_infected integer,
        recovered_can_be_infected integer,
        days_until_recovered integer,
        use_immunity integer,
        days_of_immunity integer
    )""")

    c.execute("INSERT INTO users VALUES (:username, :see_all)", {'username':
        'admin', 'see_all': 1})

    c.execute("""CREATE TABLE sir_param (
        user string,
        sus0 integer,
        inf0 integer,
        rec0 integer,
        beta integer,
        gamma integer,
        time integer
    )""")

    conn.commit()
    conn.close()

def enter_username(in_user):
    """If new username entered, it will create a record in the users table for
    that user, if username
    entered already exists nothing happens. Username is returned"""
```

```

conn = sqlite3.connect('my_database.db')
c = conn.cursor()
c.execute("INSERT OR IGNORE INTO users VALUES (:username, :see_all)",
        {'username': in_user, 'see_all': 0}) # don't add if duplicate username
conn.commit()
conn.close()
return in_user

def ca_enter_param(in_user, up):
    """Inserts new parameters entered by the user into the CA parameter database"""
    conn = sqlite3.connect('my_database.db')
    c = conn.cursor()
    c.execute("""INSERT INTO ca_param VALUES (:user, :no_cells, :generations,
        :size_x, :size_y,
                                :infection_radius, :no_infected,
                                :recovered_can_be_infected,
                                :days_until_recovered, :use_immunity,
                                :days_of_immunity)""",
        {'user': in_user, 'no_cells': up[0], 'generations': up[1], 'size_x':
            up[2], 'size_y': up[3],
            'infection_radius': up[4], 'no_infected': up[5],
            'recovered_can_be_infected': up[6],
            'days_until_recovered': up[7], 'use_immunity': up[8],
            'days_of_immunity': up[9]})

    conn.commit()
    conn.close()

def ca_return_history(in_user):
    """Returns entered parameter history depending on current user"""
    conn = sqlite3.connect('my_database.db')
    c = conn.cursor()
    c.execute("SELECT * FROM ca_param WHERE user=:curr_user", {'curr_user':
        in_user})
    # conn.close()
    return c.fetchall()

def sir_enter_param(in_user, up):
    """Inserts new parameters entered by the user into the SIR parameter database"""
    conn = sqlite3.connect('my_database.db')
    c = conn.cursor()
    c.execute("""INSERT INTO sir_param VALUES (:user, :sus0, :inf0, :rec0, :beta,
        :gamma, :time)""",
        {'user': in_user, 'sus0': up[0], 'inf0': up[1], 'rec0': up[2],
            'beta': up[3], 'gamma': up[4], 'time': up[5]
        })

    conn.commit()
    conn.close()

def sir_return_history(in_user):
    conn = sqlite3.connect('my_database.db')
    c = conn.cursor()

```

```

        c.execute("SELECT * FROM sir_param WHERE user=:curr_user",
                  {'curr_user':in_user})
        return c.fetchall()

# initial_setup()

# enter_username("Alice")

# conn = sqlite3.connect('my_database.db')
# c = conn.cursor()
#
# c.execute("SELECT * FROM users")
# print(c.fetchall())

# ca_enter_param('chase', [10, 25, 50, 50, 3, 3, True, 5, True, 5])
# ca_enter_param('chase', [1, 2, 5, 5, 1, 3, True, 5, True, 5])
# ca_enter_param('Alice', [33, 5, 80, 30, 3, 3, True, 5, True, 5])
# c.execute("SELECT * FROM ca_param")
# print(c.fetchall())

```
