

Jiology: A Constrained State-Transition Framework for Multi-Agent Resource Allocation

Kaiming Zhang

August 2026

Abstract

Complex dynamic systems typically contain local agents, interaction networks, external inputs, and resource constraints simultaneously. This paper proposes Jiology as a strict constrained four-element model and tests its minimal form in a reproducible multi-agent resource allocation simulation. The basic structure of Jiology is strictly represented by four objects: state, module, interaction, and constraint, (S, M, I, C) . The state-transition function is not a fifth basic object, but an operational rule derived jointly from the four-element structure, external inputs, and disturbances. Rather than reducing all systems to a single deterministic formula, the framework allows stochastic transitions, external inputs, and unmodeled disturbances. The experiment compares three mechanisms - no explicit constraint, fixed-strength constraint, and inequality-based adaptive constraint - using 40 agents, 200 time steps, and 200 random seeds to evaluate final resource inequality. The results show that a fixed low transfer cap produces a higher final Gini coefficient (mean 0.469, 95% CI [0.446, 0.492]), whereas the no-constraint and adaptive-constraint conditions yield 0.265 (95% CI [0.259, 0.271]) and 0.267 (95% CI [0.260, 0.273]), respectively. The result supports only a local conclusion: under the present simulation setting, constraint strength and interaction mechanisms jointly affect the resulting resource allocation structure. It does not demonstrate that Jiology can explain all complex systems, nor that adaptive constraints are generally superior to other mechanisms. Jiology is positioned here as an extensible modeling interface and research program, with explicit model definitions, an experimental protocol, reproducibility information, and limitations.

Keywords: complex dynamic systems; multi-agent systems; state transition; resource allocation; constraint mechanism; simulation; reproducibility

1 Introduction

Although artificial intelligence, multi-agent markets, organizations, and social systems differ in their objects of study, at a given scale they can all be represented as dynamic processes composed of analytical units, undergoing state changes through interactions, and subject to resource or rule constraints. Complex-systems research has developed a range of mature methods, including agent-based modeling, network models, dynamical systems, and control methods [1–4]. This paper does not claim that these methods lack theory. Instead, it asks a more limited research question: can a set of compatible interfaces describe states, agents, interactions, constraints, and transition mechanisms across different systems, and can this interface be implemented as a runnable and testable model?

The core object of Jiology is not the “ultimate nature of the world,” but an observable, representable, and testable complex dynamic system. This paper strictly adopts a four-element representation, with (S, M, I, C) as the only basic structure of Jiology:

$$\mathcal{J} = (S, \mathcal{M}, \mathcal{I}, \mathcal{C}).$$

Here, S is the state structure, $\mathcal{M}$ is the module structure, $\mathcal{I}$ is the interaction mechanism, and $\mathcal{C}$ is the constraint mechanism. The state-transition function F or the stochastic transition

kernel P_θ is not a fifth basic object. Rather, it is an operational rule derived from the four-element structure under specific scale, boundary, external-input, and parameter conditions. To avoid attributing external shocks to internal interactions, the paper additionally introduces the external input e_t and disturbance ε_t :

$$s_{t+1} = f_\theta(s_t, \mathcal{M}_t, a_t, e_t) + \varepsilon_t.$$

In a stochastic model, the transition can be written as:

$$s_{t+1} \sim P_\theta(\cdot \mid s_t, \mathcal{M}_t, a_t, e_t, \mathcal{C}_t).$$

This paper makes three contributions. First, it strictly retains the Jiology four-element core (S, M, I, C) and explicitly defines the state-transition function as a derived operational rule of the four-element structure rather than a fifth basic object. Second, it provides a more rigorous model representation than simply “adding interaction to state and then subtracting constraints,” distinguishing state from state space, interaction from causality, and constraints from subtractable dynamical terms. Third, it designs a reproducible multi-agent resource allocation simulation that translates the Jiology framework into explicit modules, interactions, and constraints. Fourth, it reports actual execution results and limits their interpretation to the experimental environment rather than treating conceptual mapping as a proof of a universal theory.

2 Related Work and Positioning

2.1 Complex Adaptive Systems

Research on complex adaptive systems focuses on how multiple agents generate collective behavior through local interactions, emphasizing emergence, adaptation, and multi-scale structure [1,2]. Jiology relates to this tradition through an interface-oriented rather than substitutive role: it seeks to make “agent - interaction - state - constraint” explicit as modeling components that facilitate cross-case comparison, without claiming to reinvent complex-systems theory.

2.2 Agent-Based Modeling

Agent-based modeling typically generates system-level outcomes by defining agent attributes, decision rules, environments, and interaction mechanisms [3]. The simulation in this paper follows this approach while treating the constraint mechanism as an independent experimental factor. This makes it possible to test how constraints alter system trajectories under the same interaction rule.

2.3 Networks and Dynamical Systems

Network science provides tools for representing agent relationships and structural change, while dynamical systems provide a formal language for studying how states evolve over time [4,5]. This paper uses a discrete-time, stochastic, finite-agent model as a minimal experiment and does not attempt to cover continuous-time systems, game-theoretic equilibria, learning dynamics, or open-system thermodynamics.

2.4 Scope of This Paper

This paper does not claim that (S, M, I, C) automatically produces unique predictions, nor does it equate “increased complexity” with thermodynamic entropy increase. It tests only a local question: given a resource-allocation interaction mechanism and external disturbances, do different constraint rules produce different levels of resource inequality?

3 Jiology Formal Model

3.1 State, Modules, and Interaction

Suppose the system contains N agents. The state at time t is:

$$s_t = (r_t, G_t),$$

where $r_t = (r_{1,t}, \dots, r_{N,t})$ is the agent resource vector and G_t is an optional interaction graph. In the minimal experiment used here, the interaction graph is not updated as an independent state variable but is generated through random pairings at each time step. The module set is:

$$\mathcal{M}_t = \{m_{1,t}, \dots, m_{N,t}\}.$$

The interaction mechanism consists of agent pairing and resource-transfer rules. For each pair of agents (i, j) , define the difference as $d_{ij,t} = r_{i,t} - r_{j,t}$. If $d_{ij,t} > 0$, the richer agent transfers a certain amount of resources to the poorer agent, and vice versa.

3.2 Constraint Mechanism

The constraint mechanism limits the maximum amount of resources that each pair of agents can transfer in one time step. Three conditions are compared:

1. No explicit constraint: the single-transfer upper bound is 0.20.
2. Fixed constraint: the single-transfer upper bound is 0.01.
3. Adaptive constraint: the upper bound is $\min(0.08, 0.01 + 0.25 \text{Gini}(r_t))$.

Here, “no explicit constraint” does not mean that the system has no limitations. It means only that the low transfer cap defined for the experiment is absent; resource non-negativity and the requirement that transfers cannot exceed the sender’s holdings still apply.

3.3 State Update

For each random pairing, the transfer amount is defined as:

$$\delta_{ij,t} = \text{sign}(d_{ij,t}) \min(0.8|d_{ij,t}|, c_t),$$

where c_t is the transfer upper bound specified by the current constraint condition. After one round of pairings, the system receives independent Gaussian disturbances with mean 0 and standard deviation 0.015, resource values are truncated so that they do not fall below 0.02, and each agent then receives a uniform resource increment of 0.004. Thus, the update mechanism used in this paper is:

$$r_{t+1} = T_{C_t}(r_t, a_t) + \varepsilon_t + b,$$

where T_{C_t} is the constrained interaction update, ε_t is the disturbance, and b is the uniform increment. This equation is an experimental implementation, not a universal law of all complex systems.

3.4 Evaluation Metric

The primary metric is the final Gini coefficient:

$$\text{Gini}(r) = \frac{\sum_{i=1}^N (2i - N - 1)r_{(i)}}{N \sum_i r_i},$$

where $r_{(i)}$ denotes the resource value after sorting from smallest to largest. A higher Gini coefficient indicates greater inequality in resource distribution. Each condition is run with 200 random seeds, and the mean, sample standard deviation, and 95% confidence interval based on a normal approximation are reported.

4 Research Question and Falsifiable Hypotheses

This paper tests only the following research question: under the same number of agents, interaction rules, and external disturbances, does the constraint mechanism change final resource inequality?

Three directional hypotheses are specified in advance:

- H1:** A fixed low transfer cap will weaken resource redistribution among agents, and therefore the final Gini coefficient will be higher than under the no-explicit-constraint condition.
- H2:** An adaptive constraint based on the current level of inequality will partially approach the equilibrium effect of the no-explicit-constraint condition.
- H3:** The effect of the constraint mechanism depends on interaction rules and resource disturbances; if the interaction rule changes, H1 and H2 should not be treated as necessarily valid.

H3 is an important boundary condition. This paper does not interpret the results as “less constraint is always better,” but only discusses one specific resource-transfer constraint in the present model.

5 Experimental Setup

The experiment uses 40 agents and 200 time steps. In each run, resources are initialized from a log-normal distribution and normalized to a mean of 1. At each time step, agents are randomly shuffled and paired. All agents follow the same interaction rule for resource transfers; the only change is the transfer-cap mechanism. Each condition uses random seeds 0–199, for a total of 600 independent runs.

Table 1: Experimental Factors and Settings

Factor	Setting
Number of agents	40
Time steps	200
Conditions	No explicit, fixed, adaptive constraint
Random seeds	0–199
Initial resources	Log-normal distribution, normalized mean 1
Interaction	Random pairing, partial equalizing transfer
External disturbance	Normal disturbance, standard deviation 0.015
Primary metric	Final Gini coefficient
Confidence interval	95%, based on 200 runs

The implementation script, raw trajectories, summary tables, and result figures should be provided as ancillary files at submission or together with a public code repository. The current version stores the experimental script and output files with the document but does not yet include a public repository link.

6 Experimental Results

The final Gini coefficients under the three conditions are as follows:

Table 2: Final Gini Coefficients under Three Constraint Conditions

Constraint condition	Mean	Std. dev.	95% CI
No explicit constraint	0.2648	0.0437	[0.2587, 0.2709]
Fixed constraint	0.4691	0.1683	[0.4457, 0.4924]
Adaptive constraint	0.2666	0.0448	[0.2604, 0.2729]

Final inequality is clearly higher under the fixed low transfer cap than under the other two conditions. The adaptive-constraint result is close to the no-explicit-constraint condition. This result is directionally consistent with H1 and H2, but it does not constitute a universal proof because the adaptive rule itself is designed from the Gini coefficient and the experiment uses only one equalizing interaction rule.

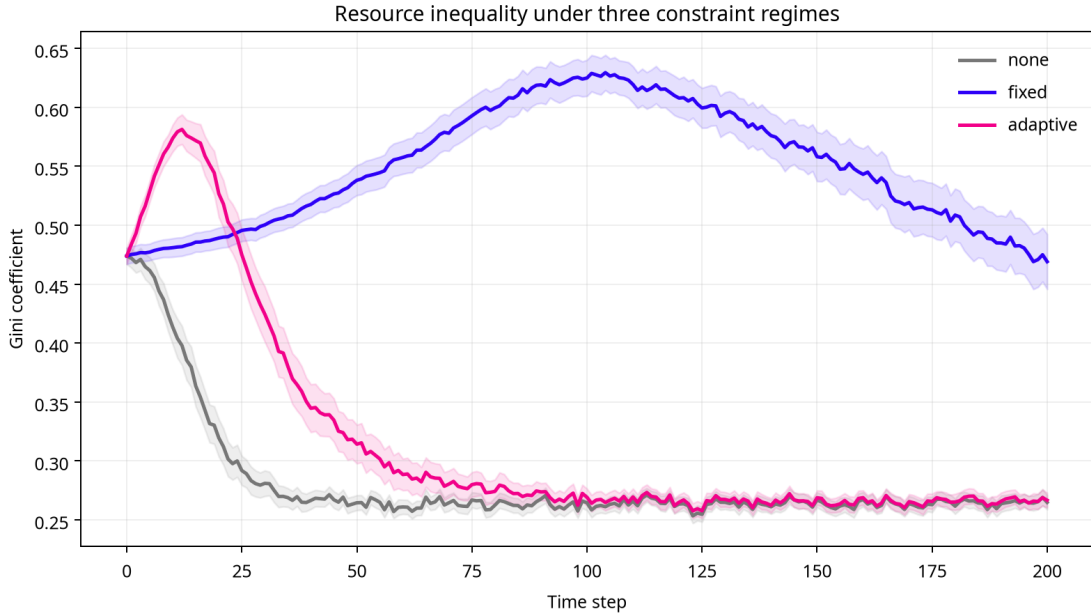


Figure 1: Resource inequality trajectories under three constraint regimes

The shaded regions in Figure 1 represent approximate confidence bands around the mean based on 200 runs. The results show that the constraint mechanism changes the speed at which the system reaches resource redistribution and its final structure. However, this paper does not treat efficiency, total resources, adaptation speed, or collapse probability beyond the Gini coefficient as primary conclusions; therefore, these results cannot determine which mechanism is superior in real organizations or markets.

7 Discussion

The experiment supports one limited use of the Jiology framework: it can organize “agent - interaction - constraint - state change” into an explicit simulation interface, allowing researchers to change the constraint mechanism independently, record state trajectories, and compare outcomes. Compared with conceptual mapping alone, the paper specifies state variables, interaction rules, constraint parameters, random disturbances, evaluation metrics, and failure conditions.

However, the experiment does not demonstrate that Jiology is a universal cross-domain theory. First, (S, M, I, C) has substantial representational flexibility, and many existing models can be redescribed using these names; without predictive gain or mechanistic gain, a unified naming scheme alone is insufficient to constitute a theoretical contribution. Second, the adaptive constraint in this paper directly depends on the current Gini coefficient, so the result contains a clear model-design component. Third, the experiment uses a closed, low-dimensional, explicitly structured resource system and therefore cannot represent markets, organizations, AI systems, or social systems.

This paper also does not use “entropy increase” to explain the experimental results. Changes in resource inequality are produced by the specific interaction rules, transfer caps, and disturbance mechanisms and cannot directly be described as thermodynamic entropy increase or as a general increase in the complexity of all complex systems. Future work on entropy or complexity would require a predefined state function, system boundary, external input, and testable inequality.

8 Limitations

First, the experiment does not systematically compare Jiology with existing multi-agent resource-allocation algorithms, so the paper cannot claim that the Jiology model is superior to existing methods. Second, the experiment uses homogeneous agents and a simple equalizing transfer rule, without heterogeneous agent objectives, learning, strategic behavior, or changes in network topology. Third, the confidence intervals use a normal approximation and reflect only uncertainty from random seeds, not uncertainty from model specification or parameter selection. Fourth, the current implementation does not have a public code repository link and therefore has not yet reached full open-reproducibility conditions. Fifth, the paper studies only one local simulation and does not support broad extrapolation to AI, markets, organizations, or civilization systems.

9 Conclusion

This paper proposes Jiology as a constrained state-transition framework and performs a minimal empirical test through a multi-agent resource allocation simulation. Under the present settings, a fixed low transfer cap produces higher resource inequality, while an adaptive cap based on the degree of inequality approaches the result of the no-explicit-constraint condition.

The more important conclusion is not that any particular constraint mechanism is universally effective, but that a cross-domain unified framework becomes testable only after states, interactions, constraints, transition functions, evaluation metrics, and failure conditions are made explicit. Therefore, Jiology V1.0 should be positioned as a modeling interface and research program for complex dynamic systems, rather than as a completed ultimate theory.

Future work includes adding heterogeneous agent objectives; comparing network topologies and interaction rules; introducing learning and strategic behavior; comparing with standard baseline models; conducting parameter-sensitivity, cross-scenario, and external-data validation; and establishing a public code repository with versioned experimental records.

References

- [1] Holland, J. H. (1995). *Hidden Order: How Adaptation Builds Complexity*. Addison-Wesley.
- [2] Mitchell, M. (2009). *Complexity: A Guided Tour*. Oxford University Press. <https://global.oup.com/academic/product/complexity-9780199798100>

- [3] Macal, C. M., & North, M. J. (2010). Tutorial on agent-based modelling and simulation. *Journal of Simulation*, 4(3), 151–162. <https://doi.org/10.1057/jos.2010.3>
- [4] Watts, D. J., & Strogatz, S. H. (1998). Collective dynamics of 'small-world' networks. *Nature*, 393, 440–442. <https://doi.org/10.1038/30918>
- [5] Strogatz, S. H. (1994). *Nonlinear dynamics and chaos: With applications to physics, biology, chemistry, and engineering*. Perseus Books.
- [6] arXiv. *Submission Guidelines and Policies for Format Requirements*. <https://info.arxiv.org/help/submit/index.html>; https://info.arxiv.org/help/policies/format_requirements.html

A Reproducibility Notes

Environment: Python 3.11; dependencies include NumPy, Pandas, and Matplotlib. The experimental script `resource_sim.py` generates the raw trajectories `trajectories.csv`, the final summary `final_summary.csv`, the confidence-interval table, and Figure 1. All random seeds are explicitly recorded as 0–199.

Reproduction Command

```
python3 resource_sim.py
```

Before submission to arXiv, the script and output files should be uploaded to a public code or data repository and a stable link should be inserted into the paper. According to arXiv’s official format requirements, a submission should include author attribution and complete references; if code or data links are included in the paper, they should point to a publicly accessible repository [6].