



Jobs

Generated by Talend Data Fabric

Project Name	zach-talend	GENERATION DATE	Feb 5, 2019 12:10:37 PM
AUTHOR	Lorenzini, Zach	Talend Data Fabric VERSION	7.1.1.20181026_1147

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)


Project Description

Properties	Values
Name	zach-talend
Language	java
Description	

Description

Properties	Values
Name	ROUTE_ESB_API
Author	Lorenzini, Zach
Version	0.1
Purpose	
Status	
Description	
Creation	Sep 5, 2018 1:13:30 PM
Modification	Dec 19, 2018 9:20:45 AM

Preview Picture

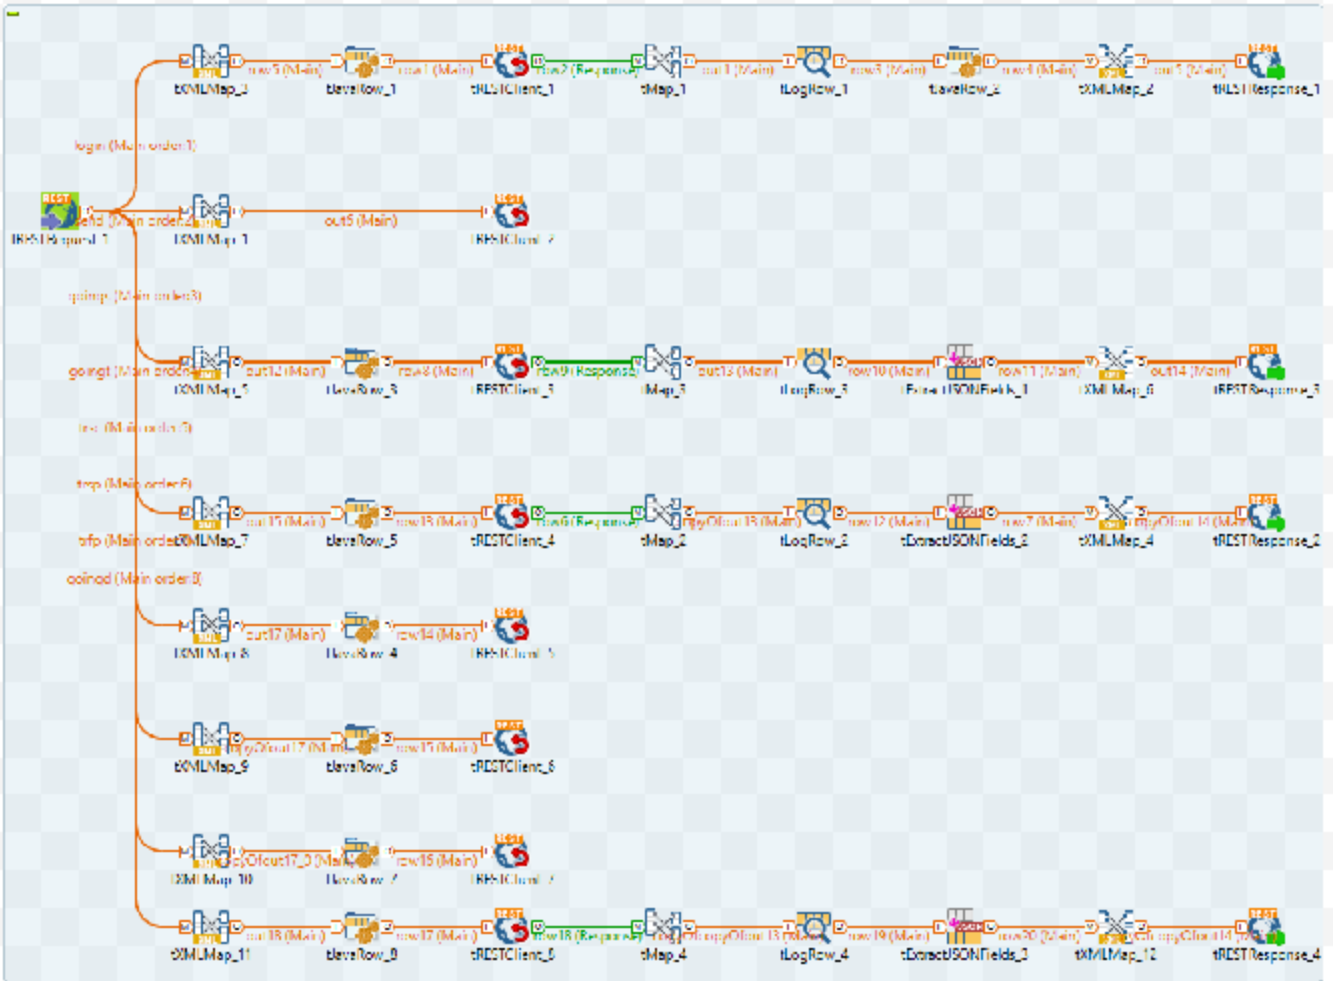

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false

Implicit tContextLoad	false
-----------------------	-------

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt?	Type	Value	Source
------	--------	--------------	------	-------	--------

username	username?	false	id_String		
password	password?	false	id_String		
username_condition	username_condition?	false	id_String		
utype	utype?	false	id_String		
fullq	fullq?	false	id_String		
emptyq	emptyq?	false	id_String		
truckid	truckid?	false	id_String		
destid	destid?	false	id_String		
getwh	getwh?	false	id_String		
maprdbuser	maprdbuser?	false	id_String	mapr	mapr_auth
maprdbpass	maprdbpass?	false	id_String	Efgh5678	mapr_auth
truck_condition	truck_condition?	false	id_String		
maprdb_url	maprdb_url?	false	id_String		
destination_condition	destination_condition?	false	id_String		

Component List

Component Name	Component Type
----------------	----------------


tExtractJSONFields_1	tExtractJSONFields
tExtractJSONFields_2	tExtractJSONFields
tExtractJSONFields_3	tExtractJSONFields
tJavaRow_1	tJavaRow
tJavaRow_2	tJavaRow
tJavaRow_3	tJavaRow
tJavaRow_4	tJavaRow
tJavaRow_5	tJavaRow
tJavaRow_6	tJavaRow
tJavaRow_7	tJavaRow
tJavaRow_8	tJavaRow
tLogRow_1	tLogRow
tLogRow_2	tLogRow
tLogRow_3	tLogRow
tLogRow_4	tLogRow
tMap_1	tMap
tMap_2	tMap

tMap_3	tMap
tMap_4	tMap
tRESTClient_1	tRESTClient
tRESTClient_2	tRESTClient
tRESTClient_3	tRESTClient
tRESTClient_4	tRESTClient
tRESTClient_5	tRESTClient
tRESTClient_6	tRESTClient
tRESTClient_7	tRESTClient
tRESTClient_8	tRESTClient
tRESTRequest_1	tRESTRequest
tRESTResponse_1	tRESTResponse
tRESTResponse_2	tRESTResponse
tRESTResponse_3	tRESTResponse
tRESTResponse_4	tRESTResponse
tXMLMap_1	tXMLMap
tXMLMap_10	tXMLMap

tXMLMap_11	tXMLMap
tXMLMap_12	tXMLMap
tXMLMap_2	tXMLMap
tXMLMap_3	tXMLMap
tXMLMap_4	tXMLMap
tXMLMap_5	tXMLMap
tXMLMap_6	tXMLMap
tXMLMap_7	tXMLMap
tXMLMap_8	tXMLMap
tXMLMap_9	tXMLMap

Components Description

Component tExtractJSONFields

	UNIQUE NAME	tExtractJSONFields_1	INPUT(S)	tLogRow_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tXMLMap_6

Component Parameters:

Properties	Values
Unique Name	tExtractJSONFields_1

Component Name	tExtractJSONFields
Version	0.102 (ALPHA)
Family	Processing/Fields
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tExtractJSONFields
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
REPOSITORY_ALLOW_AUTO_SWITCH	TRUE
Schema	Built-In
Read By	JSONPATH


API version	2_1_0
JSON field	string
Loop XPath query	"/bills/bill/line"
Loop Jsonpath query	"\$.DocumentStream[*]"
Mapping	[{SCHEMA_COLUMN=_id, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=username, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=utype, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=fullq, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=emptyq, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=truckid, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=destid, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=swhst, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=strct, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=dtrat, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=dwhct, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=dtrft, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=stage, QUERY=, NODECHECK=false, ISARRAY=false}]
Mapping	[{SCHEMA_COLUMN=_id, QUERY="_id"}, {SCHEMA_COLUMN=username, QUERY="username"}, {SCHEMA_COLUMN=utype, QUERY="utype"}, {SCHEMA_COLUMN=fullq, QUERY="fullq"}, {SCHEMA_COLUMN=emptyq, QUERY="emptyq"}, {SCHEMA_COLUMN=truckid, QUERY="truckid"}, {SCHEMA_COLUMN=destid, QUERY="destid"}, {SCHEMA_COLUMN=swhst, QUERY="swhst"}, {SCHEMA_COLUMN=strct, QUERY="strct"}, {SCHEMA_COLUMN=dtrat, QUERY="dtrat"}, {SCHEMA_COLUMN=dwhct, QUERY="dwhct"}, {SCHEMA_COLUMN=dtrft, QUERY="dtrft"}, {SCHEMA_COLUMN=stage, QUERY="stage"}]
Die on error	false
Schema	Built-In
!!!SCHEMA_OPT_NUM.NAME!!!	100
!!!DESTINATION.NAME!!!	tExtractJSONFields_1
Encoding	"UTF-8"
!!!SPLIT_LIST.NAME!!!	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tExtractJSONFields_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
_id	false	String			true	
username	false	String			true	
utype	false	String			true	
fullq	false	String			true	
emptyq	false	String			true	
truckid	false	String			true	
destid	false	String			true	
swhst	false	String			true	
strct	false	String			true	
dtrat	false	String			true	
dwhct	false	String			true	
dtrft	false	String			true	
stage	false	String			true	

Original Function Parameters:
Component tExtractJSONFields

	UNIQUE NAME	tExtractJSONFields_2	INPUT(S)	tLogRow_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tXMLMap_4

Component Parameters:

Properties	Values
Unique Name	tExtractJSONFields_2
Component Name	tExtractJSONFields
Version	0.102 (ALPHA)
Family	Processing/Fields
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tExtractJSONFields
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
REPOSITORY_ALLOW_AUTO_SWITCH	TRUE
Schema	Built-In
Read By	JSONPATH
API version	2_1_0
JSON field	string
Loop XPath query	"/bills/bill/line"
Loop Jsonpath query	"\$.DocumentStream[*]"
Mapping	[[{SCHEMA_COLUMN=_id, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=username, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=utype, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=fullq, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=emptyq, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=truckid, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=destid, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=swhst, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=strct, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=dtrat, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=dwhct, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=dtrft, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=stage, QUERY=, NODECHECK=false, ISARRAY=false}]]
Mapping	[[{SCHEMA_COLUMN=_id, QUERY="_id"}, {SCHEMA_COLUMN=username, QUERY="username"}, {SCHEMA_COLUMN=utype, QUERY="utype"}, {SCHEMA_COLUMN=fullq, QUERY="fullq"}, {SCHEMA_COLUMN=emptyq, QUERY="emptyq"}, {SCHEMA_COLUMN=truckid, QUERY="truckid"}, {SCHEMA_COLUMN=destid, QUERY="destid"}, {SCHEMA_COLUMN=swhst, QUERY="swhst"}, {SCHEMA_COLUMN=strct, QUERY="strct"}, {SCHEMA_COLUMN=dtrat, QUERY="dtrat"}, {SCHEMA_COLUMN=dwhct, QUERY="dwhct"}, {SCHEMA_COLUMN=dtrft, QUERY="dtrft"}, {SCHEMA_COLUMN=stage, QUERY="stage"}]]
Die on error	false
Schema	Built-In
!!!SCHEMA_OPT_NUM.NAME!!!	100


!!!DESTINATION.NAME!!!	tExtractJSONFields_2
Encoding	"UTF-8"
!!!SPLIT_LIST.NAME!!!	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tExtractJSONFields_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
_id	false	String			true	
username	false	String			true	
utype	false	String			true	
fullq	false	String			true	
emptyq	false	String			true	
truckid	false	String			true	
destid	false	String			true	
swhst	false	String			true	

strct	false	String			true	
dtrat	false	String			true	
dwhct	false	String			true	
dtrft	false	String			true	
stage	false	String			true	

Original Function Parameters:
Component tExtractJSONFields

	UNIQUE NAME	tExtractJSONFields_3	INPUT(S)	tLogRow_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tXMLMap_12

Component Parameters:

Properties	Values
Unique Name	tExtractJSONFields_3
Component Name	tExtractJSONFields
Version	0.102 (ALPHA)
Family	Processing/Fields
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false


tStatCatcher Statistics	false
Help	org.talend.help.tExtractJSONFields
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
REPOSITORY_ALLOW_AUTO_SWITCH	True
Schema	Built-In
Read By	JSONPATH
API version	2_1_0
JSON field	string
Loop XPath query	"/bills/bill/line"
Loop Jsonpath query	"\$.DocumentStream[*]"

Mapping	[{SCHEMA_COLUMN=_id, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=username, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=utype, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=fullq, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=emptyq, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=truckid, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=destid, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=swhst, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=strct, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=dtrat, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=dwhct, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=dtrft, QUERY=, NODECHECK=false, ISARRAY=false}, {SCHEMA_COLUMN=stage, QUERY=, NODECHECK=false, ISARRAY=false}]
Mapping	[[{SCHEMA_COLUMN=_id, QUERY="_id"}, {SCHEMA_COLUMN=username, QUERY="username"}, {SCHEMA_COLUMN=utype, QUERY="utype"}, {SCHEMA_COLUMN=fullq, QUERY="fullq"}, {SCHEMA_COLUMN=emptyq, QUERY="emptyq"}, {SCHEMA_COLUMN=truckid, QUERY="truckid"}, {SCHEMA_COLUMN=destid, QUERY="destid"}, {SCHEMA_COLUMN=swhst, QUERY="swhst"}, {SCHEMA_COLUMN=strct, QUERY="strct"}, {SCHEMA_COLUMN=dtrat, QUERY="dtrat"}, {SCHEMA_COLUMN=dwhct, QUERY="dwhct"}, {SCHEMA_COLUMN=dtrft, QUERY="dtrft"}, {SCHEMA_COLUMN=stage, QUERY="stage"}]]
Die on error	false
Schema	Built-In
!!!SCHEMA_OPT_NUM.NAME!!!	100
!!!DESTINATION.NAME!!!	tExtractJSONFields_3
Encoding	"UTF-8"
!!!SPLIT_LIST.NAME!!!	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tExtractJSONFields_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
_id	false	String			true	
username	false	String			true	
utype	false	String			true	
fullq	false	String			true	
emptyq	false	String			true	
truckid	false	String			true	
destid	false	String			true	
swhst	false	String			true	
strct	false	String			true	
dtrat	false	String			true	
dwhct	false	String			true	
dtrft	false	String			true	
stage	false	String			true	

Original Function Parameters:
Component tJavaRow

	UNIQUE NAME	tJavaRow_1	INPUT(S)	tXMLMap_3

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tRESTClient_1
--	-------	-----------------	-----------	---------------

Component Parameters:


Properties	Values
Unique Name	tJavaRow_1
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false

REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Code	context.username = input_row.username.toUpperCase(); context.password = input_row.password; context.username_condition = "{"\$eq":{"username":"' + context.username + "'}}";
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaRow_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	
string	false	String	4048		true	

Original Function Parameters:
Component tJavaRow

	UNIQUE NAME	tJavaRow_2	INPUT(S)	tLogRow_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tXMLMap_2

Component Parameters:


Properties	Values
Unique Name	tJavaRow_2
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In

Code	<pre> if (input_row.string.contains("DocumentStream")) { JSONObject ds = new JSONObject(input_row.string); JSONArray dsa = ds.getJSONArray("DocumentStream"); for (int i = 0; i < dsa.length(); i++) { JSONObject u = dsa.getJSONObject(i); String p = u.getString("password"); String t = u.getString("type"); if (p.equals(context.password)) { output_row.result = "true"; output_row.type = t; } else { output_row.result = "false"; output_row.type = "nothing"; } } } else { output_row.result = "false"; output_row.type = "nothing"; } </pre>
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaRow_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
result	false	String			true	
type	false	String			true	

Original Function Parameters: Component tJavaRow

	UNIQUE NAME	tJavaRow_3	INPUT(S)	tXMLMap_5
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tRESTClient_3

Component Parameters:

Properties	Values
------------	--------


Unique Name	tJavaRow_3
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SWITCH	TRUE
Schema	Built-In
Code	context.username_condition = "{\"\$and\": [{\"\$eq\": {\"username\": \"\" + input_row.wh + \"\"}}, {\"\$eq\": {\"stage\": \"\" + input_row.st + \"\"}}]\"";

Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaRow_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	
string	false	String	4048		true	

Original Function Parameters:
Component tJavaRow

	UNIQUE NAME	tJavaRow_4	INPUT(S)	tXMLMap_8
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tRESTClient_5

Component Parameters:

Properties	Values
Unique Name	tJavaRow_4
Component Name	tJavaRow
Version	0.101 (ALPHA)


Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SWITCH	TRUE
Schema	Built-In
Code	<pre>context.maprdb_url = "https://zmapr1:8243/api/v2/table/%2Fapps%2Froute_trans/document/" + input_row.id; output_row.string = "{"\$set":{"stage":2},"strct":"" + TalendDate.getDate("CCYY-MM-DD-hh-mm-ss") + "\"}"}";</pre>
Import	//import java.util.List;
Label format	__UNIQUE_NAME__

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaRow_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	
string	false	String	4048		true	

Original Function Parameters:
Component tJavaRow

	UNIQUE NAME	tJavaRow_5	INPUT(S)	tXMLMap_7
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tRESTClient_4

Component Parameters:

Properties	Values
Unique Name	tJavaRow_5
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false

SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SWITCH	TRUE
Schema	Built-In
Code	context.truck_condition = "{\"\$and\": [{\"\$eq\": {\"truckid\": \"\" + input_row.tr + \"\"}}, {\"\$eq\": {\"stage\": \"\" + input_row.st + \"\"}}]\""; System.out.println(context.truck_condition);
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false


Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaRow_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	
string	false	String	4048		true	

Original Function Parameters:

Component tJavaRow

	UNIQUE NAME	tJavaRow_6	INPUT(S)	tXMLMap_9
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tRESTClient_6

Component Parameters:

Properties	Values
Unique Name	tJavaRow_6
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true


DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SWITCH	TRUE
Schema	Built-In
Code	context.maprdb_url = "https://zmapr1:8243/api/v2/table/%2Fapps%2Froute_trans/document/" + input_row.id; output_row.string = "{"\$set":{"stage":4},"strat":"" + TalendDate.getDate("CCYY-MM-DD-hh-mm-ss") + " "}";
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tJavaRow_6 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	
string	false	String	4048		true	

Original Function Parameters:
Component tJavaRow

	UNIQUE NAME	tJavaRow_7	INPUT(S)	tXMLMap_10
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tRESTClient_7

Component Parameters:


Properties	Values
Unique Name	tJavaRow_7
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SWITCH	TRUE
Schema	Built-In
Code	context.maprdb_url = "https://zmapr1:8243/api/v2/table/%2Fapps%2Froute_trans/document/" + input_row.id; output_row.string = "{\$set":{{"stage":8},{"dtrft":" " + TalendDate.getDate("CCYY-MM-DD-hh-mm-ss") + "\n"}}";
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaRow_7 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	
string	false	String	4048		true	

Original Function Parameters:
Component tJavaRow

	UNIQUE NAME	tJavaRow_8	INPUT(S)	tXMLMap_11
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tRESTClient_8

Component Parameters:

Properties	Values
Unique Name	tJavaRow_8
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SWITCH	True
Schema	Built-In
Code	context.destination_condition = "{\"\$and\": [{\"\$eq\": {\"destid\": \"\" + input_row.wh + \"\"}}, {\"\$eq\": {\"stage\": \"\" + input_row.st + \"\"}}] }\";
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaRow_8 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	

string	false	String	4048		true	
--------	-------	--------	------	--	------	--

Original Function Parameters:
Component tLogRow

	UNIQUE NAME	tLogRow_1	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaRow_2

Component Parameters:

Properties	Values
Unique Name	tLogRow_1
Component Name	tLogRow
Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java


Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Basic	true
Table (print values in cells of a table)	false
Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false
Lengths	[{SCHEMA_COLUMN=string, LENGTH=10}]
Print content with log4j	true
Min column number of optimize code	100

Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tLogRow_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
string	false	String	4048		true	

Original Function Parameters:
Component tLogRow

	UNIQUE NAME	tLogRow_2	INPUT(S)	tMap_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tExtractJSONFields_2

Component Parameters:

Properties	Values
Unique Name	tLogRow_2
Component Name	tLogRow
Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false


SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Basic	true
Table (print values in cells of a table)	false
Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false

Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false
Lengths	[{SCHEMA_COLUMN=string, LENGTH=10}]
Print content with log4j	true
Min column number of optimize code	100
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out13 :

Column	Key	Type	Length	Precision	Nullable	Comment
string	false	String			true	

Original Function Parameters:
Component tLogRow

	UNIQUE NAME	tLogRow_3	INPUT(S)	tMap_3

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tExtractJSONFields_1
--	-------	-----------------	-----------	--------------------------------------

Component Parameters:

Properties	Values
Unique Name	tLogRow_3
Component Name	tLogRow
Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false


REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Basic	true
Table (print values in cells of a table)	false
Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false
Lengths	[{SCHEMA_COLUMN=string, LENGTH=10}]
Print content with log4j	true
Min column number of optimize code	100
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for out13 :

Column	Key	Type	Length	Precision	Nullable	Comment
string	false	String			true	

Original Function Parameters:
Component tLogRow

	UNIQUE NAME	tLogRow_4	INPUT(S)	tMap_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tExtractJSONFields_3

Component Parameters:

Properties	Values
Unique Name	tLogRow_4
Component Name	tLogRow
Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false


Help	org.talend.help.tLogRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Basic	true
Table (print values in cells of a table)	false
Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false

Use fixed length for values	false
Lengths	[[SCHEMA_COLUMN=string, LENGTH=10]]
Print content with log4j	true
Min column number of optimize code	100
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out13 :

Column	Key	Type	Length	Precision	Nullable	Comment
string	false	String			true	

Original Function Parameters: Component tRESTClient

	UNIQUE NAME	tRESTClient_1	INPUT(S)	tJavaRow_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Unique Name	tRESTClient_1

Component Name	tRESTClient
Version	0.102 (ALPHA)
Family	ESB/REST
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tRESTClient
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
URL	"https://zmapr1:8243/api/v2/table/%2Fapps%2Froute_users"
Relative Path	""
HTTP Method	GET

Content Type	application/xml
Accept Type	application/json
Query parameters	{NAME="condition", VALUE=context.username_condition}
REPOSITORY_ALLOW_AUTO_SWITCH	true
Input Schema	Built-In
Response Schema	Built-In
Error Schema	Built-In
Use Service Locator	false
Service namespace	"http://www.talend.org/rest/"
Service name	""
Use Service Activity Monitor	false
Use Authentication	true
Authentication Type	BASIC
Username	context.maprdbuser
Password	context.maprdbpass
Bearer Token	""
Use Authorization	false
Role	""
Use Business Correlation	false
Correlation Value	""
Check Server Identity	true
Die on error	true


Log messages	false
Follow redirects	false
Allow non-same host redirects	false
Enable WebClient Operation Reporting	true
Convert Response To DOM Document	false
Drop JSON Request Root	false
Wrap JSON Response	true
Convert Types To Strings	false
HTTP Headers	[{NAME="accept", VALUE="application/json"}]
Service Locator Custom Properties	[]
Service Activity Custom Properties	[]
Disable chunked encoding	false
Connection timeout (seconds)	30
Receive timeout (seconds)	60
Use HTTP proxy	false
Host	"61.163.92.4"
Port	8080
Username	""
Password	**
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tRESTClient_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	
string	false	String	4048		true	

Original Function Parameters: Component tRESTClient

	UNIQUE NAME	tRESTClient_2	INPUT(S)	tXMLMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tRESTClient_2
Component Name	tRESTClient
Version	0.102 (ALPHA)
Family	ESB/REST
Start	false
Startable	true
SUBTREE_START	false

END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tRESTClient
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
URL	"https://zmapr1:8243/api/v2/table/%2Fapps%2Froute_trans"
Relative Path	""
HTTP Method	POST
Content Type	application/json
Accept Type	application/json
Query parameters	[{NAME="mode", VALUE="insertOrReplace"}]
REPOSITORY_ALLOW_AUTO_SWITCH	true
Input Schema	Built-In
Response Schema	Built-In

Error Schema	Built-In
Use Service Locator	false
Service namespace	"http://www.talend.org/rest/"
Service name	""
Use Service Activity Monitor	false
Use Authentication	true
Authentication Type	BASIC
Username	context.maprdbuser
Password	context.maprdbpass
Bearer Token	""
Use Authorization	false
Role	""
Use Business Correlation	false
Correlation Value	""
Check Server Identity	true
Die on error	true
Log messages	false
Follow redirects	false
Allow non-same host redirects	false
Enable WebClient Operation Reporting	true
Convert Response To DOM Document	true
Drop JSON Request Root	true


Wrap JSON Response	true
Convert Types To Strings	false
HTTP Headers	{NAME="Content-Type", VALUE="application/json"}, {NAME="Accept", VALUE="application/json"}
Service Locator Custom Properties	[]
Service Activity Custom Properties	[]
Disable chunked encoding	false
Connection timeout (seconds)	30
Receive timeout (seconds)	60
Use HTTP proxy	false
Host	"61.163.92.4"
Port	8080
Username	""
Password	**
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tRESTClient_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

body	false	Document			true	
string	false	String	4048		true	

Original Function Parameters: Component tRESTClient

	UNIQUE NAME	tRESTClient_3	INPUT(S)	tJavaRow_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Unique Name	tRESTClient_3
Component Name	tRESTClient
Version	0.102 (ALPHA)
Family	ESB/REST
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tRESTClient
Update components	true

REPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
URL	"https://zmapr1:8243/api/v2/table/%2Fapps%2Froutetrans"
Relative Path	""
HTTP Method	GET
Content Type	application/xml
Accept Type	application/json
Query parameters	[{"NAME":"condition", "VALUE":"context.username_condition"}]
REPOSITORY_ALLOW_AUTO_SWITCH	true
Input Schema	Built-In
Response Schema	Built-In
Error Schema	Built-In
Use Service Locator	false
Service namespace	"http://www.talend.org/rest/"
Service name	""
Use Service Activity Monitor	false
Use Authentication	true


Authentication Type	BASIC
Username	context.maprdbuser
Password	context.maprdbpass
Bearer Token	""
Use Authorization	false
Role	""
Use Business Correlation	false
Correlation Value	""
Check Server Identity	true
Die on error	true
Log messages	false
Follow redirects	false
Allow non-same host redirects	false
Enable WebClient Operation Reporting	true
Convert Response To DOM Document	false
Drop JSON Request Root	false
Wrap JSON Response	true
Convert Types To Strings	false
HTTP Headers	[{NAME="accept", VALUE="application/json"}]
Service Locator Custom Properties	[]
Service Activity Custom Properties	[]
Disable chunked encoding	false

Connection timeout (seconds)	30
Receive timeout (seconds)	60
Use HTTP proxy	false
Host	"61.163.92.4"
Port	8080
Username	""
Password	**
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tRESTClient_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	
string	false	String	4048		true	

Original Function Parameters:
Component tRESTClient

	UNIQUE NAME	tRESTClient_4	INPUT(S)	tJavaRow_5

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_2
--	-------	-----------------	-----------	------------------------

Component Parameters:

Properties	Values
Unique Name	tRESTClient_4
Component Name	tRESTClient
Version	0.102 (ALPHA)
Family	ESB/REST
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tRESTClient
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

PARALLELIZE_KEEP_EMPTY	false
URL	"https://zmapr1:8243/api/v2/table/%2Fapps%2Froute_trans"
Relative Path	""
HTTP Method	GET
Content Type	application/xml
Accept Type	application/json
Query parameters	{[NAME="condition", VALUE=context.truck_condition]}
REPOSITORY_ALLOW_AUTO_SWITCH	true
Input Schema	Built-In
Response Schema	Built-In
Error Schema	Built-In
Use Service Locator	false
Service namespace	"http://www.talend.org/rest/"
Service name	""
Use Service Activity Monitor	false
Use Authentication	true
Authentication Type	BASIC
Username	context.maprdbuser
Password	context.maprdbpass
Bearer Token	""
Use Authorization	false
Role	""

Use Business Correlation	false
Correlation Value	""
Check Server Identity	true
Die on error	true
Log messages	false
Follow redirects	false
Allow non-same host redirects	false
Enable WebClient Operation Reporting	true
Convert Response To DOM Document	false
Drop JSON Request Root	false
Wrap JSON Response	true
Convert Types To Strings	false
HTTP Headers	[{NAME="accept", VALUE="application/json"}]
Service Locator Custom Properties	[]
Service Activity Custom Properties	[]
Disable chunked encoding	false
Connection timeout (seconds)	30
Receive timeout (seconds)	60
Use HTTP proxy	false
Host	"61.163.92.4"
Port	8080
Username	""


Password	**
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tRESTClient_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	
string	false	String	4048		true	

Original Function Parameters:

Component tRESTClient

	UNIQUE NAME	tRESTClient_5	INPUT(S)	tJavaRow_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tRESTClient_5
Component Name	tRESTClient
Version	0.102 (ALPHA)

Family	ESB/REST
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tRESTClient
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
URL	context.maprdb_url
Relative Path	""
HTTP Method	POST
Content Type	application/json
Accept Type	application/json

Query parameters	[]
REPOSITORY_ALLOW_AUTO_SWITCH	true
Input Schema	Built-In
Response Schema	Built-In
Error Schema	Built-In
Use Service Locator	false
Service namespace	"http://www.talend.org/rest/"
Service name	""
Use Service Activity Monitor	false
Use Authentication	true
Authentication Type	BASIC
Username	context.maprdbuser
Password	context.maprdbpass
Bearer Token	""
Use Authorization	false
Role	""
Use Business Correlation	false
Correlation Value	""
Check Server Identity	true
Die on error	true
Log messages	false
Follow redirects	false

Allow non-same host redirects	false
Enable WebClient Operation Reporting	true
Convert Response To DOM Document	true
Drop JSON Request Root	true
Wrap JSON Response	true
Convert Types To Strings	false
HTTP Headers	[[{"NAME":"Accept", "VALUE":"application/json"}, {"NAME":"Content-Type", "VALUE":"application/json"}]]
Service Locator Custom Properties	[]
Service Activity Custom Properties	[]
Disable chunked encoding	false
Connection timeout (seconds)	30
Receive timeout (seconds)	60
Use HTTP proxy	false
Host	"61.163.92.4"
Port	8080
Username	""
Password	**
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false


Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tRESTClient_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	
string	false	String	4048		true	

Original Function Parameters:

Component tRESTClient

	UNIQUE NAME	tRESTClient_6	INPUT(S)	tJavaRow_6
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tRESTClient_6
Component Name	tRESTClient
Version	0.102 (ALPHA)
Family	ESB/REST
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tRESTClient
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
URL	context.maprdb_url
Relative Path	""
HTTP Method	POST
Content Type	application/json
Accept Type	application/json
Query parameters	[]
REPOSITORY_ALLOW_AUTO_SWITCH	true
Input Schema	Built-In
Response Schema	Built-In
Error Schema	Built-In

Use Service Locator	false
Service namespace	"http://www.talend.org/rest/"
Service name	""
Use Service Activity Monitor	false
Use Authentication	true
Authentication Type	BASIC
Username	context.maprdbuser
Password	context.maprdbpass
Bearer Token	""
Use Authorization	false
Role	""
Use Business Correlation	false
Correlation Value	""
Check Server Identity	true
Die on error	true
Log messages	false
Follow redirects	false
Allow non-same host redirects	false
Enable WebClient Operation Reporting	true
Convert Response To DOM Document	true
Drop JSON Request Root	true
Wrap JSON Response	true


Convert Types To Strings	false
HTTP Headers	{(NAME="Accept", VALUE="application/json"), (NAME="Content-Type", VALUE="application/json")}
Service Locator Custom Properties	[]
Service Activity Custom Properties	[]
Disable chunked encoding	false
Connection timeout (seconds)	30
Receive timeout (seconds)	60
Use HTTP proxy	false
Host	"61.163.92.4"
Port	8080
Username	""
Password	**
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tRESTClient_6 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	

string	false	String	4048		true	
--------	-------	--------	------	--	------	--

Original Function Parameters:
Component tRESTClient

	UNIQUE NAME	tRESTClient_7	INPUT(S)	tJavaRow_7
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tRESTClient_7
Component Name	tRESTClient
Version	0.102 (ALPHA)
Family	ESB/REST
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tRESTClient
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
URL	context.maprdb_url
Relative Path	""
HTTP Method	POST
Content Type	application/json
Accept Type	application/json
Query parameters	[]
REPOSITORY_ALLOW_AUTO_SWITCH	TRUE
Input Schema	Built-In
Response Schema	Built-In
Error Schema	Built-In
Use Service Locator	false
Service namespace	"http://www.talend.org/rest/"
Service name	""
Use Service Activity Monitor	false
Use Authentication	true
Authentication Type	BASIC


Username	context.maprdbuser
Password	context.maprdbpass
Bearer Token	""
Use Authorization	false
Role	""
Use Business Correlation	false
Correlation Value	""
Check Server Identity	true
Die on error	true
Log messages	false
Follow redirects	false
Allow non-same host redirects	false
Enable WebClient Operation Reporting	true
Convert Response To DOM Document	true
Drop JSON Request Root	true
Wrap JSON Response	true
Convert Types To Strings	false
HTTP Headers	[[{"NAME": "Accept", "VALUE": "application/json"}, {"NAME": "Content-Type", "VALUE": "application/json"}]]
Service Locator Custom Properties	[]
Service Activity Custom Properties	[]
Disable chunked encoding	false

Connection timeout (seconds)	30
Receive timeout (seconds)	60
Use HTTP proxy	false
Host	"61.163.92.4"
Port	8080
Username	""
Password	**
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tRESTClient_7 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	
string	false	String	4048		true	

Original Function Parameters:
Component tRESTClient

	UNIQUE NAME	tRESTClient_8	INPUT(S)	tJavaRow_8

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_4
--	-------	-----------------	-----------	------------------------

Component Parameters:

Properties	Values
Unique Name	tRESTClient_8
Component Name	tRESTClient
Version	0.102 (ALPHA)
Family	ESB/REST
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tRESTClient
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

PARALLELIZE_KEEP_EMPTY	false
URL	"https://zmapr1:8243/api/v2/table/%2Fapps%2Froute_trans"
Relative Path	""
HTTP Method	GET
Content Type	application/xml
Accept Type	application/json
Query parameters	{[NAME="condition", VALUE=context.destination_condition]}
REPOSITORY_ALLOW_AUTO_SWITCH	true
Input Schema	Built-In
Response Schema	Built-In
Error Schema	Built-In
Use Service Locator	false
Service namespace	"http://www.talend.org/rest/"
Service name	""
Use Service Activity Monitor	false
Use Authentication	true
Authentication Type	BASIC
Username	context.maprdbuser
Password	context.maprdbpass
Bearer Token	""
Use Authorization	false
Role	""

Use Business Correlation	false
Correlation Value	""
Check Server Identity	true
Die on error	true
Log messages	false
Follow redirects	false
Allow non-same host redirects	false
Enable WebClient Operation Reporting	true
Convert Response To DOM Document	false
Drop JSON Request Root	false
Wrap JSON Response	true
Convert Types To Strings	false
HTTP Headers	[{NAME="accept", VALUE="application/json"}]
Service Locator Custom Properties	[]
Service Activity Custom Properties	[]
Disable chunked encoding	false
Connection timeout (seconds)	30
Receive timeout (seconds)	60
Use HTTP proxy	false
Host	"61.163.92.4"
Port	8080
Username	""


Password	**
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tRESTClient_8 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	
string	false	String	4048		true	

Original Function Parameters:

Component tRESTRequest

	UNIQUE NAME	tRESTRequest_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tXMLMap_3 , tXMLMap_1, tXMLMap_5, tXMLMap_7, tXMLMap_8, tXMLMap_9, tXMLMap_10, tXMLMap_11

Component Parameters:

Properties	Values
Unique Name	tRESTRequest_1

Component Name	tRESTRequest
Version	0.101 (ALPHA)
Family	ESB/REST
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tRESTRequest
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Definition	Built-In
!!!API_ID.NAME!!!	
REPOSITORY_ALLOW_AUTO_SWITCH	true

Schema	Built-In
REST Endpoint	"http://zw8:8088/"
REST API Mapping	[[{SCHEMA=login, HTTP_VERB=POST, URI_PATTERN="/login/{username}/{password}", CONSUMES=XML-JSON, PRODUCES=XML-JSON, STREAMING=false}, {SCHEMA=send, HTTP_VERB=POST, URI_PATTERN="/send/{username}/{utype}/{fullq}/{emptyq}/{truckid}/{destid}", CONSUMES=XML-JSON, PRODUCES=XML-JSON, STREAMING=false}, {SCHEMA=goings, HTTP_VERB=GET, URI_PATTERN="/goings/{wh}/{st}", CONSUMES=NONE, PRODUCES=XML-JSON, STREAMING=false}, {SCHEMA=goingt, HTTP_VERB=GET, URI_PATTERN="/goingt/{tr}/{st}", CONSUMES=NONE, PRODUCES=XML-JSON, STREAMING=false}, {SCHEMA=trsc, HTTP_VERB=POST, URI_PATTERN="/trsc/{id}", CONSUMES=XML-JSON, PRODUCES=XML-JSON, STREAMING=false}, {SCHEMA=trsp, HTTP_VERB=POST, URI_PATTERN="/trsp/{id}", CONSUMES=XML-JSON, PRODUCES=XML-JSON, STREAMING=false}, {SCHEMA=trfp, HTTP_VERB=POST, URI_PATTERN="/trfp/{id}", CONSUMES=XML-JSON, PRODUCES=XML-JSON, STREAMING=false}, {SCHEMA=goingd, HTTP_VERB=GET, URI_PATTERN="/goingd/{wh}/{st}", CONSUMES=NONE, PRODUCES=XML-JSON, STREAMING=false}]]
Use Service Locator	false
Service Namespace	"http://www.talend.org/rest/"
Service Name	"ROUTE_ESB_API"
Use Service Activity Monitor	false
Use Authentication (ESB runtime only)	false
AUTH_TYPE	BASIC
Use Authorization	false
Use Business Correlation	false
Log messages	true
Wrap JSON Request	false
Service Locator Custom Properties	[]
Service Activity Custom Properties	[]
Convert JSON values to String in response	false

Expose Swagger specification	false
Include Documentation into Swagger Spec	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for WRONG_CALLS :

Column	Key	Type	Length	Precision	Nullable	Comment
uri	false	String	255		true	
method	false	String	255		true	
status	false	Integer			true	
error	false	String	1024		true	

Schema for login :

Column	Key	Type	Length	Precision	Nullable	Comment
username	false	String			true	
password	false	String			true	

Schema for send :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

username	false	String			true	
utype	false	String			true	
fullq	false	String			true	
emptyq	false	String			true	
truckid	false	String			true	
destid	false	String			true	

Schema for goings :

Column	Key	Type	Length	Precision	Nullable	Comment
wh	false	String			true	
st	false	String			true	

Schema for goingt :

Column	Key	Type	Length	Precision	Nullable	Comment
tr	false	String			true	
st	false	String			true	

Schema for trsc :

Column	Key	Type	Length	Precision	Nullable	Comment
id	false	String			true	

Schema for trsp :

Column	Key	Type	Length	Precision	Nullable	Comment
id	false	String			true	


Schema for trfp :

Column	Key	Type	Length	Precision	Nullable	Comment
id	false	String			true	

Schema for goingd :

Column	Key	Type	Length	Precision	Nullable	Comment
wh	false	String			true	
st	false	String			true	

Original Function Parameters:
Component tRESTResponse

	UNIQUE NAME	tRESTResponse_1	INPUT(S)	tXMLMap_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tRESTResponse_1
Component Name	tRESTResponse
Version	0.101 (ALPHA)
Family	ESB/REST
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false


tStatCatcher Statistics	false
Help	org.talend.help.tRESTResponse
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Return Body Type	id_Document
Return status code	200
CUSTOM_STATUS_CODE	200
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Response Headers	[]
Drop JSON Response Root	false
JSON Array Keys	
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tRESTResponse_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	

Original Function Parameters: Component tRESTResponse

	UNIQUE NAME	tRESTResponse_2	INPUT(S)	tXMLMap_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tRESTResponse_2
Component Name	tRESTResponse
Version	0.101 (ALPHA)
Family	ESB/REST
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false


tStatCatcher Statistics	false
Help	org.talend.help.tRESTResponse
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Return Body Type	id_Document
Return status code	200
CUSTOM_STATUS_CODE	200
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Response Headers	[]
Drop JSON Response Root	false
JSON Array Keys	
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tRESTRestResponse_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	

Original Function Parameters: Component tRESTRestResponse

	UNIQUE NAME	tRESTRestResponse_3	INPUT(S)	tXMLMap_6
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tRESTRestResponse_3
Component Name	tRESTRestResponse
Version	0.101 (ALPHA)
Family	ESB/REST
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false


tStatCatcher Statistics	false
Help	org.talend.help.tRESTResponse
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Return Body Type	id_Document
Return status code	200
CUSTOM_STATUS_CODE	200
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Response Headers	[]
Drop JSON Response Root	false
JSON Array Keys	
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tRESTRestResponse_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	

Original Function Parameters: Component tRESTRestResponse

	UNIQUE NAME	tRESTRestResponse_4	INPUT(S)	tXMLMap_12
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tRESTRestResponse_4
Component Name	tRESTRestResponse
Version	0.101 (ALPHA)
Family	ESB/REST
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false


tStatCatcher Statistics	false
Help	org.talend.help.tRESTResponse
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Return Body Type	id_Document
Return status code	200
CUSTOM_STATUS_CODE	200
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Response Headers	[]
Drop JSON Response Root	false
JSON Array Keys	
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tRESTResponse_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
body	false	Document			true	

Original Function Parameters:
Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tRESTClient_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tLogRow_1

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true

Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):

Mapper table Properties(row2):

Properties	Values
Name	row2
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row2):

Name	Type	Expression	isNullable
statusCode	Integer		true
body	Document		true
string	String		true

Constraint Table Entries(row2):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (output):

Mapper table Properties(out1):

Properties	Values
Name	out1
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out1):

Name	Type	Expression	isNullable
string	String	row2.string	true

Constraint Table Entries(out1):

Name	Type	Expression	isNullable

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_2	INPUT(S)	tRESTClient_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tLogRow_2

Component Parameters:

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_2 (input):

Mapper table Properties(row6):

Properties	Values
Name	row6
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row6):

Name	Type	Expression	isNullable
statusCode	Integer		true
body	Document		true
string	String		true

Constraint Table Entries(row6):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (output):

Mapper table Properties(copyOfout13):

Properties	Values
Name	copyOfout13
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(copyOfout13):

Name	Type	Expression	isNullable
string	String	row6.string	true

Constraint Table Entries(copyOfout13):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_3	INPUT(S)	tRESTClient_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tLogRow_3

Component Parameters:

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_3 (input):

Mapper table Properties(row9):

Properties	Values
Name	row9
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row9):

Name	Type	Expression	isNullable
statusCode	Integer		true
body	Document		true
string	String		true

Constraint Table Entries(row9):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_3 (output):

Mapper table Properties(out13):

Properties	Values
Name	out13
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out13):

Name	Type	Expression	isNullable
string	String	row9.string	true

Constraint Table Entries(out13):

Name	Type	Expression	isNullable

Mapper table for tMap_3 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_4	INPUT(S)	tRESTClient_8
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tLogRow_4

Component Parameters:

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_4 (input):

Mapper table Properties(row18):

Properties	Values
Name	row18
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row18):

Name	Type	Expression	isNullable
statusCode	Integer		true
body	Document		true
string	String		true

Constraint Table Entries(row18):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_4 (output):

Mapper table Properties(copyOfcopyOfout13):

Properties	Values
Name	copyOfcopyOfout13
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(copyOfcopyOfout13):

Name	Type	Expression	isNullable
string	String	row18.string	true

Constraint Table Entries(copyOfcopyOfout13):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_4 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tXMLMap

	UNIQUE NAME	tXMLMap_1	INPUT(S)	tRESTRequest_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tRESTClient_2

Component Parameters:

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Keep order for document	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tXMLMap_1 (input):

Mapper table Properties(send):

Properties	Values
Name	send
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(send):

Name	Type	Expression	isNullable
send/ username	String		true
send/ utype	String		true
send/ fullq	String		true
send/ emptyq	String		true
send/ truckid	String		true
send/ destid	String		true

Mapper table for tXMLMap_1 (output):
Mapper table Properties(out6):

Properties	Values
Name	out6
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out6):

Name	Type	Expression	isNullable
out6/ body	Document		true
out6.body:/ root	String		true
out6.body:/ root/ utype	String	send.utype	true
out6.body:/ root/ fullq	String	send.fullq	true
out6.body:/ root/ emptyq	String	send.emptyq	true
out6.body:/ root/ truckid	String	send.truckid	true

out6.body:/ root/ destid	String	send.destid	true
out6.body:/ root/ _id	String	send.username + "-" + + send.truckid+ "-" + send.destid + "-" + TalendDate.getDate("CCYY-MM-DD-hh-mm-ss")	true
out6.body:/ root/ username	String	send.username	true
out6.body:/ root/ swhst	String	TalendDate.getDate("CCYY-MM-DD-hh-mm-ss")	true
out6.body:/ root/ strct	String	""	true
out6.body:/ root/ dtrat	String	""	true
out6.body:/ root/ dwhct	String	""	true
out6.body:/ root/ dtrft	String	""	true
out6.body:/ root/ stage	String	"0"	true
out6/ string	String		true

Mapper table for tXMLMap_1 (var):


Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tXMLMap

	UNIQUE NAME	tXMLMap_10	INPUT(S)	tRESTRequest_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaRow_7

Component Parameters:

Properties	Values
tStatCatcher Statistics	false

Enable parallel execution	false
Keep order for document	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tXMLMap_10 (input):

Mapper table Properties(trfp):

Properties	Values
Name	trfp
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(trfp):

Name	Type	Expression	isNullable
trfp/ id	String		true

Mapper table for tXMLMap_10 (output):

Mapper table Properties(copyOfout17_0):

Properties	Values
Name	copyOfout17_0
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(copyOfout17_0):

Name	Type	Expression	isNullable
copyOfout17_0/ id	String	trfp.id	true

Mapper table for tXMLMap_10 (var):


Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tXMLMap

	UNIQUE NAME	tXMLMap_11	INPUT(S)	tRESTRequest_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaRow_8

Component Parameters:

Properties	Values
tStatCatcher Statistics	false

Enable parallel execution	false
Keep order for document	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tXMLMap_11 (input):

Mapper table Properties(goingd):

Properties	Values
Name	goingd
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(goingd):

Name	Type	Expression	isNullable
goingd/ wh	String		true
goingd/ st	String		true

Mapper table for tXMLMap_11 (output):

Mapper table Properties(out18):

Properties	Values
Name	out18
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out18):

Name	Type	Expression	isNullable
out18/ wh	String	goingd.wh	true
out18/ st	String	goingd.st	true

Mapper table for tXMLMap_11 (var):


Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tXMLMap

	UNIQUE NAME	tXMLMap_12	INPUT(S)	tExtractJSONFields_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tRESTResponse_4

Component Parameters:

Properties	Values
tStatCatcher Statistics	false

Enable parallel execution	false
Keep order for document	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tXMLMap_12 (input):

Mapper table Properties(row20):

Properties	Values
Name	row20
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row20):

Name	Type	Expression	isNullable
row20/ _id	String		true
row20/ username	String		true
row20/ utype	String		true
row20/ fullq	String		true
row20/ emptyq	String		true
row20/ truckid	String		true
row20/ destid	String		true
row20/ swkst	String		true
row20/ strct	String		true
row20/ dtrct	String		true
row20/ dwhct	String		true
row20/ dtrft	String		true
row20/ stage	String		true

Mapper table for tXMLMap_12 (output):
Mapper table Properties(copyOfcopyOfout14):

Properties	Values
Name	copyOfcopyOfout14
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(copyOfcopyOfout14):

Name	Type	Expression	isNullable
copyOfcopyOfout14/body	Document		true
copyOfcopyOfout14.root	String		true
copyOfcopyOfout14.root/_id	String	row20._id	true
copyOfcopyOfout14.root/ username	String	row20.username	true
copyOfcopyOfout14.root/ utype	String	row20.utype	true

copyOfcopyOfout14. root/ fullq	body:/ String	row20.fullq	true
copyOfcopyOfout14. root/ emptyq	body:/ String	row20.emptyq	true
copyOfcopyOfout14. root/ truckid	body:/ String	row20.truckid	true
copyOfcopyOfout14. root/ destid	body:/ String	row20.destid	true
copyOfcopyOfout14. root/ swbst	body:/ String	row20.swbst	true
copyOfcopyOfout14. root/ strct	body:/ String	row20.strct	true
copyOfcopyOfout14. root/ dtrct	body:/ String	row20.dtrct	true
copyOfcopyOfout14. root/ dwhct	body:/ String	row20.dwhct	true
copyOfcopyOfout14. root/ dtrft	body:/ String	row20.dtrft	true
copyOfcopyOfout14. root/ stage	body:/ String	row20.stage	true

Mapper table for tXMLMap_12 (var):


Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tXMLMap

	UNIQUE NAME	tXMLMap_2	INPUT(S)	tJavaRow_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tRESTResponse_1

Component Parameters:

Properties	Values
tStatCatcher Statistics	false

Enable parallel execution	false
Keep order for document	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tXMLMap_2 (input):

Mapper table Properties(row4):

Properties	Values
Name	row4
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row4):

Name	Type	Expression	isNullable
row4/ result	String		true
row4/ type	String		true

Mapper table for tXMLMap_2 (output):

Mapper table Properties(out5):

Properties	Values
Name	out5
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out5):

Name	Type	Expression	isNullable
out5/ body	Document		true
out5.body:/ root	String		true
out5.body:/ root/ result	String	row4.result	true
out5.body:/ root/ type	String	row4.type	true

Mapper table for tXMLMap_2 (var):


Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tXMLMap

	UNIQUE NAME	tXMLMap_3	INPUT(S)	tRESTRequest_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaRow_1

Component Parameters:

Properties	Values
tStatCatcher Statistics	false

Enable parallel execution	false
Keep order for document	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tXMLMap_3 (input):

Mapper table Properties(login):

Properties	Values
Name	login
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(login):

Name	Type	Expression	isNullable
login/ username	String		true
login/ password	String		true

Mapper table for tXMLMap_3 (output):

Mapper table Properties(row5):

Properties	Values
Name	row5
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row5):

Name	Type	Expression	isNullable
row5/ username	String	login.username	true
row5/ password	String	login.password	true

Mapper table for tXMLMap_3 (var):


Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tXMLMap

	UNIQUE NAME	tXMLMap_4	INPUT(S)	tExtractJSONFields_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tRESTResponse_2

Component Parameters:

Properties	Values
tStatCatcher Statistics	false

Enable parallel execution	false
Keep order for document	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tXMLMap_4 (input):

Mapper table Properties(row7):

Properties	Values
Name	row7
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row7):

Name	Type	Expression	isNullable
row7/ _id	String		true
row7/ username	String		true
row7/ utype	String		true
row7/ fullq	String		true
row7/ emptyq	String		true
row7/ truckid	String		true
row7/ destid	String		true
row7/ swkst	String		true
row7/ strct	String		true
row7/ dtrct	String		true
row7/ dwhct	String		true
row7/ dtrft	String		true
row7/ stage	String		true

Mapper table for tXMLMap_4 (output):
Mapper table Properties(copyOfout14):

Properties	Values
Name	copyOfout14
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(copyOfout14):

Name	Type	Expression	isNullable
copyOfout14/ body	Document		true
copyOfout14.body:/ root	String		true
copyOfout14.body:/ root/ _id	String	row7._id	true
copyOfout14.body:/ root/ username	String	row7.username	true
copyOfout14.body:/ root/ utype	String	row7.utype	true
copyOfout14.body:/ root/ fullq	String	row7.fullq	true

copyOfout14.body:/ root/ emptyq	String	row7.emptyq	true
copyOfout14.body:/ root/ truckid	String	row7.truckid	true
copyOfout14.body:/ root/ destid	String	row7.destid	true
copyOfout14.body:/ root/ swbst	String	row7.swbst	true
copyOfout14.body:/ root/ strct	String	row7.strct	true
copyOfout14.body:/ root/ dtrct	String	row7.dtrct	true
copyOfout14.body:/ root/ dwhct	String	row7.dwhct	true
copyOfout14.body:/ root/ dtrft	String	row7.dtrft	true
copyOfout14.body:/ root/ stage	String	row7.stage	true

Mapper table for tXMLMap_4 (var):


Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tXMLMap

	UNIQUE NAME	tXMLMap_5	INPUT(S)	tRESTRequest_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaRow_3

Component Parameters:

Properties	Values
tStatCatcher Statistics	false

Enable parallel execution	false
Keep order for document	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tXMLMap_5 (input):

Mapper table Properties(goings):

Properties	Values
Name	goings
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(goings):

Name	Type	Expression	isNullable
goings/ wh	String		true
goings/ st	String		true

Mapper table for tXMLMap_5 (output):

Mapper table Properties(out12):

Properties	Values
Name	out12
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out12):

Name	Type	Expression	isNullable
out12/ wh	String	goings.wh	true
out12/ st	String	goings.st	true

Mapper table for tXMLMap_5 (var):


Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tXMLMap

	UNIQUE NAME	tXMLMap_6	INPUT(S)	tExtractJSONFields_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tRESTResponse_3

Component Parameters:

Properties	Values
tStatCatcher Statistics	false

Enable parallel execution	false
Keep order for document	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tXMLMap_6 (input):

Mapper table Properties(row11):

Properties	Values
Name	row11
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row11):

Name	Type	Expression	isNullable
row11/ _id	String		true
row11/ username	String		true
row11/ utype	String		true
row11/ fullq	String		true
row11/ emptyq	String		true
row11/ truckid	String		true
row11/ destid	String		true
row11/ swkst	String		true
row11/ strct	String		true
row11/ dtrct	String		true
row11/ dwhct	String		true
row11/ dtrft	String		true
row11/ stage	String		true

Mapper table for tXMLMap_6 (output):
Mapper table Properties(out14):

Properties	Values
Name	out14
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out14):

Name	Type	Expression	isNullable
out14/ body	Document		true
out14.body:/ root	String		true
out14.body:/ root/_id	String	row11._id	true
out14.body:/ root/username	String	row11.username	true
out14.body:/ root/utype	String	row11.utype	true
out14.body:/ root/fullq	String	row11.fullq	true

out14.body:/ root/ emptyq	String	row11.emptyq	true
out14.body:/ root/ truckid	String	row11.truckid	true
out14.body:/ root/ destid	String	row11.destid	true
out14.body:/ root/ swhst	String	row11.swhst	true
out14.body:/ root/ strct	String	row11.strct	true
out14.body:/ root/ dtrat	String	row11.dtrat	true
out14.body:/ root/ dwhct	String	row11.dwhct	true
out14.body:/ root/ dtrft	String	row11.dtrft	true
out14.body:/ root/ stage	String	row11.stage	true

Mapper table for tXMLMap_6 (var):


Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tXMLMap

	UNIQUE NAME	tXMLMap_7	INPUT(S)	tRESTRequest_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaRow_5

Component Parameters:

Properties	Values
tStatCatcher Statistics	false

Enable parallel execution	false
Keep order for document	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tXMLMap_7 (input):

Mapper table Properties(goingt):

Properties	Values
Name	goingt
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(goingt):

Name	Type	Expression	isNullable
goingt/ tr	String		true
goingt/ st	String		true

Mapper table for tXMLMap_7 (output):

Mapper table Properties(out15):

Properties	Values
Name	out15
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out15):

Name	Type	Expression	isNullable
out15/ tr	String	goingt.tr	true
out15/ st	String	goingt.st	true

Mapper table for tXMLMap_7 (var):


Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tXMLMap

	UNIQUE NAME	tXMLMap_8	INPUT(S)	tRESTRequest_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaRow_4

Component Parameters:

Properties	Values
tStatCatcher Statistics	false

Enable parallel execution	false
Keep order for document	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tXMLMap_8 (input):

Mapper table Properties(trsc):

Properties	Values
Name	trsc
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(trsc):

Name	Type	Expression	isNullable
trsc/ id	String		true

Mapper table for tXMLMap_8 (output):

Mapper table Properties(out17):

Properties	Values
Name	out17
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out17):

Name	Type	Expression	isNullable
out17/ id	String	trsc.id	true

Mapper table for tXMLMap_8 (var):


Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tXMLMap

	UNIQUE NAME	tXMLMap_9	INPUT(S)	tRESTRequest_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaRow_6

Component Parameters:

Properties	Values
tStatCatcher Statistics	false

Enable parallel execution	false
Keep order for document	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tXMLMap_9 (input):

Mapper table Properties(trsp):

Properties	Values
Name	trsp
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(trsp):

Name	Type	Expression	isNullable
trsp/ id	String		true

Mapper table for tXMLMap_9 (output):

Mapper table Properties(copyOfout17):

Properties	Values
Name	copyOfout17
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(copyOfout17):

Name	Type	Expression	isNullable
copyOfout17/ id	String	trsp.id	true

Mapper table for tXMLMap_9 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------