



Jobs

Generated by Talend Data Fabric

Project Name	zach-talend	GENERATION DATE	Feb 5, 2019 12:10:35 PM
AUTHOR	Lorenzini, Zach	Talend Data Fabric VERSION	7.1.1.20181026_1147

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description

Properties	Values
Name	zach-talend
Language	java
Description	

Description

Properties	Values
Name	Informatica_2_Intermediate
Author	Lorenzini, Zach
Version	0.1
Purpose	
Status	
Description	
Creation	Dec 14, 2018 2:03:28 PM
Modification	Jan 24, 2019 11:56:14 AM

Preview Picture



Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true

Catch user warnings	true
---------------------	------

Context List

ContextDefault


Name	Prompt	Need Prompt?	Type	Value	Source
------	--------	--------------	------	-------	--------

Component List

Component Name	Component Type
tDBInput_1	tMSSqlInput
tLogRow_1	tLogRow
tMap_1	tMap

Components Description

Component tMSSqlInput

	UNIQUE NAME	tDBInput_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Database	tMSSqlInput

Unique Name	tDBInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Use an existing connection	false
Component List	

Property Type	repository: DB (MSSQL):sql1
Host	"192.168.50.2"
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"HEB"
Username	"sa"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT * FROM CHLMPVE2 LEFT OUTER JOIN CHLPRCE2 ON CHLMPVE2.PRODUCT_NUMBER = CHLPRCE2.PRODUCT_NUMBER AND CHLMPVE2.ORG_LVL_NUMBER = CHLPRCE2.ORG_LVL_NUMBER LEFT OUTER JOIN VPREC ON CONVERT(int, CHLMPVE2.PRODUCT_NUMBER) = VPREC.PRE_ARTICULO AND CHLMPVE2.ORG_LVL_NUMBER = VPREC.PRE_SUCURSAL AND CONVERT(int, CONVERT(varchar, CHLMPVE2.PRC_EFFECTIVE_DAY, 112)) = VPREC.PRE_FECHA"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false

Trim column

```
{SCHEMA_COLUMN=ORG_LVL_CHILD, TRIM=false},
{SCHEMA_COLUMN=PRD_LVL_CHILD, TRIM=false},
{SCHEMA_COLUMN=PRD_UPC, TRIM=false},
{SCHEMA_COLUMN=PRC_BOOK_NUMBER, TRIM=false},
{SCHEMA_COLUMN=PRODUCT_NUMBER, TRIM=false},
{SCHEMA_COLUMN=ORG_LVL_NUMBER, TRIM=false},
{SCHEMA_COLUMN=PRC_KEY, TRIM=false},
{SCHEMA_COLUMN=PRC_PREVIOUS_KEY, TRIM=false},
{SCHEMA_COLUMN=PRC_FROM_DATE, TRIM=false},
{SCHEMA_COLUMN=PRC_TO_DATE, TRIM=false},
{SCHEMA_COLUMN=PRC_CURR_CODE, TRIM=false},
{SCHEMA_COLUMN=PRC_PRICE, TRIM=false},
{SCHEMA_COLUMN=PRC_FIRST_PRICE, TRIM=false},
{SCHEMA_COLUMN=PRC_PREVIOUS_PRICE, TRIM=false},
{SCHEMA_COLUMN=PRC_PRICE_MULT, TRIM=false},
{SCHEMA_COLUMN=PRC_TYPE, TRIM=false},
{SCHEMA_COLUMN=PRC_PROMO_LEVEL, TRIM=false},
{SCHEMA_COLUMN=PRC_HDR_NUMBER, TRIM=false},
{SCHEMA_COLUMN=PRC_LEVEL, TRIM=false},
{SCHEMA_COLUMN=LAST_EXE_DATE, TRIM=false},
{SCHEMA_COLUMN=PRD_LVL_ID, TRIM=false},
{SCHEMA_COLUMN=PRD_STYLE_IND, TRIM=false},
{SCHEMA_COLUMN=PRC_EFFECTIVE_DAY, TRIM=false},
{SCHEMA_COLUMN=PRC_STATUS, TRIM=false},
{SCHEMA_COLUMN=LASTUPDATE, TRIM=false},
{SCHEMA_COLUMN=PRD_LVL_CHILD1, TRIM=false},
{SCHEMA_COLUMN=ORG_LVL_CHILD1, TRIM=false},
{SCHEMA_COLUMN=PRD_UPC1, TRIM=false},
{SCHEMA_COLUMN=PRC_BOOK_NUMBER1, TRIM=false},
{SCHEMA_COLUMN=PRODUCT_NUMBER1, TRIM=false},
{SCHEMA_COLUMN=ORG_LVL_NUMBER1, TRIM=false},
{SCHEMA_COLUMN=PRC_KEY1, TRIM=false},
{SCHEMA_COLUMN=PRC_PREVIOUS_KEY1, TRIM=false},
{SCHEMA_COLUMN=PRC_FROM_DATE1, TRIM=false},
{SCHEMA_COLUMN=PRC_TO_DATE1, TRIM=false},
{SCHEMA_COLUMN=PRC_CURR_CODE1, TRIM=false},
{SCHEMA_COLUMN=PRC_PRICE1, TRIM=false},
{SCHEMA_COLUMN=PRC_PREVIOUS_PRICE1, TRIM=false},
{SCHEMA_COLUMN=PRC_PRICE_MULT1, TRIM=false},
{SCHEMA_COLUMN=PRC_TYPE1, TRIM=false},
{SCHEMA_COLUMN=PRC_PROMO_LEVEL1, TRIM=false},
{SCHEMA_COLUMN=PRC_HDR_NUMBER1, TRIM=false},
{SCHEMA_COLUMN=PRC_LEVEL1, TRIM=false},
{SCHEMA_COLUMN=PRD_IS_DEAL_GROUP, TRIM=false},
{SCHEMA_COLUMN=LAST_EXE_DATE1, TRIM=false},
{SCHEMA_COLUMN=PRD_LVL_ID1, TRIM=false},
{SCHEMA_COLUMN=PRD_STYLE_IND1, TRIM=false},
{SCHEMA_COLUMN=PRC_EFFECTIVE_DAY1, TRIM=false},
{SCHEMA_COLUMN=PRC_STATUS1, TRIM=false},
{SCHEMA_COLUMN=PRC_BUY_QTY, TRIM=false},
{SCHEMA_COLUMN=PRC_GET_QTY, TRIM=false},
{SCHEMA_COLUMN=PRC_GET_VALUE, TRIM=false},
{SCHEMA_COLUMN=PRC_GET_TYPE, TRIM=false},
{SCHEMA_COLUMN=PRC_QTY_BRK_ID, TRIM=false},
{SCHEMA_COLUMN=PRC_HDR_NAME, TRIM=false},
{SCHEMA_COLUMN=ESTADO, TRIM=false}, {SCHEMA_COLUMN=PRC_UOM,
TRIM=false}, {SCHEMA_COLUMN=PRC_MAX_QTY, TRIM=false},
{SCHEMA_COLUMN=PRC_FCST_QTY, TRIM=false},
{SCHEMA_COLUMN=LASTUPDATE1, TRIM=false},
{SCHEMA_COLUMN=PRE_ARTICULO, TRIM=false},
{SCHEMA_COLUMN=PRE_SUCURSAL, TRIM=false},
{SCHEMA_COLUMN=PRE_NIVEL, TRIM=false},
{SCHEMA_COLUMN=PRE_PRECIO, TRIM=false},
{SCHEMA_COLUMN=PRE_FECHA, TRIM=false},
{SCHEMA_COLUMN=PRE_MARGEN, TRIM=false},
{SCHEMA_COLUMN=PRE_VIGENTE, TRIM=false},
{SCHEMA_COLUMN=PRE_TIPO, TRIM=false},
```

	{SCHEMA_COLUMN=PRE_PRECNORM, TRIM=false}, {SCHEMA_COLUMN=XXX_ORIGEN, TRIM=false}, {SCHEMA_COLUMN=XXX_REMOTO, TRIM=false}}
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
ORG_LVL_CHILD	false	int	12		false	
PRD_LVL_CHILD	false	int	12		false	
PRD_UPC	false	int	18		false	
PRC_BOOK_NUMBER	false	int	12		false	
PRODUCT_NUMBER	false	String	15		true	
ORG_LVL_NUMBER	false	Integer	12		true	
PRC_KEY	false	Integer	12		true	
PRC_PREVIOUS_KEY	false	Integer	12		true	
PRC_FROM_DATE	false	java.util.Date	23	3	true	


PRC_TO_DATE	false	java.util.Date	23	3	true	
PRC_CURR_CODE	false	String	3		true	
PRC_PRICE	false	Double	11	3	true	
PRC_FIRST_PRICE	false	Double	11	3	true	
PRC_PREVIOUS_PRICE	false	Double	11	3	true	
PRC_PRICE_MULT	false	Double	7		true	
PRC_TYPE	false	Integer	2		true	
PRC_PROMO_LEVEL	false	Integer	2		true	
PRC_HDR_NUMBER	false	Integer	12		true	
PRC_LEVEL	false	Integer	1		true	
LAST_EXE_DATE	false	java.util.Date	23	3	true	
PRD_LVL_ID	false	Integer	5		true	
PRD_STYLE_IND	false	String	1		true	
PRC_EFFECTIVE_DAY	false	java.util.Date	23	3	true	
PRC_STATUS	false	Integer	5		true	
LASTUPDATE	false	java.util.Date	23	3	true	
PRD_LVL_CHILD1	false	Integer	12		true	

ORG_LVL_CHILD1	false	Integer	12		true	
PRD_UPC1	false	Integer	18		true	
PRC_BOOK_NUMBER1	false	Integer	12		true	
PRODUCT_NUMBER1	false	String	15		true	
ORG_LVL_NUMBER1	false	Integer	12		true	
PRC_KEY1	false	Integer	12		true	
PRC_PREVIOUS_KEY1	false	Integer	12		true	
PRC_FROM_DATE1	false	java.util.Date	23	3	true	
PRC_TO_DATE1	false	java.util.Date	23	3	true	
PRC_CURR_CODE1	false	String	3		true	
PRC_PRICE1	false	Double	11	3	true	
PRC_PREVIOUS_PRICE1	false	Double	11	3	true	
PRC_PRICE_MULT1	false	Double	7		true	
PRC_TYPE1	false	Integer	2		true	
PRC_PROMO_LEVEL1	false	Integer	2		true	
PRC_HDR_NUMBER1	false	Integer	12		true	
PRC_LEVEL1	false	Integer	1		true	

PRD_IS_DEAL_GROUP	false	String	1		true	
LAST_EXE_DATE1	false	java.util.Date	23	3	true	
PRD_LVL_ID1	false	Integer	5		true	
PRD_STYLE_IND1	false	String	1		true	
PRC_EFFECTIVE_DAY1	false	java.util.Date	23	3	true	
PRC_STATUS1	false	Integer	5		true	
PRC_BUY_QTY	false	Integer	7		true	
PRC_GET_QTY	false	Integer	7		true	
PRC_GET_VALUE	false	Integer	11	3	true	
PRC_GET_TYPE	false	String	1		true	
PRC_QTY_BRK_ID	false	Integer	12		true	
PRC_HDR_NAME	false	String	40		true	
ESTADO	false	Integer	1		true	
PRC_UOM	false	String	12		true	
PRC_MAX_QTY	false	Integer	12		true	
PRC_FCST_QTY	false	Integer	12		true	
LASTUPDATE1	false	java.util.Date	23	3	true	

PRE_ARTICULO	false	Integer	10		true	
PRE_SUCURSAL	false	Short	5		true	
PRE_NIVEL	false	String	1		true	
PRE_PRECIO	false	Float	7		true	
PRE_FECHA	false	Integer	10		true	
PRE_MARGEN	false	Double	15		true	
PRE_VIGENTE	false	String	1		true	
PRE_TIPO	false	Integer	5		true	
PRE_PRECNORM	false	Double	15		true	
XXX_ORIGEN	false	String	20		true	
XXX_REMOTO	false	Integer	5		true	

Original Function Parameters:
Component tLogRow

	UNIQUE NAME	tLogRow_1	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tLogRow_1


Component Name	tLogRow
Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Basic	true
Table (print values in cells of a table)	false


Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false
Lengths	<pre>[{SCHEMA_COLUMN=PRODUCT_NUMBER, LENGTH=10}, {SCHEMA_COLUMN=ORG_LVL_NUMBER, LENGTH=10}, {SCHEMA_COLUMN=PRC_PRICE_REG, LENGTH=10}, {SCHEMA_COLUMN=PRC_EFFECTIVE_DAY, LENGTH=10}, {SCHEMA_COLUMN=PRC_TYPE, LENGTH=10}, {SCHEMA_COLUMN=PRC_PRICE, LENGTH=10}, {SCHEMA_COLUMN=PRC_TYPE_RBJ, LENGTH=10}, {SCHEMA_COLUMN=PRC_TYPE_OUT, LENGTH=10}, {SCHEMA_COLUMN=PRE_ARTICULO, LENGTH=10}]</pre>
Print content with log4j	true
Min column number of optimize code	100
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out1 :

Column	Key	Type	Length	Precision	Nullable	Comment
PRODUCT_NUMBER	false	String			true	
ORG_LVL_NUMBER	false	Integer			true	
PRC_PRICE_REG	false	Double			true	
PRC_EFFECTIVE_DAY	false	java.util.Date			true	
PRC_TYPE	false	Integer			true	
PRC_PRICE	false	Double			true	
PRC_TYPE_RBJ	false	Integer			true	
PRC_TYPE_OUT	false	Integer			true	
PRE_ARTICULO	false	Integer			true	

Original Function Parameters:
Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tLogRow_1

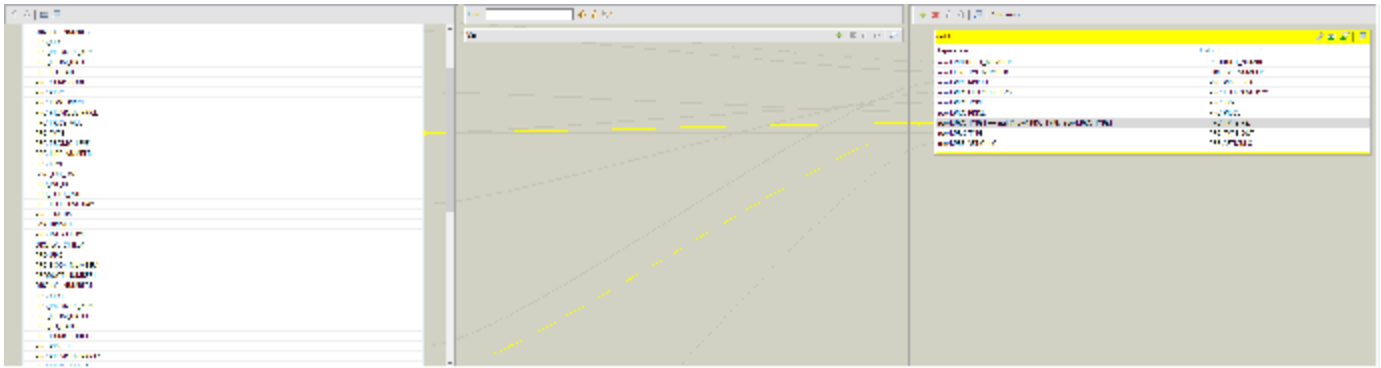

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):
Mapper table Properties(row1):

Properties	Values
Name	row1
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row1):

Name	Type	Expression	isNullable
ORG_LVL_CHILD	int		false
PRD_LVL_CHILD	int		false
PRD_UPC	int		false
PRC_BOOK_NUMBER	int		false
PRODUCT_NUMBER	String		true
ORG_LVL_NUMBER	Integer		true
PRC_KEY	Integer		true

PRC_PREVIOUS_KEY	Integer		true
PRC_FROM_DATE	java.util.Date		true
PRC_TO_DATE	java.util.Date		true
PRC_CURR_CODE	String		true
PRC_PRICE	Double		true
PRC_FIRST_PRICE	Double		true
PRC_PREVIOUS_PRICE	Double		true
PRC_PRICE_MULT	Double		true
PRC_TYPE	Integer		true
PRC_PROMO_LEVEL	Integer		true
PRC_HDR_NUMBER	Integer		true
PRC_LEVEL	Integer		true
LAST_EXE_DATE	java.util.Date		true
PRD_LVL_ID	Integer		true
PRD_STYLE_IND	String		true
PRC_EFFECTIVE_DAY	java.util.Date		true
PRC_STATUS	Integer		true

LASTUPDATE	java.util.Date		true
PRD_LVL_CHILD1	Integer		true
ORG_LVL_CHILD1	Integer		true
PRD_UPC1	Integer		true
PRC_BOOK_NUMBER1	Integer		true
PRODUCT_NUMBER1	String		true
ORG_LVL_NUMBER1	Integer		true
PRC_KEY1	Integer		true
PRC_PREVIOUS_KEY1	Integer		true
PRC_FROM_DATE1	java.util.Date		true
PRC_TO_DATE1	java.util.Date		true
PRC_CURR_CODE1	String		true
PRC_PRICE1	Double		true
PRC_PREVIOUS_PRICE1	Double		true
PRC_PRICE_MULT1	Double		true
PRC_TYPE1	Integer		true
PRC_PROMO_LEVEL1	Integer		true

PRC_HDR_NUMBER1	Integer		true
PRC_LEVEL1	Integer		true
PRD_IS_DEAL_GROUP	String		true
LAST_EXE_DATE1	java.util.Date		true
PRD_LVL_ID1	Integer		true
PRD_STYLE_IND1	String		true
PRC_EFFECTIVE_DAY1	java.util.Date		true
PRC_STATUS1	Integer		true
PRC_BUY_QTY	Integer		true
PRC_GET_QTY	Integer		true
PRC_GET_VALUE	Integer		true
PRC_GET_TYPE	String		true
PRC_QTY_BRK_ID	Integer		true
PRC_HDR_NAME	String		true
ESTADO	Integer		true
PRC_UOM	String		true
PRC_MAX_QTY	Integer		true

PRC_FCST_QTY	Integer		true
LASTUPDATE1	java.util.Date		true
PRE_ARTICULO	Integer		true
PRE_SUCURSAL	Short		true
PRE_NIVEL	String		true
PRE_PRECIO	Float		true
PRE_FECHA	Integer		true
PRE_MARGEN	Double		true
PRE_VIGENTE	String		true
PRE_TIPO	Integer		true
PRE_PRECNORM	Double		true
XXX_ORIGEN	String		true
XXX_REMOTO	Integer		true

Constraint Table Entries(row1):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (output):

Mapper table Properties(out1):

Properties	Values
Name	out1
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out1):

Name	Type	Expression	isNullable
PRODUCT_NUMBER	String	row1.PRODUCT_NUMBER	true
ORG_LVL_NUMBER	Integer	row1.ORG_LVL_NUMBER	true
PRC_PRICE_REG	Double	row1.PRC_PRICE1	true
PRC_EFFECTIVE_DAY	java.util.Date	row1.PRC_EFFECTIVE_DAY	true
PRC_TYPE	Integer	row1.PRC_TYPE	true
PRC_PRICE	Double	row1.PRC_PRICE	true
PRC_TYPE_RBJ	Integer	row1.PRC_TYPE1 == null ? row1.PRC_TYPE : row1.PRC_TYPE1	true
PRC_TYPE_OUT	Integer	row1.PRC_TYPE	true
PRE_ARTICULO	Integer	row1.PRE_ARTICULO	true

Constraint Table Entries(out1):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------