

Jobs

Generated by Talend Data Fabric

Project Name	zach-talend	GENERATION DATE	Feb 5, 2019 12:10:32 PM
AUTHOR	Lorenzini, Zach	Talend Data Fabric VERSION	7.1.1.20181026_1147

Summary

Project Description
Description
Preview Picture
Settings
Context List
Component List
Components Description


Project Description

Properties	Values
Name	zach-talend
Language	java
Description	

Description

Properties	Values
Name	Informatica_2_Int_AG
Author	Lorenzini, Zach
Version	0.1
Purpose	
Status	
Description	
Creation	Jan 24, 2019 1:01:50 PM
Modification	Jan 29, 2019 1:30:59 PM

Preview Picture

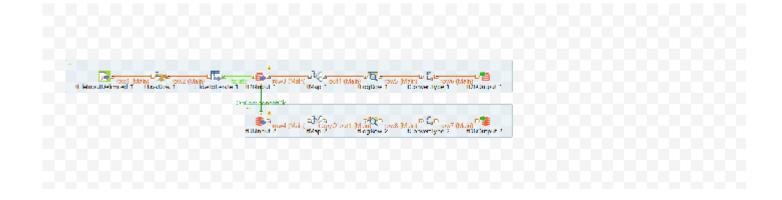

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

News	Malua
Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true

Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt?	Туре	Value	Source
current_date	current_date?	false	id_String		
days_back	days_back?	false	id_Integer	1	

Component List

Component Name	Component Type
tConvertType_1	tConvertType
tConvertType_2	tConvertType
tDBInput_1	tMSSqlInput
tDBInput_2	tMSSqlInput
tDBOutput_1	tMSSqlOutput
tDBOutput_2	tMSSqlOutput
tFileInputDelimited_1	tFileInputDelimited

tFlowTolterate_1	tFlowToIterate
tJavaRow_1	tJavaRow
tLogRow_1	tLogRow
tLogRow_2	tLogRow
tMap_1	tMap
tMap_2	tMap

Components Description

Component tConvertType

UNIQUE NAME	tConvertType_1	INPUT(S)	tLogRow_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tDBOutput_1

Component Parameters.		
Properties	Values	
Unique Name	tConvertType_1	
Component Name	tConvertType	
Version	0.101 (ALPHA)	
Family	Processing	
Startable	false	
SUBTREE_START	false	
END_OF_FLOW	false	

true
false
false
org.talend.help.tConvertType
true
C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
false
2
false
ALLIEH
repository: DB (MSSQL):sql2 - VPREC
true
О
Built-In
true
false
UNIQUE_NAME
UNIQUE_NAME COMMENT
row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for VPREC:

Schema for VEKE	<u>C.</u>					
Column	Key	Туре	Length	Precision	Nullable	Comment
PRE_ARTICULO	true	int	10		false	
PRE_SUCURSAL	true	short	5		false	
PRE_NIVEL	false	String	1		false	
PRE_PRECIO	false	Float	24		true	
PRE_FECHA	true	int	10		false	
PRE_MARGEN	false	Double	53		true	
PRE_VIGENTE	false	String	1		true	
PRE_TIPO	false	Short	5		true	
PRE_PRECNORM	false	double	53		false	
XXX_ORIGEN	false	String	20		true	
XXX_REMOTO	false	Short	5		true	

Original Function Parameters: Component tConvertType

	UNIQUE NAME	tConvertType_2	INPUT(S)	tLogRow_2	
	LABEL	UNIQUE_NAME	OUTPUT(S)	tDBOutput_2	

Component Parameters:	
Properties	Values
Unique Name	tConvertType_2
Component Name	tConvertType
Version	0.101 (ALPHA)
Family	Processing
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tConvertType
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SV	MHTEH
Schema	repository: DB (MSSQL):sql2 - VPREC
Auto Cast	true
Manual Cast	О
Schema	Built-In
Set empty values to Null before converting	true
Die on error	false
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for VPREC:

Schema for VI IL	<u> </u>					
Column	Key	Туре	Length	Precision	Nullable	Comment
PRE_ARTICULO	true	int	10		false	
PRE_SUCURSAL	true	short	5		false	
PRE_NIVEL	false	String	1		false	
PRE_PRECIO	false	Float	24		true	

PRE_FECHA	true	int	10	false	
PRE_MARGEN	false	Double	53	true	
PRE_VIGENTE	false	String	1	true	
PRE_TIPO	false	Short	5	true	
PRE_PRECNORM	false	double	53	false	
XXX_ORIGEN	false	String	20	true	
XXX_REMOTO	false	Short	5	true	

Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tDBInput_1	INPUT(S)	tFlowToIterate_1
				tMap_1
	LABEL	UNIQUE_NAME	OUTPUT(S)	, tDBInput_2

component Farameters.			
Properties	Values		
Database	tMSSqlInput		
Unique Name	tDBInput_1		
Component Name	tMSSqlInput		
Version	0.102 (ALPHA)		
Family	Databases/DB Specifics/MS_SQL_Server		
Start	false		

Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):sql1
Host	"192.168.50.2"
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"

Schema	"dbo"
Database	"HEB"
Username	"sa"
Password	******
REPOSITORY_ALLOW_AUTO_SV	MITTEH
Schema	repository: DB (MSSQL):sql1 - CHLPRCE2
Table Name	"CHLPRCE2"
Query Type	Built-In
Guess Schema	п
Query	"SELECT * FROM CHLPRCE2 WHERE DATEDIFF(d, PRC_EFFECTIVE_DAY, CONVERT(datetime2, "" + context.current_date + "')) = 0"
Specify a data source alias	false
Data source alias	пп
Mapping	id_MSSQL
Additional JDBC Parameters	н
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false

Trim column	[(SCHEMA_COLUMN=PRD_LVL_CHILD, TRIM=false), SCHEMA_COLUMN=ORG_LVL_CHILD, TRIM=false), SCHEMA_COLUMN=PRD_UPC, TRIM=false), SCHEMA_COLUMN=PRC_BOOK_NUMBER, TRIM=false), SCHEMA_COLUMN=PRODUCT_NUMBER, TRIM=false), SCHEMA_COLUMN=PRC_LVL_NUMBER, TRIM=false), SCHEMA_COLUMN=PRC_KEY, TRIM=false), SCHEMA_COLUMN=PRC_PREVIOUS_KEY, TRIM=false), SCHEMA_COLUMN=PRC_PREVIOUS_KEY, TRIM=false), SCHEMA_COLUMN=PRC_PROM_DATE, TRIM=false), SCHEMA_COLUMN=PRC_TO_DATE, TRIM=false), SCHEMA_COLUMN=PRC_PRICE, TRIM=false), SCHEMA_COLUMN=PRC_PRICE, TRIM=false), SCHEMA_COLUMN=PRC_PREVIOUS_PRICE, TRIM=false), SCHEMA_COLUMN=PRC_PREVIOUS_PRICE, TRIM=false), SCHEMA_COLUMN=PRC_PRICE_MULT, TRIM=false), SCHEMA_COLUMN=PRC_PROMO_LEVEL, TRIM=false), SCHEMA_COLUMN=PRC_PROMO_LEVEL, TRIM=false), SCHEMA_COLUMN=PRC_LEVEL, TRIM=false), SCHEMA_COLUMN=PRC_LEVEL, TRIM=false), SCHEMA_COLUMN=PRD_LS_DEAL_GROUP, TRIM=false), SCHEMA_COLUMN=PRD_STATUS, TRIM=false), SCHEMA_COLUMN=PRC_STATUS, TRIM=false), SCHEMA_COLUMN=PRC_BUY_QTY, TRIM=false), SCHEMA_COLUMN=PRC_BUY_QTY, TRIM=false), SCHEMA_COLUMN=PRC_GET_VALUE, TRIM=false), SCHEMA_COLUMN=PRC_GET_VALUE, TRIM=false), SCHEMA_COLUMN=PRC_GET_VALUE, TRIM=false), SCHEMA_COLUMN=PRC_GET_VALUE, TRIM=false), SCHEMA_COLUMN=PRC_GET_VALUE, TRIM=false), SCHEMA_COLUMN=PRC_GET_TYPE, TRIM=false), SCHEMA_COLUMN=PRC_GET_TYPE, TRIM=false), SCHEMA_COLUMN=PRC_GET_TYPE, TRIM=false), SCHEMA_COLUMN=PRC_GET_TYPE, TRIM=false), SCHEMA_COLUMN=PRC_GET_TYPE, TRIM=false), SCHEMA_COLUMN=PRC_HDR_NAME, TRIM=false), SCHEMA_COLUMN=PRC_HDR_NAME, TRIM=false), SCHEMA_COLUMN=PRC_TYPE, TRI
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for CHLPRCE2:

Column	Key	Туре	Length	Precision	Nullable	Comment
PRD_LVL_CHILD	true	int			false	

true	int			false
true	int			false
true	int			false
false	String	15		true
false	Integer			true
false	Integer			true
false	Integer			true
false	java.util.Date	23	3	true
false	java.util.Date	23	3	true
false	String	3		true
false	Double		3	true
false	Double		3	true
false	Double			true
false	Integer			true
false	Integer			true
false	Integer			true
false	Integer			true
	true true false	true int true int false String false Integer false Integer false java.util.Date false java.util.Date false Double false Double false Integer false Integer	true int true int false String 15 false Integer false Integer false java.util.Date 23 false java.util.Date 23 false Double false Double false Integer false Integer	true int true int true int false String 15 false Integer false Integer false java.util.Date 23 3 false java.util.Date 23 3 false Double 3 false Double 3 false Integer false Integer

PRD_IS_DEAL_GROUP	false	String	1		true
LAST_EXE_DATE	false	java.util.Date	23	3	true
PRD_LVL_ID	false	Integer			true
PRD_STYLE_IND	false	String	1		true
PRC_EFFECTIVE_DAY	false	java.util.Date	23	3	true
PRC_STATUS	false	Integer			true
PRC_BUY_QTY	false	Integer			true
PRC_GET_QTY	false	Integer			true
PRC_GET_VALUE	false	Integer		3	true
PRC_GET_TYPE	false	String	1		true
PRC_QTY_BRK_ID	false	Integer			true
PRC_HDR_NAME	false	String	40		true
ESTADO	false	Integer			true
PRC_UOM	false	String	12		true
PRC_MAX_QTY	false	Integer			true
PRC_FCST_QTY	false	Integer			true
LASTUPDATE	false	java.util.Date	23	3	true

Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tDBInput_2	INPUT(S)	tDBInput_1
	LABEL	UNIQUE_NAME	OUTPUT(S)	tMap_2

Component Parameters:					
Properties	Values				
Database	tMSSqlInput				
Unique Name	DBInput_2				
Component Name	tMSSqlInput				
Version	0.102 (ALPHA)				
Family	Databases/DB Specifics/MS_SQL_Server				
Start	false				
Startable	true				
SUBTREE_START	true				
END_OF_FLOW	false				
Activate	true				
DUMMY	false				
tStatCatcher Statistics	false				
Help	org.talend.help.tMSSqlInput				
Update components	true				
IREPORT_PATH					
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java				

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):sql1
Host	"192.168.50.2"
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"HEB"
Username	"sa"
Password	******
REPOSITORY_ALLOW_AUTO_SV	ALICH
Schema	repository: DB (MSSQL):sql1 - CHLMPVE2
Table Name	"CHLMPVE2"
Query Type	Built-In
Guess Schema	пп
Query	"SELECT * FROM CHLMPVE2 WHERE DATEDIFF(d, PRC_EFFECTIVE_DAY, CONVERT(datetime2, '" + context.current_date + "')) = 0"

Specify a data source alias	false			
Data source alias	""			
Mapping	id_MSSQL			
Additional JDBC Parameters	***			
Encoding	"ISO-8859-15"			
Trim all the String/Char columns	false			
Trim column	[{SCHEMA_COLUMN=ORG_LVL_CHILD, TRIM=false}, {SCHEMA_COLUMN=PRD_LVL_CHILD, TRIM=false}, {SCHEMA_COLUMN=PRD_UPC, TRIM=false}, {SCHEMA_COLUMN=PRD_UPC, TRIM=false}, {SCHEMA_COLUMN=PRODUCT_NUMBER, TRIM=false}, {SCHEMA_COLUMN=PRODUCT_NUMBER, TRIM=false}, {SCHEMA_COLUMN=PRODUCT_NUMBER, TRIM=false}, {SCHEMA_COLUMN=PRC_KEY, TRIM=false}, {SCHEMA_COLUMN=PRC_KEY, TRIM=false}, {SCHEMA_COLUMN=PRC_PREVIOUS_KEY, TRIM=false}, {SCHEMA_COLUMN=PRC_FROM_DATE, TRIM=false}, {SCHEMA_COLUMN=PRC_TO_DATE, TRIM=false}, {SCHEMA_COLUMN=PRC_PRICE, TRIM=false}, {SCHEMA_COLUMN=PRC_PRICE, TRIM=false}, {SCHEMA_COLUMN=PRC_PRICE, TRIM=false}, {SCHEMA_COLUMN=PRC_PREVIOUS_PRICE, TRIM=false}, {SCHEMA_COLUMN=PRC_PRICE_MULT, TRIM=false}, {SCHEMA_COLUMN=PRC_PROMO_LEVEL, TRIM=false}, {SCHEMA_COLUMN=PRC_PROMO_LEVEL, TRIM=false}, {SCHEMA_COLUMN=PRC_HDR_NUMBER, TRIM=false}, {SCHEMA_COLUMN=PRC_LEVEL, TRIM=false}, {SCHEMA_COLUMN=PRC_LEVEL, TRIM=false}, {SCHEMA_COLUMN=PRC_LEVEL, TRIM=false}, {SCHEMA_COLUMN=PRC_LEVEL, TRIM=false}, {SCHEMA_COLUMN=PRD_STYLE_IND, TRIM=false}, {SCHEMA_COLUMN=PRD_STYLE_IND, TRIM=false}, {SCHEMA_COLUMN=PRC_STATUS, TRIM=false}, {SCHEMA_COLUMN=PRC_STATUS, TRIM=false}, {SCHEMA_COLUMN=PRC_STATUS, TRIM=false}]]			
Label format	UNIQUE_NAME			
Hint format	UNIQUE_NAME COMMENT			
Connection format	row			
Show Information	false			
Comment				
Use an existing validation rule	false			
Validation Rule Type				

Schema for CHLMPVE2:

Column	Key	Туре	Length	Precision	Nullable	Comment
ORG_LVL_CHILD	true	int			false	
PRD_LVL_CHILD	true	int			false	
PRD_UPC	true	int			false	
PRC_BOOK_NUMBER	true	int			false	
PRODUCT_NUMBER	false	String	15		true	
ORG_LVL_NUMBER	false	Integer			true	
PRC_KEY	false	Integer			true	
PRC_PREVIOUS_KEY	false	Integer			true	
PRC_FROM_DATE	false	java.util.Date	23	3	true	
PRC_TO_DATE	false	java.util.Date	23	3	true	
PRC_CURR_CODE	false	String	3		true	
PRC_PRICE	false	Double		3	true	
PRC_FIRST_PRICE	false	Double		3	true	
PRC_PREVIOUS_PRICE	false	Double		3	true	
PRC_PRICE_MULT	false	Double			true	
PRC_TYPE	false	Integer			true	

PRC_PROMO_LEVEL	false	Integer			true	
PRC_HDR_NUMBER	false	Integer			true	
PRC_LEVEL	false	Integer			true	
LAST_EXE_DATE	false	java.util.Date	23	3	true	
PRD_LVL_ID	false	Integer			true	
PRD_STYLE_IND	false	String	1		true	
PRC_EFFECTIVE_DAY	false	java.util.Date	23	3	true	
PRC_STATUS	false	Integer			true	
LASTUPDATE	false	java.util.Date	23	3	true	

Original Function Parameters: Component tMSSqlOutput

	UNIQUE NAME	tDBOutput_1	INPUT(S)	tConvertType_1
	LABEL	UNIQUE_NAME	OUTPUT(S)	none

Component Parameters.					
Properties	Values				
Database	tMSSqlOutput				
Unique Name	tDBOutput_1				
Component Name	tMSSqlOutput				
Version	0.102 (ALPHA)				

Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	repository: DB (MSSQL):sql2
Use an existing connection	false
Component List	
JDBC Provider	JTDS
Host	"192.168.50.3"
Port	"1433"

г

Schema	"dbo"
Database	"HEB"
Database Driver	MSSQL
Username	"sa"
Password	*****
Table	"VPREC"
Action on table	NONE
Turn on Identity insert	false
Action on data	INSERT_OR_UPDATE
Specify identity field	false
Identity field	PRE_ARTICULO
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SV	VITTEH
Schema	repository: DB (MSSQL):sql2 - VPREC
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	пп
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	HII
Encoding	"ISO-8859-15"

г

Commit every	1
Additional columns	o contract of the contract of
Use field options	false
Field options	[{SCHEMA_COLUMN=PRE_ARTICULO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_SUCURSAL, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_NIVEL, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_PRECIO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_FECHA, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_MARGEN, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_VIGENTE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_TIPO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_TIPO, UPDATE_KEY=false, DELETE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_PRECNORM, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=XXX_ORIGEN, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=XXX_REMOTO, UPDATE_KEY=false, DELETE_KEY=false, UPDATE_KEY=false, UPDATE_KEY=fal
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for VPREC:

Scrienia for VFKE	<u> </u>					
Column	Key	Туре	Length	Precision	Nullable	Comment
PRE_ARTICULO	true	int	10		false	
PRE_SUCURSAL	true	short	5		false	
PRE_NIVEL	false	String	1		false	
PRE_PRECIO	false	Float	24		true	
PRE_FECHA	true	int	10		false	
PRE_MARGEN	false	Double	53		true	
PRE_VIGENTE	false	String	1		true	
PRE_TIPO	false	Short	5		true	
PRE_PRECNORM	false	double	53		false	
XXX_ORIGEN	false	String	20		true	
XXX_REMOTO	false	Short	5		true	

Original Function Parameters: Component tMSSqlOutput

UNIQUE NAME	tDBOutput_2	INPUT(S)	tConvertType_2
LABEL	UNIQUE_NAME	OUTPUT(S)	none

Properties	Values
Database	tMSSqlOutput
Unique Name	tDBOutput_2
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	repository: DB (MSSQL):sql2

Use an existing connection	false
Component List	
JDBC Provider	JTDS
Host	"192.168.50.3"
Port	"1433"
Schema	"dbo"
Database	"HEB"
Database Driver	MSSQL
Username	"sa"
Password	******
Table	"VPREC"
Action on table	NONE
Turn on Identity insert	false
Action on data	INSERT_OR_UPDATE
Specify identity field	false
Identity field	PRE_ARTICULO
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SV	ALTIEH
Schema	repository: DB (MSSQL):sql2 - VPREC
Reject Schema	Built-In
Specify a data source alias	false

Data source alias	н
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	пп
Encoding	"ISO-8859-15"
Commit every	1
Additional columns	О
Use field options	false
Field options	[{SCHEMA_COLUMN=PRE_ARTICULO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_SUCURSAL, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_NIVEL, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_PRECIO, UPDATE_KEY=false, DELETE_KEY=false, UPDATBLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_FECHA, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_MARGEN, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_VIGENTE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_TIPO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRE_PRECNORM, UPDATE_KEY=false, DELETE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=XXX_ORIGEN, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=XXX_ORIGEN, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=XXX_REMOTO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, INSERTABLE=true}, INSERTABLE=true}
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for VPREC:

Scrienia for VFRE	<u> </u>					
Column	Key	Туре	Length	Precision	Nullable	Comment
PRE_ARTICULO	true	int	10		false	
PRE_SUCURSAL	true	short	5		false	
PRE_NIVEL	false	String	1		false	
PRE_PRECIO	false	Float	24		true	
PRE_FECHA	true	int	10		false	
PRE_MARGEN	false	Double	53		true	
PRE_VIGENTE	false	String	1		true	
PRE_TIPO	false	Short	5		true	
PRE_PRECNORM	false	double	53		false	
XXX_ORIGEN	false	String	20		true	
XXX_REMOTO	false	Short	5		true	

Original Function Parameters: Component tFileInputDelimited

; →	UNIQUE NAME	tFileInputDelimited_1	INPUT(S)	none	
	LABEL	UNIQUE_NAME	OUTPUT(S)	tJavaRow_1	

Component Parameters:	
Properties	Values
Unique Name	tFileInputDelimited_1
Component Name	tFileInputDelimited
Version	0.102 (ALPHA)
Family	File/Input
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileInputDelimited
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
REPOSITORY_ALLOW_AUTO_SV	MITTEH
Schema	Built-In
File name/Stream	"C:/Users/zach/workspace/date_list.csv"
CSV options	true
Row Separator	"\n"
CSV Row Separator	"\n"
Field Separator	n.n 7
Escape char	ппп
Text enclosure	ппп
Header	1
Footer	0
Limit	
Skip empty rows	true
Uncompress as zip file	false
Die on error	false
Schema	Built-In
!!!TEMP_DIR.NAME!!!	"C:/Users/zach/workspace"
Advanced separator (for numbers)	false

Thousands separator	" "
Decimal separator	n n
Extract lines at random	false
Number of lines	10
Trim all columns	false
Check column to trim	[{SCHEMA_COLUMN=current_date, TRIM=false}]
Check each row structure against schema	false
Check date	false
Encoding	"ISO-8859-15"
Split row before field	false
Permit hexadecimal (0xNNN) or octal (0NNNN) for numeric types	false
Decode table	[{SCHEMA_COLUMN=current_date, DECODE=false}]
!!!DESTINATION.NAME!!!	
Min column number of optimize code	100
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

${\bf Schema\ for\ tFileInputDelimited_1:}$

Column	Key	Туре	Length	Precision	Nullable	Comment
current_date	false	String			true	

Original Function Parameters: Component tFlowTolterate

 UNIQUE NAME	tFlowTolterate_1	INPUT(S)	tJavaRow_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tDBInput_1

Component Parameters:			
Properties	Values		
Unique Name	tFlowTolterate_1		
Component Name	tFlowTolterate		
Version	0.101 (ALPHA)		
Family	Orchestration		
Startable	false		
SUBTREE_START	false		
END_OF_FLOW	true		
Activate	true		
DUMMY	false		
tStatCatcher Statistics	false		
Help	org.talend.help.tFlowTolterate		
Update components	true		
IREPORT_PATH			

JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Use the default (key, value) in global variables.	true
Customize	
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFlowTolterate 1:

Column	Key	Туре	Length	Precision	Nullable	Comment	

Original Function Parameters: Component tJavaRow

	UNIQUE NAME	tJavaRow_1	INPUT(S)	tFileInputDelimited_1
_ 				

LABELUNIQUE_NAMEOUTPUT(S) tFlowTolterate_1
--

Component Parameters:	
Properties	Values
Unique Name	tJavaRow_1
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false

REPOSITORY_ALLOW_AUTO_SV	ALIEH
Schema	Built-In
Code	context.current_date = input_row.current_date;
Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaRow_1 :

Column Key Type Length	Precision Nullable Comment	
------------------------	----------------------------	--

Original Function Parameters: Component tLogRow

 UNIQUE NAME	tLogRow_1	INPUT(S)	tMap_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tConvertType_1

Properties	Values
Unique Name	tLogRow_1
Component Name	tLogRow
Version	0.101 (ALPHA)

Family	Logs_Errors
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SWHTEH	
Schema	Built-In
Basic	true
Table (print values in cells of a table)	false
Vertical (each row is a key/value list)	false
Print unique name	true

Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false
Lengths	[{SCHEMA_COLUMN=PRE_ARTICULO, LENGTH=10}, {SCHEMA_COLUMN=PRE_SUCURSAL, LENGTH=10}, {SCHEMA_COLUMN=PRE_NIVEL, LENGTH=10}, {SCHEMA_COLUMN=PRE_PRECIO, LENGTH=10}, {SCHEMA_COLUMN=PRE_FECHA, LENGTH=10}, {SCHEMA_COLUMN=PRE_MARGEN, LENGTH=10}, {SCHEMA_COLUMN=PRE_VIGENTE, LENGTH=10}, {SCHEMA_COLUMN=PRE_TIPO, LENGTH=10}, {SCHEMA_COLUMN=PRE_PRECNORM, LENGTH=10}, {SCHEMA_COLUMN=XXX_ORIGEN, LENGTH=10}, {SCHEMA_COLUMN=XXX_REMOTO, LENGTH=10}]
Print content with log4j	true
Min column number of optimize code	100
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for VPREC:

Column	Key	Туре	Length	Precision	Nullable	Comment
PRE_ARTICULO	true	int	10		false	
PRE_SUCURSAL	true	int	5		false	
PRE_NIVEL	false	String	1		false	
PRE_PRECIO	false	Double	24		true	
PRE_FECHA	true	int	10		false	
PRE_MARGEN	false	Double	53		true	
PRE_VIGENTE	false	String	1		true	
PRE_TIPO	false	Integer	5		true	
PRE_PRECNORM	false	double	53		false	
XXX_ORIGEN	false	String	20		true	
XXX_REMOTO	false	Integer	5		true	

Original Function Parameters: Component tLogRow

UNIQUE NAME	tLogRow_2	INPUT(S)	tMap_2
LABEL	UNIQUE_NAME	OUTPUT(S)	tConvertType_2

Component Parameters:

Properties	Values

Unique Name	tLogRow_2
Component Name	tLogRow
Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SV	ALLIEH
Schema	Built-In
Basic	true

Table (print values in cells of a table)	false
Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false
Lengths	[{SCHEMA_COLUMN=PRE_ARTICULO, LENGTH=10}, {SCHEMA_COLUMN=PRE_SUCURSAL, LENGTH=10}, {SCHEMA_COLUMN=PRE_NIVEL, LENGTH=10}, {SCHEMA_COLUMN=PRE_PRECIO, LENGTH=10}, {SCHEMA_COLUMN=PRE_FECHA, LENGTH=10}, {SCHEMA_COLUMN=PRE_MARGEN, LENGTH=10}, {SCHEMA_COLUMN=PRE_VIGENTE, LENGTH=10}, {SCHEMA_COLUMN=PRE_TIPO, LENGTH=10}, {SCHEMA_COLUMN=PRE_PRECNORM, LENGTH=10}, {SCHEMA_COLUMN=XXX_ORIGEN, LENGTH=10}]
Print content with log4j	true
Min column number of optimize code	100
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	


Schema for VPREC :

Ochema for VI ILL	<u> </u>					
Column	Key	Туре	Length	Precision	Nullable	Comment
PRE_ARTICULO	true	int	10		false	
PRE_SUCURSAL	true	int	5		false	
PRE_NIVEL	false	String	1		false	
PRE_PRECIO	false	Double	24		true	
PRE_FECHA	true	int	10		false	
PRE_MARGEN	false	Double	53		true	
PRE_VIGENTE	false	String	1		true	
PRE_TIPO	false	Integer	5		true	
PRE_PRECNORM	false	double	53		false	
XXX_ORIGEN	false	String	20		true	
XXX_REMOTO	false	Integer	5		true	

Original Function Parameters: Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tDBInput_1



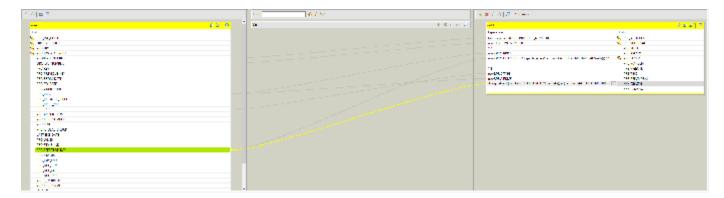

Component Parameters:

Component Parameters:			
Properties	Values		
tStatCatcher Statistics	false		
Enable parallel execution	false		
Mapping links display as:	AUTO		
Temp data directory path:			
Max buffer size (nb of rows):	2000000		
Ignore trailing zeros for BigDecimal	true		
Show Information	false		
Comment			
Use an existing validation rule	false		

Mapper table for tMap_1 (input):
Mapper table Properties(row3):

napper table Properties (10w3).			
Properties	Values		
Name	row3		
Matching-mode	UNIQUE_MATCH		
isMinimized	false		
isReject	false		
isRejectInnerJoin	false		
isInnerJoin	false		
expressionFilter	null		

Metadata Table Entries(row3):

Meranara Table Fillies	1040).		
Name	Туре	Expression	isNullable
PRD_LVL_CHILD	int		false
ORG_LVL_CHILD	int		false
PRD_UPC	int		false
PRC_BOOK_NUMBER	int		false
PRODUCT_NUMBER	String		true
ORG_LVL_NUMBER	Integer		true
PRC_KEY	Integer		true

PRC_PREVIOUS_KEY	Integer	true
PRC_FROM_DATE	java.util.Date	true
PRC_TO_DATE	java.util.Date	true
PRC_CURR_CODE	String	true
PRC_PRICE	Double	true
PRC_PREVIOUS_PRICE	Double	true
PRC_PRICE_MULT	Double	true
PRC_TYPE	Integer	true
PRC_PROMO_LEVEL	Integer	true
PRC_HDR_NUMBER	Integer	true
PRC_LEVEL	Integer	true
PRD_IS_DEAL_GROUP	String	true
LAST_EXE_DATE	java.util.Date	true
PRD_LVL_ID	Integer	true
PRD_STYLE_IND	String	true
PRC_EFFECTIVE_DAY	java.util.Date	true
PRC_STATUS	Integer	true

PRC_BUY_QTY	Integer	true
PRC_GET_QTY	Integer	true
PRC_GET_VALUE	Integer	true
PRC_GET_TYPE	String	true
PRC_QTY_BRK_ID	Integer	true
PRC_HDR_NAME	String	true
ESTADO	Integer	true
PRC_UOM	String	true
PRC_MAX_QTY	Integer	true
PRC_FCST_QTY	Integer	true
LASTUPDATE	java.util.Date	true

Constraint Table Entries(row3):

Name Type Expression isNullable	9

Mapper table for tMap_1 (output): Mapper table Properties(out1):

Properties	Values
Name	out1
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out1):

Name	Туре	Expression	isNullable
PRE_ARTICULO	int	Integer.parseInt(row3.PRODUCT_NUMBER)	false
PRE_SUCURSAL	int	row3.ORG_LVL_NUMBER	false
PRE_NIVEL	String	"S"	false
PRE_PRECIO	Double	row3.PRC_PRICE	true
PRE_FECHA	int	row3.PRC_EFFECTIVE_DAY.getDate() + (1 + row3.PRC_EFFECTIVE_DAY.getMonth()) * 100 + (1900 + row3.PRC_EFFECTIVE_DAY.getYear()) * 10000	false
PRE_MARGEN	Double		true
PRE_VIGENTE	String	"N"	true
PRE_TIPO	Integer	row3.PRC_TYPE	true
PRE_PRECNORM	double	row3.PRC_PRICE	false
XXX_ORIGEN	String	String.valueOf(row3.PRC_EFFECTIVE_DAY.getDate() + (1+ row3.PRC_EFFECTIVE_DAY.getMonth()) * 100 + (1900 + row3.PRC_EFFECTIVE_DAY.getYear()) * 10000)	true
XXX_REMOTO	Integer		true

Constraint Table Entries(out1):

Name	Туре	Expression	isNullable

Mapper table for tMap_1 (var):

Mapper table Properties (Var):

mapper table i roperties vai j.		
Values		
Var		
true		
false		
false		
false		
null		

Metadata Table Entries(Var):

me	Туре	Expression	isNullable
----	------	------------	------------

Constraint Table Entries(Var):

Name Type Expre	ssion isNullable
-----------------	------------------

Component tMap

 UNIQUE NAME	tMap_2	INPUT(S)	tDBInput_2
LABEL	UNIQUE_NAME	OUTPUT(S)	tLogRow_2

Component Parameters:

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_2 (input):
Mapper table Properties(row4):

Properties	Values
Name	row4
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row4):

Name		Expression	isNullable
ORG_LVL_CHILD	int		false
PRD_LVL_CHILD	int		false
PRD_UPC	int		false
PRC_BOOK_NUMBER	int		false
PRODUCT_NUMBER	String		true
ORG_LVL_NUMBER	Integer		true
PRC_KEY	Integer		true

PRC_PREVIOUS_KEY	Integer	true
PRC_FROM_DATE	java.util.Date	true
PRC_TO_DATE	java.util.Date	true
PRC_CURR_CODE	String	true
PRC_PRICE	Double	true
PRC_FIRST_PRICE	Double	true
PRC_PREVIOUS_PRICE	Double	true
PRC_PRICE_MULT	Double	true
PRC_TYPE	Integer	true
PRC_PROMO_LEVEL	Integer	true
PRC_HDR_NUMBER	Integer	true
PRC_LEVEL	Integer	true
LAST_EXE_DATE	java.util.Date	true
PRD_LVL_ID	Integer	true
PRD_STYLE_IND	String	true
PRC_EFFECTIVE_DAY	java.util.Date	true
PRC_STATUS	Integer	true

LASTUPDATE	java.util.Date	true
------------	----------------	------

Constraint Table Entries(row4):

Name	Туре	Expression	isNullable	

Mapper table for tMap_2 (output):
Mapper table Properties(copyOfout1):

Mapper table Properties (copyOfout1):			
Properties	Values		
Name	copyOfout1		
Matching-mode			
isMinimized	false		
isReject	false		
isRejectInnerJoin	false		
isInnerJoin	false		
expressionFilter	null		

Metadata Table Entries(copyOfout1):

Name	Туре	Expression	isNullable
PRE_ARTICULO	int	Integer.parseInt(row4.PRODUCT_NUMBER)	false
PRE_SUCURSAL	int	row4.ORG_LVL_NUMBER	false
PRE_NIVEL	String	"S"	false
PRE_PRECIO	Double	row4.PRC_PRICE	true
PRE_FECHA	int	row4.PRC_EFFECTIVE_DAY.getDate() + (1 + row4.PRC_EFFECTIVE_DAY.getMonth()) * 100 + (1900 + row4.PRC_EFFECTIVE_DAY.getYear()) * 10000	false
PRE_MARGEN	Double		true
PRE_VIGENTE	String	"S"	true
PRE_TIPO	Integer	row4.PRC_TYPE	true
PRE_PRECNORM	double	row4.PRC_PRICE	false
XXX_ORIGEN	String	String.valueOf(row4.PRC_EFFECTIVE_DAY.getDate() + (1+ row4.PRC_EFFECTIVE_DAY.getMonth()) * 100 + (1900 + row4.PRC_EFFECTIVE_DAY.getYear()) * 10000)	true
XXX_REMOTO	Integer		true

Constraint Table Entries(copyOfout1):

Name Type Expression isNullable	Name	Туре Ехр	pression isNullable

Mapper table for tMap_2 (var):

Mapper table Properties (Var):

mapper table i reperties (tar).			
Properties	Values		
Name	Var		
Matching-mode			
isMinimized	true		
isReject	false		
isRejectInnerJoin	false		
isInnerJoin	false		
expressionFilter	null		

Metadata Table Entries(Var):

me	Туре	Expression	isNullable	
----	------	------------	------------	--

Constraint Table Entries(Var):

Name	Туре	Expression	isNullable