

Network Telescope Analysis

Automated Report

June 9, 2025

1 Top Scanners

Table ?? lists the ten most active scanners observed in the first 100k packets.

IP	Packets	Share
88.213.209.194	7598	7.72%
185.242.226.50	7148	7.27%
192.241.217.10	2965	3.01%
192.241.223.55	2945	2.99%
45.14.226.132	1759	1.79%
45.33.110.79	1161	1.18%
80.75.212.37	1135	1.15%
8.138.99.185	1025	1.04%
192.241.209.24	795	0.81%
198.199.115.21	787	0.80%

Table 1: Top 10 scanner IPs.

2 Top Target Ports

Port	TCP Packets
8124	7150
6066	2966
8000	2710
34567	2538
37777	2536
8088	1681
84	1402
22	1202
12102	1135
3389	1074

Table 2: Top TCP destination ports.

Port	UDP Packets
5060	3878
514	1522
53	911
123	386
10184	291
8000	185
8082	148
5353	142
6881	138
4000	137

Table 3: Top UDP destination ports.

3 Protocol Breakdown



4 Heavy Hitter Details

The most active source was 88.213.209.194 from Bulgaria (BG). In the sample it sent 7,598 packets to 832 unique IPs across three destination ports.

5 Visualizations

6 Interpretation

Scanning primarily targets a handful of ports such as 8124, 6066 and 5060, suggesting automation scripts aimed at common services. The time series shows nearly steady traffic with minor fluctuations, indicating mass scanning rather than short bursts. The heavy hitter probes hundreds of addresses, reinforcing the pattern of broad reconnaissance.

Selecting the heavy hitter scanner, its steady activity against few ports hints at an automated mass scanner rather than a targeted probe. Such hosts generally pose minimal direct risk if the telescope is non-routable, yet the underlying intent is malicious reconnaissance and the IP may belong to a larger botnet.

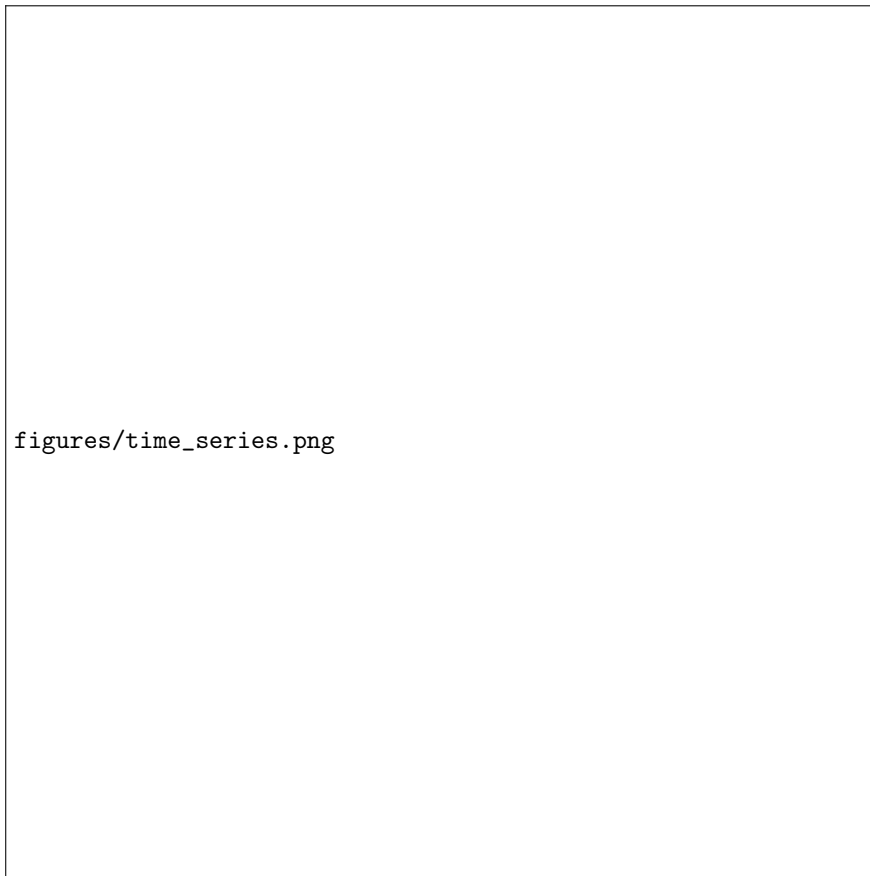


Figure 1: Packet count over time using 5 minute bins.



Figure 2: Distribution of top scanned ports.



Figure 3: Unique IPs targeted by the most prolific scanners.