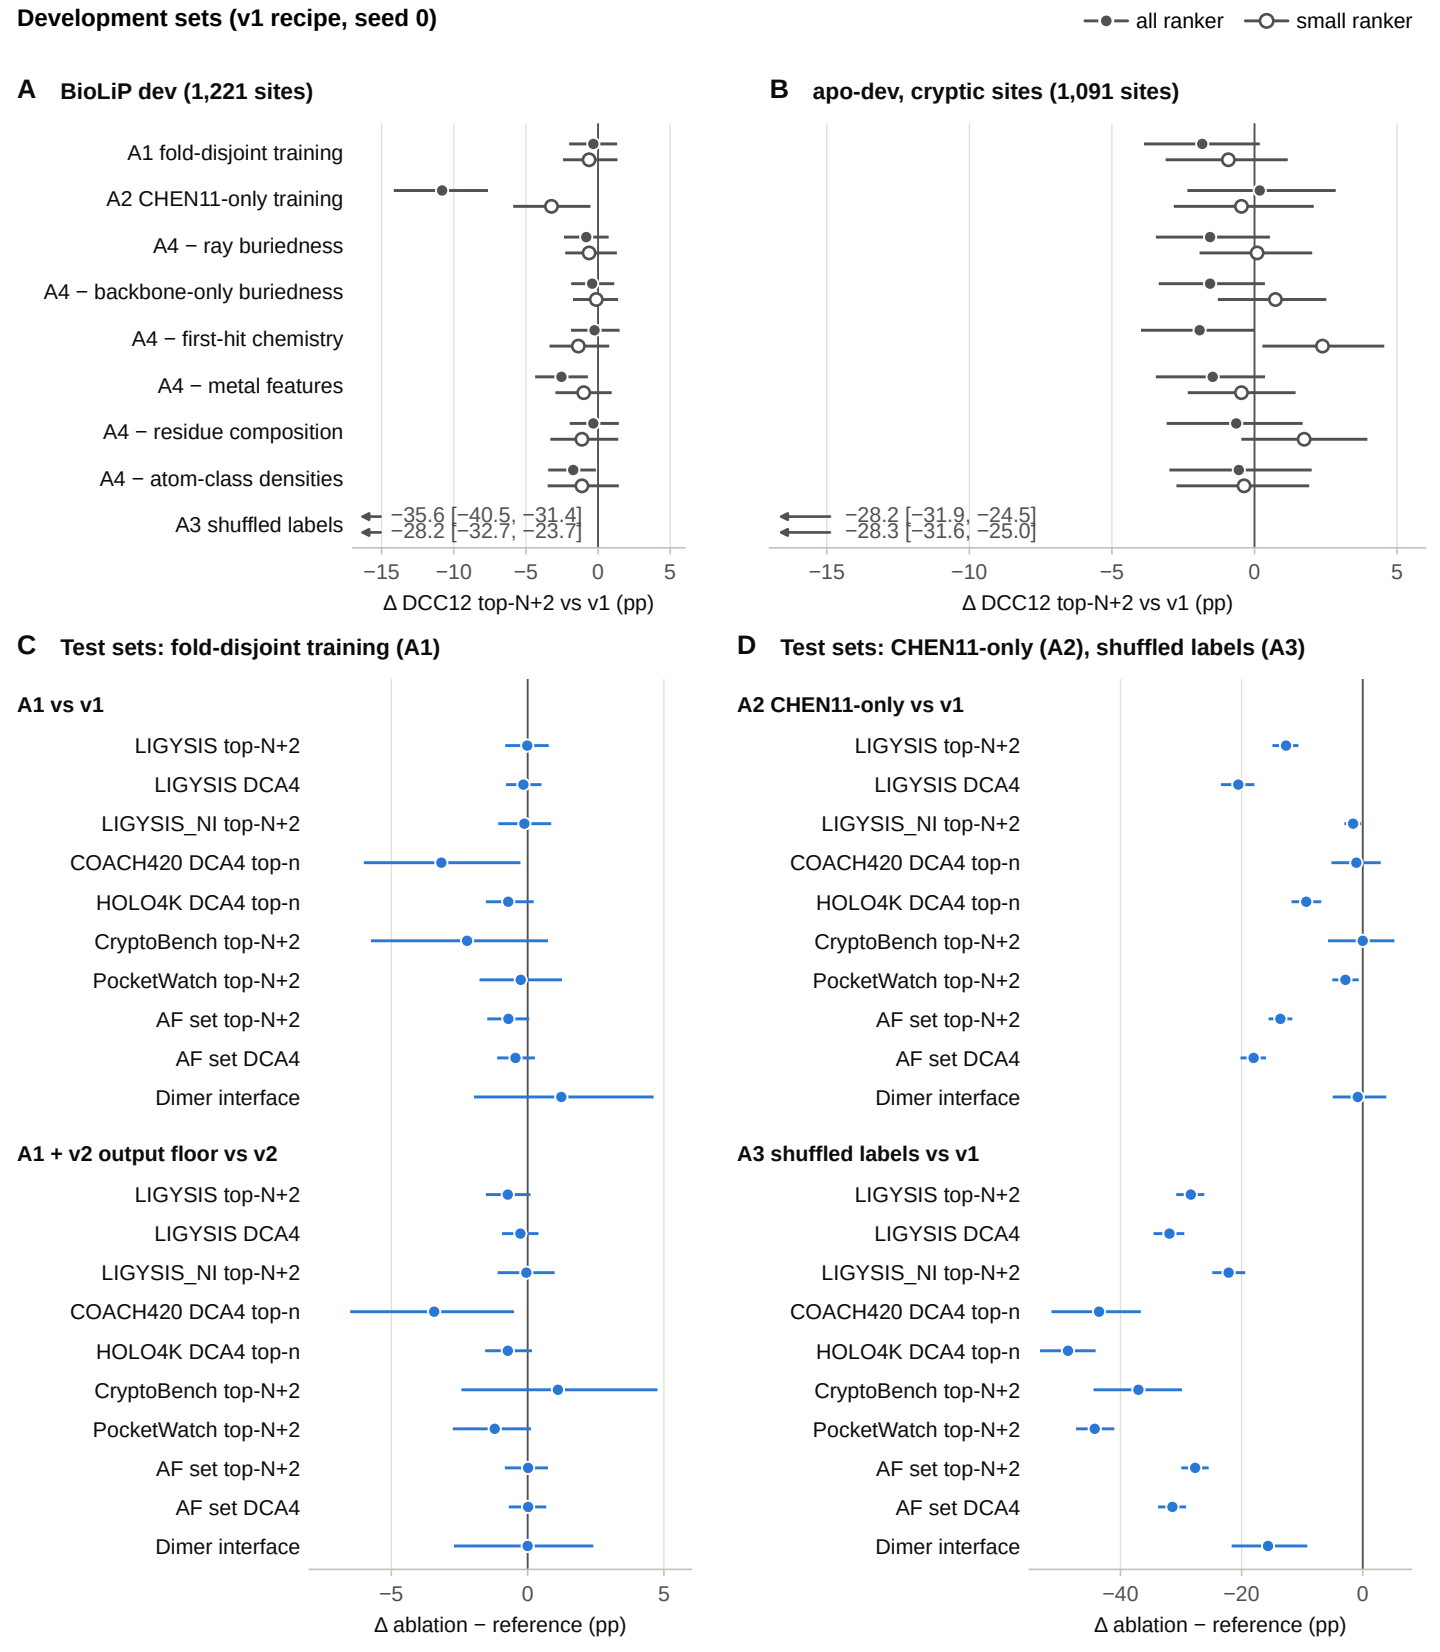
Development sets (v1 recipe, seed 0)
all ranker
small ranker
A BioLiP dev (1,221 sites)
A1 fold-disjoint training
A2 CHEN11-only training
A4 − ray buriedness
A4 − backbone-only buriedness
A4 − first-hit chemistry
A4 − metal features
A4 − residue composition
A4 − atom-class densities
A3 shuffled labels
−35.6 [−40.5, −31.4]
−28.2 [−32.7, −23.7]
−15
−10
−5
0
5
Δ DCC12 top-N+2 vs v1 (pp)
B apo-dev, cryptic sites (1,091 sites)
−28.2 [−31.9, −24.5]
−28.3 [−31.6, −25.0]
−15
−10
−5
0
5
Δ DCC12 top-N+2 vs v1 (pp)
C Test sets: fold-disjoint training (A1)
A1 vs v1
LIGYSIS top-N+2
LIGYSIS DCA4
LIGYSIS_NI top-N+2
COACH420 DCA4 top-n
HOLO4K DCA4 top-n
CryptoBench top-N+2
PocketWatch top-N+2
AF set top-N+2
AF set DCA4
Dimer interface
A1 + v2 output floor vs v2
LIGYSIS top-N+2
LIGYSIS DCA4
LIGYSIS_NI top-N+2
COACH420 DCA4 top-n
HOLO4K DCA4 top-n
CryptoBench top-N+2
PocketWatch top-N+2
AF set top-N+2
AF set DCA4
Dimer interface
−5
0
5
Δ ablation − reference (pp)
D Test sets: CHEN11-only (A2), shuffled labels (A3)
A2 CHEN11-only vs v1
LIGYSIS top-N+2
LIGYSIS DCA4
LIGYSIS_NI top-N+2
COACH420 DCA4 top-n
HOLO4K DCA4 top-n
CryptoBench top-N+2
PocketWatch top-N+2
AF set top-N+2
AF set DCA4
Dimer interface
A3 shuffled labels vs v1
LIGYSIS top-N+2
LIGYSIS DCA4
LIGYSIS_NI top-N+2
COACH420 DCA4 top-n
HOLO4K DCA4 top-n
CryptoBench top-N+2
PocketWatch top-N+2
AF set top-N+2
AF set DCA4
Dimer interface
−40
−20
0
Δ ablation − reference (pp)