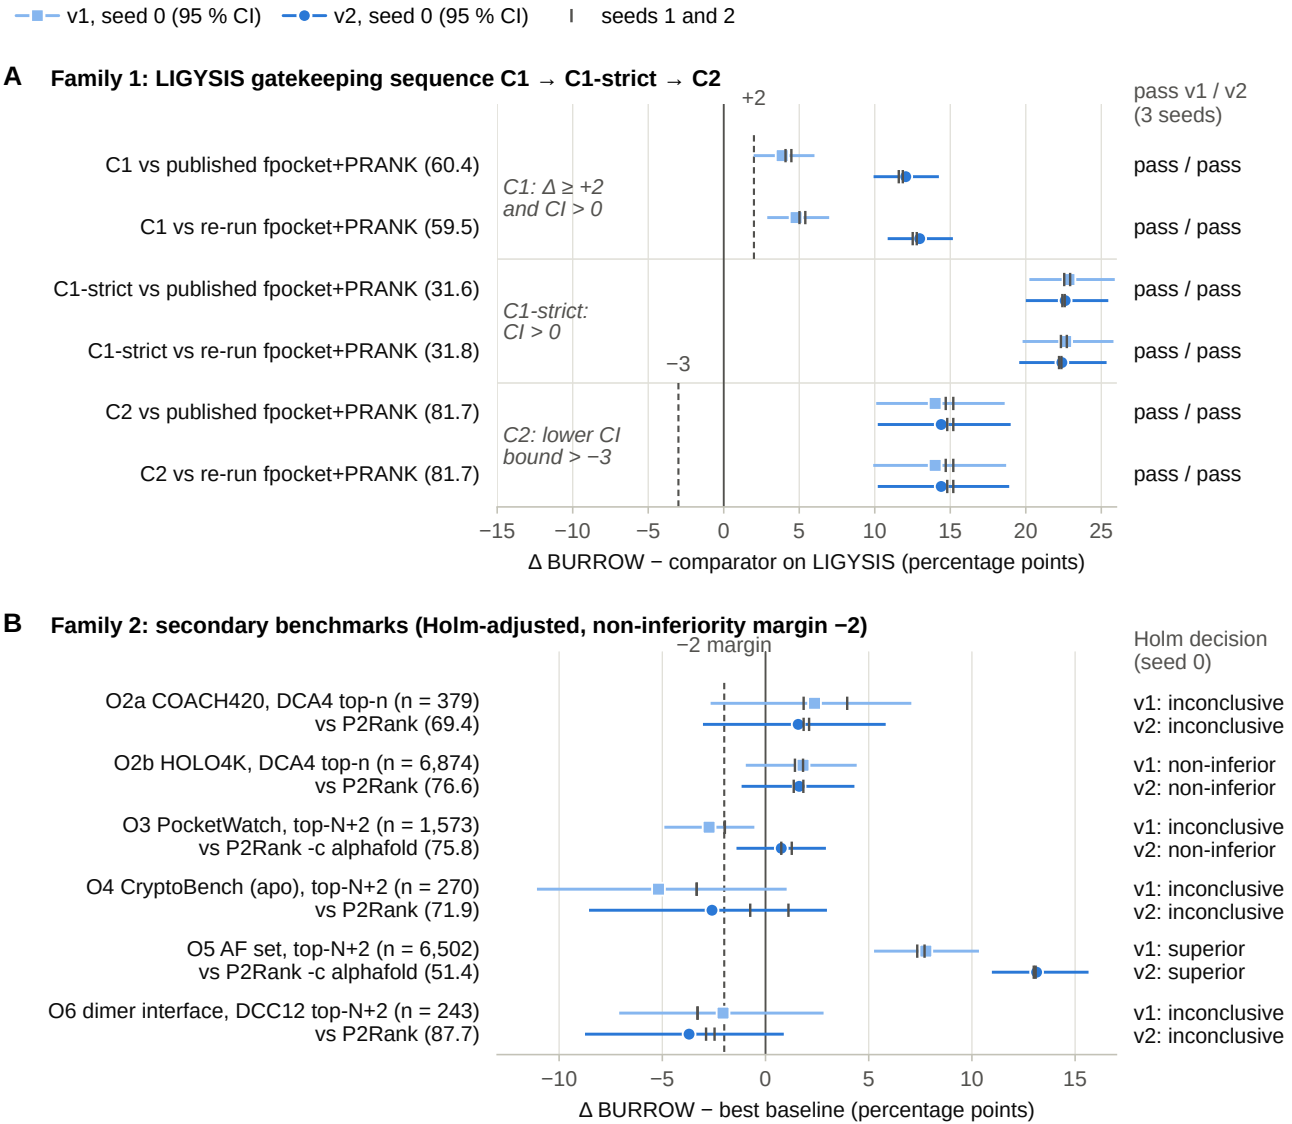
v1, seed 0 (95 % CI)
v2, seed 0 (95 % CI)
seeds 1 and 2
A
Family 1: LIGYSIS gatekeeping sequence C1 → C1-strict → C2
pass v1 / v2 (3 seeds)
C1 vs published fpocket+PRANK (60.4)
C1 vs re-run fpocket+PRANK (59.5)
C1-strict vs published fpocket+PRANK (31.6)
C1-strict vs re-run fpocket+PRANK (31.8)
C2 vs published fpocket+PRANK (81.7)
C2 vs re-run fpocket+PRANK (81.7)
C1: Δ ≥ +2 and CI > 0
C1-strict: CI > 0
C2: lower CI bound > −3
+2
−3
pass / pass
−15 −10 −5 0 5 10 15 20 25
Δ BURROW − comparator on LIGYSIS (percentage points)
B
Family 2: secondary benchmarks (Holm-adjusted, non-inferiority margin −2)
−2 margin
Holm decision (seed 0)
O2a COACH420, DCA4 top-n (n = 379) vs P2Rank (69.4)
O2b HOLO4K, DCA4 top-n (n = 6,874) vs P2Rank (76.6)
O3 PocketWatch, top-N+2 (n = 1,573) vs P2Rank -c alphafold (75.8)
O4 CryptoBench (apo), top-N+2 (n = 270) vs P2Rank (71.9)
O5 AF set, top-N+2 (n = 6,502) vs P2Rank -c alphafold (51.4)
O6 dimer interface, DCC12 top-N+2 (n = 243) vs P2Rank (87.7)
v1: inconclusive v2: inconclusive
v1: non-inferior v2: non-inferior
v1: inconclusive v2: non-inferior
v1: inconclusive v2: inconclusive
v1: superior v2: superior
v1: inconclusive v2: inconclusive
−10 −5 0 5 10 15
Δ BURROW − best baseline (percentage points)