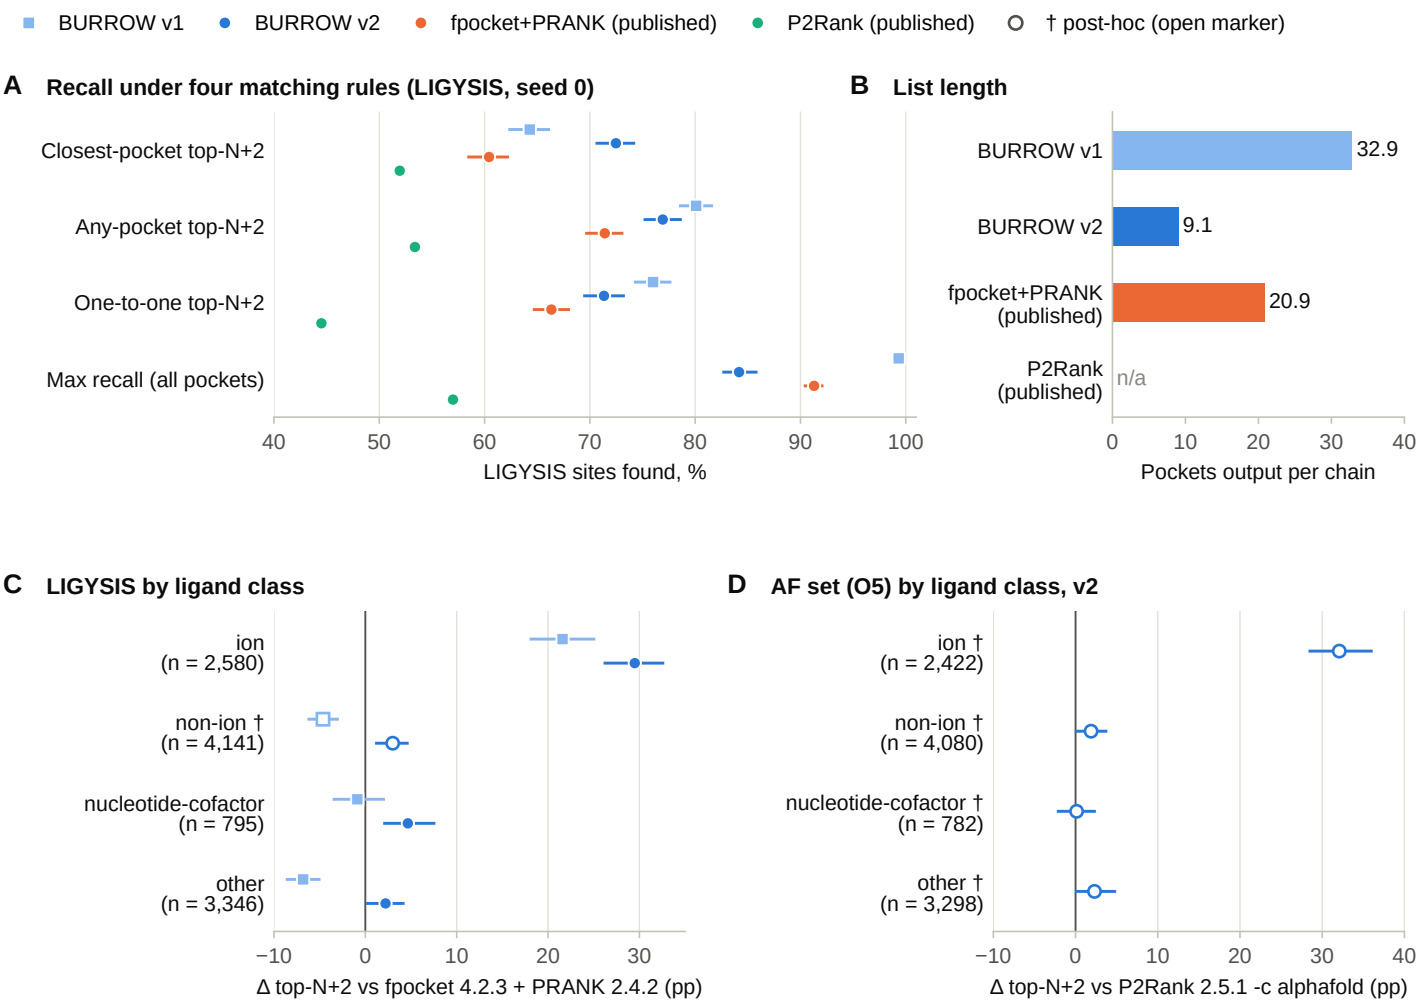
BURROW v1
BURROW v2
fpocket+PRANK (published)
P2Rank (published)
† post-hoc (open marker)
A
Recall under four matching rules (LIGYSIS, seed 0)
Closest-pocket top-N+2
Any-pocket top-N+2
One-to-one top-N+2
Max recall (all pockets)
40
50
60
70
80
90
100
LIGYSIS sites found, %
B
List length
BURROW v1
32.9
BURROW v2
9.1
fpocket+PRANK (published)
20.9
P2Rank (published)
n/a
0
10
20
30
40
Pockets output per chain
C
LIGYSIS by ligand class
ion (n = 2,580)
non-ion † (n = 4,141)
nucleotide-cofactor (n = 795)
other (n = 3,346)
−10
0
10
20
30
Δ top-N+2 vs fpocket 4.2.3 + PRANK 2.4.2 (pp)
D
AF set (O5) by ligand class, v2
ion † (n = 2,422)
non-ion † (n = 4,080)
nucleotide-cofactor † (n = 782)
other † (n = 3,298)
−10
0
10
20
30
40
Δ top-N+2 vs P2Rank 2.5.1 -c alphafold (pp)