TOP VIEW (PCB side) 4:1

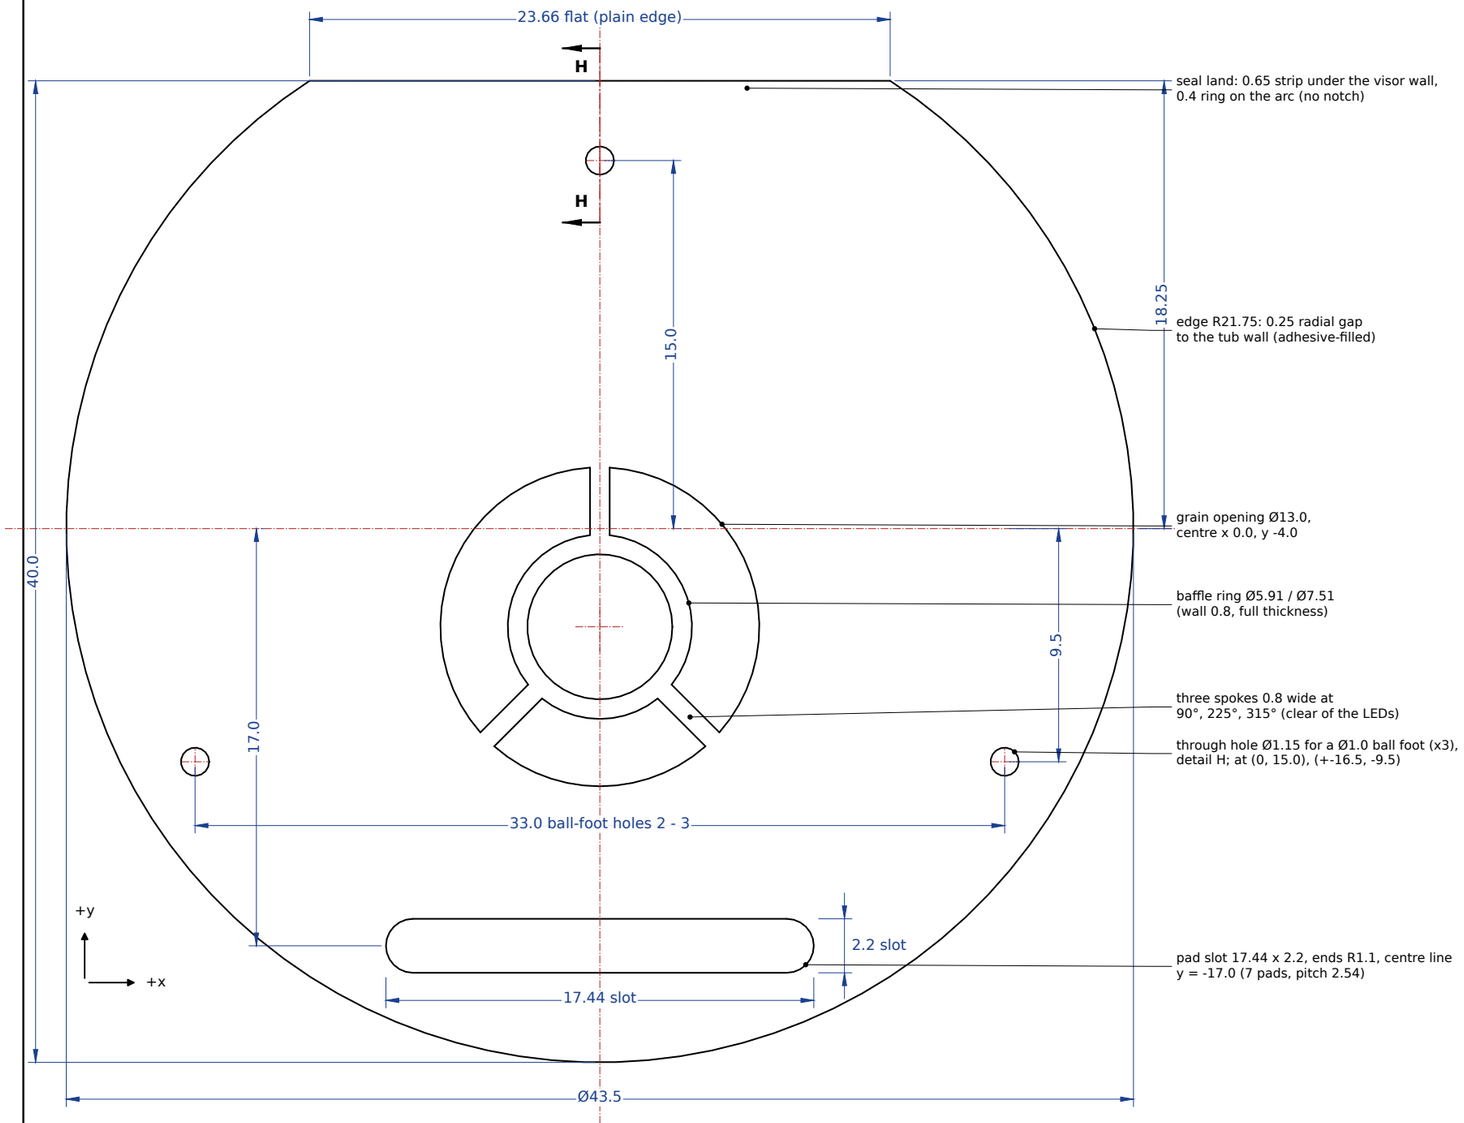

DETAIL H - ball foot 1 as assembled (x = 0) 20:1

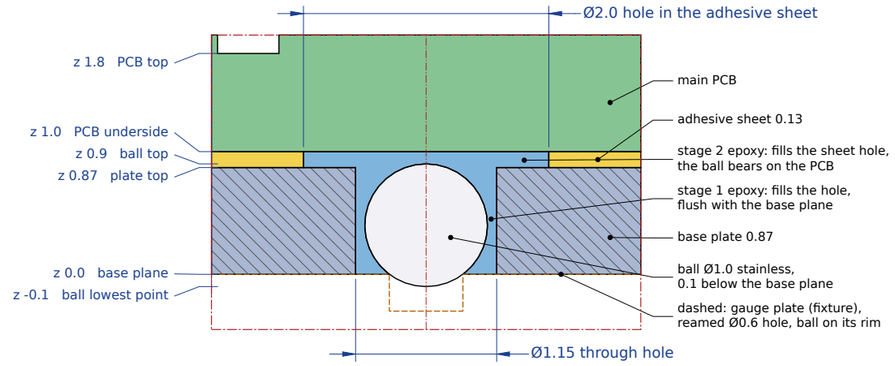

Feature	Qty	Size	Position (x, y)
Outline	1	R21.75, flat y 18.25	centre (0, 0)
Grain opening	1	Ø13.0 through	(0.0, -4.0)
Baffle ring	1	Ø5.91 / Ø7.51	concentric with the opening
Spokes	3	0.8 wide	90°, 225°, 315° from +x
Pad slot	1	17.44 x 2.2	centre (0, -17.0)
Ball-foot holes	3	Ø1.15 through	(0, 15.0), (+-16.5, -9.5)
Thickness	-	0.87	z 0 to 0.87

NOTES

1. Rev C: plate 0.87 mm; with the 0.13 mm adhesive sheet the PCB underside is at z = 1.0.
2. Ball feet: the print cannot hold a 0.1 mm protrusion. Clamp the plate flat on a gauge plate with three reamed Ø0.6 holes, drop the balls in (each seats on the rim of its hole, 0.1 proud), pot them from this side, cure. At lamination the sheet holes are filled with epoxy as well (README assembly steps 2 and 10).
3. The top face is the bonding face for the adhesive sheet and the seal land (r 21.35 to 21.75, joint 0.33 mm). Plain edge: no notch crosses the seal land. The plate is registered to the PCB in the lamination jig (D outline against the PCB locating holes), not by a key in the tub (D07).
4. One slot for the seven pads (webs between Ø2.2 holes would be 0.34 mm).
5. No wall below 0.8 mm (check 5). Dyed, NOT vapor smoothed (hidden part, three bonding faces).
6. Flatness, free state on a surface plate: 0.3 mm maximum; flatten under weight if exceeded. Thickness 0.87 +-0.05 (0.82 to 0.92 accepted); ream the three foot holes to Ø1.15.

Generated from the CAD model by cad/drawings.py - dimensions are nominal model values, computed, not typed. Frame: origin at puck centre on the base plane, +x right, +y toward the visor, +z up.

TITLE
GL1-011 Base plate

PROJECT / PART
GreenLine GL-1 electronic ball marker - base plate

MATERIAL / FINISH	PROCESS
PA12 (HP 3D HR PA 12), dyed black	HP Multi Jet Fusion, dyed, NOT vapor smoothed
GENERAL TOLERANCE	SCALE (A3) / UNITS
printed: +-0.3 or +-0.3 % (bureau MJF), as printed	4:1 / 20:1 mm

STATUS	DWG REV / PARAMS	SHEET / DATE
PROVISIONAL - not released	C-EVT1 / C-EVT1	1 of 1 2026-11-11