



16-Lead Extremely Thin Quad Flat, No Lead Package (NL) - 3x3x0.5mm Body [XQFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

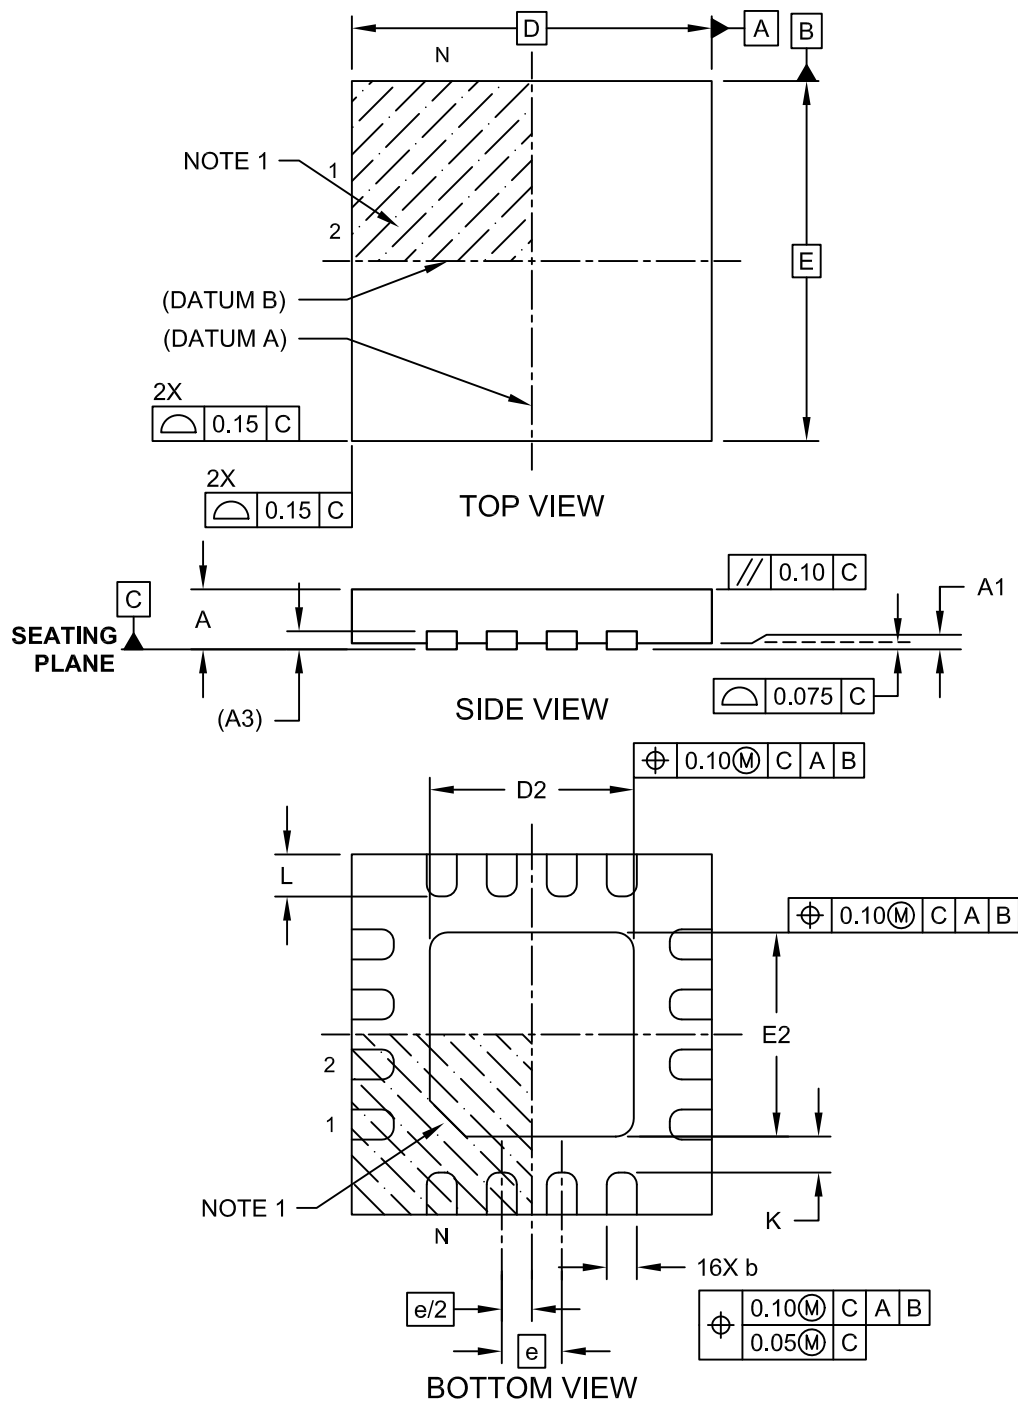

16-Lead Extremely Thin Quad Flat, No Lead Package (NL) - 3x3x0.5mm Body [XQFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

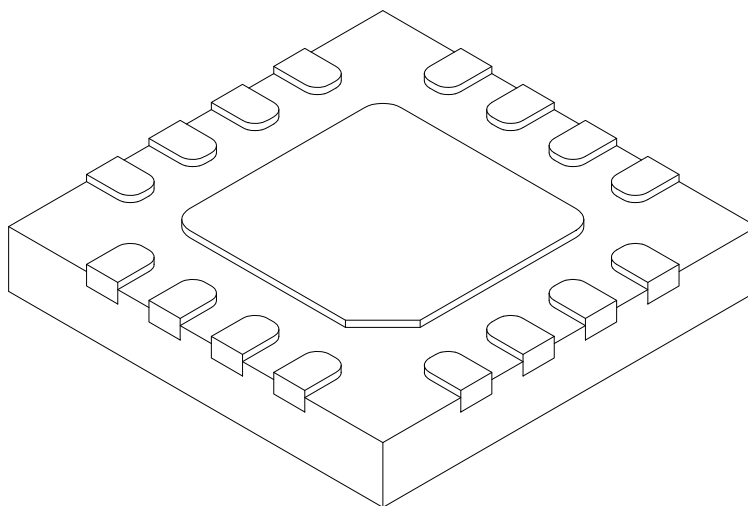

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		16		
Pitch	e		0.50 BSC		
Overall Height	A		0.40	0.45	0.50
Standoff	A1		0.00	0.02	0.05
Terminal Thickness	A3		0.15 REF		
Overall Width	E		3.00 BSC		
Exposed Pad Width	E2		1.65	1.70	1.75
Overall Length	D		3.00 BSC		
Exposed Pad Length	D2		1.65	1.70	1.75
Terminal Width	b		0.20	0.25	0.30
Terminal Length	L		0.30	0.35	0.40
Terminal-to-Exposed-Pad	K		0.20	-	-

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.