



**10-Lead Very Thin Plastic Dual Flat, No Lead Package (JUA) - 3x4 mm Body [VDFN]
With Fused Leads; Micrel Legacy Package FDFN34-10LD-PL-9**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

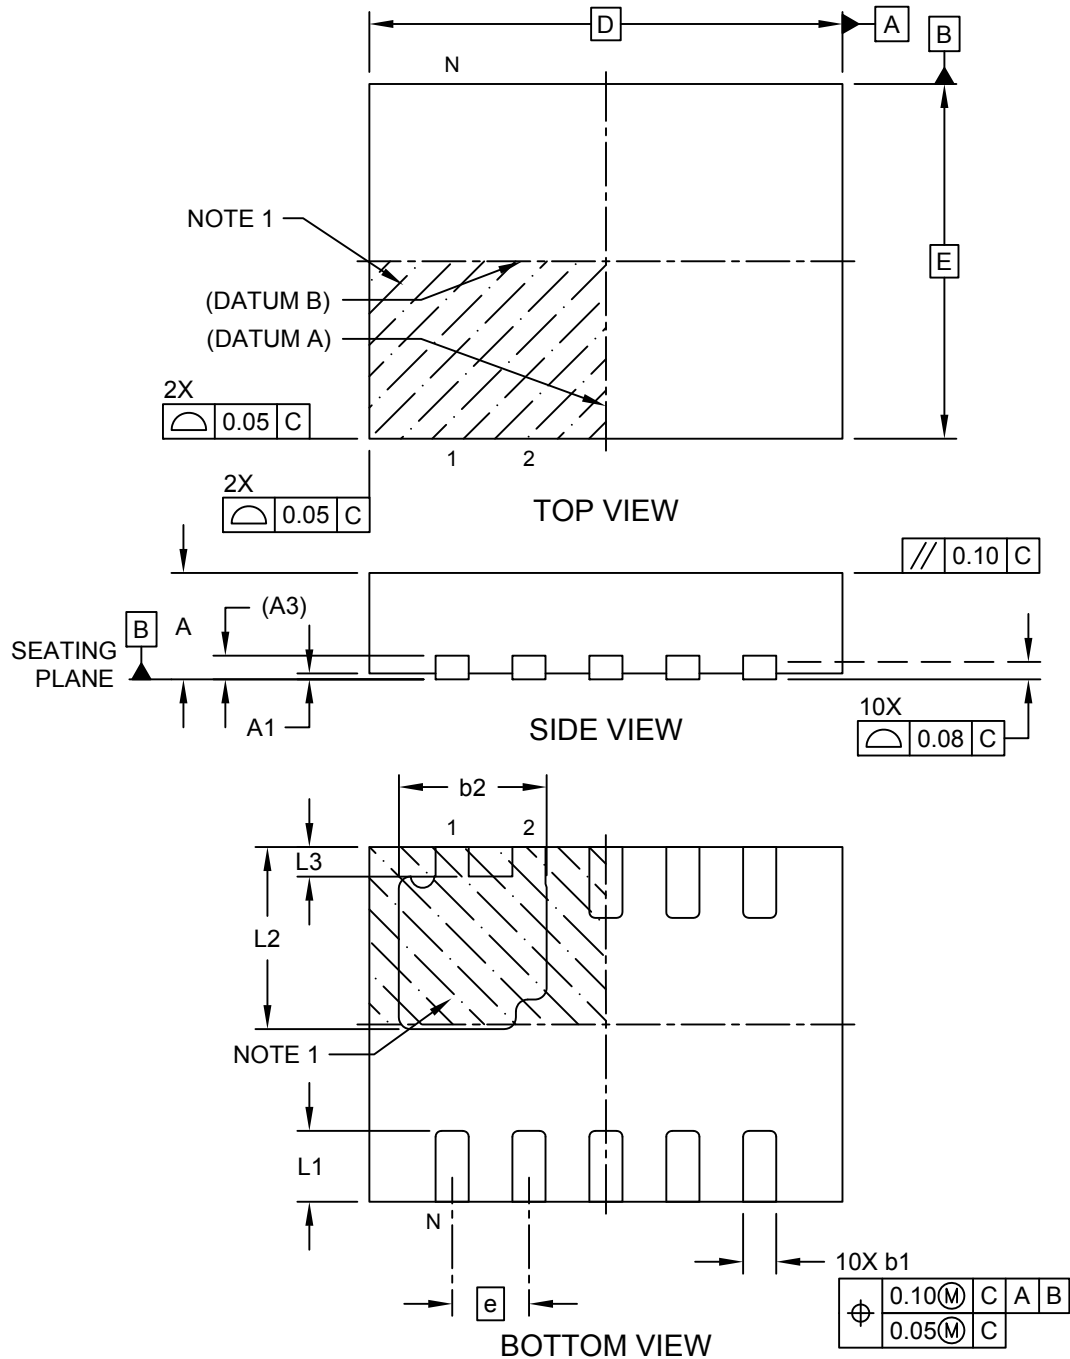

**10-Lead Very Thin Plastic Dual Flat, No Lead Package (JUA) - 3x4 mm Body [VDFN]
With Fused Leads; Micrel Legacy Package FDFN34-10LD-PL-9**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

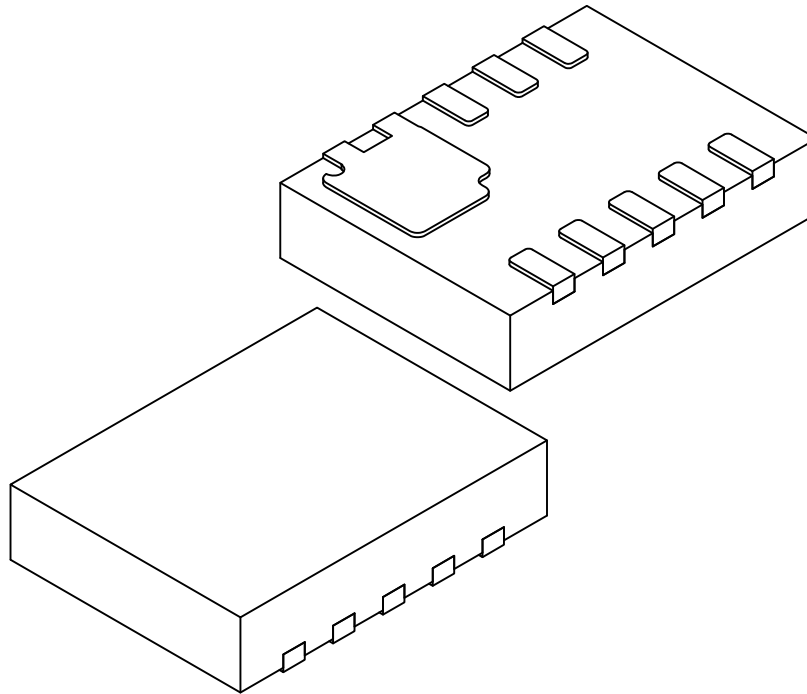


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	10		
Pitch	e	0.65		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.20 REF		
Overall Length	D	4.00 BSC		
Overall Width	E	3.00BSC		
Terminal Width	b1	0.23	0.28	0.33
Terminal Width	b2	1.198	1.248	1.298
Terminal Length	L1	0.55	0.60	0.65
Terminal Length	L2	1.49	1.54	1.59
Terminal Length	L3	0.20	0.25	0.30

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

**10-Lead Very Thin Plastic Dual Flat, No Lead Package (JUA) - 3x4 mm Body [VDFN]
With Fused Leads; Micrel Legacy Package FDFN34-10LD-PL-9**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

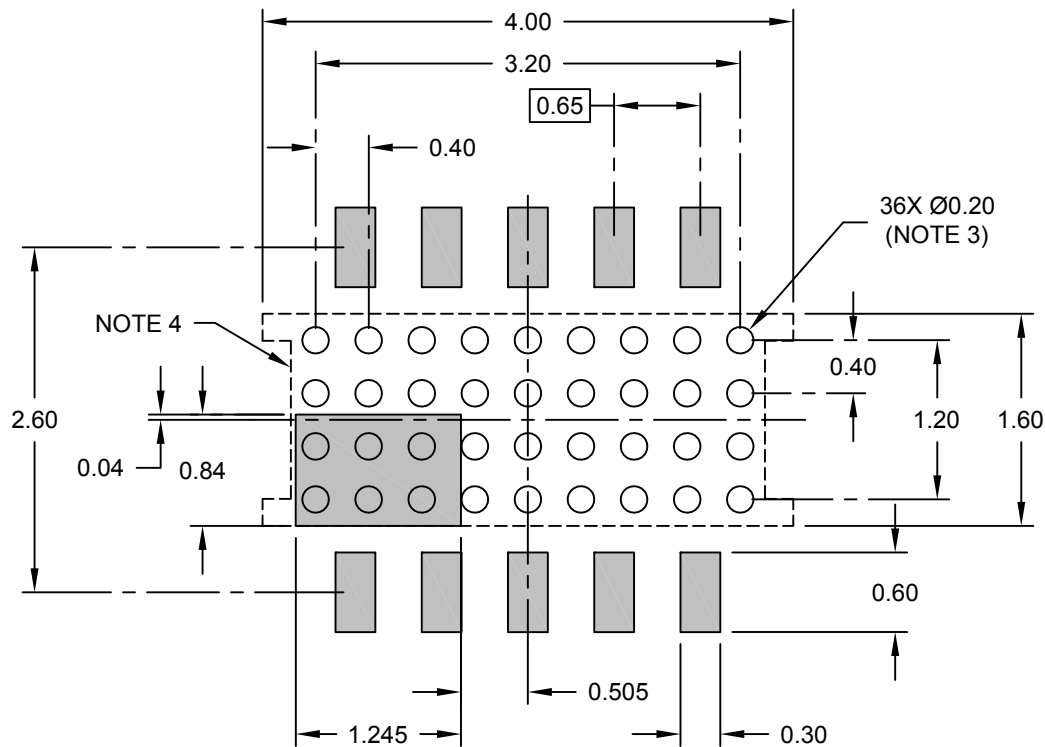

RECOMMENDED LAND PATTERN

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process
3. Thermal vias should be connected to Ground for maximum thermal performance
4. Hidden lines indicate recommended metal trace/ground plane for improved thermal performance

Microchip Technology Drawing C04-3027 Rev A