


**20-Lead Very Thin Plastic Quad Flat, No Lead Package (N3A) -
3.5x3.5x0.75 mm Body [VQFN]**


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

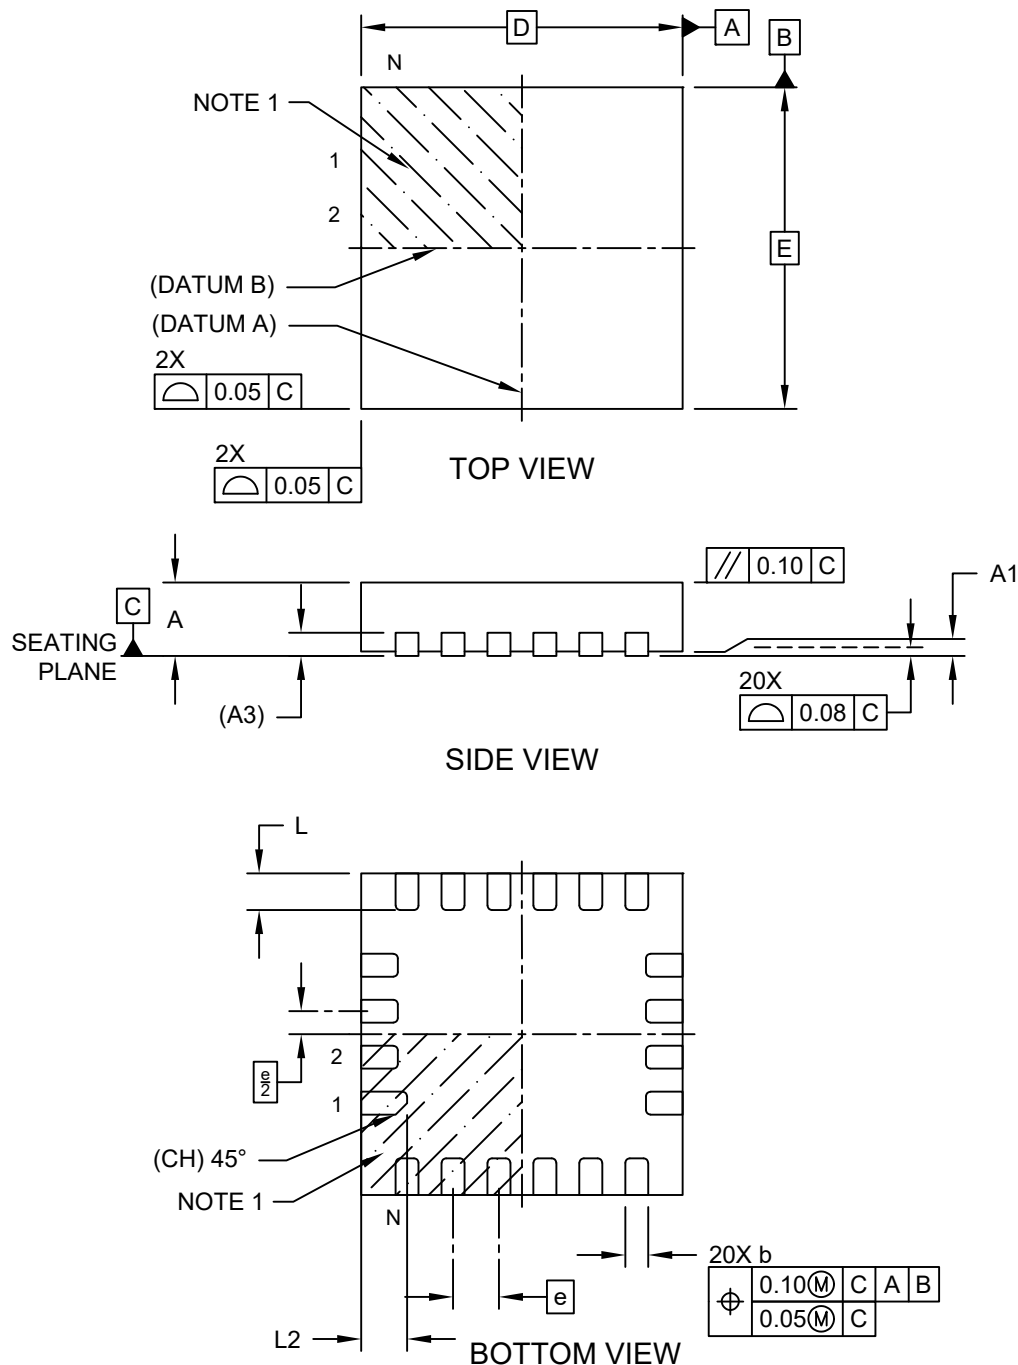

Microchip Technology Drawing C04-1033 Rev A Sheet 1 of 2

**20-Lead Very Thin Plastic Quad Flat, No Lead Package (N3A) -
3.5x3.5x0.75 mm Body [VQFN]**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

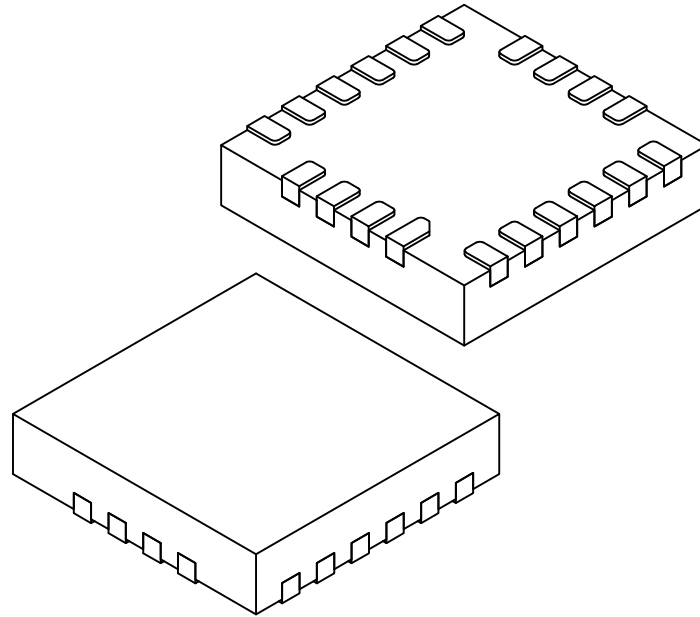


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		20		
Pitch	e		0.50 BSC		
Overall Height	A		–	–	0.75
Standoff	A1		0.00	0.20	0.50
Terminal Thickness	A3		0.203 REF		
Overall Length	D		3.50 BSC		
Overall Width	E		3.50 BSC		
Terminal Width	b		0.20	0.25	0.30
Terminal Length	L		0.35	0.40	0.45
Terminal Length Pin 1	L2		0.45	0.50	0.55

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

**20-Lead Very Thin Plastic Quad Flat, No Lead Package (N3A) -
3.5x3.5x0.75 mm Body [VQFN]**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

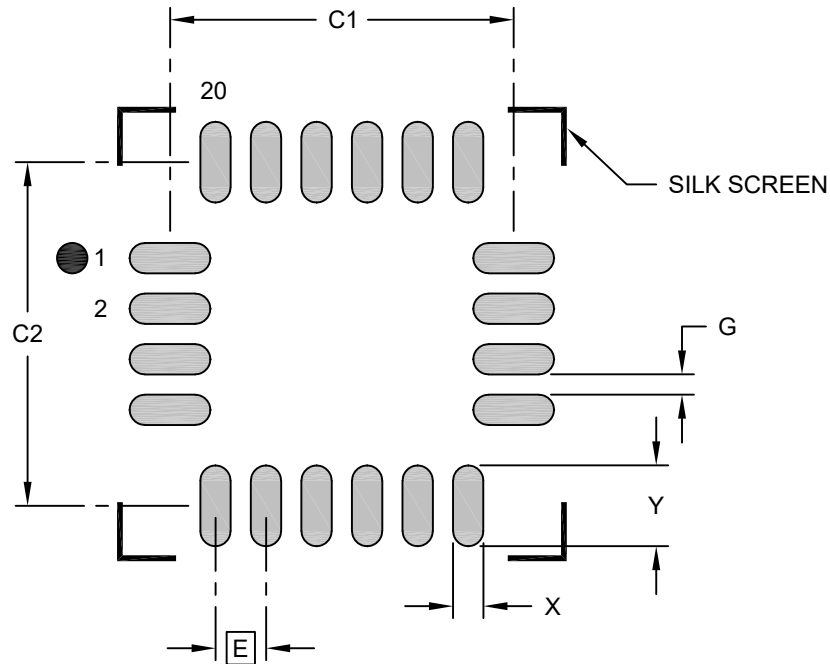

RECOMMENDED LAND PATTERN

Dimension	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E		0.50 BSC	
Contact Pad Spacing	C1		3.40	
Contact Pad Spacing	C2		3.40	
Contact Pad Width (X20)	X			0.30
Contact Pad Length (X20)	Y			0.80
Contact Pad to Contact Pad (X16)	G	0.20		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3033 Rev A