



**6-Lead Ultra Thin Plastic Dual Flat, No Lead (HKA) - 1.6x1.6x0.6 mm Body [UDFN]
With 1.26x0.50 mm Exposed Pad; Micrel Legacy Package TDFN1616-6LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

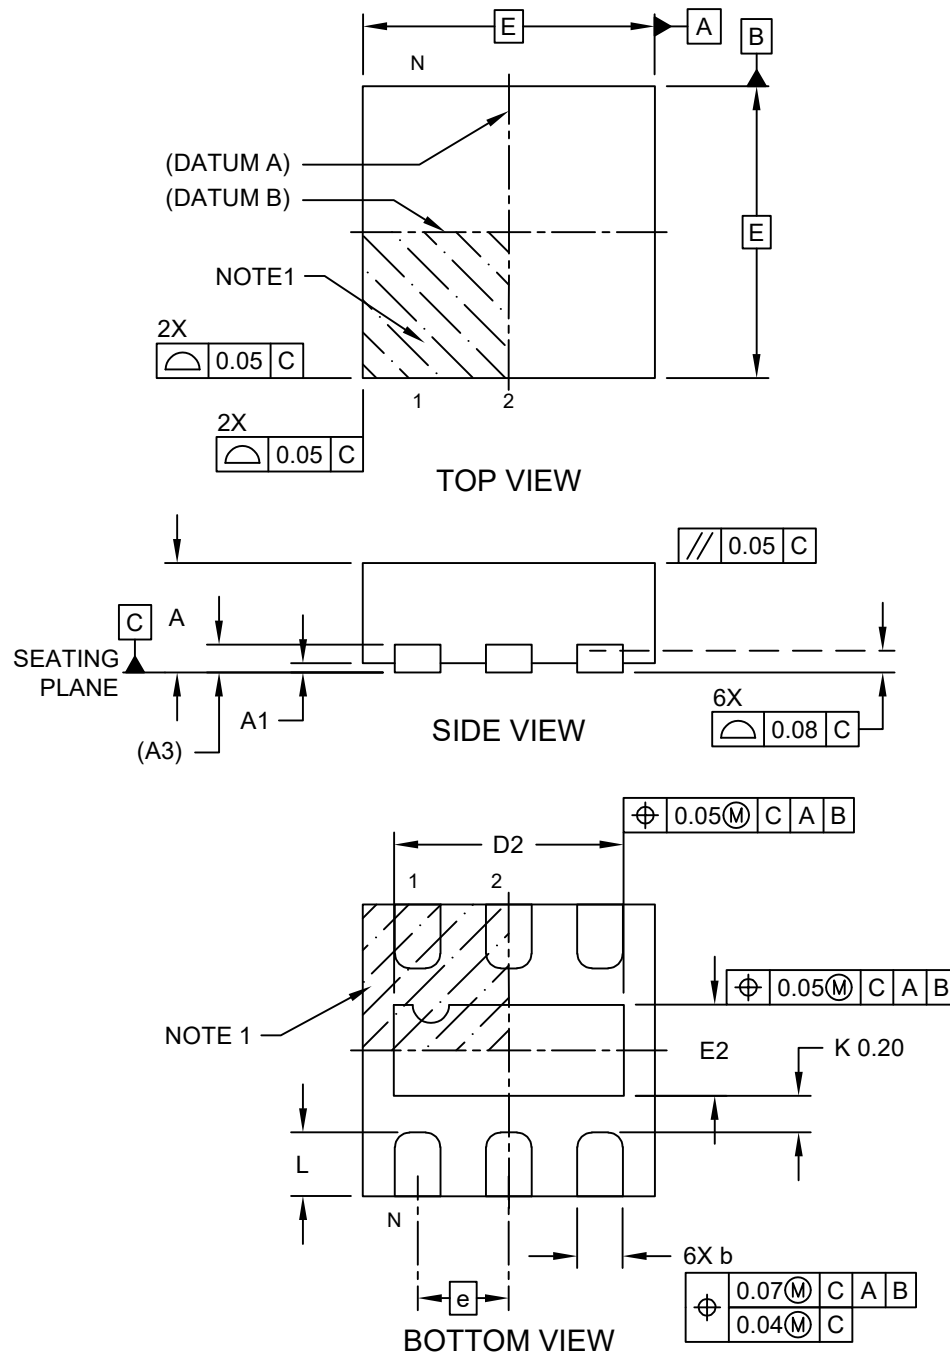

**6-Lead Ultra Thin Plastic Dual Flat, No Lead (HKA) - 1.6x1.6x0.6 mm Body [UDFN]
With 1.26x0.50 mm Exposed Pad; Micrel Legacy Package TDFN1616-6LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

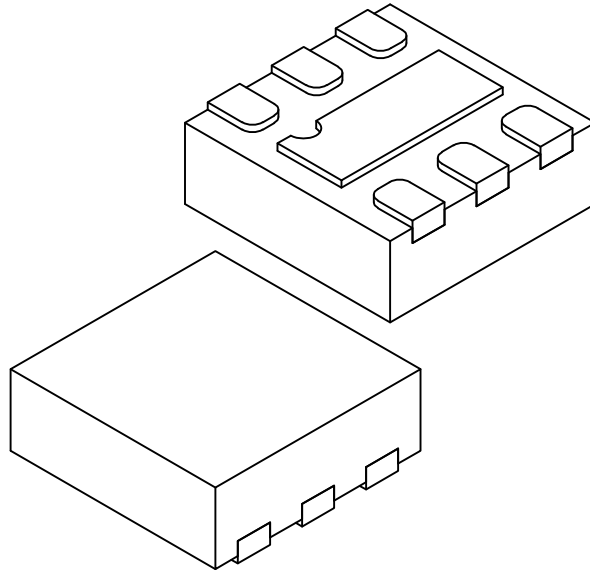


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	6		
Pitch	e	0.50 BSC		
Overall Height	A	0.50	0.55	0.60
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.152 REF		
Overall Length	D	1.60 BSC		
Exposed Pad Length	D2	1.21	1.26	1.31
Overall Width	E	1.60 BSC		
Exposed Pad Width	E2	0.45	0.50	0.55
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.30	0.35	0.40
Terminal-to-Exposed-Pad	K	0.20	—	—

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

**6-Lead Ultra Thin Plastic Dual Flat, No Lead (HKA) - 1.6x1.6x0.6 mm Body [UDFN]
With 1.26x0.50 mm Exposed Pad; Micrel Legacy Package TDFN1616-6LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

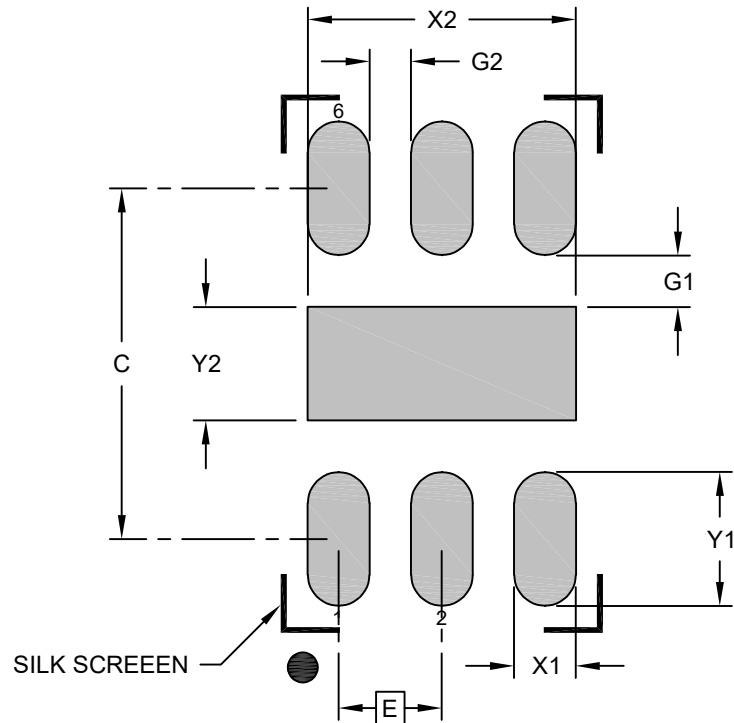

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Center Pad Width	X2			1.30
Center Pad Length	Y2			0.55
Contact Pad Spacing	C		1.70	
Contact Pad Width (X6)	X1			0.30
Contact Pad Length (X6)	Y1			0.65
Contact Pad to Center Pad (X6)	G1	0.25		
Contact Pad to Contact Pad (X4)	G2	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-3154 Rev A