



128-Lead Plastic Quad Flat Pack (TTX) - 20x14x2.7 mm Body [QFP]
SMSC Legacy Package QE3

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

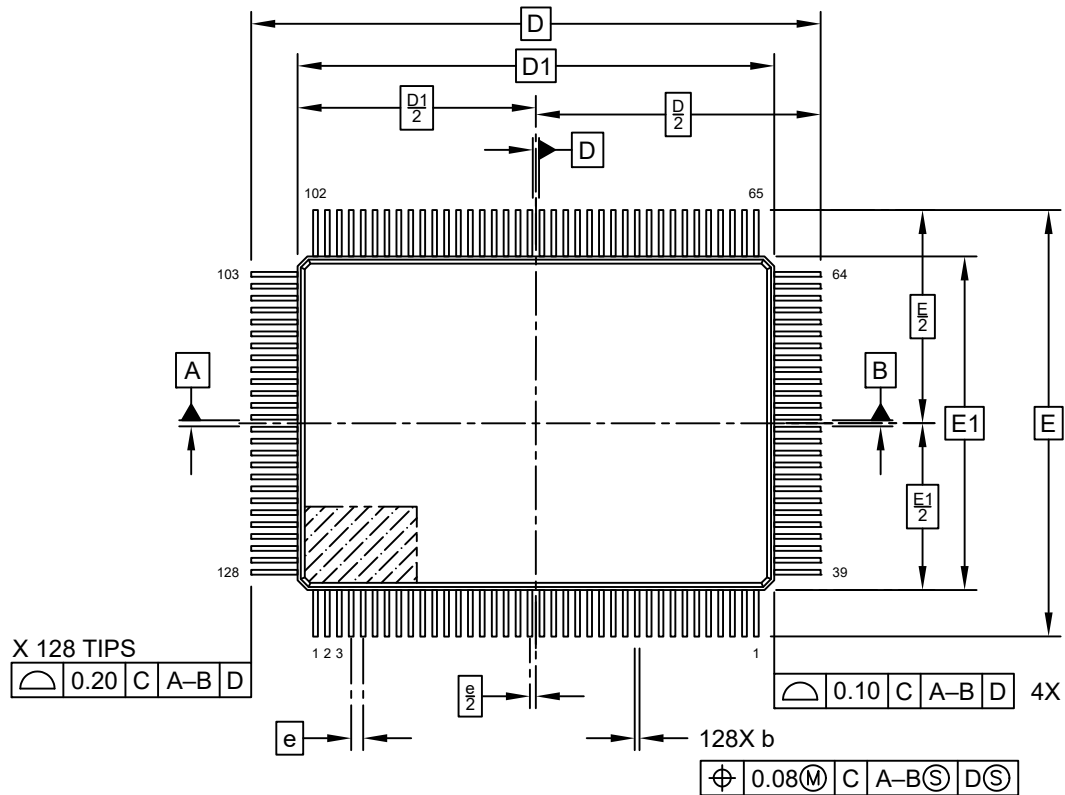


TOP VIEW

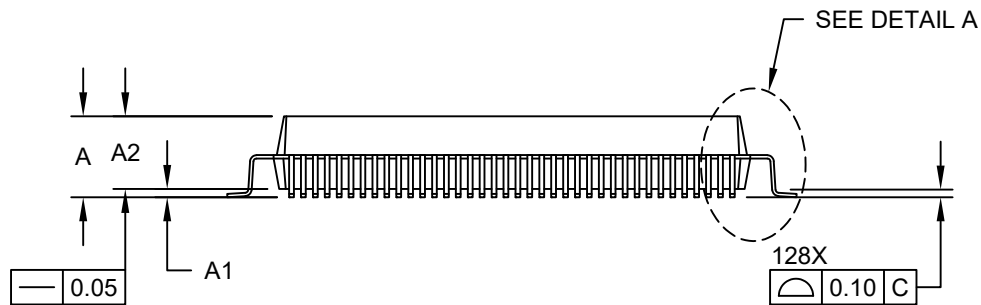

SIDE VIEW

128-Lead Plastic Quad Flat Pack (TTX) - 20x14x2.7 mm Body [QFP] SMSC Legacy Package QE3

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

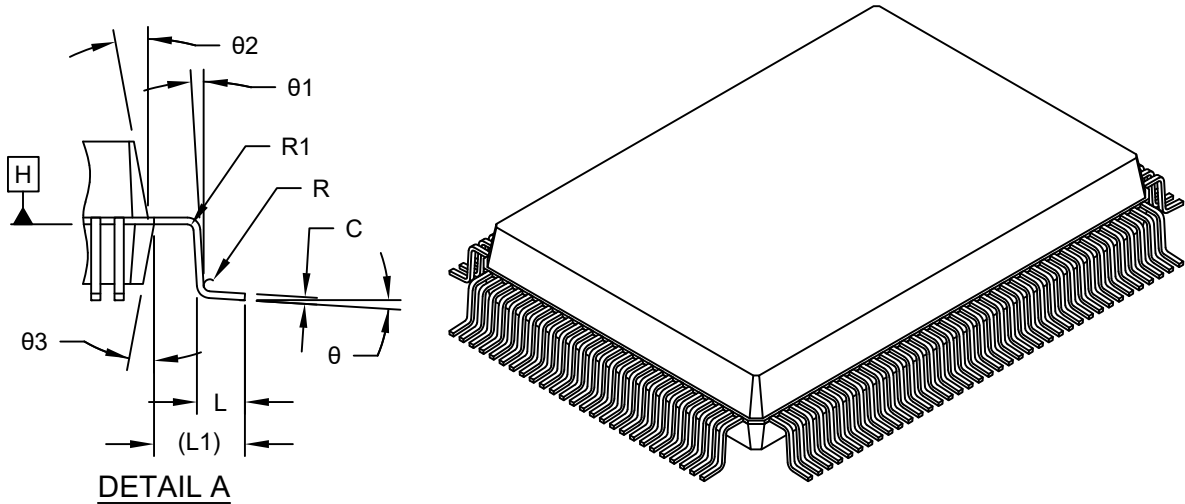


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Leads	N	128		
Lead Pitch	e	0.50 BSC		
Overall Height	A	-	-	3.40
Standoff	A1	0.05	-	0.50
Molded Package Thickness	A2	2.55	-	3.05
Overall Length	D	23.90 BSC		
Molded Package Length	D1	20.00 BSC		
Overall Width	E	17.90 BSC		
Molded Package Width	E1	14.00 BSC		
Foot Length	L	0.78	0.88	1.03
Footprint	L1	1.95 REF		
Lead Width	b	0.13	0.16	0.23
Foot Angle	θ	0°	3.5°	7°
Lead Angle	θ1	0°	-	-
Mold Draft Angle Top	θ2	5°	-	16°
Mold Draft Angle Bottom	θ3	5°	-	16°
Lead Bend Radius	R	0.13	-	0.30
Lead Bend Radius	R1	0.13	-	-

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

128-Lead Plastic Quad Flat Pack (TTX) - 20x14x2.7 mm Body [QFP] SMSC Legacy Package QE3

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

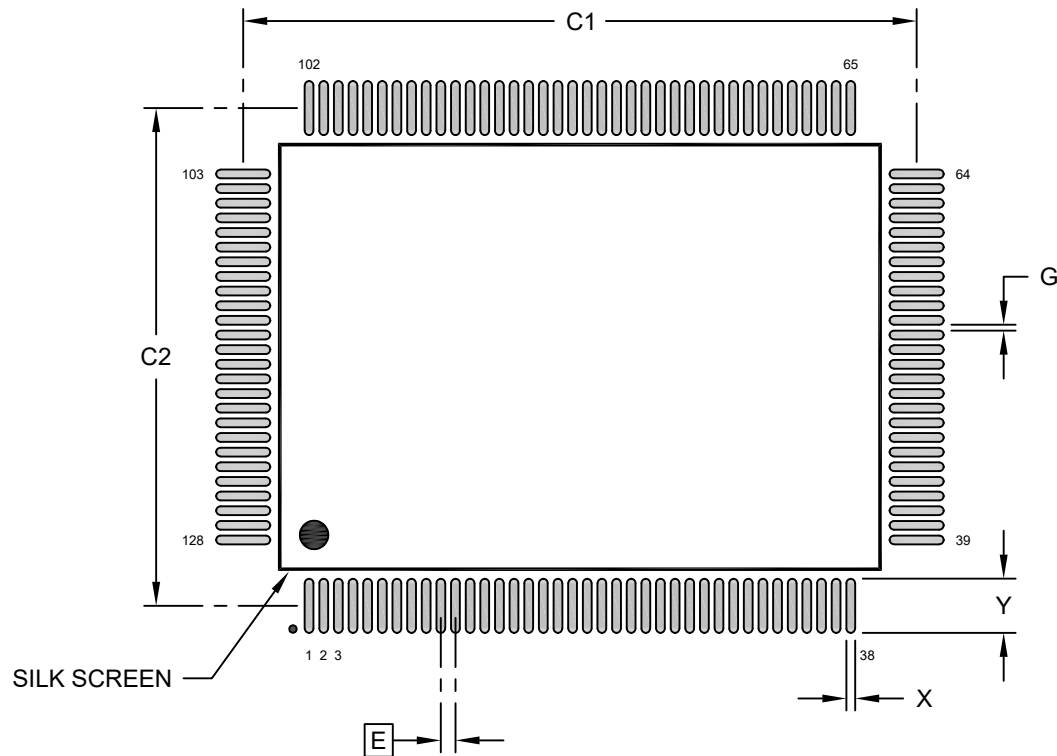

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Contact Pad Spacing	C1		23.00	
Contact Pad Spacing	C2		17.00	
Contact Pad Width (Xnn)	X			0.30
Contact Pad Length (Xnn)	Y			1.85
Contact Pad to Contact Pad (Xnn)	G	0.20		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.