



672-Ball [Standard] Ball Grid Array (CQC) - 27x27x2.24 mm Body [BGA] Microsemi Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

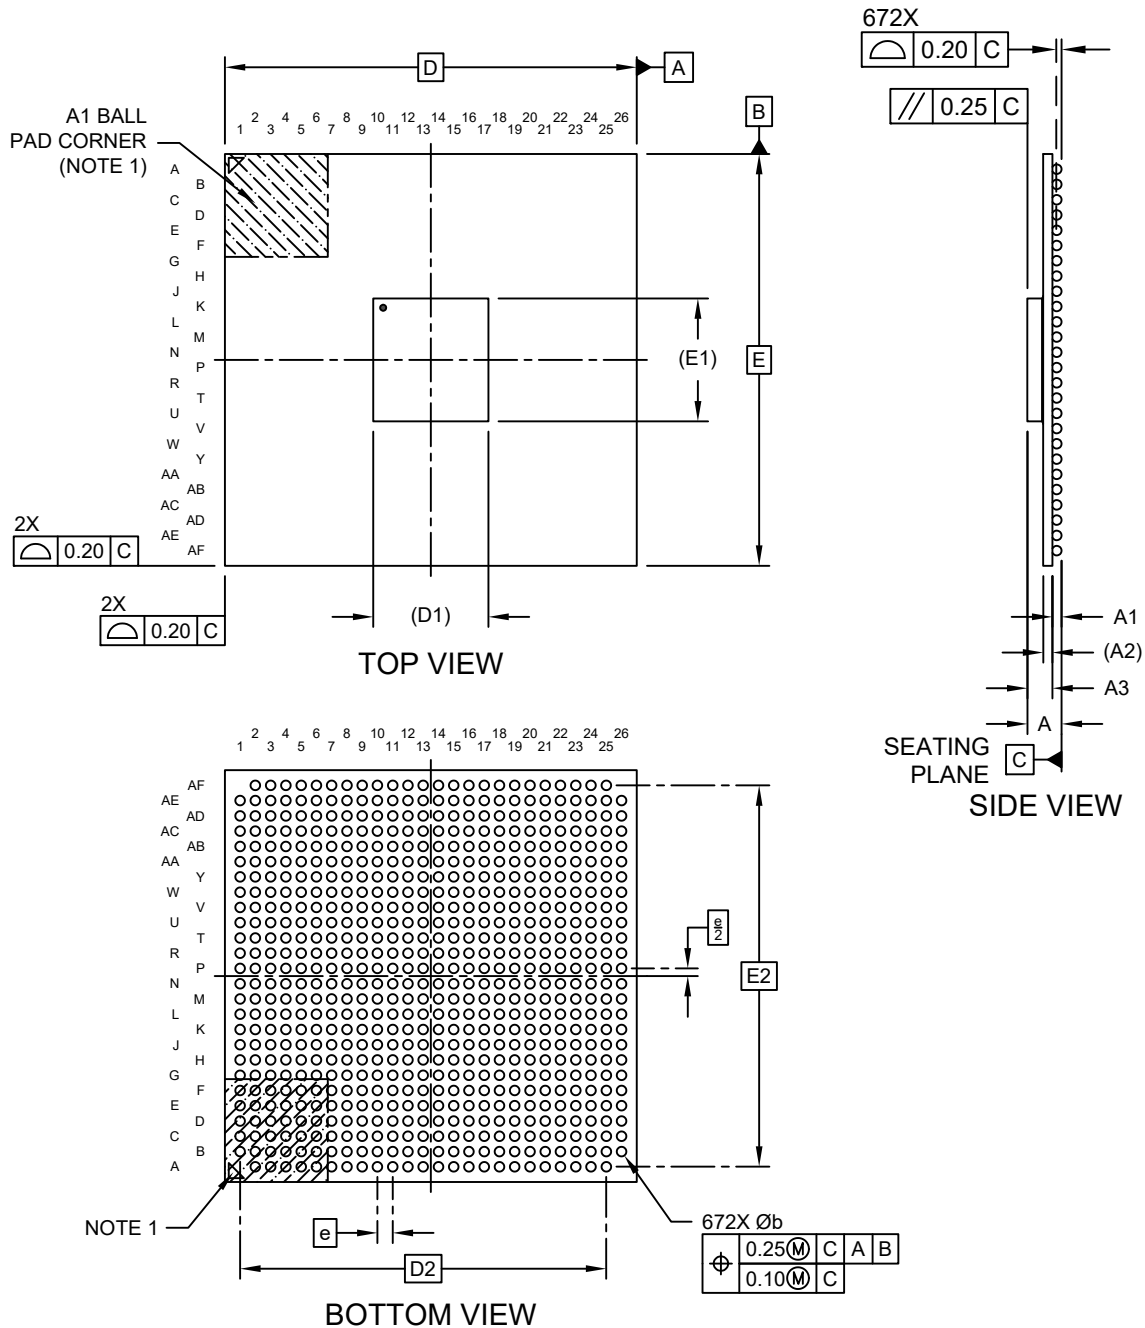

672-Ball [Standard] Ball Grid Array (CQC) - 27x27x2.24 mm Body [BGA] Microsemi Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

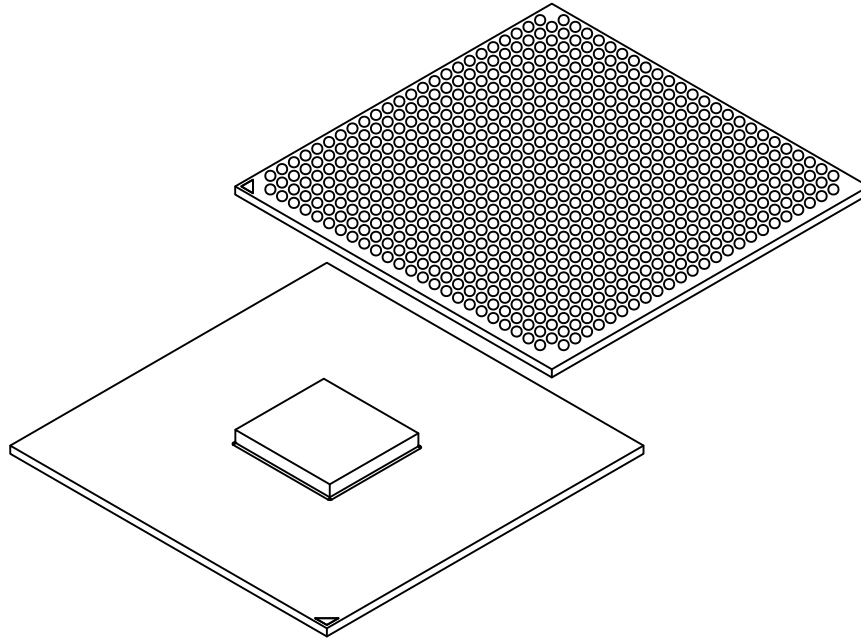


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	672		
Pitch	e	1.00		
Overall Height	A	1.68	1.96	2.24
Ball Height	A1	0.40	0.50	0.60
Substrate Thickness	A2	0.60 REF		
Package Thickness	A3	1.28	1.46	1.64
Overall Length	D	27.00 BSC		
Die Width	D1	6.40 REF		
Ball Array Length	D2	25.00 BSC		
Overall Width	E	27.00 BSC		
Die Width	E1	6.80 REF		
Ball Array Width	E2	25.00 BSC		
Ball Diameter	b	0.50	0.64	0.70

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

672-Ball [Standard] Ball Grid Array (CQC) - 27x27x2.24 mm Body [BGA] Microsemi Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

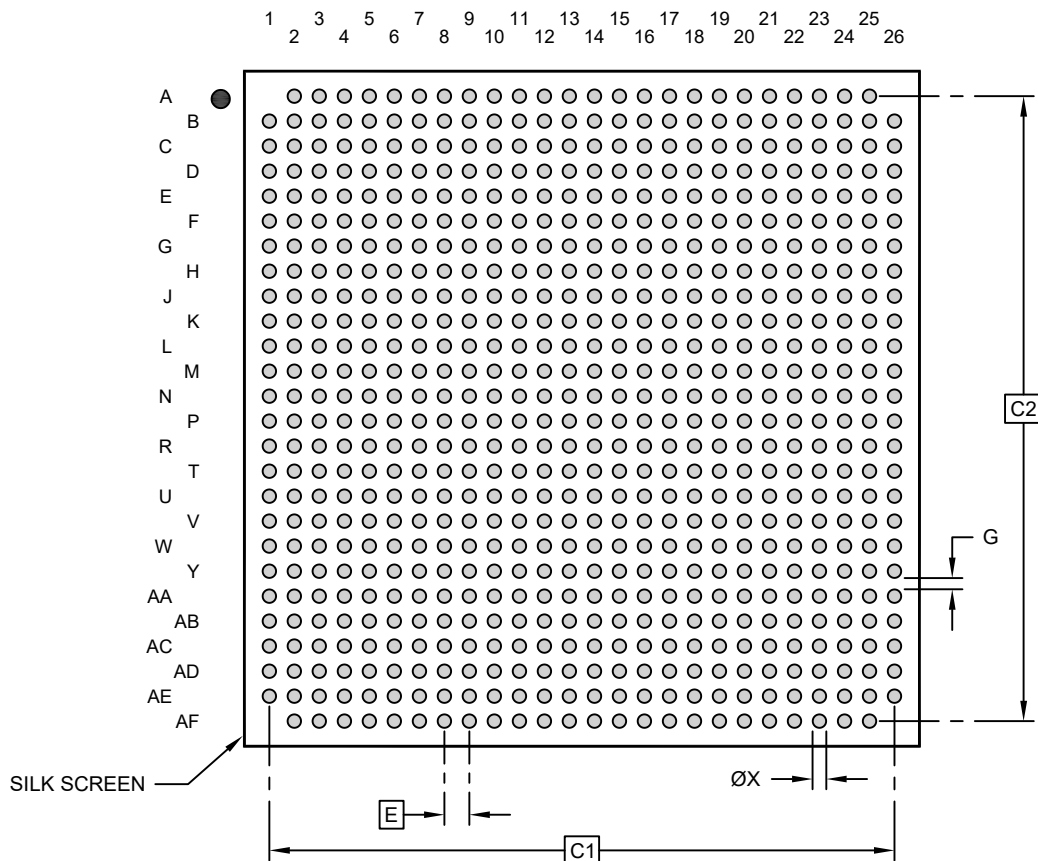

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.00 BSC		
Contact Pad Spacing	C1	25.00 BSC		
Contact Pad Spacing	C2	25.00 BSC		
Contact Pad Width	X			0.55
Contact Pad to Contact Pad	G	0.45		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-27216 Rev A