


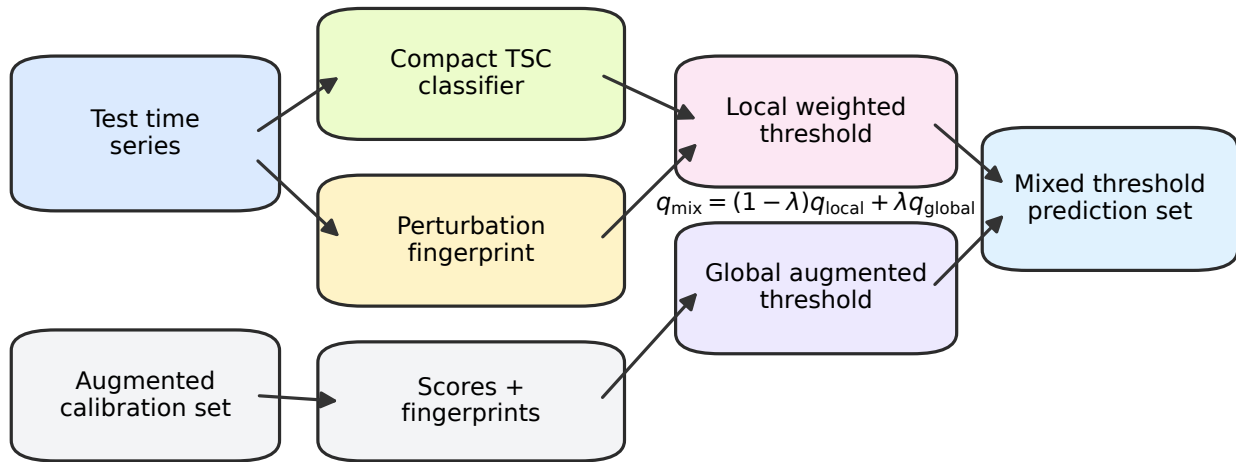

FAST-CP uses cheap corruption fingerprints to adapt conformal thresholds without retraining.