

Evaluate testing data (survival) - rfsrc

Andrew Chang

2018-12-05

Contents

0. Load Data	1
1. Scores	1
2. Important Features	4

Label: os_time

```
## user input
project_home <- "~/EVE/tests"
project_name <- "rfsrc_outCV_test"
## end of user input
```

0. Load Data

300 of samples were used

100 of full features

2 runs, each run contains 3 CVs.


1. Scores

average = T: scores are based on pre-validation (combine predictions from all CVs per job and then calculate a single score per job).



average = F: report all the scores from each CV across entire jobs.

Brier: currently only works for rfsrc engine

Averaged scores during RFE

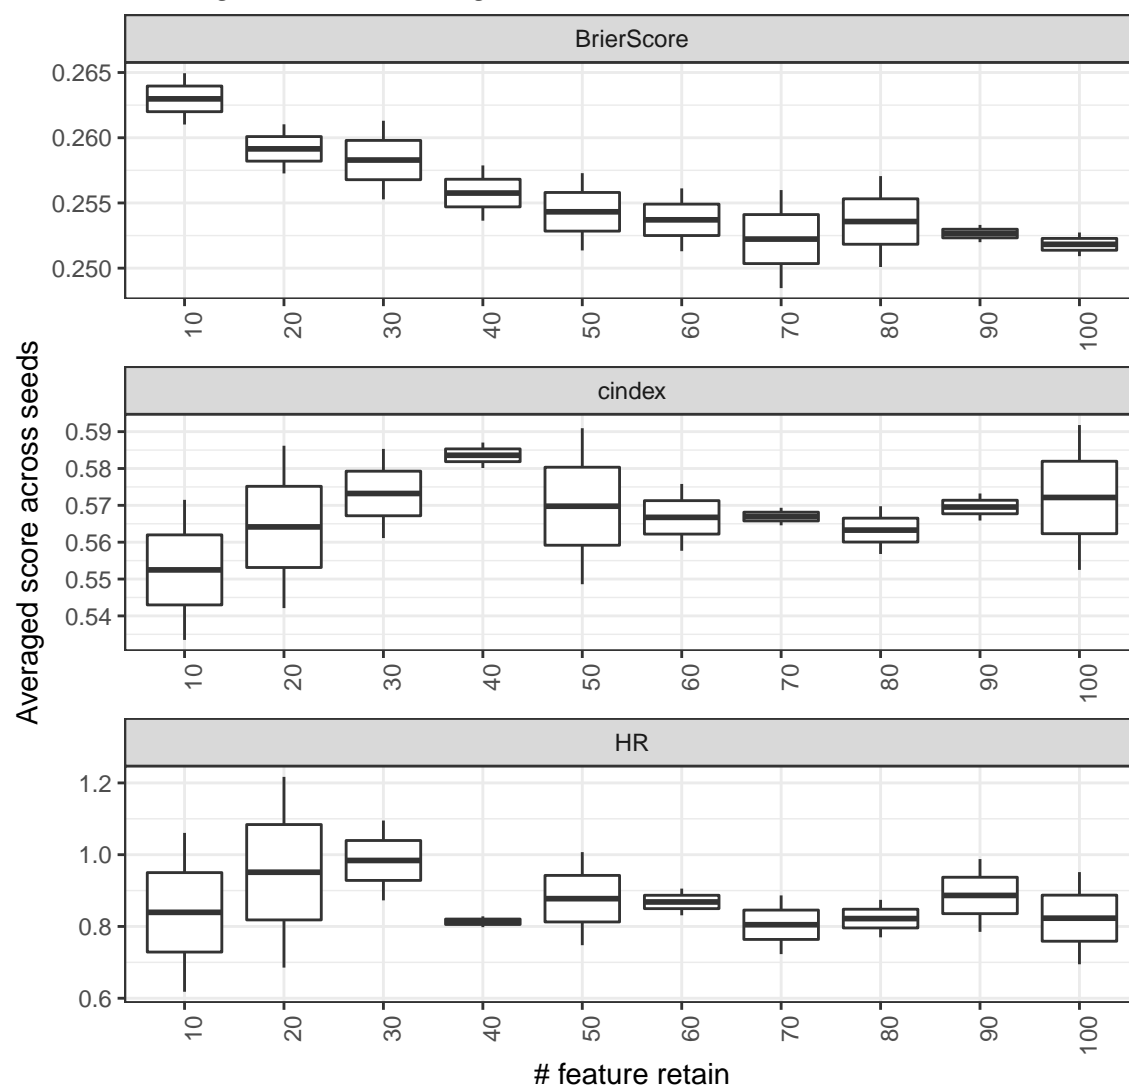

pearson corr: 0.1

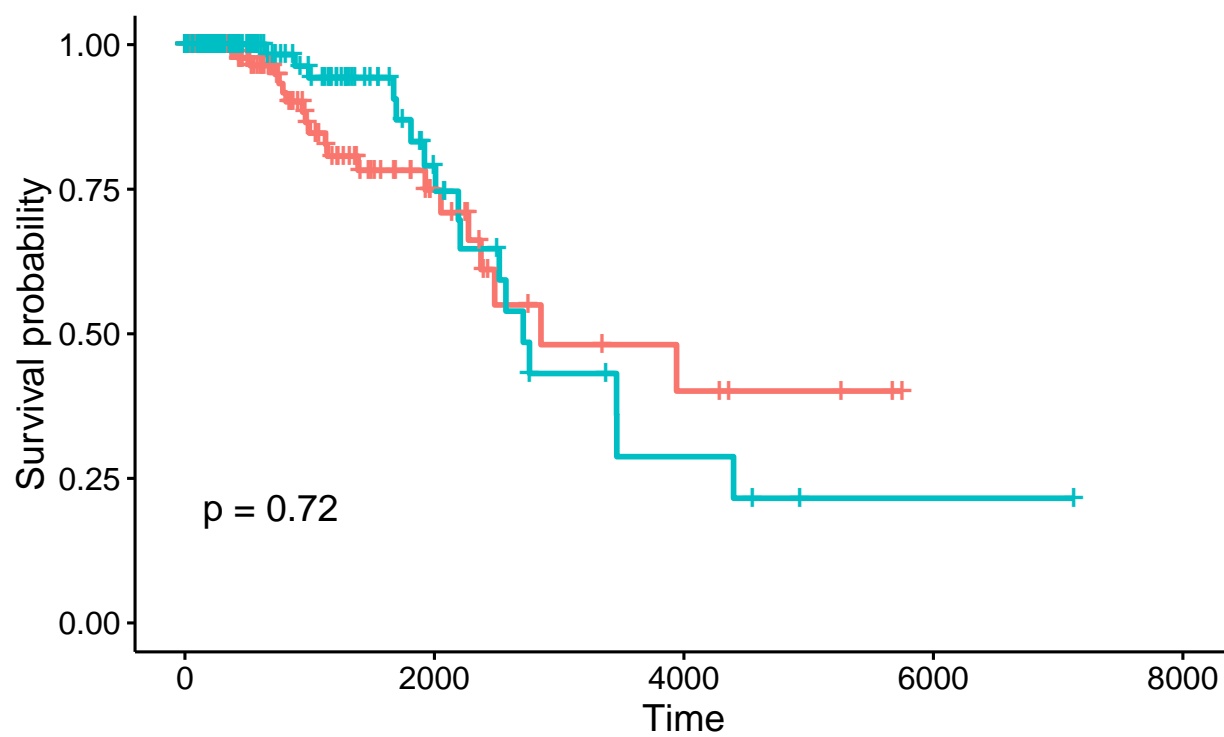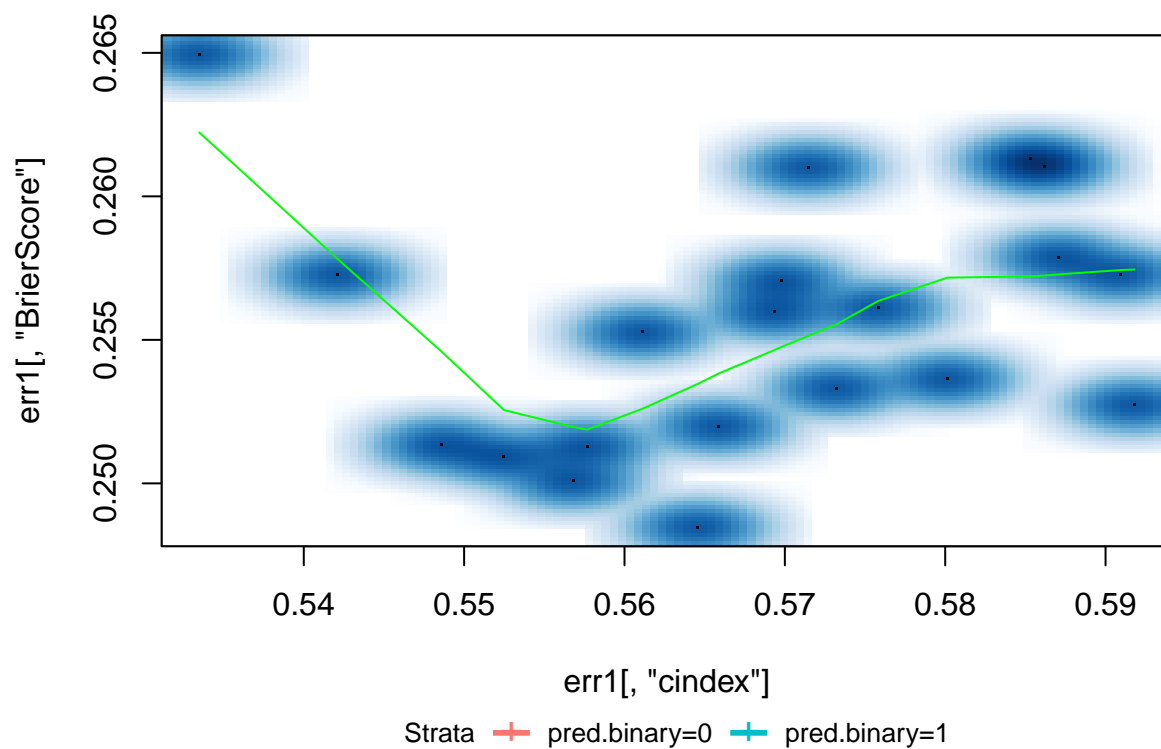

2. Important Features

