Class 5: Data Viz with ggplot

Zahra Rashidi (PID A18561538)

Background

there are lots of ways to make figures in R. These include so-called "base R" graphics (e.g. 'plot()') and tones off add-on packages like **ggplot2**.

For example here we make the same plot with both:

```
head(cars)
```

```
  speed dist
1     4    2
2     4   10
3     7    4
4     7   22
5     8   16
6     9   10
```

First, I need to install the package using `install.packages()`. install.packages("ggplot2") N.B. We never run on install cmd in a quarto code chunk or we will end up re-installing packages many many times-which is not what we want!

Everytime we want to use of these "add-on" packages we need to load it up in R with the library() function:

```
library(ggplot2)
```

```
Warning: package 'ggplot2' was built under R version 4.4.3
```

```
head(cars)
```

```
  speed dist
1     4    2
2     4   10
3     7    4
4     7   22
5     8   16
6     9   10
```

```r
plot(cars)
```

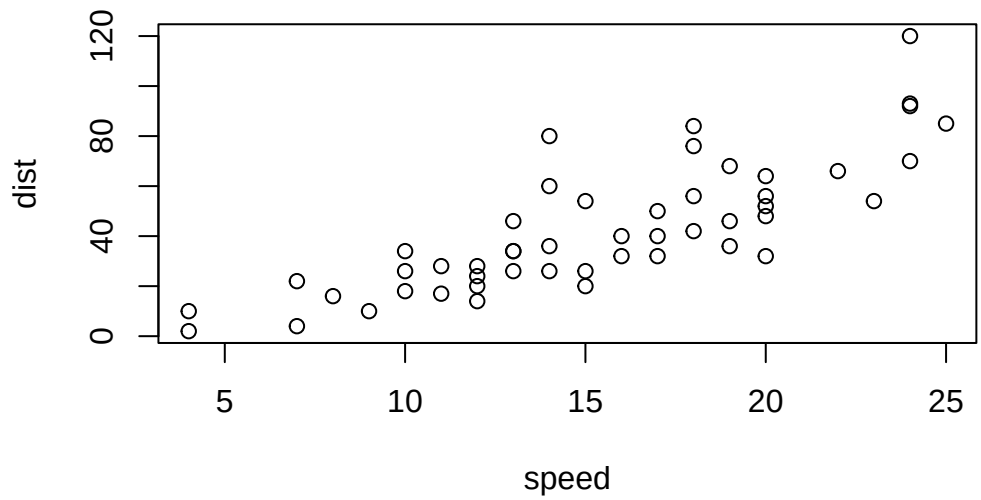

#ggplot(cars)

every ggplot needs at least 3 things: - The **data**, the stuff you want plotted - The **aes** thitics, how the data map to the plot -The **geom**etry, the type of plot

```r
p <- ggplot(cars) +
  aes(x=speed, y=dist) +
  geom_point() + geom_smooth(method="lm",se=FALSE) + labs(title="Stopping distance of old
p
```

```
`geom_smooth()` using formula = 'y ~ x'
```

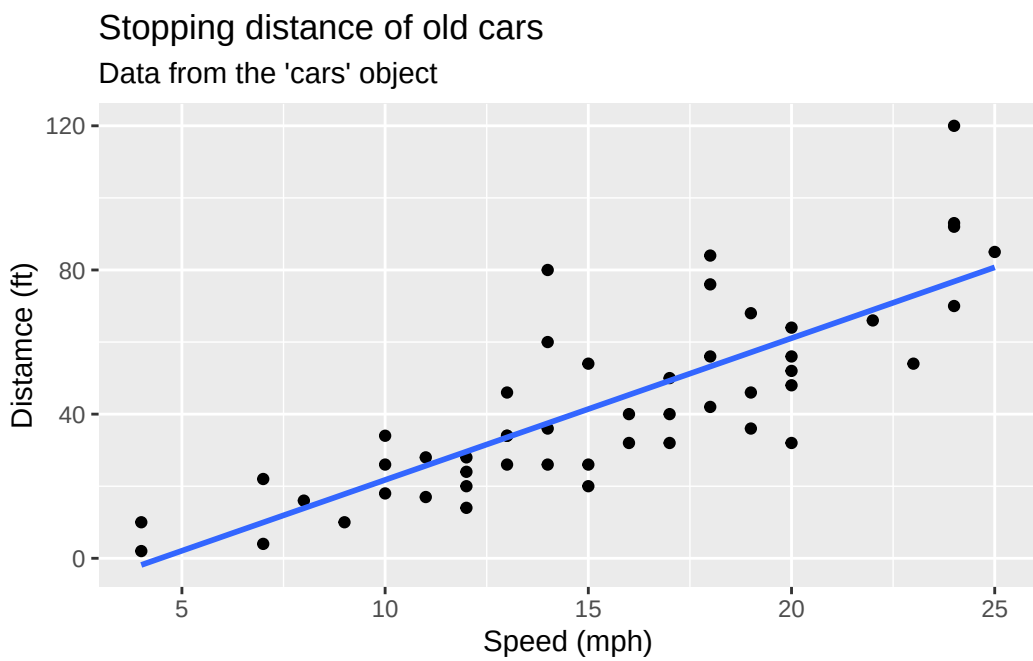

##Gene expression plot we can read the input data from the class website

```
url <- "https://bioboot.github.io/bimm143_S20/class-material/up_down_expression.txt"
genes <- read.delim(url)
head(genes)
```

```
        Gene Condition1 Condition2      State
1      A4GNT -3.6808610 -3.4401355 unchanging
2       AAAS  4.5479580  4.3864126 unchanging
3      AASDH  3.7190695  3.4787276 unchanging
4       AATF  5.0784720  5.0151916 unchanging
5       AATK  0.4711421  0.5598642 unchanging
6 AB015752.4 -3.6808610 -3.5921390 unchanging
```

```
ggplot(genes)+ aes(Condition1, Condition2)+ geom_point()
```

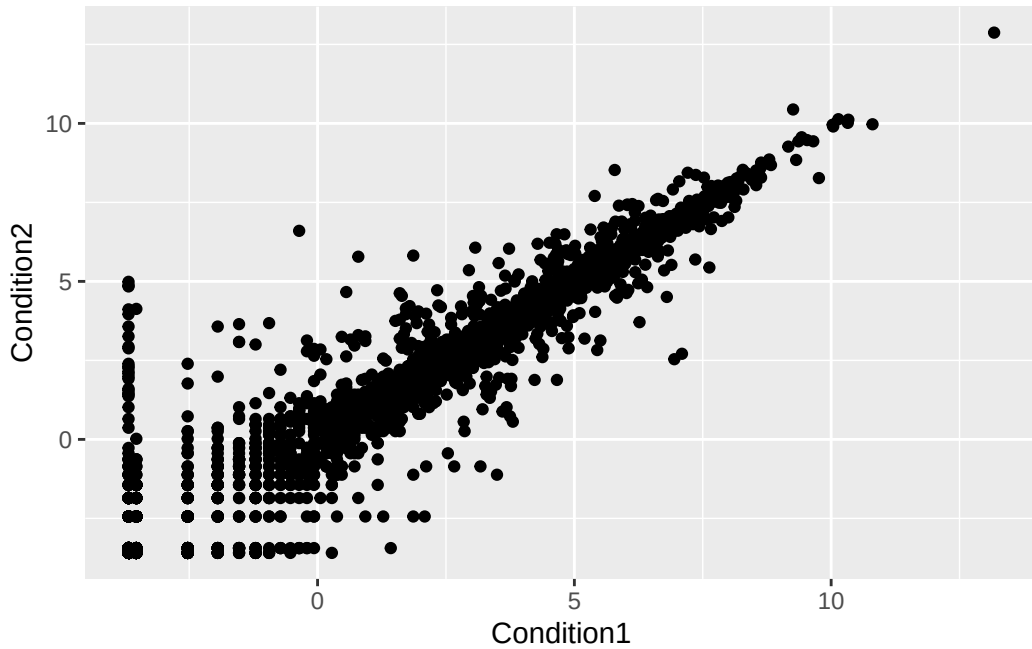


```
table(genes$State)
```

```
      down unchanging         up
        72       4997        127
```

Version 2 let's color by State so we can see the "up" and "down" significant genes compared to all the unchanging genes

```
ggplot(genes)+ aes(Condition1, Condition2, col=State)+ geom_point()
```

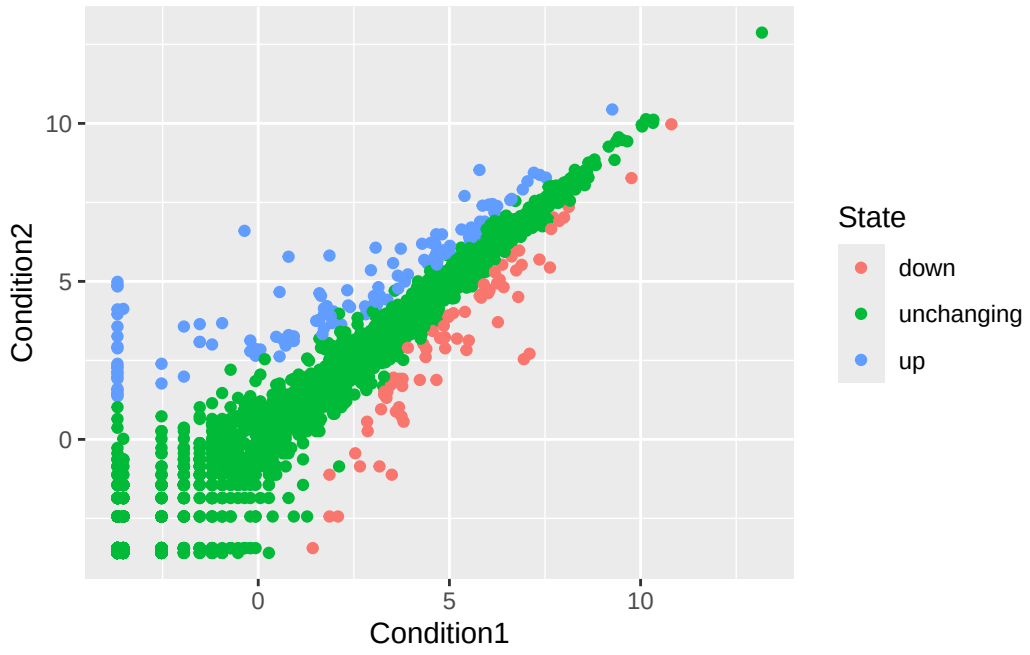

Version 3 plots, let's modify the default colors to something we like

```
ggplot(genes)+ aes(Condition1, Condition2, col=State)+ geom_point() + scale_colour_manual(
```

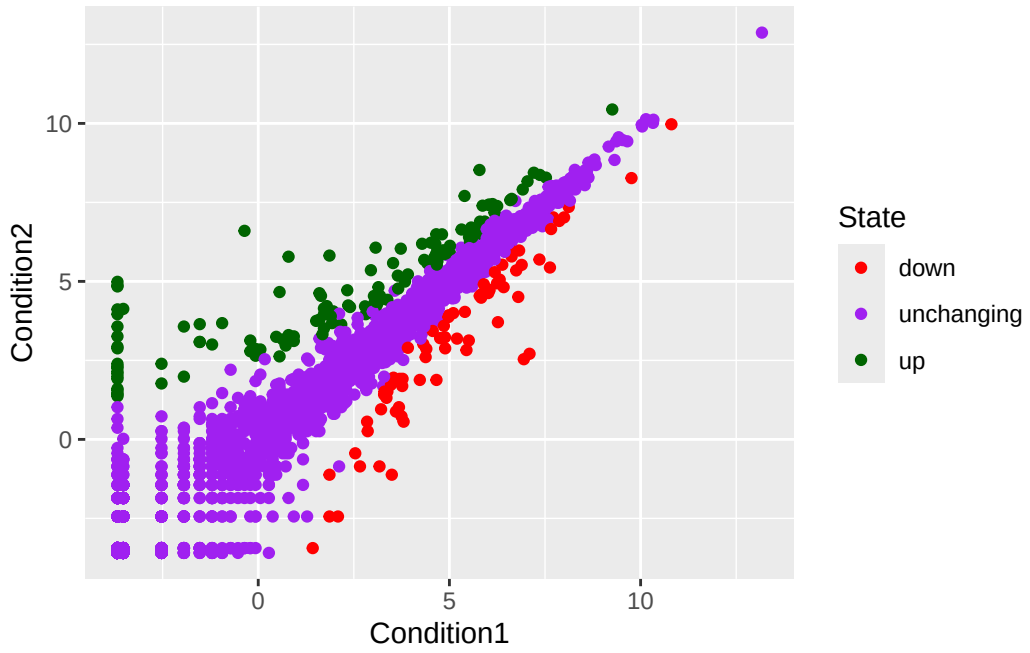


```
ggplot(genes)+
  aes(Condition1, Condition2, col=State)+
  geom_point() +
  scale_colour_manual(values=c("red", "blue", "magenta")) +
  labs(
    x="Control (no drugs)",
    y="Drug",
    title="Gene Expression Changes upon GLP-1 drug"
  ) +
  theme_bw()
```

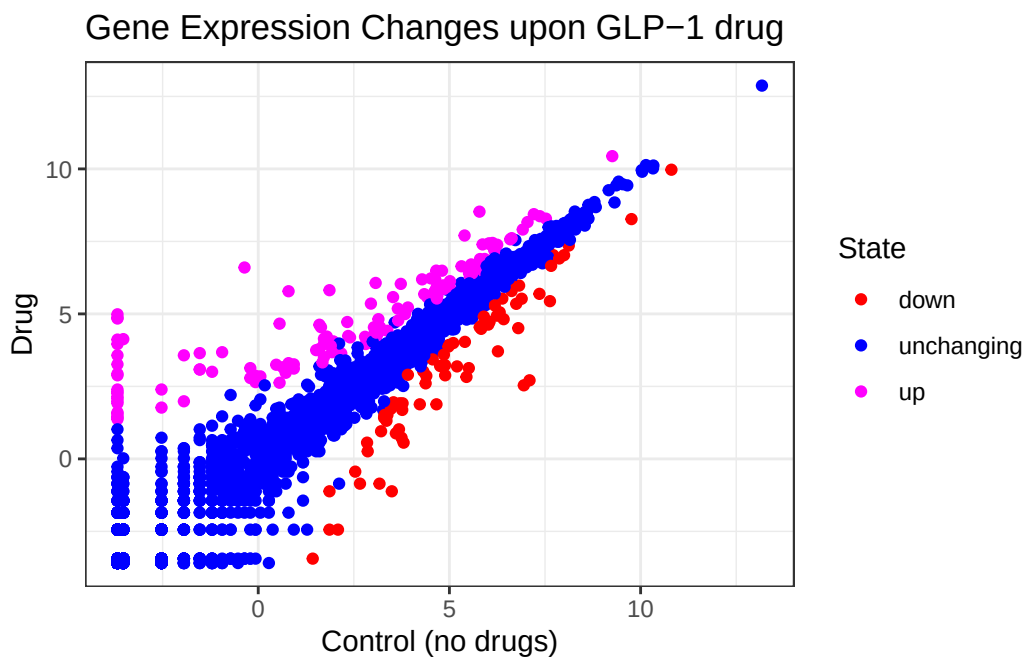


```
url <- "https://raw.githubusercontent.com/jennybc/gapminder/master/inst/extdata/gapminder.
gapminder <- read.delim(url)
```

```
head(gapminder, 3)
```

```
      country continent year lifeExp      pop gdpPercap
1 Afghanistan      Asia 1952  28.801  8425333  779.4453
2 Afghanistan      Asia 1957  30.332  9240934  820.8530
3 Afghanistan      Asia 1962  31.997 10267083  853.1007
```

```
ggplot(gapminder)+
  aes(gdpPercap, lifeExp)+
  geom_point(alpha=0.3, col="blue")
```

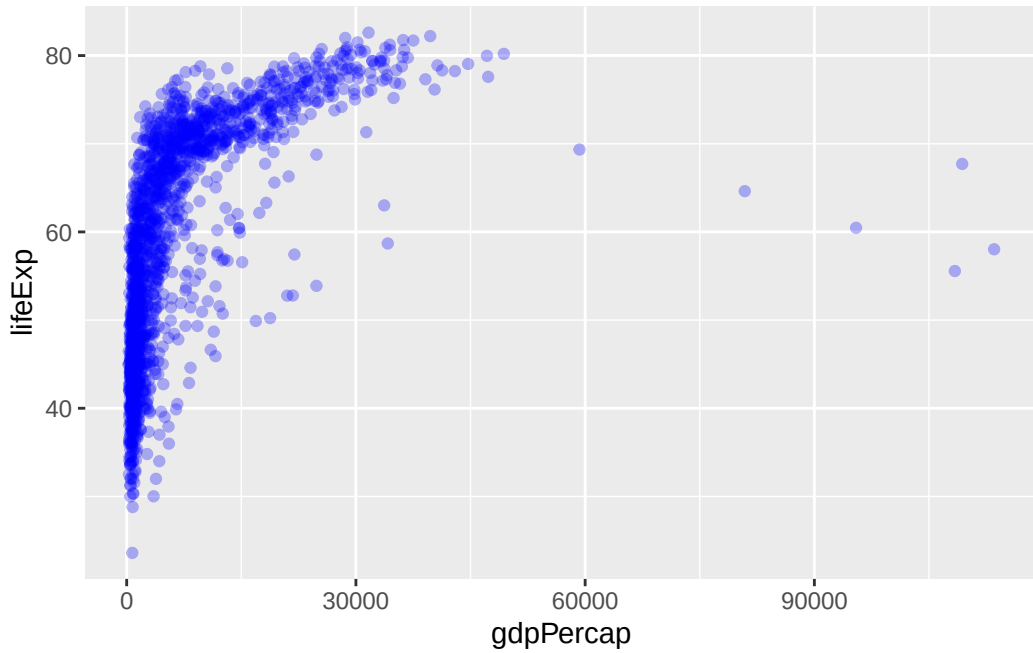


```
ggplot(gapminder)+
  aes(gdpPercap, lifeExp,col=continent)+
  geom_point(alpha=0.3)
```

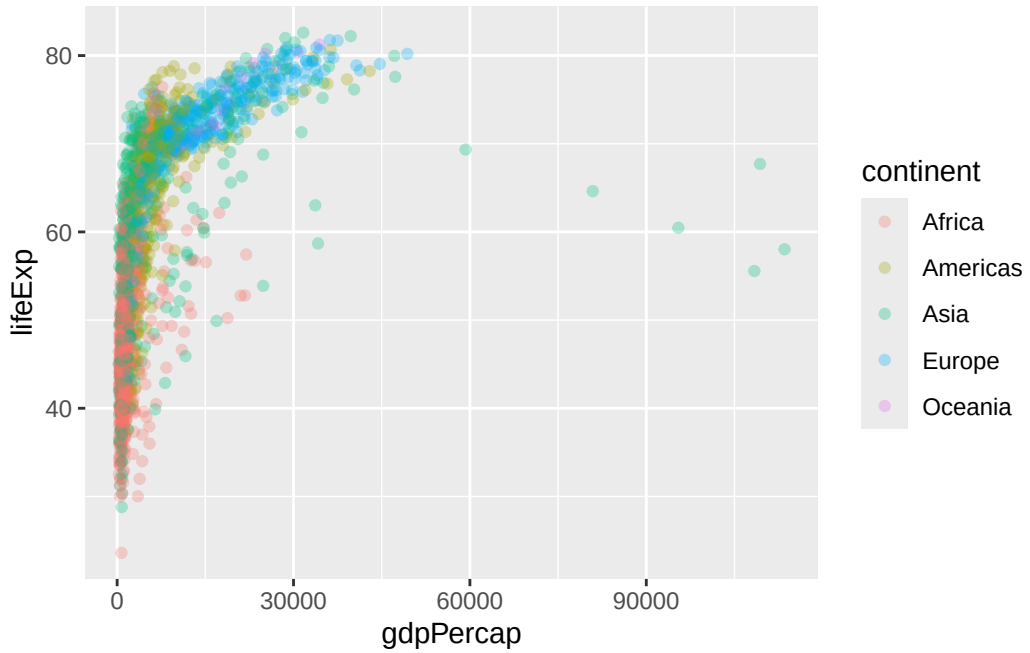


```
ggplot(gapminder)+
  aes(gdpPercap, lifeExp,col=continent)+
  geom_point(alpha=0.3)+
  facet_wrap(~continent)
```

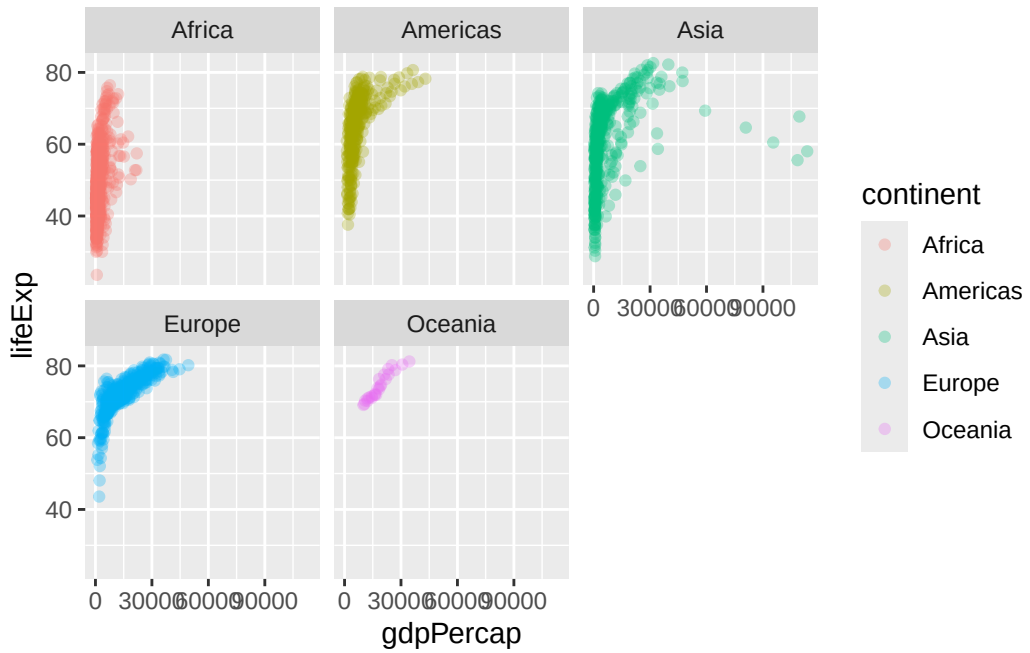

##Custon plots how big is this gapmider dataset?

```
nrow(gapminder)
```

```
[1] 1704
```

I want to "filter" down to a subset of this data. I will use the **dplyr** package to help me. First I need to install it and then load it up…..
install. packages("dplyr") and then 'library(dyplr)'

```
library(dplyr)
```

```
Warning: package 'dplyr' was built under R version 4.4.3


Attaching package: 'dplyr'

The following objects are masked from 'package:stats':

    filter, lag
```

```
The following objects are masked from 'package:base':

    intersect, setdiff, setequal, union
```

trying URL "https://cran.rstudio.com/bin/macosx/big-sur-arm64/contrib/4.5/dplyr_1.1.4.tgz'
Content type 'application/x-gzip' length 1614595 bytes (1.5 MB)

```r
library(dplyr)
gapminder_2007 <- filter(gapminder, year==2007)
head(gapminder_2007)
```

```
      country continent year lifeExp      pop  gdpPercap
1 Afghanistan      Asia 2007  43.828 31889923   974.5803
2     Albania    Europe 2007  76.423  3600523  5937.0295
3     Algeria    Africa 2007  72.301 33333216  6223.3675
4      Angola    Africa 2007  42.731 12420476  4797.2313
5   Argentina  Americas 2007  75.320 40301927 12779.3796
6   Australia   Oceania 2007  81.235 20434176 34435.3674
```

```r
filter(gapminder, year==2007, country=="United States")
```

```
        country continent year lifeExp       pop gdpPercap
1 United States  Americas 2007  78.242 301139947  42951.65
```

Q Make a plot comparing 1977 and 2007 for all countries

```r
input <- filter(gapminder, year %in% c(1977, 2007))
head(input)
```

```
      country continent year lifeExp      pop gdpPercap
1 Afghanistan      Asia 1977  38.438 14880372  786.1134
2 Afghanistan      Asia 2007  43.828 31889923  974.5803
3     Albania    Europe 1977  68.930  2509048 3533.0039
4     Albania    Europe 2007  76.423  3600523 5937.0295
5     Algeria    Africa 1977  58.014 17152804 4910.4168
6     Algeria    Africa 2007  72.301 33333216 6223.3675
```
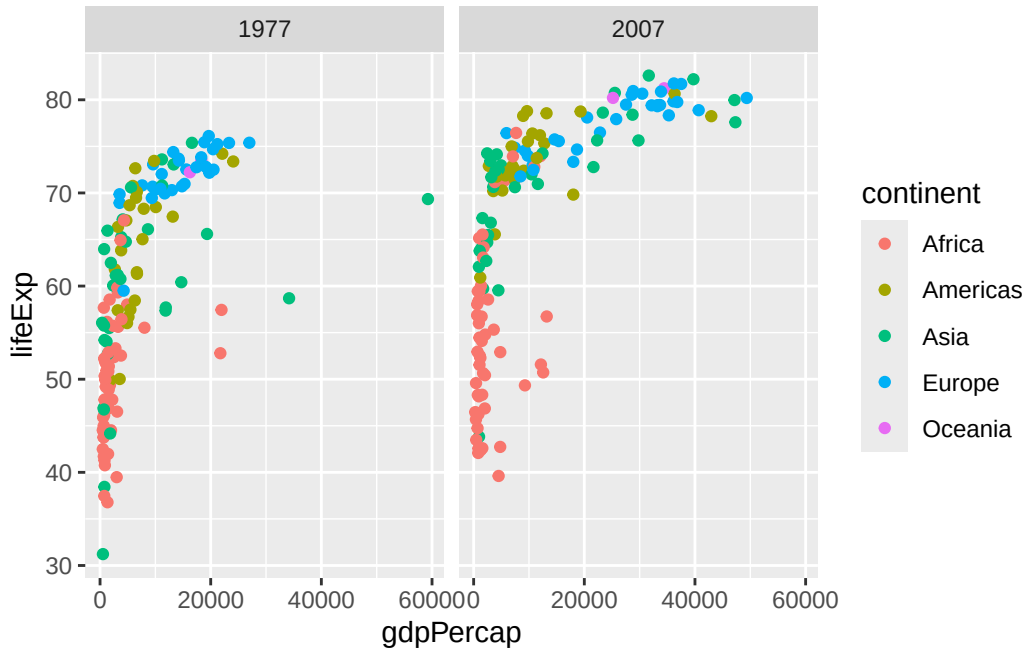
```r
input <- filter(gapminder, year %in% c(1977,2007))

ggplot(data=input, aes(gdpPercap, lifeExp, col=continent)) +
geom_point() + facet_wrap(~year)
```