TableNet: One Network for Picks and Wheels

The architecture of a combined PickNet + WheelNet

Design note. Companion to *How PickNet Works* and *How WheelNet Works*

October 2026 · Status: steps 1–3 done

PickNet predicts which card a drafter takes. WheelNet predicts which of the cards they pass will come back eight picks later. The two models read almost the same input, and they are built from the same parts: a card table, a causal history encoder over one token per pick, and a decoder over the cards in a pack. This note describes **TableNet**, one network that does both jobs: a shared trunk with a *pick head* and a *wheel head*. The name is the point of it: the pick head models you, and the wheel head models what the rest of the table leaves behind. It reuses the terms of the two companion guides (history token $\mathbf{x}_t$, history state $\mathbf{h}_t$, candidate token, passed-card token, bag, draft context, wheel-eligible pick), and only explains what is new. Code: `scripts/train_tablenet.py` in the wheelnet repo (step 1, Section 7); the trunk is `PickNet` in `picknet/src/picknet/model.py`.

Contents

1 The job, and why one network **2**

2 The big picture **2**

3 The one real problem: when does the pick happen? **3**
3.1 Where the wheel label hides, and the leakage rule 3

4 The wheel head **4**
4.1 Passed-card tokens from candidate tokens 4
4.2 Layers 4

5 "If I take A, will B wheel?" **5**

6 Loss and training **5**

7 The plan: two steps, each one a go/no-go **6**

8 What is shared and what differs **11**

9 Shapes, for one batch **11**

10 One wheel prediction, start to finish **11**

11 FAQ **12**

1 The job, and why one network

For every draft, TableNet outputs two things in one forward pass:

1. **Pick probabilities** at every slot: a softmax over the cards in pack t, exactly as PickNet.
2. **Wheel probabilities** at every wheel-eligible pick: for each distinct card passed at t, the probability that at least one copy is still in the pack when it returns at $t + 8$, exactly as WheelNet.

There are three reasons to expect sharing to work, roughly in order of strength.

- **A wheel is seven picks.** A card wheels if each of the next seven drafters passes it. That is seven pick decisions by people the model cannot see but can infer from what they took. A model that has learned how drafters pick already holds most of what a wheel model needs: how strong each card is in this format, which cards protect each other in a pack, and which colours the table is taking.
- **Same input, same labels source.** Both models read the packs shown, the picks made and what the others took, and both get their labels from the same 17Lands rows. Every draft gives pick labels at all 42 slots and wheel labels for 189 passed cards (18 wheel-eligible picks, 13 down to 8 passed cards each).
- **One model to run live.** The overlay in the project's open list wants "what should I take" and "what will come back" at the same moment. Section 5 shows TableNet can also answer the question a drafter actually asks: *if I take A, will B wheel?*

What we expect: the wheel task gains (it gets a much better-trained card and history representation) and the pick task gains little or nothing. The pick task is the flagship, so the design treats any loss of pick accuracy as a failure (Section 6).

2 The big picture

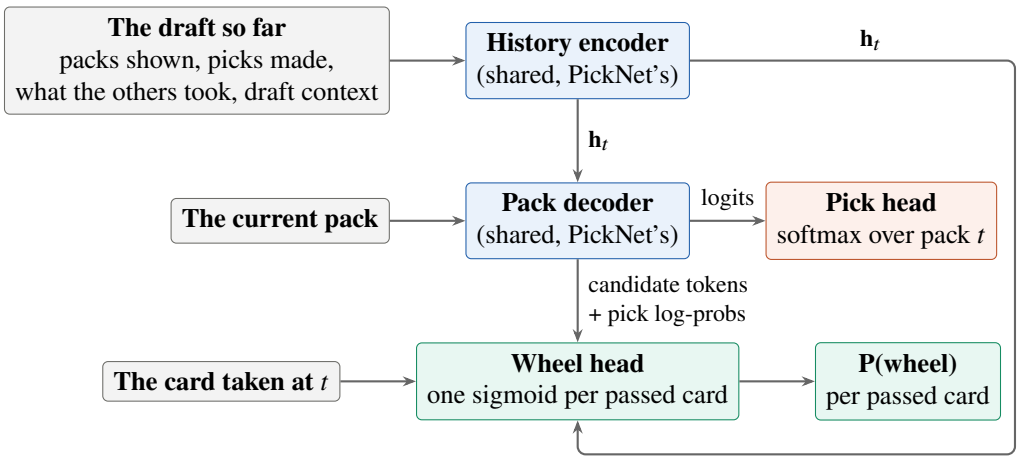


Figure 1: TableNet. Blue: PickNet's trunk, unchanged. Orange: PickNet's own scoring head. Green: the new wheel head. The card taken at t enters only the wheel head (Section 3).

The trunk is PickNet with nothing changed: card table, history tokens, causal history encoder, pack decoder. The pick head is PickNet's scoring head. The only new part is the wheel head, a small network that reads the trunk's outputs at a wheel-eligible pick t and scores each passed card.

The wheel head does *not* get its own history encoder or its own pack decoder. That is the point of the design: all of WheelNet's 4 history layers and 3 decoder layers are replaced by PickNet's.

3 The one real problem: when does the pick happen?

PickNet and WheelNet disagree about one detail of the history token, and everything in the design follows from it.

	PickNet token t	WheelNet token t
pack shown	pack t	pack t
card taken	at $t-1$ (`pick_in(prev)`)	at t (`taken(card(pick))`)
state $\mathbf{h}_t$ knows	every pick *before* t	every pick *up to and including* t

Both are right for their job. PickNet predicts pick t, so pick t must not be in its own state. WheelNet scores the cards *passed* at t, which only exist once pick t is made, and which card you took matters (take the only red card and the remaining cards look different to the table).

So a shared trunk can't simply reuse WheelNet's convention: that would hand the pick head its own answer. The options are:

1. **Read pick t in the wheel head only (chosen).** Keep PickNet's trunk exactly as it is. The wheel head receives $\mathbf{h}_t$, the candidate tokens of pack t, and the card vector $\mathbf{e}_{\text{pick}_t}$ as a separate input. The trunk never sees pick t at slot t; the wheel head does.
2. **Read state $\mathbf{h}_{t+1}$.** PickNet's next state does contain pick t. But it also contains pack $t+1$, which you do not have when you decide what to pass, so the live overlay could not use it. It also moves the wheel head one slot closer to the label (below).
3. **Two history streams.** Run the history encoder twice, with and without pick t. This doubles the trunk's cost and gives up the efficiency that motivated sharing.

Option 1 has a bonus: since pick t is a separate input to a small head, the head can be re-run with a different pick for almost no cost (Section 5).

3.1 Where the wheel label hides, and the leakage rule

The label for a card passed at pick p is the pack shown at pick $p+8$. That pack is an input to history token $p+8$, and the others-taken bag of token $p+8$ is literally "passed at p minus what came back". In a model that reads the whole draft in one pass, this is the main way to fool yourself.

The rule: every path into the wheel head at pick t must stop at slot t. In the chosen design this holds by construction, because the wheel head only reads three things, and each one is already causal in PickNet:

- $\mathbf{h}_t$: the history encoder's causal mask lets token t see tokens $0..t$ only.
- The final candidate tokens of pack t: the pack decoder's cross-attention lets pack t see $\mathbf{h}_0..\mathbf{h}_t$ only, and its self-attention stays within pack t.
- $\mathbf{e}_{\text{pick}_t}$ and the pick log-probabilities at t: from slot t only.

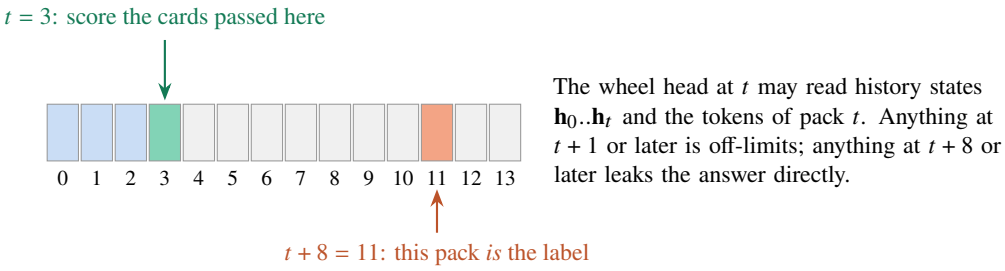


Figure 2: One pack of one draft. Blue and green: what the wheel head may use when scoring pick 3. Orange: where its label lives.

Any attention layer added inside the wheel head must therefore stay within the passed cards of one pack. Never give it cross-attention to the full **h** sequence, and never run the trunk without its causal masks "to get a better state". Either change leaks every label in pack 1 and 2 and produces very good, meaningless numbers. A cheap guard to keep in the training script: score the wheel head once with every slot after t zeroed out in the inputs, and check the outputs don't change.

4 The wheel head

4.1 Passed-card tokens from candidate tokens

PickNet already builds a token for every card in pack t (its candidate tokens) and refines them through the pack decoder. WheelNet needs a token for every *distinct passed* card. These are the same cards, minus one copy of the card taken:

- If you took the only copy of card A, A has no passed-card token.
- If you took one of two copies of A, A keeps its token, with "copies passed" = 1.

So the passed-card tokens are simply PickNet's candidate slots of pack t whose "copies passed" (copies shown minus one if it is the card taken) is at least 1, and each starts from that slot's final candidate token. Each passed-card token is the concatenation

$$\mathbf{u}_{t,c} = \Big[\underbrace{\mathbf{z}^{\text{final}}_{t,c}}_{\text{candidate token}} , \underbrace{\mathbf{h}_t}_{\text{the drafter}} , \underbrace{\mathbf{e}_{\text{pick}_t}}_{\text{card you took}} , \underbrace{\log p_t(c)}_{\text{how pickable } c \text{ was}} , \underbrace{\log p_t(\text{pick}_t)}_{\text{how obvious your pick was}} , \underbrace{\text{copies}_c}_{\text{1, 2, 3+}} \Big]$$

of size $3d + 3$, where d is the trunk width. The two log-probabilities come from PickNet's own pick head at t, so the wheel head starts with the trunk's best single summary of "how much does a drafter want this card here". A card the drafter had a 40% chance of taking is unlikely to survive seven more drafters.

4.2 Layers

1. **Input projection.** Linear $3d + 3 \to d_w$, plus a learned *wheel-pick embedding* ($21 \times d_w$: 3 packs × up to 7 wheel-eligible picks, so 13-, 14- and 15-card packs all fit; as WheelNet's `pick_pos`). Pick 1 and pick 6 of a pack have very different base rates (46% and 12.5% of passed cards wheel on MSH).

2. **Optional self-attention over the passed cards** (L layers, $L = 0$ or 1). Passed cards shield each other: a card is more likely to wheel when it travels with better cards. PickNet's decoder already compared the candidates, but it compared them *with* your pick still in the pack. One layer lets the passed cards re-compare after it is gone. Attention is within one pack's passed cards only.
3. **Scoring head.** LayerNorm, Linear $d_w \to d_w$, GELU, dropout, Linear $d_w \to 1$, then a sigmoid.

Outputs are independent sigmoids, not a softmax: several cards can wheel together, and none may. WheelNet shows that sums of these probabilities still match the true size of the returning pack (6.02 vs 6.00 at pick 1 on MSH), even though nothing tells it that size.

wheel head, trunk $d = 256$, $d_w = 256$	$L = 0$	$L = 1$
input projection ($771 \to 256$) and wheel-pick embedding	203,008	203,008
self-attention layer over passed cards	—	789,760
scoring head	66,561	66,561
total	269,569	1,059,329

For scale: a per-set WheelNet has 3.9M parameters (one per set), the features-only multi-set WheelNet 4.05M, and the all-sets PickNet trunk the head reads 8.48M.

5 "If I take A, will B wheel?"

WheelNet answers "given the pick you made, which passed cards come back?". In a live draft you want that answer *before* you pick, for each card you might take. Because pick t enters only the wheel head, TableNet can answer it cheaply:

1. Run the trunk once for the draft so far. This gives $\mathbf{h}_t$, the candidate tokens of pack t and the pick probabilities.
2. For each card A in the pack, run only the wheel head with $\mathbf{e}_{\text{pick}_t} = \mathbf{e}_A$ and the passed set "pack minus one A". That is one small head call per candidate, 0.3M–1.1M parameters.

The result is a table: rows are "what I take", columns are "what I hope wheels", cells are $P(\text{wheel})$. Combined with the pick probabilities, this is the take-or-wait decision as a single lookup.

Caveat. The head is trained only on the picks humans actually made, and humans usually take the best card. Rows for unusual picks (taking the 10th-best card) are extrapolation. They should be read as directional until checked against drafts where that pick did happen.

6 Loss and training

$$\mathcal{L} = \underbrace{\text{mean pick NLL}}_{\text{over valid picks}} + \lambda_{\text{w}} \underbrace{\text{mean wheel BCE}}_{\text{over passed-card tokens}} \quad \big(+\ 0.3 \times \text{deck BCE in the all-sets model}\big)$$

- **Each term is a mean over its own items.** A draft has about 42 scored picks but about 190 passed-card tokens. Summing instead of averaging would let the wheel loss swamp the pick loss.

- **Scales.** On MSH the pick NLL is about 0.81 nats per pick and the wheel BCE about 0.42 per token. Start at $\lambda_w = 0.3$ and sweep $\{0.1, 0.3, 1\}$.
- **The pick task must not lose.** A setting is kept only if pick top-1 on the test split is no more than 0.1 points below the pick-only model trained the same way. A small λ_w that keeps picks flat and still matches WheelNet is the goal; a large one that buys wheel accuracy with pick accuracy is not useful, because the standalone WheelNet already exists.
- **Dropout.** WheelNet trains with dropout 0.2 and PickNet with 0.1 (0.05 in the all-sets model). The trunk keeps PickNet's; the wheel head uses 0.1.

7 The plan: two steps, each one a go/no-go

step	what changes	go if
1. Frozen trunk (done)	The all-sets PickNet (`frahob_freeze`: `all_d256_ep3` with FRA and HOB card vectors fitted, 8.48M parameters, 70.9% pick top-1) is frozen. Only the wheel head trains: $L = 0$ and $L = 1$ side by side on the same frozen forward pass.	wheel log loss within 1% of the per-set WheelNet on most sets
2. Joint fine-tune (done)	Start from step 1; train trunk + both heads with the loss above, trunk at a lower learning rate than the head.	wheel at least ties WheelNet; pick top-1 within 0.1 pt of PickNet on every set

Step 1 setup. Data comes straight from PickNet's all-sets shards: all 19 Premier sets, up to 15,000 training drafts each (285,000 in all), 1,000 validation drafts per set for early stopping, and every test draft of every set. The train/val/test splits are the chronological 70/15/15 splits WheelNet uses; the draft lists were checked to be identical set by set. Wheel labels are computed from the shards (the cards passed at t against the pack shown at $t + 8$), so 13-, 14- and 15-card sets all work. Two epochs, AdamW, learning rate 10^{-3} one-cycle, batch 64; about 43 minutes per epoch on an M-series laptop GPU. Pick accuracy cannot change in this step, because the trunk and the pick head are frozen.

Two checks run before training: `trunk()` reproduces `PickNet.forward`'s pick logits exactly, and blanking every input after slot t leaves the wheel head's inputs at t unchanged (the leakage guard from Section 3).

Baselines. Each set's own WheelNet (the per-set transformer, 3.9M parameters, trained only on that set). For FRA (Reality Fracture, one week of data) and HOB (The Hobbit), which had no WheelNet yet, the shipped `wheelnet_time` configuration is trained for this comparison. On MSH there are also the features-only multi-set WheelNet (log loss 0.4188) and `wheelnet_time` (0.4218).

Step 1 results. Test log loss on each set's chronological test drafts (lower is better). The example counts match WheelNet's test predictions exactly on all 16 sets that have one, so each row compares the two models on the same passed cards. EOE, MOM and WOE had no WheelNet. Final validation log loss, pooled over the 19 sets: $L = 0$ 0.4412, $L = 1$ 0.4353.

set	pack	WheelNet	TableNet $L = 0$	TableNet $L = 1$	$L = 1$ vs WheelNet
BLB	13	0.4622	0.4762	0.4711	+1.9%
DFT	14	0.4239	0.4295	0.4238	−0.0%
DSK	14	0.4159	0.4237	0.4177	+0.4%
ECL	13	0.4508	0.4647	0.4583	+1.7%
EOE	13	—	0.4506	0.4453	—
FDN	14	0.4202	0.4306	0.4249	+1.1%
FIN	14	0.4375	0.4467	0.4410	+0.8%
FRA	14	0.4330	0.4405	0.4350	+0.4%
HOB	14	0.4171	0.4318	0.4245	+1.8%
LCI	15	0.4434	0.4547	0.4492	+1.3%
MKM	13	0.4487	0.4558	0.4501	+0.3%
MOM	15	—	0.4463	0.4406	—
MSH	14	0.4249	0.4319	0.4267	+0.4%
OTJ	14	0.4058	0.4149	0.4088	+0.7%
SOS	14	0.4150	0.4302	0.4220	+1.7%
TDM	14	0.4177	0.4275	0.4207	+0.7%
TLA	14	0.4214	0.4306	0.4245	+0.7%
TMT	14	0.4173	0.4259	0.4201	+0.7%
WOE	14	—	0.4707	0.4650	—
mean over the 16 sets with a WheelNet (median 0.7%; within 1% on 10 of 16)					+0.9%

Reading the results.

- **Close, and it passes the bar on most sets.** A head of 1.06M parameters on a frozen pick model gets within 1% of a dedicated 3.9M-parameter WheelNet on 10 of 16 sets, ties it on DFT, and is never more than 1.9% behind. Most of what the wheel task needs is already in PickNet's representation.
- **The attention layer earns its place.** $L = 1$ beats $L = 0$ on every set, by 0.005–0.008 in log loss (1–2%). Letting the passed cards re-compare after your pick is gone matters.
- **The gap is not about data size.** Its correlation with the set's training-draft count is 0.03. FRA (one week) is 0.4% behind and HOB (six weeks) 1.8%; BLB, ECL, HOB and SOS are the four largest gaps and share no pack size or data size.
- **The baselines are not the newest WheelNet.** The older sets' WheelNets have no draft context. On MSH, days-into-format context alone is worth 0.7% (0.4249 → 0.4218) and the multi-set WheelNet another 0.7% (0.4188). Against those, TableNet's step 1 is 1.2% and 1.9% behind on MSH. FRA and HOB's baselines already have that context.

Verdict: step 1 says go. The frozen trunk gets most of the way; step 2 (unfreezing it) is the test of whether the last 1–2% can be had without costing pick accuracy.

Step 2 results. Starting from step 1, everything trained together for one pass over the same 285,000 Premier drafts (batch 32, PickNet learning rate 5×10^{-5}, head 3×10^{-4}, one-cycle, $\lambda_w = 0.3$, deck weight 0.3; 2.2 hours including scoring). Before training, the scorer reproduced PickNet's published MSH test numbers exactly (top-1 0.7010, NLL 0.7703). Pooled validation: wheel log loss 0.4353 → 0.4338, pick top-1 70.75% (step 2000) → 70.86%.

		wheel log loss vs WheelNet		pick top-1 (test)		
set	WheelNet	step 1	step 2	PickNet	step 2	change (pt)
BLB	0.4622	+1.9%	+1.5%	71.53%	71.49%	−0.04
DFT	0.4239	−0.0%	−0.4%	71.23%	71.20%	−0.03
DSK	0.4159	+0.4%	+0.1%	72.28%	72.28%	0.00
ECL	0.4508	+1.7%	+1.2%	71.79%	71.81%	+0.02
EOE	—	—	—	71.19%	71.19%	0.00
FDN	0.4202	+1.1%	+0.8%	72.53%	72.50%	−0.03
FIN	0.4375	+0.8%	+0.4%	71.03%	71.01%	−0.03
FRA	0.4330	+0.4%	+0.0%	67.87%	68.16%	**+0.29**
HOB	0.4171	+1.8%	+1.3%	71.93%	72.14%	**+0.21**
LCI	0.4434	+1.3%	+1.0%	70.18%	70.17%	−0.01
MKM	0.4487	+0.3%	−0.0%	70.70%	70.69%	−0.02
MOM	—	—	—	70.24%	70.23%	−0.01
MSH	0.4249	+0.4%	+0.1%	70.10%	70.09%	−0.01
OTJ	0.4058	+0.7%	+0.4%	70.81%	70.77%	−0.04
SOS	0.4150	+1.7%	+1.2%	71.66%	71.64%	−0.02
TDM	0.4177	+0.7%	+0.3%	69.05%	69.00%	−0.05
TLA	0.4214	+0.7%	+0.4%	70.52%	70.52%	0.00
TMT	0.4173	+0.7%	+0.3%	72.18%	72.22%	+0.04
WOE	—	—	—	69.50%	69.48%	−0.03
mean		+0.92%	**+0.53%**			+0.01

- **Wheels: the gap almost halves.** Step 2 improves on step 1 on all 19 sets. The mean gap to WheelNet falls from 0.92% to 0.53% (median 0.36%); 12 of 16 sets are within 1%, and DFT, MKM and FRA are at or past parity. The remaining gaps are on the same sets as before (BLB, HOB, ECL, SOS).
- **Picks: no cost.** Top-1 is within 0.1 points of the starting PickNet on all 19 sets (worst TDM, −0.05). On the 17 older sets the mean change is −0.015 points and pick NLL rises by at most 0.001, which is noise. FRA (+0.29) and HOB (+0.21) gain clearly, most likely because this is the first time the whole network trained on their drafts; the starting PickNet had only their card vectors fitted. A pick-only control ($\lambda_w = 0$) would separate that from any effect of the wheel loss.
- **Against the newer WheelNets, still behind.** On MSH, TableNet (0.4252) ties the context-free WheelNet (0.4249) but trails `wheelnet_time` (0.4218) by 0.8% and the multi-set WheelNet (0.4188) by 1.5%.

Verdict: step 2 meets the pick bar everywhere and gets the wheel gap to about half a percent, but does not reach "at least ties WheelNet". One network now does both jobs at 99.5% of the dedicated wheel models' log loss. Next candidates: a higher wheel weight ($\lambda_w = 1$), since picks show no strain; a second pass; and the draft-time context the newer WheelNets use.

Step 2 follow-ups (2026-10-15). Same setup unless noted. Pick changes are against a pick-only control: the same fine-tune with $\lambda_w = 0$. Full write-up: `paper/combined/gap-diagnosis.md`.

run	wheel vs WheelNet (mean)	pick top-1 vs control (mean / worst)	pick NLL vs control
$\lambda_w = 0.3$ (step 2)	+0.53%	−0.001 / −0.02	0.0000
$\lambda_w = 1$	+0.19%	−0.010 / −0.03	+0.0002
$\lambda_w = 1$, second pass	−0.10%	−0.013 / −0.08	+0.0004
$\lambda_w = 3$	**−0.22%**	−0.034 / −0.09	+0.0012
$\lambda_w = 3$, history encoder blocked	+0.22%	−0.013 / −0.06	+0.0006

- **The wheel loss does not help picks.** The control's picks match step 2's (FRA's and HOB's gains come from training on their drafts).
- **More wheel signal closes the gap.** At $\lambda_w = 3$, TableNet is past the per-set WheelNet on average (11 of 16 sets at or past parity), and pick top-1 stays inside the 0.1-point bar, with no margin left. A second pass at $\lambda_w = 1$ gets most of that gain at a third of the pick NLL cost. On MSH the best run (0.4224) is still behind `wheelnet_time` (0.4218) and the multi-set WheelNet (0.4188).
- **Where the tasks disagree.** Averaged over 1000 batches, the pick and wheel gradients on PickNet's weights are close to orthogonal in the card table and pack decoder, but anti-aligned in the history encoder (-0.14 to -0.19 at step 1; -0.36 to -0.52 at $\lambda_w = 3$).
- **The history encoder is where the wheel gain comes from.** Keeping the wheel gradient out of it (and its input embeddings) removes all of $\lambda_w = 3$'s wheel gain and two-thirds of its pick cost. The wheel task needs the history summarized differently from the pick task. Next: give the wheel task its own history capacity (a small separate history encoder for the wheel head, or wheel-only adapters) rather than sharing or blocking it.

Step 3 (in progress): a history encoder for the wheel head. Figure 3 shows the change. `whist_layers=2` adds a second, small causal history encoder (1.93M parameters) used only by the wheel head. It reads the same inputs as PickNet's history encoder, through PickNet's card table, with its own embeddings. Its state at each wheel slot is added to that slot's passed-card tokens. Its output projection starts at zero, so training begins exactly at the step-1 head. A start-up check confirms that its state at t ignores every later slot. Two runs are under way:

- **Run A** (`wheel_block=all`, $\lambda_w = 1$): the wheel loss never reaches PickNet.
- **Run B** (`wheel_block=hist`, $\lambda_w = 3$): the wheel loss reaches PickNet's card table and decoder, but not its history encoder.

Results.

- **Run A** gives the $\lambda_w = 1$ wheel accuracy (+0.26% against the per-set WheelNet) with no pick cost at all.
- **Run B** gives the $\lambda_w = 3$ wheel accuracy (-0.19%; 11 of 16 sets at or past parity) at a third of its pick cost. Top-1 is -0.010 points against the pick-only control (worst set -0.05), and NLL is +0.0005.

B is the best trade-off so far. On MSH, the multi-set WheelNet (0.4188) is still better than B (0.4227). Details: `overnight_findings.pdf`.

How to read step 1. If the frozen head gets close to WheelNet, PickNet's representation already contains what the wheel task needs, and step 2 should be easy. If it falls well short, the gap shows how much the wheel task needs features that picks alone don't teach. That doesn't kill the idea, since step 2 lets the trunk learn them, but it makes negative transfer to picks more likely.

An earlier, smaller version of step 1 is `scripts/probe_picknet_wheel.py`: the same head on the MSH features-only PickNet, for a like-for-like comparison with the features-only multi-set WheelNet.

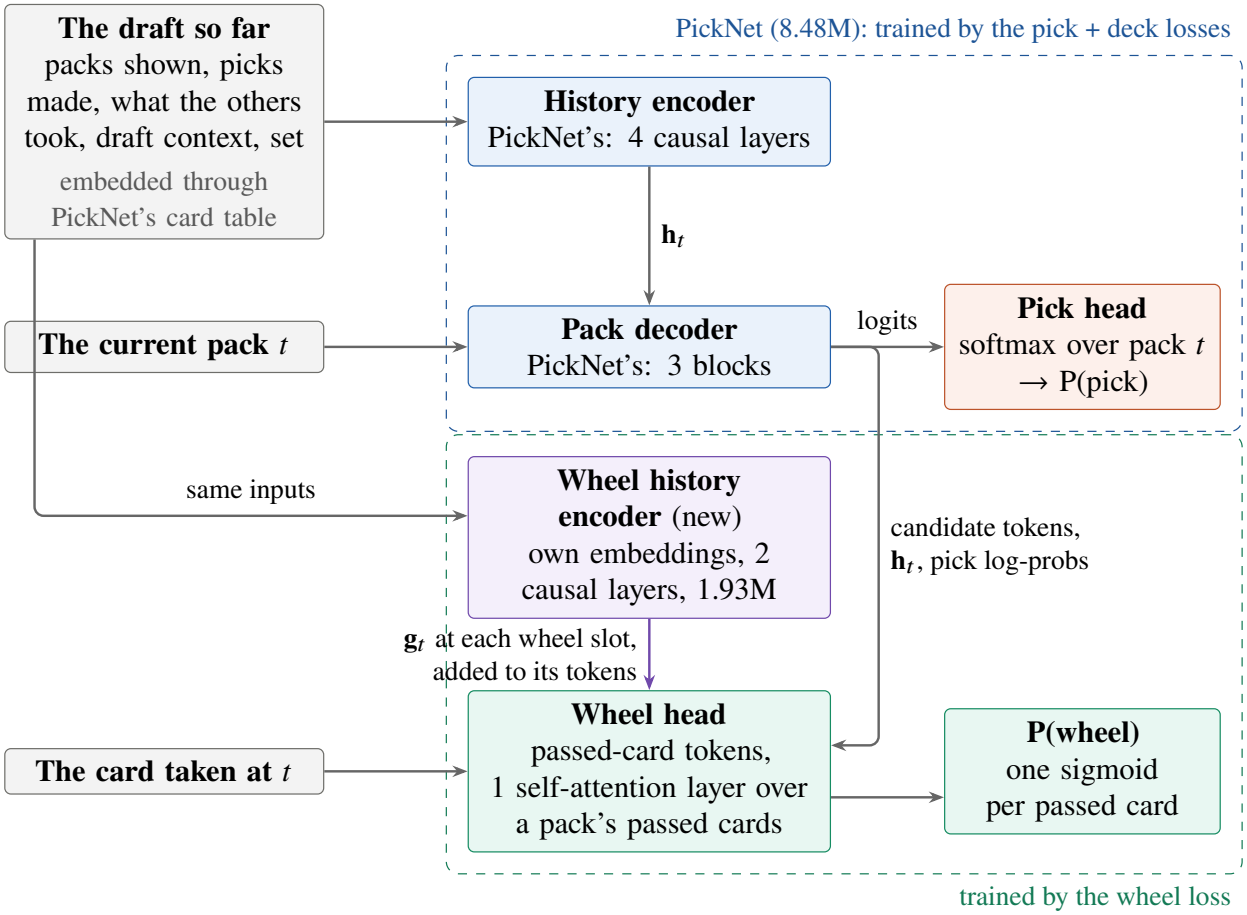


Figure 3: TableNet with a wheel history encoder. Blue: PickNet's trunk. Orange: its pick head. Purple: the new wheel history encoder. Green: the wheel head. The dashed outlines mark which losses train which parts; how far the wheel loss reaches into PickNet is set by `wheel_block`.

8 What is shared and what differs

part	PickNet	WheelNet	TableNet
card table	features (+ name ids in all-sets)	features or ids, tied bags	PickNet's
history token	pack t, pick $t-1$	pack t, pick t	PickNet's (pick $t-1$)
positions	45 or 42 history slots	42 history + 18 wheel picks	PickNet's 45 + 21 wheel picks in the head
history encoder	causal, 3–4 layers	causal, 4 layers	PickNet's
pack tokens	all cards in pack t	distinct passed cards	candidate slots with copies passed ≥ 1
pack decoder	per-pack self-attn + cross-attn to $\mathbf{h}_{\leq t}$	block-diagonal self-attn + cross-attn to $\mathbf{h}_{\leq t}$	PickNet's
output	softmax over pack	sigmoid per passed card	both
extra heads	deck head (all-sets)	none	deck head + wheel head
width, dropout	d=128 or 256, 0.1 / 0.05	d=192, 0.2	trunk's; head d_w=256, 0.1

9 Shapes, for one batch

For step 1: $B = 64$ drafts, $T = 45$ slots (3 packs $\times$ 15, the all-sets layout), $P = 15$ candidate positions, 21 wheel slots (3 packs $\times$ 7; a 14-card set uses 6 per pack, the rest are masked), trunk $d = 256$, head $d_w = 256$.

stage	shape	code (`train_tablenet.py`)
history states $\mathbf{h}$	`[B, 45, 256]`	`trunk()`
final candidate tokens	`[B, 45, 15, 256]`	`trunk()`
pick log-probs	`[B, 45, 15]`	`trunk()`, then `log_softmax`
copies passed, token mask, label	`[B, 21, 15]` each	`wheel_targets()`
head input $\mathbf{u}$	`[B, 21, 15, 771]`	`head_inputs()`
wheel logits	`[B, 21, 15]`	`WheelHead.forward`

10 One wheel prediction, start to finish

Pack 1, pick 3 ($t = 2$). There are 12 cards in front of you; you take a red removal spell.

1. **Trunk.** Build history tokens 0–2 (packs 0–2, picks before 2, draft context) and run the causal history encoder: $\mathbf{h}_2$ knows your first two picks. Build 12 candidate tokens for pack 2 and run the pack decoder; the pick head gives each card a probability. Training compares these to your actual pick.
2. **Passed cards.** Remove one copy of the removal spell: 11 cards are passed, each a distinct card here, so 11 passed-card tokens. Gather each one's final candidate token.
3. **Wheel head.** Concatenate each token with $\mathbf{h}_2$, the removal spell's card vector, its own pick log-prob, the spell's pick log-prob, and its copies count. Project, add the wheel-pick embedding for "pack 1, pick 3", optionally one self-attention layer across the 11, and score.
4. **Output.** 11 sigmoids. Four cards come back at pick 11, so these should sum to about 4.

In training all of this happens for all 45 slots, all wheel picks and B drafts in one pass. Nothing at slots 3–44 is read for this prediction. Slot 10 (pick 11) holds its answer.

11 FAQ

Why not compute wheels by simulating PickNet for the other seven drafters? The table simulator does exactly that, but it needs each seat's pool and history, which the data doesn't have. A learned head skips that inference and is trained directly on the outcome.

Will the wheel task make picks better? Probably not by much. Wheel labels say what *other* drafters took, which is related to your own choice only through card strength and signals that PickNet already reads. The bar is "no worse".

Why not reuse WheelNet's convention (pick t in token t) and shift PickNet's targets? PickNet would then read its own answer at slot t. You could predict pick t from state $t-1$ instead, but that state hasn't seen pack t, and the pack decoder's comparison of the cards in the pack is PickNet's largest single gain.

Does this work for 13- and 15-card sets? The head does, with $n-8$ wheel-eligible picks per pack instead of 6. The wheel labels need all picks of a pack present, and the current feature pipeline assumes 14-card packs with complete drafts, so the all-sets step needs the label code generalised first.

What about Sealed/draft multitask, which was a dead end? That paired two different inputs (a Sealed pool and a draft) for one deck-strength target. Here it's one input with two targets that are mechanically linked. Step 1, the frozen trunk, is the cheap test of whether the link is real.