

The *Entropy* Mechanism of Reinforcement Learning for Reasoning Language Models

Ganqu Cui^{1,*}, Yuchen Zhang^{1,4,*}, Jiacheng Chen^{1,*}, Lifan Yuan³, Zhi Wang⁵, Yuxin Zuo², Haozhan Li²,
Yuchen Fan¹, Huayu Chen², Weize Chen², Zhiyuan Liu², Hao Peng³, Lei Bai¹, Wanli Ouyang¹,
Yu Cheng^{1,6,†}, Bowen Zhou^{1,2,†}, Ning Ding^{2,1,†}

¹ Shanghai AI Laboratory ² Tsinghua University ³ UIUC ⁴ Peking University ⁵ Nanjing University ⁶ CUHK

Code: <https://github.com/PRIME-RL/Entropy-Mechanism-of-RL>

Abstract

This paper aims to overcome a major obstacle in scaling reinforcement learning (RL) for reasoning with large language models (LLMs), namely the collapse of policy *entropy*. Such phenomenon is consistently observed across vast RL runs without entropy intervention, where the policy entropy dropped sharply at the early training stage, leading to an overly confident policy model. As a consequence, this diminished exploratory ability is always accompanied with the saturation of policy performance. In practice, we establish a transformation equation $R = -a \exp \mathcal{H} + b$, between entropy $\mathcal{H}$ and downstream performance R , where a, b are fitting coefficients. This empirical law strongly indicates that, the policy performance is traded from policy entropy, thus bottlenecked by its exhaustion, and the ceiling is fully predictable ($\mathcal{H} = 0, R = -a + b$). Our finding necessitates entropy management for continuous exploration toward scaling compute for RL. To this end, we investigate entropy dynamics both theoretically and empirically. **Our derivation highlights that, the change in policy entropy is driven by the covariance between action probability and the change in logits, which is proportional to its advantage when using Policy Gradient-like algorithms (Williams, 1992).** This is to say, a high-probability action with high advantage would reduce policy entropy, while a rare action with high advantage would increase policy entropy. Empirical study shows that, the values of covariance term and entropy differences matched exactly, supporting the theoretical conclusion. Moreover, the covariance term stays mostly positive throughout training, further explaining why policy entropy would decrease monotonically. Through understanding the mechanism behind entropy dynamics, we motivate to control entropy by restricting the update of high-covariance tokens. Specifically, we propose two simple yet effective techniques, namely Clip-Cov and KL-Cov, which clip and apply KL penalty to tokens with high covariances respectively. Experiments show that these methods encourage exploration, thus helping policy escape entropy collapse and achieve better downstream performance.

本文旨在突破强化学习 (RL) 在大规模语言模型 (LLMs) 推理中面临的主要瓶颈——策略熵的坍塌现象。该现象在大量未干预熵的强化学习实验中持续出现：策略熵在训练初期急剧下降，导致策略模型过度自信。这种探索能力的削弱往往伴随着策略性能的饱和。我们建立了熵 $\mathcal{H}$ 与下游性能 R 之间的转换方程 $R = -a \exp \mathcal{H} + b$ (其中 a, b 为拟合系数)，该经验规律明确表明：策略性能会因熵耗尽而受限，其上限可完全预测 ($\mathcal{H}=0$ 时 $R=-a+b$)。研究结果表明，熵管理是实现强化学习计算规模扩展的持续探索关键。为此，我们从理论与实证双重视角探究熵动态规律。推导过程揭示，策略熵的变化源于动作概率与 logit 变化的协方差，这与使用策略梯度类算法时的优势成正比 (Williams, 1992)。换言之，高概率高优势动作会降低策略熵，而低概率高优势动作则会提升策略熵。实证研究表明，协方差项与熵差异的数值完全吻合，有力支持了理论结论。值得注意的是，协方差项在训练过程中始终保持正值，这进一步解释了策略熵为何会呈现单调递减趋势。通过深入理解熵动态变化的内在机制，我们提出通过限制高协方差标记的更新来调控熵值。具体而言，我们开发了两种简单高效的调控技术——Clip-Cov (协方差剪裁) 和 KL-Cov (协方差KL惩罚)，分别对高协方差标记实施剪裁和KL惩罚。实验结果表明，这些方法能有效促进探索行为，帮助策略避免熵坍塌问题，从而在下游任务中取得更优表现。

“Nature never undertakes any change unless her interests are served by an increase in entropy.”

—Max Planck

*Equal contribution.

†Corresponding Authors.

Contents

1	Introduction	3
2	The Predictable “Collapse” of Policy Entropy	4
2.1	Preliminaries	4
2.2	Settings	5
2.3	A First Glance: Entropy Collapse and Performance Saturation	5
2.4	Fitting the Curves between Entropy and Performance	6
2.5	Understanding the Coefficients	7
2.6	Discussion	7
3	Dynamics Analysis of Policy Entropy	8
3.1	Entropy Dynamics of Softmax Policy	8
3.2	Entropy Dynamics under Policy Gradient / Natural Policy Gradient Algorithms	9
3.3	Empirical Verification	9
4	Entropy Control by Covariance Regularization	10
4.1	Effect of Entropy Regularization	10
4.2	Suppressing Tokens with High Covariances	11
4.3	Experiments	13
4.4	Get Policy Entropy Controlled	14
4.5	Discussion	15
5	Related Work	15
6	Conclusion	15
A	Training Details for Different Models	20
B	More Fitting Results	20
C	Fitting Results of Training with Different Dataset.	20
D	Fitting Results of Instruct Models	20
E	Proof	21
E.1	Useful Lemmas	21
E.2	Proof for Lemma 1	21
E.3	Proof for Proposition 1	22
E.4	Proof for Theorem 2	22

当强化学习 (RL) 应用于近期以推理为核心的大型语言模型 (LLMs) 时, 其突破了狭隘的任务限定: 模型的广泛泛化能力开辟了全新维度, 极大拓展了探索空间。这一转变带来了显著的推理能力提升 (OpenAI, 2024a; DeepSeek-AI等, 2025), 但核心难题依然存在——相较于模仿学习 (预训练与微调), 如何扩展经验学习所需的计算资源 (强化学习) (Silver&Sutton, 2025) 仍是重大挑战。其中最突出的障碍当属策略熵的衰减问题。

1 Introduction

Applied to recent reasoning-centric large language models (LLMs), reinforcement learning (RL) escapes narrow, task-specific confines: the models' sweeping generalization introduces a new axis that vastly enlarges the exploratory landscape. This shift has yielded impressive reasoning gains (OpenAI, 2024a; DeepSeek-AI et al., 2025), yet the dilemma persists—scaling training compute for *learning from experience* (reinforcement learning) (Silver & Sutton, 2025) rather than *imitation learning* (pre-training and finetuning) remains non-trivial. Among the challenges emerges a major obstacle, the diminishment of *policy entropy*.

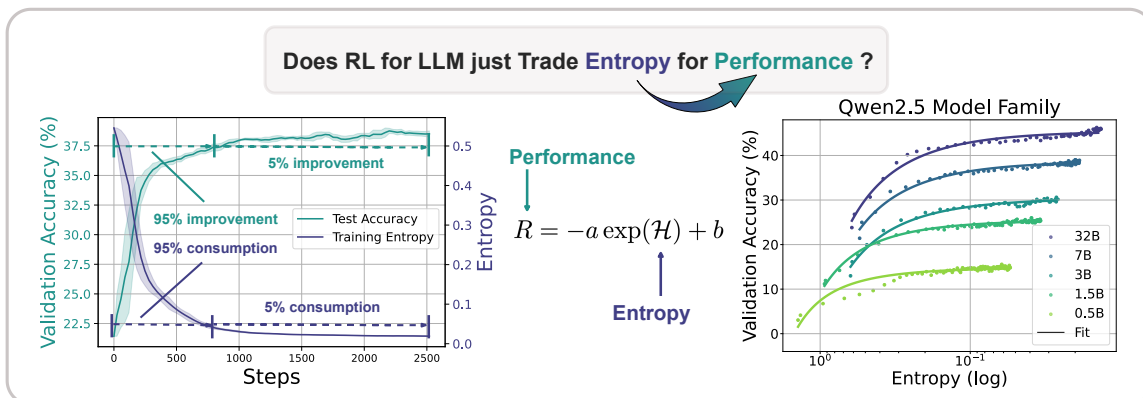


Figure 1: **Left:** Entropy collapse and performance saturation. Over 95% entropy drop/performance gains take place at the early stage of RL training. The model then reaches a plateau with little improvement. **Right:** The predictable relationship between validation performance and policy entropy. Without intervention, the policy “trades” entropy for performance exponentially, showing clear ceilings that hinder further policy enhancement.

The core challenge in RL is the exploitation-exploration trade-off (Sutton, 1988), balancing the reuse of proven strategies against the search for novel ones. For exploration, a key concept quantifying the exploratory potential is *policy entropy*, which measures the uncertainty in the policy’s action selection process. In RL literature, the ability to mitigate the decline of policy entropy is regarded as essential to most algorithms (Williams & Peng, 1991; Williams, 1992; Eysenbach & Levine, 2021), and policy entropy has been intensively steered and actively controlled via regularization (Ziebart et al., 2008; Schulman et al., 2017b; Haarnoja et al., 2018).

For LLMs, while the typical behavior of policy entropy remains largely understudied (Yu et al., 2025; He et al., 2025), we find an intriguing and consistent pattern from broad experiments: Policy entropy sharply declines to near 0 in a few training steps, demonstrating that the policy becomes extremely certain. Consequently, the inability to explore new paths leads to a performance plateau, where the validation performance also struggles to improve at the same time. Quantitatively, we further reveal that, without entropy intervention like entropy loss or KL regularization, **the downstream performance is fully predictable from policy entropy, and the fitted curve is a simple exponential function $R = -a \exp(H) + b$, as shown in Figure 1.** Basically, the policy is trading uncertainty (entropy) for rewards (Yue et al., 2025) in a predictable manner.

This empirical law results in two critical corollaries: (1) Like Scaling Laws (Kaplan et al., 2020; Hoffmann et al., 2022), the exploitation-exploration curve is predetermined given the policy model and training data. This allows us to predict policy performance at the early stage of RL and predict the performance of large models given small models (OpenAI, 2024b) (Sec. 2.4). (2) More importantly, this equation indicates that the upper bound of the policy performance is also deterministic with the exhaustion of policy entropy ($H = 0, R = -a + b$), so the return of scaling training compute for RL could be marginal. What’s worse, naively applying entropy regularization methods are proven ineffective (Sec. 4.1). **In short, scalable RL calls for breaking the entropy bottleneck.**

Solving this issue requires principled understandings of the mechanisms behind this observation, i.e., *why policy entropy decreases monotonically?* To this end, we analyze the dynamics of policy entropy both theoretically and empirically. Our key findings highlight that, for softmax policy like LLMs, the entropy change between two consecutive steps is proportional to the covariance of the log-probability and corresponding logit change for an action (Liu, 2025). Furthermore, under Policy Gradient (Williams, 1992)-like and Natural Policy Gradient (Kakade, 2001)-like algorithms, the logit difference is proportional to the action advantage.

要解决这个问题, 需要从原理层面理解这一现象背后的机制, 即政策熵为何会单调递减? 为此, 我们从理论和实证两个维度对政策熵的动态变化进行了分析。研究发现, 对于类似softmax策略的大型语言模型 (LLM), 连续两个步骤之间的熵变化量与动作对数概率和对应logit变化量的协方差成正比 (刘, 2025)。此外, 在类似政策梯度 (Williams, 1992) 和自然政策梯度 (Kakade, 2001) 的算法中, logit差异与动作优势成正比。

图1: 左图: 熵坍塌与性能饱和。在强化学习训练初期, 超过95%的性能提升伴随着熵的下降。随后模型进入平台期, 性能提升微乎其微。右图: 验证性能与策略熵的可预测关系。若无干预, 策略会以指数级速度用熵换取性能, 这种现象显示出明显的天花板效应, 阻碍了策略的进一步优化。

强化学习的核心挑战在于探索与利用的权衡 (Sutton, 1988), 即在重复使用已验证策略与探索新策略之间寻求平衡。衡量探索潜力的关键指标是策略熵, 它反映了策略在选择行动时的不确定性。在强化学习领域, 如何有效缓解策略熵的衰减被视为大多数算法的核心需求 (Williams&Peng, 1991; Williams, 1992; Eysenbach&Levine, 2021)。为此, 研究者通过正则化技术对策略熵进行了深入调控 (Ziebart等, 2008; Schulman等, 2017b; Haarnoja等, 2018)。

对于大型语言模型 (LLMs), 尽管其策略熵的典型行为仍缺乏深入研究 (Yu等人, 2025; He等人, 2025), 但我们通过广泛实验发现了一个引人注目的稳定模式: 策略熵在训练初期 (约0步) 急剧下降, 表明模型决策变得异常确定。这种固化的决策模式导致探索新路径的能力受限, 最终使模型性能陷入停滞, 验证性能也难以提升。定量分析显示, 若不采用熵损失或KL正则化等熵干预手段, 下游性能完全可由策略熵预测, 拟合曲线呈现简单的指数函数形式 $R = -a \exp(H) + b$ (如图1所示)。本质上, 该策略正以可预测的方式用不确定性 (熵) 换取奖励 (Yue等人, 2025)。

直观来看，具有高优势和高概率的动作会降低策略熵，而罕见动作即使优势显著也会增加熵值。这一理论结论已通过实验结果得到验证。在训练初期，策略在训练数据上表现出高协方差，表明其置信度经过良好校准（Kadavath等人，2022），因此能够安全利用高置信度的轨迹，从而增强信念并降低熵值（Zuo等人，2025；Zhang等人，2025；Agarwal等人，2025）。随着训练进程推进，协方差逐渐下降但仍保持正值，持续拉低策略熵值。

熵动力学分析表明，高协方差会损害可扩展强化学习的性能，这为我们提供了提升策略熵的指导原则——限制高协方差标记的步长。基于此，我们设计了两种熵控制策略：Clip-Cov和KL-Cov，用以替代代理损失函数中的clip和PPO-KL方法（Schulman等人，2017b）。Clip-Cov随机选取协方差为正的少量标记并分离其梯度；而KL-Cov则对协方差最大的标记施加KL惩罚。实验结果表明，通过调整阈值参数可主动控制策略熵。由此，策略模型成功摆脱低熵陷阱，在数学推理任务中表现更优。

Intuitively, an action with high advantage and high probability would reduce policy entropy, while a rare action with a high advantage would increase entropy. This theoretical conclusion is validated by experimental results. At the early stage, the policy demonstrates high covariance on training data, implicating the policy's confidence is well-calibrated (Kadavath et al., 2022), thus can safely exploit trajectories with high confidence, strengthening belief and minimize entropy (Zuo et al., 2025; Zhang et al., 2025; Agarwal et al., 2025). As training progresses, the covariance gradually declines but still maintains positive, continually dragging policy entropy even lower.

The analysis of entropy dynamics demonstrates that, the high covariance is detrimental to scalable RL, which provides us guidelines about uplifting policy entropy—limit the step sizes of high-covariance tokens. We thereby motivate to design two corresponding strategies aiming at entropy control, namely Clip-Cov and KL-Cov, to replace the clip and PPO-KL methods in surrogate loss (Schulman et al., 2017b). Clip-Cov randomly selects a small portion of tokens with positive covariances and detach their gradients. KL-Cov, on the other hand, applies KL penalty on tokens with the largest covariances. Experiment results show that, we can actively control policy entropy by tuning threshold parameters. Consequently, the policy model escapes the low entropy trap and achieves better performance on mathematical reasoning.

It has become a common belief that the training computes will shift from pre-training to post-training, especially RL (Silver & Sutton, 2025). On the road to scale RL with increased compute, it is pivotal to keep exploration, find novel paths, and continuously improve, thus utilizing the compute even better (Sutton, 2019). Our work provides an entropy-centric perspective for this purpose, which hopefully could be beneficial for understanding, analyzing, and advancing the underlying mechanisms of RL for LLMs.

学界普遍认为，计算资源将从预训练阶段转向后训练阶段，尤其在强化学习领域（Silver&Sutton, 2025）。在通过提升计算能力扩展强化学习应用的过程中，保持探索性、发现新路径并持续优化至关重要，这能更高效地利用计算资源（Sutton, 2019）。我们的研究为此提供了以熵为核心的视角，有望为理解、分析和推进大型语言模型（LLMs）强化学习的底层机制提供有益见解。

2 The Predictable “Collapse” of Policy Entropy

政策熵的可预测“崩溃”

在强化学习过程中，若不采用熵或KL正则化等干预措施，策略熵会以可预测的方式被用于奖励计算。验证奖励R与策略熵H之间的经验性定量关系可表示为R

TAKEAWAY

Without intervention, e.g., entropy or KL regularization, policy entropy is *traded for reward predictably* during RL. The empirical quantitative relationship between validation reward R and policy entropy $\mathcal{H}$ can be expressed as $R = -a \exp(\mathcal{H} + b)$. Then:

- It suggests the predictability of policy performance from entropy; 系数a、b反映了策略和数据的内在特征；
- The coefficients a, b reflect internal characteristics of policy and data;
- The performance ceiling of the policy ($\mathcal{H} = 0, R = -a + b$) greatly burdens the scalability of RL for LLM reasoning. 该策略的性能上限（ $\mathcal{H}=0, R= -a+b$ ）严重制约了强化学习在大型语言模型推理中的扩展能力。

本节成功解答了研究问题：在强化学习过程中，大型语言模型的策略熵通常呈现何种行为？通过大量实验，我们观察到持续存在的“熵坍塌”现象——这种现象在强化学习中并不理想，因为策略会难以探索新路径（第2.3节）。我们进一步拓展了策略熵与验证性能之间的经验可预测关系（第2.4节），并对方程中的系数进行了分析（第2.5节）。

In this section, we manage to answer the research question: *What is the typical behavior of policy entropy during RL for LLMs?* Through extensive experiments, we observe a consistent “entropy collapse” phenomenon, which is not favored in RL since the policy would struggle to explore new paths (Sec. 2.3). We further extend it to an empirically predictable relation between policy entropy and validation performance (Sec. 2.4), and analyze the coefficients in the equation (Sec. 2.5).

2.1 Preliminaries

我们通过在数学和编程等可验证任务上使用强化学习（RL）来调优语言模型（LLM），以防止奖励黑客攻击。给定输入提示 x ，语言模型 π_θ 会自回归生成输出序列 y ，该序列由 T 个标记 $\{y_1, \dots, y_T\}$ 组成。我们利用强化学习优化语言模型策略，以最大化验证者提供的累积奖励 r ：

We consider tuning LLMs with RL on verifiable tasks, such as math and coding, to avoid reward hacking. Given an input prompt x , an LLM π_θ autoregressively generates an output sequence y , which consists of T tokens $\{y_1, \dots, y_t, \dots, y_T\}$. We use RL to optimize the LLM policy to maximize the cumulative rewards r received from the verifier:

$$\max_{\theta} J(\theta) := \mathbb{E}_{x \sim \mathcal{D}, y \sim \pi_{\theta}(x)} [r(y)] \quad (1)$$

where $\mathcal{D}$ is the training distribution.

To optimize the objective function, it is a common practice to use the Policy Gradient algorithm (Williams, 1992) for gradient estimation: 为优化目标函数，通常采用策略梯度算法（Williams, 1992）进行梯度估计：

$$\nabla_{\theta} J(\theta) = \mathbb{E}_{x \sim \mathcal{D}, y \sim \pi_{\theta}(x)} \left[\sum_{t=0}^T \nabla_{\theta} \log \pi_{\theta}(y_t | y_{<t}) A_t \right]. \quad (2)$$

Here A_t is the advantage of current action and is implemented differently across RL algorithms. If we only have rewards for the full trajectory, the vanilla REINFORCE algorithm (Williams, 1992) directly defines

此处的 A_t 即当前动作的优势，其在强化学习算法中的实现方式各不相同。若仅获得完整轨迹的奖励，标准强化学习算法（Williams, 1992）将直接定义

2.2 Settings

$A_t = r(y)$. To reduce variance, GRPO (Shao et al., 2024) and RLOO (Kool et al., 2019; Ahmadian et al., 2024) further incorporates group-wise normalization. For example, GRPO samples K responses for each prompt and estimates the advantage as follows:

$$A_t = \frac{r(y) - \text{mean}(r(y^{1:K}))}{\text{std}(r(y^{1:K}))}. \quad (3)$$

To handle off-policy data and constrain the policy update size, PPO (Schulman et al., 2017b) proposed to optimize surrogate loss. 为处理离策略数据并控制策略更新规模，PPO (Schulman 等人, 2017b) 提出优化替代损失函数。

$$L(\theta) = \mathbb{E}_t \left[\min \left(\frac{\pi_\theta(y_t | y_{<t})}{\pi_{\theta_{\text{old}}}(y_t | y_{<t})} A_t, \text{clip} \left(\frac{\pi_\theta(y_t | y_{<t})}{\pi_{\theta_{\text{old}}}(y_t | y_{<t})}, 1 - \epsilon, 1 + \epsilon \right) A_t \right) \right] \quad (4)$$

Policy entropy. Policy entropy quantifies the predictability or randomness inherent in the actions selected by an agent. Given policy model π_θ , training dataset $\mathcal{D}$, we measure the **average token-level entropy** of the policy model on training data, which is defined as follows:

$$\mathcal{H}(\pi_\theta, \mathcal{D}) = -\mathbb{E}_{\mathcal{D}, \pi_\theta} [\log \pi_\theta(y_t | y_{<t})] = -\frac{1}{|\mathcal{D}|} \sum_{x \in \mathcal{D}} \frac{1}{|y|} \sum_{t=1}^{|y|} \mathbb{E}_{y_t \sim \pi_\theta} [\log \pi_\theta(y_t | y_{<t}, x)] \quad (5)$$

Such entropy quantifies the uncertainty level of the policy on current prompts and is widely adopted in maximum entropy RL as a regularization term (Ziebart et al., 2008; Haarnoja et al., 2017, 2018). In practice, we calculate the entropy for each batch of prompts randomly sampled from the training dataset.

2.2 Settings 我们采用统一方案，涵盖4个模型家族和11个基础模型（参数量0.5-32B），包含数学和编程两个可验证任务领域，这些任务在8个公开基准测试中进行评估，并采用4种强化学习算法。

We adopt a unified protocol covering 4 model families and 11 base models (0.5-32B parameters), verifiable task domains of math and coding evaluated on 8 public benchmarks, and 4 RL algorithms.

Models. The models adopted in our experiments span 4 model families and 11 widely used open-source base models. Specifically, these consist of the Qwen2.5 family (Qwen2.5-0.5B, 1.5B, 3B, 7B, 32B) (Qwen et al., 2025), the Mistral family (Mistral-7B-v0.3 (Jiang et al., 2023), Mistral-Nemo-Base-2407 (MistralAI-NeMo), Mistral-Small-3.1-24B-Base-2501 (MistralAI-Small-3)), the LLaMA family (LLaMA3.2-3B (Meta-Llama-3.2), LLaMA3.1-8B (Meta, 2024)), and DeepSeek-Math-7B-Base (Shao et al., 2024)).

Tasks and datasets. We primarily focus on math and coding problems with verifiable rewards. Due to inherent differences in the initial reasoning abilities between model families, we train models using data of different difficulty levels to stabilize the RL process. Details can be found in Appendix A. Meanwhile, we use the same data during downstream performance evaluation to maintain consistency. For math tasks, the evaluation datasets include MATH500 (Hendrycks et al., 2021), AIME 2024 (Li et al., 2024), AMC (Li et al., 2024), OlympiadBench (He et al., 2024), and OMNI-MATH (Gao et al., 2024). For code tasks, we split the testset of Euris-2-RL-Code (Cui et al., 2025) and KodCode (Xu et al., 2025).

RL training. We start RL from the base models following the “Zero” setting (DeepSeek-AI et al., 2025) with the veRL framework (Sheng et al., 2024). For RL algorithms, we employ GRPO (Shao et al., 2024), REINFORCE++ (Hu, 2025), and PRIME (Cui et al., 2025). For hyperparameters, we use a learning rate of 5×10^{-7} for the policy model and 10^{-6} for the implicit PRM (Yuan et al., 2025) in PRIME. Both policy and PRMs use a batch size of 256 and a micro-batch size of 128. The rollout stage collects 512 prompts with 8 sampled responses. By default, we set the reference KL divergence coefficient to 0. The ϵ in policy loss (Equation 4) is 0.2. We filter out prompts that receive all correct or incorrect responses.

2.3 A First Glance: Entropy Collapse and Performance Saturation

Across all experiments, we observe a consistent pattern: The policy entropy encounters a sharp drop at the very beginning of the training, and it keeps declining monotonically to near zero. Meanwhile, the policy’s

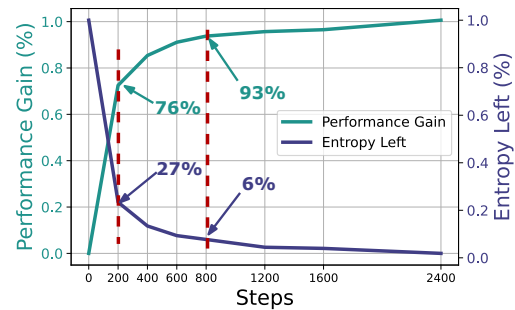


Figure 2: Avg. entropy consumption/performance gain (%) in 11 RL runs with different models.

策略熵。策略熵用于量化智能体选择行为时所具有的可预测性或随机性。给定策略模型 π_θ 和训练数据集 $\mathcal{D}$ ，我们通过计算该策略模型在训练数据集上的平均标记级熵来衡量其复杂程度，具体定义如下：该熵值用于量化智能体对当前输入的不确定性程度，是最大熵强化学习中常用的正则化项 (Ziebart 等人, 2008; Haarnoja 等人, 2017, 2018)。具体操作中，我们会从训练数据集中随机抽取一批输入样本，分别计算其熵值。

任务与数据集。我们主要针对数学和编程类问题进行研究，这些问题都具有可验证的奖励机制。考虑到不同模型家族在初始推理能力上的固有差异，我们采用不同难度级别的数据进行训练以稳定强化学习过程（具体细节参见附录A）。同时，我们在下游性能评估中使用相同数据以保持一致性。数学任务的评估数据集包括 MATH500 (亨德里克斯等人, 2021)、AIME 2024 (李等人, 2024)、AMC (李等人, 2024)、OlympiadBench (何等人, 2024) 和 OMNI-MATH (高等人, 2024)。编程任务方面，我们拆分了 Euris-2-RL-Code (崔等人, 2025) 和 KodCode (徐等人, 2025) 的测试集。

2.4 Fitting the Curves between Entropy and Performance

该政策的验证性能呈现反向趋势：训练初期快速提升，随后趋于稳定。

validation performance presents an inverse trend, where it rises rapidly when training starts, and then saturates at a certain level.

Figure 2 illustrates the average normalized entropy consumption/performance gain in percentage throughout 2400-gradient step RL runs with 11 different models. We can see that 73% of the entropy consumption and 76% of the performance gain occurred in just the first 200 gradient steps (1/12 of training), and the first 800 (1/3) steps account for over 93% performance gains together with 94% entropy losses. This means that over 2/3 of the training steps yielded marginal returns.

2.4 Fitting the Curves between Entropy and Performance 熵与性能之间的曲线拟合

Motivated by the observed entropy collapse phenomenon, we conduct a more detailed quantitative analysis. Through extensive experiments, we find the downstream performance (accuracy) and entropy can be fitted in the exponential function:

$$R = -a \exp(\mathcal{H}) + b, \quad (6)$$

where R represents the validation performance and $\mathcal{H}$ is entropy. The fitting results of different model families with GRPO are presented in Figure 3 and 4. It is worth noting that, the fitted curves precisely describe the performance-entropy relationships over all conducted experiments, with models spanning all kinds of sizes, families, and different tasks. Only 2 coefficients are needed for fitting the curve of over 200 data points, showing a high degree of regularity. The fitting results of instruct models and training on different datasets can be found in Appendix B.

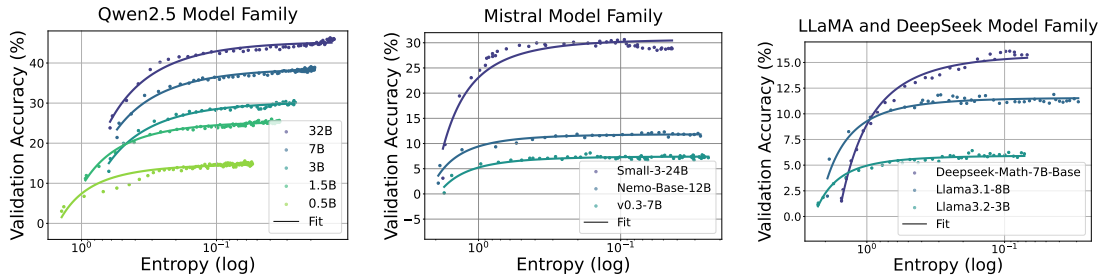


Figure 3: Fitting curves between policy entropy and validation performance on math task. We conduct validation every 4 rollout steps until convergence.

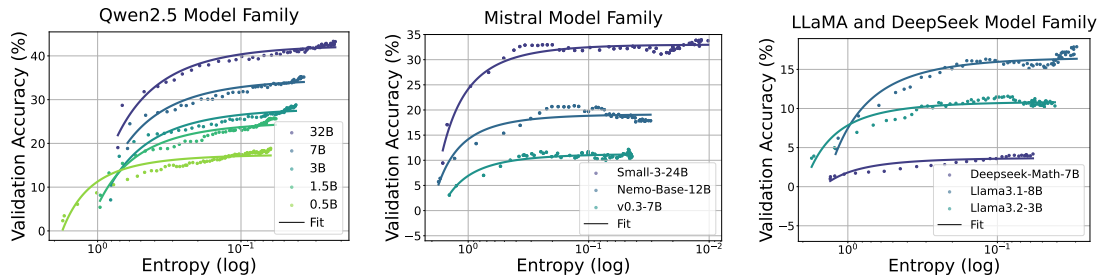


Figure 4: Fitting curves between policy entropy and validation performance in coding task. We conduct validation every 4 rollout steps until convergence.

Predicting late stage from early stage. As we can precisely fit a curve between policy entropy and validation performance, one straightforward application of this fitting is to predict policy performance at low entropy with observations from high entropy data points. To verify that the functional form can be applied at the early stage of RL training, we take a step further by fitting the function within limited training steps and using the fitted function to predict the final performance.

Take Qwen2.5 family as an example, we fit the function form with coefficients a and b using only the first 36 training steps. Using this function, we perform an advance prediction for the subsequent 200 training steps.

图2展示了11个不同模型在2400步梯度下降强化学习训练中，平均归一化熵消耗与性能增益的百分比变化。数据显示，前200步（占训练周期的1/12）就贡献了73%的熵消耗和76%的性能提升，而前800步（占1/3）的训练阶段，不仅带来了超过93%的性能增益，还导致了94%的熵损失。这意味着超过三分之二的训练步骤仅带来边际效益。

其中R代表验证性能，H为熵值。图3和图4展示了不同模型家族在GRPO下的拟合结果。值得注意的是，拟合曲线精准描述了所有实验中性能与熵值的关系，涵盖各类规模、家族及不同任务的模型。仅需两个系数即可拟合包含200多个数据点的曲线，显示出高度规律性。指令模型在不同数据集上的拟合结果详见附录B。

受熵坍塌现象的启发，我们进行了更深入的定量分析。通过大量实验发现，下游性能（准确率）与熵值可用指数函数进行拟合：

从早期阶段预测晚期阶段。由于我们能够精确拟合策略熵与验证性能之间的曲线，这种拟合方法的一个直接应用就是利用高熵数据点的观测结果来预测低熵条件下的策略性能。为了验证该函数形式是否适用于强化学习训练的早期阶段，我们进一步尝试在有限训练步骤内完成函数拟合，并利用拟合后的函数来预测最终性能。

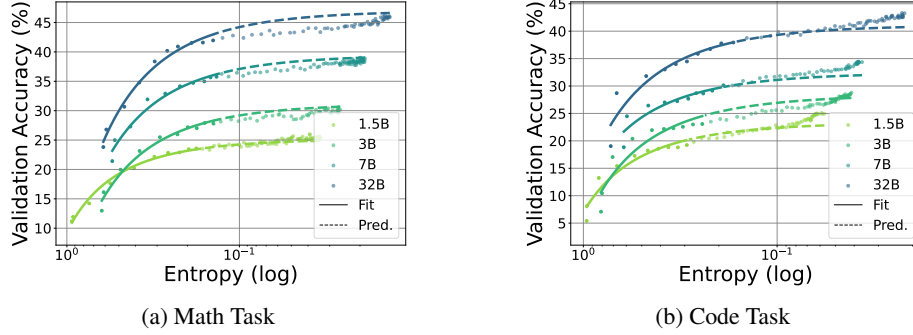


Figure 5: Predicting the final performance of Qwen2.5 family with only 15% training steps with the fitted function. The average RMSE is 0.9% and 1.2% for all predicted steps, 0.5% and 1.9% for final step performance, respectively.

As shown in Figure 5, for the math and coding task, we achieve an average Root Mean Square Error (RMSE) of 0.9% and 1.2% during prediction, 0.5% and 1.9% for final performance, respectively. It suggests that the late stage performance of the policy can be estimated early in training, without the need to run the full RL process. Moreover, we can also obtain the final performance of the policy when it becomes static. With $\mathcal{H} = 0$, $R = -a + b$, which is the upper bound of the policy given the training data.

2.5 Understanding the Coefficients

The coefficients are algorithm-irrelevant. We investigate whether different RL algorithms would affect the fitted function. Figure 6 plots the fitted curves with GRPO, RLOO, and PRIME. We find that, although these algorithms apply distinct advantage estimation methods, they do not influence the fitted entropy-performance function. This indicates that the coefficients a, b reflect some intrinsic properties of the policy model and training data.

Predicting coefficients when scaling parameters. Taking a closer look at the coefficients a, b , their meanings are clear. By differentiating the equation, we derive $dR/d\mathcal{H} = -a \exp(\mathcal{H})$, which means a is the rate at which the model converts entropy into downstream performance. Also, as stated above, $-a + b$ is the maximum validation score the model can achieve when entropy is fully depleted. Intuitively, a, b should be relevant with model sizes, where larger models could trade entropy for reward more efficiently, as well as achieve higher performance.

To validate this, we again adopt Qwen2.5 model family, since they have similar architecture and undergo similar training process. In Figure 7, we plot the model parameter count (without embedding) versus a, b on math and coding tasks. It is observed that, both a and b vary smoothly with policy size at a log-linear rate. This log-linear relationship between model sizes and coefficients is also observed in Gao et al. (2022). It allows us to extrapolate the coefficients of larger models based on the training dynamics of smaller models, extending the predictability to the dimension of model sizes. In other words, it enables us to predict the final performance of larger LMs through RL training without actually training them, once we train smaller models within the same family and get their coefficients. Figure 13 also illustrates that the coefficients are related with training data.

2.6 Discussion

The predictability. To now, we have established predictability between (1) policy performance and entropy; (2) coefficients in (1) and model sizes. Such predictability reminds us of Scaling Laws for language models (Kaplan et al., 2020; Hoffmann et al., 2022) and RLHF (Gao et al., 2022). It seems that, RL with LLMs keeps trading entropy for reward throughout training. However, other works that adopt different policy models (Luo et al., 2025) or use off-policy data (Yan et al., 2025) observed distinct entropy patterns. Therefore, this predictability

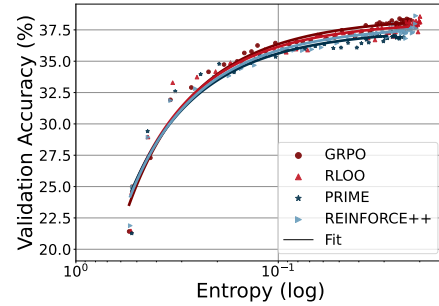


Figure 6: Training Qwen2.5-7B with different RL algorithms.

系数与算法无关。我们研究不同强化学习算法是否会影响拟合函数。图6展示了采用GRPO、RLOO和PRIME三种算法的拟合曲线。研究发现，尽管这些算法采用了不同的优势估计方法，但它们对拟合的熵-性能函数没有影响。这表明系数 a, b 反映了策略模型和训练数据的内在特性。

在参数缩放过程中预测系数时，仔细观察系数 a, b 的含义会发现：通过对方程求导可得 $dR/d\mathcal{H} = -a \exp(\mathcal{H})$ ，这表明 a 代表模型将熵转化为下游性能的转换速率。正如前文所述， $-a + b$ 则是模型在熵完全耗尽时所能达到的最大验证分数。直观来看， a 和 b 应与模型规模相关——规模更大的模型能更高效地用熵换取奖励，同时也能取得更高的性能表现。为验证这一结论，我们再次采用Qwen2.5模型家族，因其架构相似且训练流程相近。图7展示了数学和编程任务中模型参数量（不含嵌入层）随 a, b 参数的变化趋势。观察发现， a 和 b 均以对数线性速率随策略规模变化，这种模型规模间的对数线性关系。

可预测性。目前已建立以下可预测性关系：(1) 政策表现与熵值之间的关联；(2) (1)中系数与模型规模之间的对应关系。这种可预测性让人联想到语言模型的缩放定律（Kaplan等人，2020；Hoffmann等人，2022）以及RLHF（Gao等人，2022）。研究表明，使用大型语言模型进行强化学习时，其在训练过程中始终在熵值与奖励之间进行权衡。不过，采用不同策略模型（Luo等人，2025）或使用离策略数据（Yan等人，2025）的研究则观察到了不同的熵值变化模式。

高等人（2022）的研究也发现了这种关联性。该方法通过分析小型模型的训练动态，使我们能够推算大型模型的系数，从而将可预测性扩展到模型规模维度。换句话说，只要在同一家族内训练小型模型并获取其系数，就能通过强化学习训练预测大型语言模型的最终性能，而无需实际训练。图13还表明，这些系数与训练数据存在显著关联。

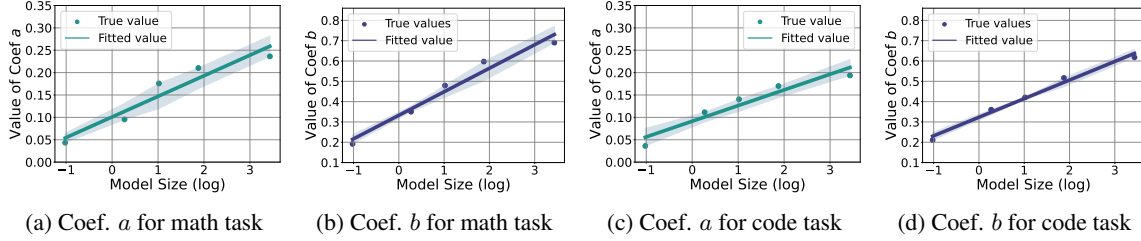


Figure 7: Fitted curves between coefficients and model sizes of Qwen2.5 model family. The model sizes are parameter counts (B) without embeddings. a, b are obtained from experiments in Sec. 2.4. We use log-linear function to fit the curve.

这种可预测性并非绝对普遍，我们呼吁对不同条件下的熵行为进行更深入的分析。

is not arguably universal, and we call for a more in-depth analysis of the entropy behavior under different conditions.

The ceiling. There is an intensive discussion questioning whether RL merely elicits the latent behaviors that were already learned in pre-training, thus cannot break the ceiling of the base model (Yue et al., 2025). Our results conditionally support this claim that, **if policy entropy diminishes, the ceiling not only exists, but also can be predicted. However, we argue that it is not the intrinsic limitation of RL that sets up the ceiling, but the entropy mechanism of LLMs leads to the result. Although LLMs provide us with strong policy priors, their output distributions are also narrowed, which might hinder the exploration potential during RL.**

3 Dynamics Analysis of Policy Entropy

TAKEAWAY

- (1) For softmax policy including LLMs, the change of policy entropy is determined by the **covariance** between the log-probability and the change in logits of actions.
- (2) For Policy Gradient and Natural Policy Gradient, the change in logits is proportional to the action advantage, meaning that a high covariance leads to a quick decrease of policy entropy, as observed in RL for LLM reasoning.

We have unveiled that the entropy collapse issue will greatly obstacle RL scaling for LLM reasoning. To solve it, we need a more principled understanding of the *dynamics of policy entropy*, i.e., when will entropy decrease and when will entropy increase. In this section, we focus on the entropy dynamics, especially **the step-wise entropy difference $\mathcal{H}(\pi_{\theta}^{k+1}) - \mathcal{H}(\pi_{\theta}^k)$** . We start from a theoretical perspective, firstly derive the first-order derivative of entropy for softmax policy in Sec. 3.1, then extend further in Policy Gradient and Natural Policy Gradient algorithms (Sec. 3.2). Afterwards, we validate our conclusion with experiments (Sec. 3.3).

3.1 Entropy Dynamics of Softmax Policy

For step k , we try to calculate the **entropy difference before and after one step parameter update, i.e., $\mathcal{H}(\pi_{\theta}^{k+1})$ and $\mathcal{H}(\pi_{\theta}^k)$** . For this, we first consider an intrinsic property of LLMs that they are **softmax policies**, which means the policies are parameterized by

$$\pi_{\theta}(a|s) = \frac{\exp(z_{s,a})}{\sum_{a' \in \mathcal{A}} \exp(z_{s,a'})}. \quad (7)$$

Here $s \sim d_{\pi_{\theta}}$ and $a \sim \pi_{\theta}^k(\cdot|s)$ represent state and action, $z_{s,a}$ is the output logit of action a given state s . For any softmax policy, we have the following Lemma:

Lemma 1 (Entropy difference of softmax policy) (Proof in Appendix E.2, adapted from Liu (2025)) **Assume that policy π_{θ} is a tabular softmax policy, where each state-action pair (s, a) is associated with an individual logit parameter $z_{s,a} = \theta_{s,a}$, the difference of policy entropy given state s between two consecutive steps under first-order approximation satisfies**

$$\mathcal{H}(\pi_{\theta}^{k+1}) - \mathcal{H}(\pi_{\theta}^k) \approx \mathbb{E}_{s \sim d_{\pi_{\theta}}} [\mathcal{H}(\pi_{\theta}^{k+1}|s) - \mathcal{H}(\pi_{\theta}^k|s)] \approx \mathbb{E}_{s \sim d_{\pi_{\theta}}} \left[-\text{Cov}_{a \sim \pi_{\theta}^k(\cdot|s)} (\log \pi_{\theta}^k(a|s), z_{s,a}^{k+1} - z_{s,a}^k) \right]$$

其中 $s \sim d_{\pi_{\theta}}$ 和 $a \sim \pi_{\theta}(\cdot|s)$ 分别表示状态和动作， $z_{s,a}$ 是给定状态 s 时动作 a 的输出 logit。对于任意 softmax 策略，我们有以下引理：

引理1 (softmax策略的熵差) (证明见附录E.2, 改编自Liu (2025)) 假设策略 π_{θ} 为表格式 softmax 策略，其中每个状态-动作对 (s, a) 对应一个独立的 logit 参数 $z_{s,a} = \theta_{s,a}$ 。在一级近似条件下，策略在状态 s 下连续两步的熵差满足

在低阶近似条件下，给定状态 s 时，两个连续步骤的策略熵差异满足

关于智能体天花板问题，学界存在激烈争论：强化学习 (RL) 是否仅能激活训练前已习得的潜在行为，因而无法突破基础模型的天花板 (Yue et al., 2025)。我们的研究结果有条件地支持这一观点——当策略熵值降低时，天花板不仅存在，还能被预测。但需要强调的是，天花板的形成并非源于强化学习的内在局限，而是由大型语言模型 (LLMs) 的熵机制所导致。尽管 LLMs 能提供强大的策略先验，但其输出分布的局限性可能抑制强化学习过程中的探索潜力。

(1) 对于包含大语言模型 (LLM) 的 softmax 策略，其策略熵的变化由动作的对数概率与 logit 值变化之间的协方差决定。(2) 在策略梯度和自然策略梯度中，logit 值的变化与行动优势成正比，这意味着高协方差会导致策略熵快速下降，这与在 RL 中对大模型推理的观察结果一致。

我们发现，熵坍缩问题将严重阻碍大规模语言模型推理中的强化学习扩展。要解决这一难题，需要更系统地理解策略熵的动态变化规律——即熵何时会减少、何时会增加。本节重点研究熵动态特性，特别是分步熵差 $\mathcal{H}(\pi_{\theta}^{k+1}) - \mathcal{H}(\pi_{\theta}^k)$ 。我们从理论层面展开研究：首先在第3.1节推导 softmax 策略的熵一阶导数，接着在第3.2节进一步拓展到策略梯度和自然策略梯度算法。最后通过实验验证了我们的结论 (第3.3节)。

其中，输出logit在第k步与第k+1步之间的变化量。该引理表明，策略熵的变化量近似等于动作对数概率与logit变化量之间的负协方差。具体而言，当动作a在策略更新前获得较高概率，且更新后其对应的logit值也持续上升时，该动作将降低策略熵。

3.2 Entropy Dynamics under Policy Gradient / Natural Policy Gradient Algorithms

表示第k步与第k+1步之间输出logit值的变化量。

Here $z_{s,a}^{k+1} - z_{s,a}^k$ is the change in the output logits between step k and step $k+1$. This Lemma indicates that, the change of policy entropy approximately equals the negative covariance between log-probability of the action and the change of logits. That is to say, when an action a receives a high probability from the policy before updating, and its corresponding logit is also increasing after updating, then it will decrease the policy entropy.

根据引理1，输出logit值的阶梯式差异 z_{k+1}^k, z_k ，会改变熵值，这与所采用的具体训练算法相关。本文进一步推策略梯度/自然策略梯度算法下的动力学特性

3.2 Entropy Dynamics under Policy Gradient / Natural Policy Gradient Algorithms

From Lemma 1, the step-wise difference of output logits $z_{s,a}^{k+1} - z_{s,a}^k$ contributes to change of entropy, which is related with the specific training algorithm in use. Here, we further derive the logits change under Policy Gradient (Williams, 1992) and Natural Policy Gradient (Kakade, 2001) algorithms.

Assuming that we are updating the actor policy via Policy Gradient, then $z_{s,a}^{k+1} - z_{s,a}^k = -\eta \cdot \nabla_z J(\theta)$, where $J(\theta)$ denotes the objective function and η denote the learning rate. $\nabla_z J(\theta)$ is calculated with Eq. 2, we have the following proposition:

Proposition 1 (Difference of policy logits in vanilla policy gradient) (Proof in Appendix E.3) Let the actor policy π_θ be a tabular softmax policy and updated using Eq. 2 via gradient backtracking with learning rate η , the difference of $z_{s,a}$ between two consecutive steps satisfies

$$z_{s,a}^{k+1} - z_{s,a}^k = \eta \pi_\theta(a|s) A(s,a)$$

Applying Proposition 1 to Lemma 1, we can further describe entropy change with the following theorem:

Theorem 1 (Entropy change under policy gradient) Let the actor policy π_θ be a tabular softmax policy, and π_θ be updated via vanilla policy gradient, the difference of policy entropy given state s between two consecutive steps satisfies

$$\mathcal{H}(\pi_\theta^{k+1}|s) - \mathcal{H}(\pi_\theta^k|s) \approx -\eta \cdot \text{Cov}_{a \sim \pi_\theta^k(\cdot|s)} (\log \pi_\theta^k(a|s), \pi_\theta^k(a|s) \cdot A(s,a))$$

Theorem 1 reveals how policy entropy changes under the policy gradient method. Intuitively, an action a receives both high/low probability and high/low advantage would lower the entropy, and vice versa. At the early stage, the policy demonstrates high covariance on training data, implicating the policy's confidence is well-calibrated (Kadavath et al., 2022), thus can safely exploit trajectories with high confidence, strengthening belief and minimize entropy (Zuo et al., 2025; Zhang et al., 2025; Agarwal et al., 2025).

Liu (2025) conducted derivation for Natural Policy Gradient. We present the conclusion below.

Theorem 2 (Entropy change under natural policy gradient) (Proof in Appendix E.4) Let the actor policy π_θ be a tabular softmax policy, and π_θ is updated via natural policy gradient (Kakade, 2001), the difference of policy entropy given state s between two consecutive steps satisfies

$$\mathcal{H}(\pi_\theta^{k+1}|s) - \mathcal{H}(\pi_\theta^k|s) \approx -\eta \cdot \text{Cov}_{a \sim \pi_\theta^k(\cdot|s)} (\log \pi_\theta^k(a|s), A(s,a))$$

Conclusion. From Theorem 1 and Theorem 2, we obtain the intuitive insight that, in principle, a strong positive correlation between the action probability $P(a)$ under the current policy and the corresponding advantage value $A(a)$, on average, leads to a decrease in policy entropy. Conversely, a negative correlation tends to increase the entropy. This deeper understanding of the dynamics of policy entropy provides a theoretical foundation for designing practical strategies for entropy control in policy optimization.

3.3 Empirical Verification

The preceding theoretical analysis provides insights about the factors influencing policy entropy when optimizing a softmax policy via a policy gradient algorithm. In this section, we conduct experiments to validate the theoretical conclusion, specifically, Theorem 1.

Settings. We apply GRPO with policy gradient, i.e. on-policy learning without PPO surrogate loss, on Qwen2.5-7B. In this context, we adopt the bandit setting where the prompt x is the state, and whole response y is the action. Then the covariance term becomes:

$$\text{Cov}_{a \sim \pi_\theta(\cdot|s)} (\log \pi_\theta(a|s), \pi_\theta(a|s) \cdot A(s,a)) = \text{Cov}_{y \sim \pi_\theta(\cdot|x)} (\log \pi_\theta(y|x), \pi_\theta(y|x) \cdot A(y,x)) \quad (8)$$

我们采用多臂老虎机模型，其中提示 x 表示状态，完整响应 y 表示动作。此时协方差项可表示为：

假设我们通过策略梯度更新行为者策略，那么 $z_{k+1}^k, z_k = \eta \cdot \nabla_z J(\theta)$ ，其中 $J(\theta)$ 表示目标函数， η 表示学习率。根据公式2计算 $\nabla_z J(\theta)$ 后，我们得到以下命题：

命题1（标准策略梯度中策略对数几率的差）（证明详见附录E.3）设行为者策略 π_θ 为表格式softmax策略，通过公式2采用梯度回溯法（学习率 η ）进行更新，则连续两个步骤间的 z 差异满足

定理1（策略梯度下的熵变化）：若行为者策略 π_θ 为表格式softmax策略，并通过标准策略梯度进行更新，则在状态 s 下，连续两个步骤的策略熵差满足

定理1揭示了策略梯度方法下策略熵的变化规律。直观来看，当某个动作同时具有高/低概率和高/低优势时，熵值会降低；反之则会升高。在训练初期，策略在训练数据上表现出较高的协方差，这表明策略的置信度已得到良好校准（Kadavath等人，2022）。因此，策略能够安全地利用高置信度的轨迹，从而增强信念并降低熵值（Zuo等人，2025；Zhang等人，2025；Agarwal等人，2025）。

定理2（自然策略梯度下的熵变化）（证明详见附录E.4）：当智能体policy π_θ 采用表格式softmax策略，且通过自然策略梯度（Kakade, 2001）更新策略 π_θ 时，连续两个步骤中状态 s 下的策略熵差满足

结论。根据定理1和定理2，我们得出一个直观结论：原则上，当前策略下的动作概率 $P(a)$ 与对应优势值 $A(a)$ 之间存在强正相关性时，平均而言会导致策略熵下降；反之，负相关性则会增加熵值。这种对策略熵动态变化的深入理解，为设计熵控制策略提供了理论基础，从而为策略优化中的熵管理提供实践指导。

During training, we calculate the group-wise covariance for each prompt, and average across a batch of prompts. We further normalize the log-prob by the length of the response, which gives

$$\log \pi_{\theta}(\mathbf{y} \mid \mathbf{x}) = \frac{1}{|\mathbf{y}|} \left[\sum_{t=1}^{|\mathbf{y}|} \log \pi_{\theta}(y_t \mid \mathbf{y}_{<t}, \mathbf{x}) \right] \quad (9)$$

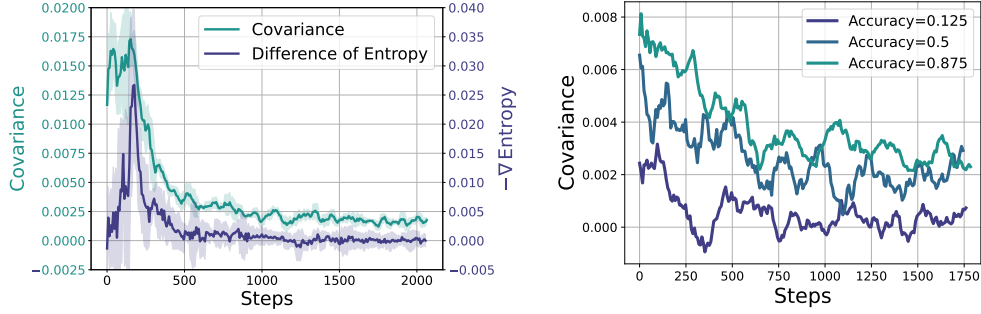


Figure 8: *Left*: The dynamics of policy entropy (step-wise entropy difference) and covariance during on-policy GRPO training. They show similar trends as expected from the theoretical results. *Right*: Different prompt groups show distinct covariance behaviors. Easier prompts with higher accuracy have higher covariances as well, while harder prompts have lower covariances.

实验结果。我们基于前述推导的 $Cov(\cdot)$ 和 $H(\pi_{\theta})$ 两个关键指标记录了整个训练周期的数据，尝试分析它们之间的关系和动态变化。符号 $\propto$ 表示成正比。这意味着熵的变化率与协方差之间存在线性关系

Experiment results. We record two key metrics based on the aforementioned derivation $Cov(\cdot)$ and $H(\pi_{\theta})$ across the training period and try to analyse their relationship and dynamics.

1) **Similarity of dynamic between $Cov(\cdot)$ and $-d(H)$.** According to Theorem 1, we have the theoretical result $-d(H) \propto Cov(\cdot)$. As shown in LHS of Figure 8, the empirical curves of $-d(H)$ and $Cov(\cdot)$ exhibit highly similar dynamics, providing strong empirical support for the theorem. In particular, during the early stages of training, entropy H decreases rapidly, accompanied by a relatively large and positive $Cov(\cdot)$. As the RL training progresses, the entropy decay slows down, and $Cov(\cdot)$ stabilizes at a lower level, reflecting the gradual convergence of the policy. It can also be observed that $Cov(\cdot)$ remains positive along the training process, thus resulting in a persistent decrease in entropy.

2) **Variation in $Cov(\cdot)$ dynamics across examples of different difficulty.** Leveraging our group-based sampling strategy, we categorize training examples by difficulty based on their accuracy. RHS of Figure 8 illustrates the covariance curves for three difficulty groups, where lower accuracy indicates higher difficulty. We observe that $Cov(\cdot)$ tends to be smaller in magnitude for harder examples, which aligns with intuition: when the model struggles to learn, high-probability actions are not reliably associated with higher expected returns. In contrast, for easier examples, where the model is more confident and better calibrated, $Cov(\cdot)$ tends to be higher, indicating a stronger alignment between action probabilities and advantage estimates.

协方差正则化下的熵控制

4 Entropy Control by Covariance Regularization

我们可以通过限制高协方差tokens的更新来控制策略熵，例如采用剪切 (Clip-Cov) 或KL惩罚 (KL-Cov)。这能防止策略出现熵塌缩，从而促进探索。

TAKEAWAY

We can control policy entropy by restricting the update of tokens with high covariances, e.g., clipping (Clip-Cov) or applying KL penalty (KL-Cov). These simple techniques prevent policy from entropy collapse thus promoting exploration.

The analysis of entropy dynamics gives us guidelines for entropy control, regularizing the update step size of high-covariance actions. In this section, we introduce two simple yet effective techniques, KL-Cov and Clip-Cov, that control entropy precisely and achieve better downstream performance.

4.1 Effect of Entropy Regularization 熵正则化的影响

A common approach in the RL literature to control policy entropy is to apply entropy loss (Schulman et al., 2017b). We conduct experiments to see whether it is effective for LLMs. Figure 9 presents the results of adding

图8：左图展示了在on-policyGRPO训练过程中，策略熵（分步熵差）与协方差的动态变化，其趋势与理论预期一致。

右图显示不同prompt组表现出显著的协方差差异：准确率较高的简单提示具有更高的协方差，而难度较大的提示则表现出更低的协方差。

1) 熵协方差 ($Cov(\cdot)$) 与负熵差 ($-d(H)$) 的动态相似性。根据定理1，我们得到理论结论： $-d(H) \propto Cov(\cdot)$ 。如图8 LHS所示， $-d(H)$ 与 $Cov(\cdot)$ 的实证曲线展现出高度相似动态特征，为该定理提供了强有力的实证支持。具体而言，在训练初期，熵 H 快速下降，伴随较大的正向协方差变化。随着强化学习训练的推进，熵的衰减速率逐渐放缓，协方差稳定在较低水平，反映出策略的逐步收敛。值得注意的是，协方差在整个训练过程中始终保持正值，从而导致熵值持续下降。

2) 不同难度样本中协方差动态的变化。通过运用基于群体的采样策略，我们根据训练样本的准确率将其划分为不同难度等级。图8右侧展示了三个难度组的协方差曲线，其中准确率越低表示难度越高。我们发现，对于较难样本，协方差的数值往往更小，这与直觉相符：当模型学习困难时，高概率动作与高预期回报的关联性会减弱。相反，在简单样本中，由于模型更具信心且校准更优，协方差值通常更高，表明动作概率与优势估计之间的关联性更强。

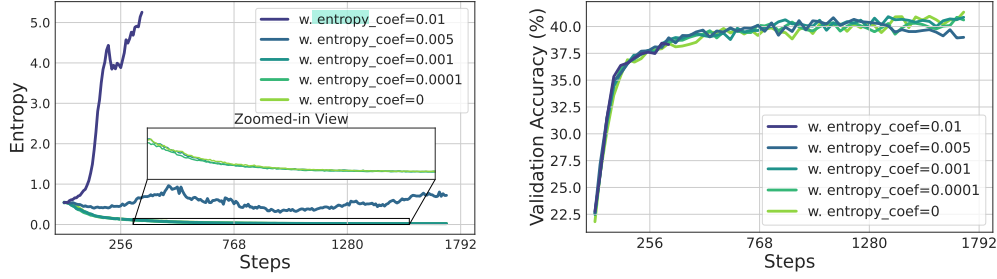


图9：引入熵损失（ $L_{\text{ent}} = L - \alpha \mathcal{H}(\pi_{\theta})$ ）后，政策熵与验证准确率的变化。其中 L 为原始损失， α 为熵损失系数。

Figure 9: The policy entropy and validation accuracy of adding entropy loss where $L_{\text{ent}} = L - \alpha \mathcal{H}(\pi_{\theta})$. L is the original loss and α is the coefficient of entropy loss.

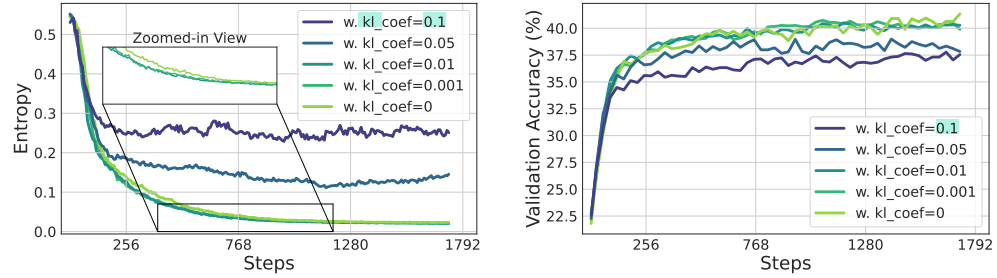


Figure 10: The policy entropy and validation accuracy of adding KL penalty between policy and reference model where $L_{\text{KL}} = L + \beta \mathbb{D}_{\text{KL}}(\pi_{\theta} || \pi_{\text{ref}})$. L is the original loss and β is the coefficient of KL loss.

图10展示了在策略模型与参考模型之间引入KL惩罚（ $L_{\text{KL}} = L + \beta \mathbb{D}_{\text{KL}}(\pi_{\theta} || \pi_{\text{ref}})$ ）时的策略熵与验证准确率变化。其中 L 为原始损失函数， β 为KL损失系数。

entropy loss. As demonstrated, entropy loss is highly sensitive to coefficients, while small coefficients have a minor influence on entropy (0.0001, 0.001), large coefficients lead to entropy explosion (0.01). Although setting the coefficient at 0.005 successfully stabilizes policy entropy, it does not outperform other baselines.

We also attempt to control the entropy by adjusting the KL penalty between the policy model and the reference model. In Figure 10, we report the results. Despite the reference KL achieves stable entropy values, it fails to improve policy and instead leads to a degradation in performance.

To summarize, naively adopting entropy regularization techniques from conventional RL struggles to solve the entropy bottleneck of LLMs. These regularization terms are either hyper-parameter sensitive (He et al., 2025) or degrade policy performance. Therefore, most recent works do not include them as well (Cui et al., 2025; Hu et al., 2025; Liu et al., 2025; Yu et al., 2025).

4.2 Suppressing Tokens with High Covariances

抑制具有高协方差的token

The unsuccessful attempt to incorporate entropy and reference KL regularization into the policy loss drives us to seek a more fundamental approach to control entropy. As previously elaborated, we know that the policy entropy dynamic is closely connected with the covariance between action probability and advantage. Meanwhile, as shown in Table 1, a small portion of tokens exhibit extremely high covariance, far exceeding the average. That is saying that these outlier tokens take a dominant part in triggering the entropy collapse. To mitigate their adverse effect, we aim to impose constraints on their contribution to the policy loss. In RL literature, two variants of PPO employ either clipping or KL penalty to constrain the policy updates (Schulman et al., 2017b), preventing overly aggressive changes. Drawing inspiration from these approaches, we propose two simple but effective covariance-aware methods Clip-Cov and KL-Cov to achieve this goal.

Natural policy gradient is rarely used in post-training of LLMs because of its time-consuming second-order optimization. But its introduction of target function with KL distance as constraint share a similar idea with

Table 1: Covariance distribution of Qwen2.5-7B in training step 1.

Group	Mean Value
Top 0.02%	5.654
Top 0.2%	3.112
Top 2%	1.385
Top 20%	0.351
Top 50%	0.152
All	0.003

实验表明，熵损失对系数变化极为敏感：当系数较小时（0.0001、0.001），熵值变化微乎其微；但系数增大时（0.01），熵值会急剧飙升。虽然将系数设为0.005能有效稳定策略熵值，但其性能仍不及其他基准模型。

我们还尝试通过调整策略模型与参考模型之间的KL惩罚来控制熵值。图10展示了实验结果。尽管参考模型的KL惩罚能保持稳定的熵值，但它并未提升策略模型的性能，反而导致性能下降。

综上所述，若生搬硬套传统强化学习中的熵正则化技术，难以突破大语言模型的熵瓶颈。这类正则化项要么对超参数敏感（He等人，2025），要么会降低策略性能。因此，最新研究普遍不再采用此类正则化方法（Cui等人，2025；Hu等人，2025；Liu等人，2025；Yu等人，2025）。

自然策略梯度因其耗时的二阶优化过程，很少用于大型语言模型的后训练。但其引入以KL距离为约束的目标函数，与GRPO和PPO的理念有异曲同工之妙。

将熵和KL散度正则化整合到策略损失中的尝试未能成功，这促使我们寻求更基础的熵控制方法。如前所述，策略熵动态与动作概率和优势之间的协方差密切相关。同时，如表1所示，部分标记表现出极高的协方差，远超平均水平。这意味着这些异常标记在引发熵崩溃中起主导作用。为缓解其负面影响，我们计划对其对策略损失的贡献施加约束。在强化学习领域，PPO的两个变体通过采用裁剪或KL惩罚来约束策略更新（Schulman等人，2017b），防止过度激进的变化。受这些方法启发，我们提出两种简单有效的协方差感知方法——Clip-Cov和KL-Cov，以实现这一目标。

4.3 Experiments

表2：GRPO、采用clip-higher技术的GRPO及我们方法的详细结果。AIME和AMC的结果为平均@32。加粗表示最佳结果。

Table 2: Detailed results of GRPO, GRPO with clip-higher technique and our methods. For AIME and AMC, the results are avg.@32. **Bold** denotes the best results.

Method	AIME24	AIME25	AMC	MATH-500	OMNI-MATH	OlympiadBench	Minerva	Avg.
<i>Qwen2.5-7B</i>								
GRPO	21.2	9.6	58.7	78.8	27.9	40.7	36.7	38.6
w. Clip-higher	18.1	11.5	56.6	79.2	29.8	43.3	40.4	38.8
w. CLIP-Cov	22.1	15.8	58.2	80.4	30.5	44.1	41.1	40.4
w. KL-Cov	22.6	12.9	61.4	80.8	29.1	42.6	38.2	40.6
<i>Qwen2.5-32B</i>								
GRPO	21.8	16.2	69.7	84.2	35.2	43.6	45.5	45.8
w. Clip-higher	35.6	22.3	69.5	77.2	35.1	42.5	43.0	47.2
w. CLIP-Cov	32.3	22.7	67.2	87.0	42.0	57.2	46.0	50.3
w. KL-Cov	36.8	30.8	74.5	84.6	39.1	49.0	46.3	52.2

因此，我们在本节后续部分将定理2应用于PPO等算法。

TRPO (Schulman et al., 2015) and PPO. For this reason, we apply Theorem 2 into algorithms like PPO later in this section.

Supposing a batch of N rollout tokens, $\pi_\theta(y_i)$ denotes the output probability of the policy model for token y_i given its corresponding prefix. According to Theorem 2, we firstly define token-wise centered cross-product between log probability and advantage as:

$$Cov(y_i) = (\log \pi_\theta(y_i) - \frac{1}{N} \sum_{j=1}^N \log \pi_\theta(y_j)) \dagger (A(y_i) - \frac{1}{N} \sum_{j=1}^N A(y_j)) \quad (10)$$

Cov表示集合N中每个标记的协方差，其期望值即为定理2所述的协方差。

The Cov is the covariance of each token in N . Its expectation is the covariance in Theorem 2.

Clip-Cov. In the Clip-Cov strategy, we clip a small fraction of high-covariance tokens out from policy gradient updates as follows. With Eq. 10 calculated, we randomly select $r \cdot N$ of high-covariance tokens according to the covariance value:

$$I_{\text{clip}} = I \sim \text{Uniform}(i \mid Cov(y_i) \in [\omega_{\text{low}}, \omega_{\text{high}}]), [r \cdot N] \quad (11)$$

Where I is short for index, r denotes the clip ratio. $\omega_{\text{low}}, \omega_{\text{high}}$ are two predefined bounds for covariance, respectively. Both are set much higher than the average covariance ($>500 \times$). Finally, tokens with the chosen indexes will be detached from the policy gradient, which is:

$$L_{\text{Clip-Cov}}(\theta) = \begin{cases} \mathbb{E}_t \left[\frac{\pi_\theta(y_t | \mathbf{y}_{<t})}{\pi_{\theta_{\text{old}}}(y_t | \mathbf{y}_{<t})} A_t \right], & t \notin I_{\text{clip}} \\ 0, & t \in I_{\text{clip}} \end{cases} \quad (12)$$

假设存在N个部署令牌的批次， $\pi(y)$ 表示策略模型在给定前缀时对令牌y的输出概率。根据定理2，我们首先定义按令牌中心化的对数概率与优势的交叉积：

Clip-Cov策略。该策略通过以下方式从策略梯度更新中剔除部分高协方差参数：根据公式10计算协方差值后，随机选取r·N个高协方差参数。

其中I是索引的缩写，r表示剪切比。 ω_{low} 和 ω_{high} 分别是协方差的两个预设上限，二者均被设定为远高于平均协方差（>500倍）。最后，具有选定索引的标记将从策略梯度中分离，其表达式为：

where the t is the t -th token in one rollout response and each t uniquely corresponds to a index i in N .

KL-Cov. The KL-Cov strategy is simpler. Specifically, similar to Clip-Cov, we first compute the covariance as in Eq. 10. Then, we rank and select tokens within the top- k proportion of covariance:

$$I_{\text{KL}} = \{i \mid \text{Rank}(Cov(y_i)) \leq k \cdot N\}, \quad (13)$$

The k here denotes the proportion of tokens that will be subjected to the KL penalty and $k \ll 1$. At last, we impose the KL penalty (KL divergence between the current policy and the rollout policy) on the selected tokens, the policy loss is computed as:

$$L_{\text{KL-Cov}}(\theta) = \begin{cases} \mathbb{E}_t \left[\frac{\pi_\theta(y_t | \mathbf{y}_{<t})}{\pi_{\theta_{\text{old}}}(y_t | \mathbf{y}_{<t})} A_t \right], & t \notin I_{\text{KL}} \\ \mathbb{E}_t \left[\frac{\pi_\theta(y_t | \mathbf{y}_{<t})}{\pi_{\theta_{\text{old}}}(y_t | \mathbf{y}_{<t})} A_t - \beta \mathbb{D}_{\text{KL}}(\pi_{\theta_{\text{old}}}(y_t | \mathbf{y}_{<t}) \parallel \pi_\theta(y_t | \mathbf{y}_{<t})) \right], & t \in I_{\text{KL}} \end{cases} \quad (14)$$

Where β is the coefficient to control the weight for the KL penalty. We present the pseudo-code in Listing 1.

其中t表示单次输出响应中的第t个标记，且每个t都唯一对应N中的索引i。

KL-Cov。KL-Cov策略更为简洁。具体而言，与Clip-Cov类似，我们首先计算公式10所示的协方差矩阵，随后对协方差矩阵进行排序，筛选出协方差值排名前k%的标记。

这里的k表示将被施加KL惩罚的标记比例，且 $k \ll 1$ 。最终，我们对选定标记施加KL惩罚（即当前策略与预置策略之间的KL散度），策略损失计算公式为：

```

def compute_policy_loss(old_log_prob, log_prob, advantages,
                        select_ratio, method, **args):
    ratio = exp(log_prob - old_log_prob)
    pg_losses1 = -ratio * advantages
    + # calculate token wise centered cross - product
    + covs = (log_prob - log_prob.mean()) * (advantages - advantages.mean())
    + select_num = int(select_ratio * len(pg_losses1))
    if method == "clip_cov":
        pg_losses2 = -clip(ratio, args["clip_range_lb"], args["clip_range_ub"]) * advantages
    + # randomly select index to be detached
    + clip_idx = random_select(covs[covs > args["cov_lb"] & covs < args["cov_ub"]], num=select_num)
    + pg_losses1[clip_idx].detach_()
    + pg_losses2[clip_idx].detach_()
    pg_loss = maximum(pg_losses1, pg_losses2).mean()
    if method == "kl_cov":
        kl_coef = args["kl_coef"]
        kl_penalty = (log_prob - old_log_prob).abs()
    - pg_losses = pg_losses1 + kl_coef * kl_penalty
    + # find out index with highest conviriance
    + select_idx = topk(covs, k=select_num, largest=True)
    + # apply KL penalty of these samples
    + pg_losses1[select_idx] += kl_coef * kl_penalty[select_idx]
    pg_loss = pg_losses1.mean()
    return pg_loss

```

清单1：Clip-Cov和KL-Cov的策略损失计算伪代码。实现只需修改几行代码。

Listing 1: The pseudo-code of the policy loss computation with Clip-Cov and KL-Cov. The implementation only need to modify several lines of code.

4.3 Experiments

Settings. We train Qwen2.5 models on math tasks to validate Clip-Cov and KL-Cov. We use the DAPO-MATH dataset (Yu et al., 2025) for training. In each rollout step, we sample 8 responses per prompt for a batch of 256 prompts using a temperature of 1, and subsequently perform 8 policy updates on the collected responses. We also filter out the prompts with all-correct/incorrect responses. The test datasets include MATH500, AIME 2024, AIME 2025 (Li et al., 2024), AMC, OMNI-MATH, OlympiadBench, and Minerva (Lewkowycz et al., 2022). During evaluation, we set the rollout temperature to 0.6 for AIME and AMC, while using greedy decoding for all other test sets. For baselines, we compare the original GRPO, and GRPO with Clip-higher, which tunes the upper threshold ϵ in PPO loss to 0.28 (Yu et al., 2025). In Clip-Cov, the clip ratio r is 2×10^{-4} , with ω_{low} and ω_{high} equals 1 and 5, respectively. For KL-Cov, the k is set as 2×10^{-3} and 2×10^{-4} for Qwen2.5-7B and 32B, respectively, the KL coefficient β is set as 1. The max generation length is 8192.

Results and analysis. We present the experimental results in Table 2, one can see that our two approaches both achieve non-trivial improvements across all benchmarks. Compared to GRPO, our method outperforms it by 2.0% on average for the 7B model and by 6.4% for the 32B model.

As shown in Figure 11, our method is able to maintain a considerably higher level of entropy throughout training. For example, when the baseline’s entropy reaches a plateau and can no longer be consumed, the KL-Cov method still sustains an entropy level over $10 \times$ higher. Meanwhile, the response length of the policy model steadily increases, and its performance on the test set consistently surpasses that of the baseline. This indicates that our model is able to explore more “freely” during training, learning better policy through RL.

Compared to the clip-higher technique, although it can also increase entropy and lead to performance improvement in the early stage of training, it gradually becomes unstable, with performance saturating and declining. In contrast, our method obtains more stable entropy curves throughout training, ultimately achieving non-trivial improvements over the baselines.

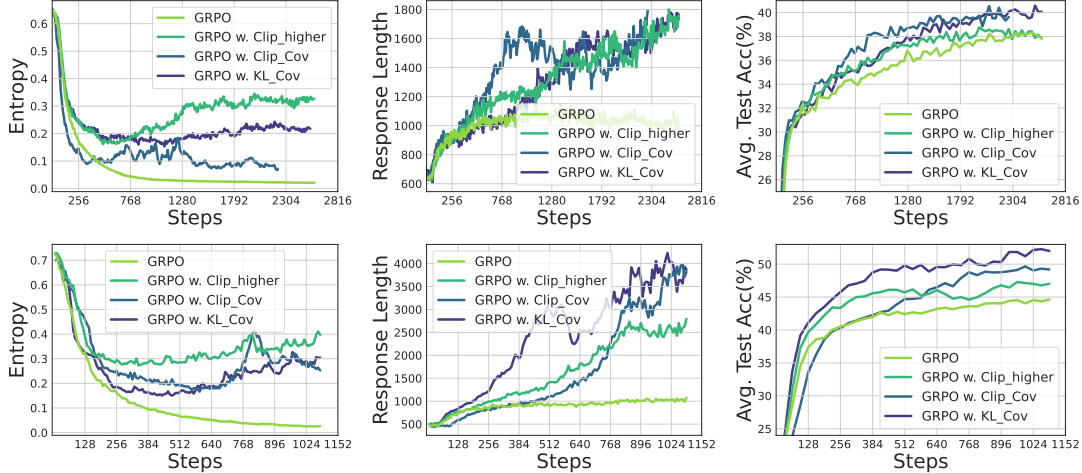


Figure 11: Training **Qwen2.5-7B (Top)** / **Qwen2.5-32B (bottom)** with GRPO with/without our methods. *Left*: Entropy dynamics. Our methods uplift policy entropy from collapse, enabling sustained exploration. *Middle*: Our method also incentivizes longer responses compared with vanilla GRPO. *Right*: The policy model consistently outperforms the baseline on testsets, avoiding performance plateaus.

Moreover, we observe that our method yields more substantial gains on the larger Qwen2.5-32B. Specifically, our method achieves improvements of **15.0%** and **14.6%** compared to GRPO on the most challenging benchmarks, AIME24 and AIME25, respectively. We infer that this is because the 32B model possesses greater potential from pretraining compared to the 7B model. Once the “exploration curse” caused by entropy collapse is lifted, the 32B model is able to explore more diverse and higher-quality policies.

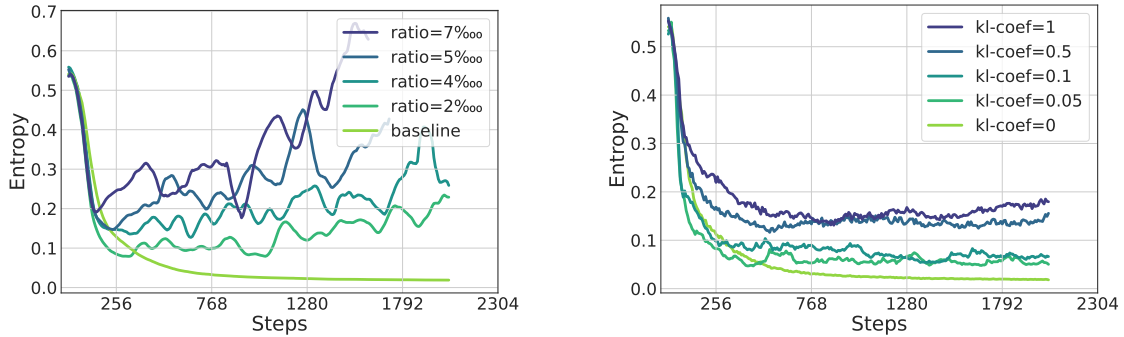


Figure 12: Differences in entropy dynamics of Qwen2.5-7B under varying KL coefficients and Clip ratios, evaluated Clip-Cov (*left*) and KL-Cov (*right*) settings, respectively.

4.4 Get Policy Entropy Controlled

We also evaluate the capability of our methods in controlling policy entropy as shown in Figure 12. For Clip-Cov, the level of policy entropy can be adjusted by tuning the ratio of clipped samples, where more clipped samples result in higher entropy. For KL-Cov, we can modulate the entropy by controlling the KL coefficient β , *i.e.*, the weight of the KL penalty. Specifically, a larger coefficient brings higher entropy. Comparing them, KL-Cov reaches stabler entropy curves than Clip-Cov, which might be preferable for stabilizing the training process. Although the optimal value of entropy under different scenarios remains an open question, our method demonstrates that we can simply tune the hyperparameters to control policy entropy, thus are capable of steering entropy and enabling the model to explore more effectively.

我们还评估了所提出方法在控制策略熵方面的性能，如图12所示。对于**Clip-Cov**方法，通过调节剪裁样本的比例可以调整策略熵水平——剪裁样本比例越高，熵值就越大。而对于**KL-Cov**方法，我们可以通过控制KL系数 β （即KL惩罚的权重）来调节熵值，系数越大熵值越高。对比发现，**KL-Cov**方法的熵曲线比**Clip-Cov**更稳定，这可能更有利于训练过程的稳定。虽然不同场景下的最优熵值仍待探索，但我们的方法证明了只需简单调整超参数即可控制策略熵，从而能够引导熵值变化，使模型能更有效地进行探索。

4.5 Discussion

与clip-higher的关联。我们的主要基准模型clip-higher (Yu et al., 2025) 同样能够激励更高策略熵。事实上, 该技术与我们的方法具有相似的功能特性。通过提高重要性采样比率的上限阈值, clip-higher会为策略更新纳入更多低概率标记。此外, 该阈值仅影响具有正向优势的标记, 这意味着clip-higher实际上在梯度计算中增加了更多低协方差 (低概率、高优势, 平均协方差约为-0.03) 的标记。我们更进一步地直接采用协方差作为阈值, 从而实现对熵的更精准控制。

Connection with clip-higher. Our main baseline, clip-higher (Yu et al., 2025), can also incentivize higher policy entropy. In fact, this technique shares similar functionality with our methods. By raising the upper threshold of the importance sampling ratio, clip-higher includes more low-probability tokens for policy updates. Also, the upper threshold only affects the tokens with positive advantages, which means clip-higher is actually adding more low-covariance (low probability, high advantage, with average covariance of ~ -0.03) tokens in gradient calculation. We take a step further by directly using the covariance as the threshold, thus controlling the entropy more precisely.

The philosophy of entropy control. In experiments, we find that the policy entropy is sensitive to hyperparameter settings. Specifically, our methods only interfere with a very small fraction of tokens (10^{-4} to 10^{-3}), yet totally change the entropy curve. This means several “pivotal” tokens are crucial for the entropy of LLMs. Also, we don’t observe a relationship between the intervened entropy and model performance. It still remains open whether there exists an optimal entropy value to balance the exploration and training stability.

5 Related Work

Policy entropy in reinforcement learning. Stemmed in information theory, entropy provides a principled mechanism to manage the exploitation-exploration tradeoff. Entropy-regularized reinforcement learning, also referred as maximum entropy RL (Ziebart et al., 2008; Toussaint, 2009), adopts a regularization term in reward to encourage high-entropy actions. This regularization term was widely-inherited in RL algorithms (Mnih et al., 2015, 2016; Schulman et al., 2017a,b; Haarnoja et al., 2017, 2018), and is viewed as a necessity. On the other hand, in RL for LLMs, there exist different opinions on whether entropy regularization should be preserved (Ouyang et al., 2022; Shao et al., 2024; Hu et al., 2025; He et al., 2025). Our experiments indicate that, it is necessary to control entropy, but we can design better objectives than entropy loss.

Predictability of reinforcement learning for reasoning language models. The first part of this work reveals the predictability of RL for LLM reasoning. The development of LLMs is largely guided by the neural scaling laws, which bridge model performances with computational budgets, model sizes, and the amount of training data (Hestness et al., 2017; Kaplan et al., 2020; Hoffmann et al., 2022). With scaling experiments on smaller models, the loss and task performance of larger models could be accurately predicted. In RL, Hilton et al. (2023); Rybkin et al. (2025) studied the scaling behavior of policy performances versus computing on non-LLM models, but the predictability of RL for LLMs has yet to be investigated. Gao et al. (2022) proposed to predict reward scores from KL divergence in RL on LLMs, which was used for modeling overoptimization effect of a proxy reward model. This work aligns with our conclusion considering that, 1) the verifiable reward eliminates the gap between the proxy reward model and ground truth; 2) the similarity between KL divergence and policy entropy.

Reinforcement learning for LLMs. Reinforcement learning has emerged as a major approach for LLM post-training (Ouyang et al., 2022; Meta, 2024; Team et al., 2023; Qwen et al., 2025; Jiang et al., 2023). Recent works have achieved further breakthrough on enhancing the reasoning capability of LLMs using RL with verifiable rewards (OpenAI, 2024a; Lambert et al., 2024; DeepSeek-AI et al., 2025; Team et al., 2025), drawing great attention in research community (Cui et al., 2025; Liu et al., 2025; Hu et al., 2025; He et al., 2025). However, there still lacks systematic study on the underlying mechanisms of RL for LLMs, which constitutes the primary goal of our work.

6 Conclusion

In this study, we try to address the challenge of policy entropy collapse in reinforcement learning for large language model reasoning. We empirically demonstrate that performance gains are often achieved by sacrificing exploratory capacity, which in turn imposes a foreseeable limit on improvement. To gain a deeper understanding, we conduct a theoretical investigation into entropy dynamics and introduce two simple regularization techniques, Clip-Cov and KL-Cov, to directly manage high-covariance tokens and thereby counteract entropy collapse. Looking further, RL has been identified as the next scaling axis after pre-training. However, scaling computing for RL requires more than entropy minimization. We hope this research could provide valuable insights into the role of entropy, fostering RL to reach a higher level of intelligence.

关于熵控制的哲学思考。实验表明, 策略熵对超参数设置极为敏感。具体而言, 我们的方法仅对极小比例的标记 (10^{-4} 至 10^{-3}) 产生干预, 却能彻底改变熵曲线。这说明几个“关键”标记对大模型的熵值起着决定性作用。值得注意的是, 我们并未发现干预后的熵值与模型性能存在关联。目前仍悬而未决的是: 是否存在一个最优熵值, 能在探索性训练与模型稳定性之间取得平衡?

强化学习中的策略熵。源于信息论的熵, 为平衡利用与探索提供了理论机制。熵正则化强化学习 (又称最大熵强化学习, Ziebart et al., 2008; Toussaint, 2009) 通过在奖励函数中引入正则化项来鼓励高熵动作。这一正则化项被广泛应用于强化学习算法 (Mnih et al., 2015, 2016; Schulman et al., 2017a, b; Haarnoja et al., 2017, 2018), 被视为必要条件。然而在大语言模型的强化学习中, 关于是否应保留熵正则化存在不同观点 (欧阳等人, 2022; 邵等人, 2024; 胡等人, 2025; 何等人, 2025)。我们的实验表明, 控制熵是必要的, 但我们可以设计比熵损失更优的目标函数。

强化学习在语言模型推理中的可预测性研究。本研究的第一部分揭示了强化学习在语言模型推理中的可预测性。语言模型的发展主要遵循神经网络缩放定律, 该定律将模型性能与计算预算、模型规模及训练数据量联系起来 (赫斯特内斯等人, 2017; 卡普兰等人, 2020; 霍夫曼等人, 2022)。通过在小型模型上的缩放实验, 可以准确预测大型模型的损失和任务性能。在强化学习领域, 希尔顿等人 (2023) 和里布金等人 (2025) 研究了非语言模型在计算条件下的策略性能缩放行为, 但强化学习在语言模型中的可预测性尚未得到深入探讨。高某等人 (2022) 提出通过KL散度预测强化学习中语言模型的奖励分数, 该方法被用于建模代理奖励模型的过度优化效应。本研究与我们的结论一致, 具体体现在: 1) 可验证奖励消除了代理奖励模型与真实值之间的差距; 2) KL散度与策略熵具有相似性。

强化学习在大模型中的应用。强化学习已成为大模型后训练的重要方法 (欧阳等, 2022; Meta, 2024; 团队等, 2023; Qwen等, 2025; 蒋等, 2023)。近期研究通过采用可验证奖励机制的强化学习, 显著提升了大模型的推理能力 (OpenAI, 2024a; Lambert等, 2024; DeepSeek-AI等, 2025; 团队等, 2025), 在学界引发广泛关注 (崔等, 2025; 刘等, 2025; 胡等, 2025; 何等, 2025)。然而, 针对强化学习在大模型中的底层机制仍缺乏系统性研究, 这正是我们研究的核心目标。

本研究致力于解决强化学习在大规模语言模型推理中面临的熵坍塌问题。实证研究表明, 性能提升往往需要牺牲探索能力, 这必然导致改进空间的预设上限。为深入理解这一现象, 我们从理论层面探究熵动态机制, 并提出两种简单正则化技术——Clip-Cov和KL-Cov, 通过直接调控高协方差标记来对抗熵坍塌。值得注意的是, 强化学习已被视为继预训练之后的下一个扩展维度, 但其扩展计算需要超越单纯的熵最小化。我们希望本研究能为熵在强化学习中的作用提供新见解, 助力该领域迈向更高层次的智能发展。

References

- Alekh Agarwal, Sham M Kakade, Jason D Lee, and Gaurav Mahajan. On the theory of policy gradient methods: Optimality, approximation, and distribution shift. *Journal of Machine Learning Research*, 22(98): 1–76, 2021.
- Shivam Agarwal, Zimin Zhang, Lifan Yuan, Jiawei Han, and Hao Peng. The unreasonable effectiveness of entropy minimization in llm reasoning. *arXiv preprint arXiv:2505.15134*, 2025.
- Arash Ahmadian, Chris Cremer, Matthias Gall , Marzieh Fadaee, Julia Kreutzer, Olivier Pietquin, Ahmet  st n, and Sara Hooker. Back to basics: Revisiting reinforce style optimization for learning from human feedback in llms. *arXiv preprint arXiv:2402.14740*, 2024.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, et al. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
- Ganqu Cui, Lifan Yuan, Zefan Wang, Hanbin Wang, Wendi Li, Bingxiang He, Yuchen Fan, Tianyu Yu, Qixin Xu, Weize Chen, Jiarui Yuan, Huayu Chen, Kaiyan Zhang, Xingtai Lv, Shuo Wang, Yuan Yao, Xu Han, Hao Peng, Yu Cheng, Zhiyuan Liu, Maosong Sun, Bowen Zhou, and Ning Ding. Process reinforcement through implicit rewards, 2025. URL <https://arxiv.org/abs/2502.01456>.
- DeepSeek-AI, Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, Xiaokang Zhang, Xingkai Yu, Yu Wu, Z. F. Wu, Zhibin Gou, Zhihong Shao, Zhuoshu Li, Ziyi Gao, Aixin Liu, Bing Xue, Bingxuan Wang, Bochao Wu, Bei Feng, Chengda Lu, Chenggang Zhao, Chengqi Deng, Chenyu Zhang, Chong Ruan, Damai Dai, Deli Chen, Dongjie Ji, Erhang Li, Fangyun Lin, Fucong Dai, Fuli Luo, Guangbo Hao, Guanting Chen, Guowei Li, H. Zhang, Han Bao, Hanwei Xu, Haocheng Wang, Honghui Ding, Huajian Xin, Huazuo Gao, Hui Qu, Hui Li, Jianzhong Guo, Jiashi Li, Jiawei Wang, Jingchang Chen, Jingyang Yuan, Junjie Qiu, Junlong Li, J. L. Cai, Jiaqi Ni, Jian Liang, Jin Chen, Kai Dong, Kai Hu, Kaige Gao, Kang Guan, Kexin Huang, Kuai Yu, Lean Wang, Lecong Zhang, Liang Zhao, Litong Wang, Liyue Zhang, Lei Xu, Leyi Xia, Mingchuan Zhang, Minghua Zhang, Minghui Tang, Meng Li, Miaojun Wang, Mingming Li, Ning Tian, Panpan Huang, Peng Zhang, Qiancheng Wang, Qinyu Chen, Qishi Du, Ruiqi Ge, Ruisong Zhang, Ruizhe Pan, Runji Wang, R. J. Chen, R. L. Jin, Ruyi Chen, Shanghao Lu, Shangyan Zhou, Shanhuang Chen, Shengfeng Ye, Shiyu Wang, Shuiping Yu, Shunfeng Zhou, Shuting Pan, S. S. Li, Shuang Zhou, Shaoqing Wu, Shengfeng Ye, Tao Yun, Tian Pei, Tianyu Sun, T. Wang, Wangding Zeng, Wanbiao Zhao, Wen Liu, Wenfeng Liang, Wenjun Gao, Wenqin Yu, Wentao Zhang, W. L. Xiao, Wei An, Xiaodong Liu, Xiaohan Wang, Xiaokang Chen, Xiaotao Nie, Xin Cheng, Xin Liu, Xin Xie, Xingchao Liu, Xinyu Yang, Xinyuan Li, Xuecheng Su, Xuheng Lin, X. Q. Li, Xiangyue Jin, Xiaojin Shen, Xiaosha Chen, Xiaowen Sun, Xiaoxiang Wang, Xinnan Song, Xinyi Zhou, Xianzu Wang, Xinxia Shan, Y. K. Li, Y. Q. Wang, Y. X. Wei, Yang Zhang, Yanhong Xu, Yao Li, Yao Zhao, Yaofeng Sun, Yaohui Wang, Yi Yu, Yichao Zhang, Yifan Shi, Yiliang Xiong, Ying He, Yishi Piao, Yisong Wang, Yixuan Tan, Yiyang Ma, Yiyuan Liu, Yongqiang Guo, Yuan Ou, Yudian Wang, Yue Gong, Yuheng Zou, Yujia He, Yunfan Xiong, Yuxiang Luo, Yuxiang You, Yuxuan Liu, Yuyang Zhou, Y. X. Zhu, Yanhong Xu, Yanping Huang, Yaohui Li, Yi Zheng, Yuchen Zhu, Yunxian Ma, Ying Tang, Yukun Zha, Yuting Yan, Z. Z. Ren, Zehui Ren, Zhangli Sha, Zhe Fu, Zhean Xu, Zhenda Xie, Zhengyan Zhang, Zhewen Hao, Zhicheng Ma, Zhigang Yan, Zhiyu Wu, Zihui Gu, Zijia Zhu, Zijun Liu, Zilin Li, Ziwei Xie, Ziyang Song, Zizheng Pan, Zhen Huang, Zhipeng Xu, Zhongyu Zhang, and Zhen Zhang. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning, 2025. URL <https://arxiv.org/abs/2501.12948>.
- Benjamin Eysenbach and Sergey Levine. Maximum entropy rl (provably) solves some robust rl problems. *arXiv preprint arXiv:2103.06257*, 2021.
- Bofei Gao, Feifan Song, Zhe Yang, Zefan Cai, Yibo Miao, Qingxiu Dong, Lei Li, Chenghao Ma, Liang Chen, Runxin Xu, et al. Omni-math: A universal olympiad level mathematic benchmark for large language models. *arXiv preprint arXiv:2410.07985*, 2024.
- Leo Gao, John Schulman, and Jacob Hilton. Scaling laws for reward model overoptimization. In *International Conference on Machine Learning*, 2022.
- Tuomas Haarnoja, Haoran Tang, Pieter Abbeel, and Sergey Levine. Reinforcement learning with deep energy-based policies. In *International conference on machine learning*, pp. 1352–1361. PMLR, 2017.

- Tuomas Haarnoja, Aurick Zhou, Pieter Abbeel, and Sergey Levine. Soft actor-critic: Off-policy maximum entropy deep reinforcement learning with a stochastic actor. In *International conference on machine learning*, pp. 1861–1870. Pmlr, 2018.
- Chaoqun He, Renjie Luo, Yuzhuo Bai, Shengding Hu, Zhen Thai, Junhao Shen, Jinyi Hu, Xu Han, Yujie Huang, Yuxiang Zhang, Jie Liu, Lei Qi, Zhiyuan Liu, and Maosong Sun. OlympiadBench: A challenging benchmark for promoting AGI with olympiad-level bilingual multimodal scientific problems. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar (eds.), *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 3828–3850, Bangkok, Thailand, August 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.acl-long.211. URL <https://aclanthology.org/2024.acl-long.211/>.
- Jujie He, Jiakai Liu, Chris Yuhao Liu, Rui Yan, Chaojie Wang, Peng Cheng, Xiaoyu Zhang, Fuxiang Zhang, Jiacheng Xu, Wei Shen, Siyuan Li, Liang Zeng, Tianwen Wei, Cheng Cheng, Bo An, Yang Liu, and Yahui Zhou. Skywork open reaonser series. <https://capricious-hydrogen-41c.notion.site/Skywork-Open-Reaonser-Series-1d0bc9ae823a80459b46c149e4f51680>, 2025. Notion Blog.
- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset. *arXiv preprint arXiv:2103.03874*, 2021.
- Joel Hestness, Sharan Narang, Newsha Ardalani, Gregory Diamos, Heewoo Jun, Hassan Kianinejad, Md Mostofa Ali Patwary, Yang Yang, and Yanqi Zhou. Deep learning scaling is predictable, empirically. *arXiv preprint arXiv:1712.00409*, 2017.
- Jacob Hilton, Jie Tang, and John Schulman. Scaling laws for single-agent reinforcement learning. *arXiv preprint arXiv:2301.13442*, 2023.
- Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, et al. Training compute-optimal large language models. *arXiv preprint arXiv:2203.15556*, 2022.
- Jian Hu. Reinforce++: A simple and efficient approach for aligning large language models. *arXiv preprint arXiv:2501.03262*, 2025.
- Jingcheng Hu, Yinmin Zhang, Qi Han, Daxin Jiang, Xiangyu Zhang, and Heung-Yeung Shum. Open-reasoner-zero: An open source approach to scaling up reinforcement learning on the base model. *arXiv preprint arXiv:2503.24290*, 2025.
- Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L  lio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timoth  e Lacroix, and William El Sayed. Mistral 7b, 2023. URL <https://arxiv.org/abs/2310.06825>.
- Saurav Kadavath, Tom Conerly, Amanda Askell, Tom Henighan, Dawn Drain, Ethan Perez, Nicholas Schiefer, Zac Hatfield-Dodds, Nova DasSarma, Eli Tran-Johnson, et al. Language models (mostly) know what they know. *arXiv preprint arXiv:2207.05221*, 2022.
- Sham M Kakade. A natural policy gradient. *Advances in neural information processing systems*, 14, 2001.
- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361*, 2020.
- Wouter Kool, Herke van Hoof, and Max Welling. Buy 4 reinforce samples, get a baseline for free! In *DeepRLStructPred@ICLR*, 2019. URL <https://api.semanticscholar.org/CorpusID:198489118>.
- Nathan Lambert, Jacob Daniel Morrison, Valentina Pyatkin, Shengyi Huang, Hamish Ivison, Faeze Brahman, Lester James Validad Miranda, Alisa Liu, Nouha Dziri, Xinxin Lyu, Yuling Gu, Saumya Malik, Victoria Graf, Jena D. Hwang, Jiangjiang Yang, Ronan Le Bras, Oyvind Tafjord, Chris Wilhelm, Luca Soldaini, Noah A. Smith, Yizhong Wang, Pradeep Dasigi, and Hanna Hajishirzi. T  lu 3: Pushing frontiers in open language model post-training. *ArXiv*, abs/2411.15124, 2024.

- Aitor Lewkowycz, Anders Andreassen, David Dohan, Ethan Dyer, Henryk Michalewski, Vinay Ramasesh, Ambrose Slone, Cem Anil, Imanol Schlag, Theo Gutman-Solo, et al. Solving quantitative reasoning problems with language models. *Advances in Neural Information Processing Systems*, 35:3843–3857, 2022.
- Jia Li, Edward Beeching, Lewis Tunstall, Ben Lipkin, Roman Soletskyi, Shengyi Huang, Kashif Rasul, Longhui Yu, Albert Q Jiang, Ziju Shen, et al. Numinamath: The largest public dataset in ai4maths with 860k pairs of competition math problems and solutions. *Hugging Face repository*, 13:9, 2024.
- Jiacai Liu. How does rl policy entropy converge during iteration? <https://zhuanlan.zhihu.com/p/28476703733>, 2025. URL <https://zhuanlan.zhihu.com/p/28476703733>.
- Zichen Liu, Changyu Chen, Wenjun Li, Penghui Qi, Tianyu Pang, Chao Du, Wee Sun Lee, and Min Lin. Understanding rl-zero-like training: A critical perspective. *arXiv preprint arXiv:2503.20783*, 2025.
- Michael Luo, Sijun Tan, Justin Wong, Xiaoxiang Shi, William Y Tang, Manan Roongta, Colin Cai, Jeffrey Luo, Tianjun Zhang, Li Erran Li, et al. Deepscaler: Surpassing o1-preview with a 1.5 b model by scaling rl. *Notion Blog*, 2025.
- Meta. The llama 3 herd of models, 2024. URL <https://arxiv.org/abs/2407.21783>.
- Meta-Llama-3.2. Llama 3.2: Revolutionizing edge ai and vision with open, customizable models. URL <https://ai.meta.com/blog/llama-3-2-connect-2024-vision-edge-mobile-devices>.
- MistralAI-NeMo. Mistralai-nemo. URL <https://mistral.ai/news/mistral-nemo>.
- MistralAI-Small-3. Mistralai-small-3. URL <https://mistral.ai/news/mistral-small-3>.
- Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Andrei A Rusu, Joel Veness, Marc G Bellemare, Alex Graves, Martin Riedmiller, Andreas K Fiedjeland, Georg Ostrovski, et al. Human-level control through deep reinforcement learning. *nature*, 518(7540):529–533, 2015.
- Volodymyr Mnih, Adria Puigdomenech Badia, Mehdi Mirza, Alex Graves, Timothy Lillicrap, Tim Harley, David Silver, and Koray Kavukcuoglu. Asynchronous methods for deep reinforcement learning. In *International conference on machine learning*, pp. 1928–1937. PmLR, 2016.
- OpenAI. Openai o1 system card. *ArXiv*, abs/2412.16720, 2024a.
- OpenAI. Gpt-4 technical report, 2024b. URL <https://arxiv.org/abs/2303.08774>.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744, 2022.
- Qwen, An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Haoran Wei, Huan Lin, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiayi Yang, Jingren Zhou, Junyang Lin, Kai Dang, Keming Lu, Keqin Bao, Kexin Yang, Le Yu, Mei Li, Mingfeng Xue, Pei Zhang, Qin Zhu, Rui Men, Runji Lin, Tianhao Li, Tianyi Tang, Tingyu Xia, Xingzhang Ren, Xuancheng Ren, Yang Fan, Yang Su, Yichang Zhang, Yu Wan, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, and Zihan Qiu. Qwen2.5 technical report, 2025. URL <https://arxiv.org/abs/2412.15115>.
- Oleh Rybkin, Michal Nauman, Preston Fu, Charlie Snell, Pieter Abbeel, Sergey Levine, and Aviral Kumar. Value-based deep rl scales predictably. *arXiv preprint arXiv:2502.04327*, 2025.
- John Schulman, Sergey Levine, Pieter Abbeel, Michael Jordan, and Philipp Moritz. Trust region policy optimization. In *International conference on machine learning*, pp. 1889–1897. PMLR, 2015.
- John Schulman, Xi Chen, and Pieter Abbeel. Equivalence between policy gradients and soft q-learning. *arXiv preprint arXiv:1704.06440*, 2017a.
- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017b.

- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, Y. K. Li, Y. Wu, and Daya Guo. Deepseekmath: Pushing the limits of mathematical reasoning in open language models, 2024. URL <https://arxiv.org/abs/2402.03300>.
- Guangming Sheng, Chi Zhang, Zilingfeng Ye, Xibin Wu, Wang Zhang, Ru Zhang, Yanghua Peng, Haibin Lin, and Chuan Wu. Hybridflow: A flexible and efficient rlhf framework. *arXiv preprint arXiv: 2409.19256*, 2024.
- David Silver and Richard S Sutton. Welcome to the era of experience. *Google AI*, 2025.
- Richard Sutton. The bitter lesson. *Incomplete Ideas (blog)*, 13(1):38, 2019.
- Richard S Sutton. Learning to predict by the methods of temporal differences. *Machine learning*, 3:9–44, 1988.
- Gemini Team, Rohan Anil, Sebastian Borgeaud, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, Katie Millican, et al. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023.
- Kimi Team, Angang Du, Bofei Gao, Bowei Xing, Changjiu Jiang, Cheng Chen, Cheng Li, Chenjun Xiao, Chenzhuang Du, Chonghua Liao, et al. Kimi k1. 5: Scaling reinforcement learning with llms. *arXiv preprint arXiv:2501.12599*, 2025.
- Marc Toussaint. Robot trajectory optimization using approximate inference. In *Proceedings of the 26th annual international conference on machine learning*, pp. 1049–1056, 2009.
- Ronald J Williams. Simple statistical gradient-following algorithms for connectionist reinforcement learning. *Machine learning*, 8:229–256, 1992.
- Ronald J Williams and Jing Peng. Function optimization using connectionist reinforcement learning algorithms. *Connection Science*, 3(3):241–268, 1991.
- Zhangchen Xu, Yang Liu, Yueqin Yin, Mingyuan Zhou, and Radha Poovendran. Kodcode: A diverse, challenging, and verifiable synthetic dataset for coding, 2025. URL <https://arxiv.org/abs/2503.02951>.
- Jianhao Yan, Yafu Li, Zican Hu, Zhi Wang, Ganqu Cui, Xiaoye Qu, Yu Cheng, and Yue Zhang. Learning to reason under off-policy guidance. *arXiv preprint arXiv:2504.14945*, 2025.
- Qiyang Yu, Zheng Zhang, Ruofei Zhu, Yufeng Yuan, Xiaochen Zuo, Yu Yue, Tiantian Fan, Gaohong Liu, Lingjun Liu, Xin Liu, Haibin Lin, Zhiqi Lin, Bole Ma, Guangming Sheng, Yuxuan Tong, Chi Zhang, Mofan Zhang, Wang Zhang, Hang Zhu, Jinhua Zhu, Jiaze Chen, Jiangjie Chen, Chengyi Wang, Honglin Yu, Weinan Dai, Yuxuan Song, Xiang Wei, Haodong Zhou, Jingjing Liu, Wei Ma, Ya-Qin Zhang, Lin Yan, Mu Qiao, Yong-Xu Wu, and Mingxuan Wang. Dapo: An open-source llm reinforcement learning system at scale. 2025. URL <https://api.semanticscholar.org/CorpusID:277104124>.
- Lifan Yuan, Wendi Li, Huayu Chen, Ganqu Cui, Ning Ding, Kaiyan Zhang, Bowen Zhou, Zhiyuan Liu, and Hao Peng. Free process rewards without process labels. *International conference on machine learning*, 2025.
- Yang Yue, Zhiqi Chen, Rui Lu, Andrew Zhao, Zhaokai Wang, Shiji Song, and Gao Huang. Does reinforcement learning really incentivize reasoning capacity in llms beyond the base model? *ArXiv*, abs/2504.13837, 2025.
- Huaye Zeng, Dongfu Jiang, Haozhe Wang, Ping Nie, Xiaotong Chen, and Wenhua Chen. Acecoder: Acing coder rl via automated test-case synthesis, 2025. URL <https://arxiv.org/abs/2502.01718>.
- Qingyang Zhang, Haitao Wu, Changqing Zhang, Peilin Zhao, and Yatao Bian. Right question is already half the answer: Fully unsupervised llm reasoning incentivization. *arXiv preprint arXiv:2504.05812*, 2025.
- Brian D Ziebart, Andrew L Maas, J Andrew Bagnell, Anind K Dey, et al. Maximum entropy inverse reinforcement learning. In *Aaai*, volume 8, pp. 1433–1438. Chicago, IL, USA, 2008.
- Yuxin Zuo, Kaiyan Zhang, Shang Qu, Li Sheng, Xuekai Zhu, Biqing Qi, Youbang Sun, Ganqu Cui, Ning Ding, and Bowen Zhou. Ttrl: Test-time reinforcement learning. *arXiv preprint arXiv:2504.16084*, 2025.

A Training Details for Different Models

Due to inherent differences in the initial reasoning abilities between model families, we train models using data of different difficulty levels to stabilize the RL process. Specifically, for math tasks, we train the Qwen family and Mistral-24B model using Eurur-2-RL-Math (Cui et al., 2025), while other model families are trained using GSM8K (Cobbe et al., 2021). The downstream performance is evaluated using MATH500 (Hendrycks et al., 2021), AIME 2024 (Li et al., 2024), AMC (Li et al., 2024), OlympiadBench (He et al., 2024), and OMNI-MATH (Gao et al., 2024). For code tasks, we train the Qwen family and Mistral-24B model using AceCode (Zeng et al., 2025), Eurur-2-RL-Code (Cui et al., 2025), and Kodcode³.

B More Fitting Results

In this section, we present more fitting experiment results.

C Fitting Results of Training with Different Dataset.

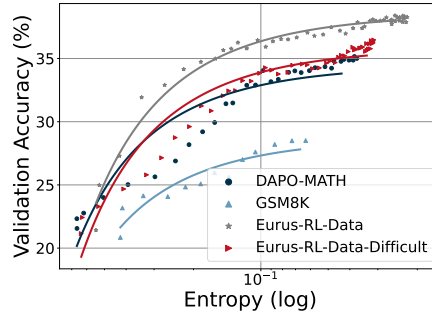


Figure 13: Training Qwen2.5-7B with different data.

D Fitting Results of Instruct Models

We also conduct fitting experiments on instruct models, and the fitting function remains valid in our experiments. We present the fitting results here.

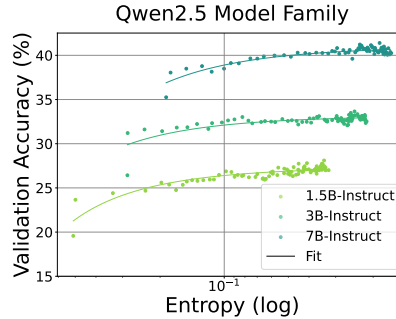


Figure 14: Training Qwen2.5 instruct models on math task.

³We process the data with style instruct and complete into a format that can be handled by unit tests. For the online-judge style, we removed this portion of the data as it was derived from instruct style data.

E Proof

E.1 Useful Lemmas

Lemma 2 (Derivative of softmax function)

$$\frac{\partial \log \pi_\theta(a \mid s)}{\partial \theta_{s,a'}} = \mathbf{1}\{a = a'\} - \pi_\theta(a' \mid s)$$

Lemma 3 (Expectation of Advantage function given state s)

$$\begin{aligned} \mathbb{E}_{a \sim \pi_\theta(\cdot \mid s)} [A^{\pi_\theta}(s, a)] &= \mathbb{E}_{a \sim \pi_\theta(\cdot \mid s)} [Q^{\pi_\theta}(s, a) - V^{\pi_\theta}(s)] \\ &= \mathbb{E}_{a \sim \pi_\theta(\cdot \mid s)} [Q(s, a)] - \mathbb{E}_{a \sim \pi_\theta(\cdot \mid s)} [V(s)] \\ &= V(s) - V(s) \\ &= 0 \end{aligned}$$

E.2 Proof for Lemma 1

Lemma 1: *Let the actor policy π_θ be a tabular softmax policy, the difference of information entropy given state s between two consecutive steps satisfies*

$$\mathcal{H}(\pi_\theta^{k+1} \mid s) - \mathcal{H}(\pi_\theta^k \mid s) \approx -\text{Cov}_{a \sim \pi_\theta^k(\cdot \mid s)} (\log \pi_\theta^k(a \mid s), z_{s,a}^{k+1} - z_{s,a}^k)$$

Proof adapted from (Liu, 2025).

In tabular softmax policy, each state-action pair (s, a) is associated with an individual logit parameter $z_{s,a} = \theta_{s,a}$. We assume that we are updating logits z via $z^{k+1} = z^k + \eta \cdot \nabla J(\pi_\theta)$. Given η is relatively small, leveraging Taylor's expansion under first-order approximation, we have

$$\mathcal{H}(\pi_\theta^{k+1} \mid s) \approx \mathcal{H}(\pi_\theta^k \mid s) + \langle \nabla \mathcal{H}(\pi_\theta^k \mid s), (z^{k+1} - z^k) \rangle$$

We then to derive what $\nabla \mathcal{H}(\pi_\theta^k \mid s)$ is, according to the definition of $\mathcal{H}$, we have

$$\begin{aligned} \nabla_\theta \mathcal{H}(\pi_\theta \mid s) &= \nabla_\theta \mathcal{H}(\pi_\theta(\cdot \mid s)) \\ &= \nabla_\theta (-\mathbb{E}_{a \sim \pi_\theta(\cdot \mid s)} [\log \pi_\theta(a \mid s)]) \\ &= -\mathbb{E}_{a \sim \pi_\theta(\cdot \mid s)} [\nabla_\theta \log \pi_\theta(a \mid s) + \log \pi_\theta(a \mid s) \nabla_\theta \log \pi_\theta(a \mid s)] \\ &= -\mathbb{E}_{a \sim \pi(\cdot \mid s)} [\log \pi_\theta(a \mid s) \nabla_\theta \log \pi_\theta(a \mid s)] \end{aligned}$$

Then we have,

$$\begin{aligned} \langle \nabla_\theta \mathcal{H}(\pi_\theta^k \mid s), (z^{k+1} - z^k) \rangle &= -\langle \mathbb{E}_{a \sim \pi(\cdot \mid s)} [\log \pi_\theta(a \mid s) \nabla_\theta \log \pi_\theta(a \mid s)], (\theta^{k+1} - \theta^k) \rangle \\ &= -\mathbb{E}_{a \sim \pi(\cdot \mid s)} [\log \pi_\theta(a \mid s) \langle \nabla_\theta \log \pi_\theta(a \mid s), \theta^{k+1} - \theta^k \rangle] \\ &= -\mathbb{E}_{a \sim \pi(\cdot \mid s)} \left[\log \pi_\theta(a \mid s) \sum_{a' \in \mathcal{A}} \frac{\partial \log \pi_\theta(a \mid s)}{\partial \theta_{s,a'}} \cdot (\theta_{s,a'}^{k+1} - \theta_{s,a'}^k) \right] \\ &= -\mathbb{E}_{a \sim \pi(\cdot \mid s)} \left[\log \pi_\theta(a \mid s) \sum_{a' \in \mathcal{A}} (\mathbf{1}\{a = a'\} - \pi(a' \mid s)) \cdot (\theta_{s,a'}^{k+1} - \theta_{s,a'}^k) \right] \\ &= -\mathbb{E}_{a \sim \pi(\cdot \mid s)} \left[\log \pi_\theta(a \mid s) \left[(\theta_{s,a}^{k+1} - \theta_{s,a}^k) - \sum_{a' \in \mathcal{A}} \pi(a' \mid s) (\theta_{s,a'}^{k+1} - \theta_{s,a'}^k) \right] \right] \\ &= -\mathbb{E}_{a \sim \pi(\cdot \mid s)} [\log \pi_\theta(a \mid s) (\theta_{s,a}^{k+1} - \theta_{s,a}^k)] + \mathbb{E}_{a \sim \pi(\cdot \mid s)} [\log \pi_\theta(a \mid s) \cdot \mathbb{E}_{a' \sim \pi(\cdot \mid s)} [\theta_{s,a'}^{k+1} - \theta_{s,a'}^k]] \\ &= -\mathbb{E}_{a \sim \pi(\cdot \mid s)} [\log \pi_\theta(a \mid s) (\theta_{s,a}^{k+1} - \theta_{s,a}^k)] + \mathbb{E}_{a \sim \pi(\cdot \mid s)} [\log \pi_\theta(a \mid s)] \cdot \mathbb{E}_{a' \sim \pi(\cdot \mid s)} [\theta_{s,a'}^{k+1} - \theta_{s,a'}^k] \\ &= -\text{Cov}_{a \sim \pi(\cdot \mid s)} (\log \pi_\theta(a \mid s), \theta^{k+1} - \theta^k) \\ &= -\text{Cov}_{a \sim \pi(\cdot \mid s)} (\log \pi_\theta(a \mid s), z^{k+1} - z^k) \end{aligned}$$

E.3 Proof for Proposition 1

Proposition 1: Let the actor policy π_θ be tabular softmax policy and updated using Eq. 2, the difference of $z_{s,a}$ between two consecutive steps satisfies

$$z_{s,a}^{k+1} - z_{s,a}^k = \eta \cdot \pi_\theta(a | s) \cdot A(s, a)$$

Proof.

In tabular softmax policy, each state-action pair (s, a) is associated with an individual logit parameter $z_{s,a} = \theta_{s,a}$. Through gradient backtracking, $z_{s,a}$ is updated via $z_{s,a}^{k+1} = z_{s,a}^k + \eta \cdot \nabla_{\theta_{s,a}} J(\theta)$, therefore, we have

$$\begin{aligned} z_{s,a}^{k+1} - z_{s,a}^k &= \eta \cdot \nabla_{\theta_{s,a}} J(\theta) \\ &= \eta \cdot \mathbb{E}_{a' \sim \pi_\theta(\cdot | s)} [\nabla_{\theta_{s,a}} \log \pi_\theta(a' | s) \cdot A(s, a')] \\ &= \eta \cdot \mathbb{E}_{a' \sim \pi_\theta(\cdot | s)} \left[\underbrace{\frac{\partial \log \pi_\theta(a' | s)}{\partial \theta_{s,a}}}_{\text{Lemma 2}} \cdot A(s, a') \right] \\ &= \eta \cdot \sum_{a' \in \mathcal{A}} [\pi_\theta(a' | s) \cdot (\mathbf{1}\{a = a'\} - \pi_\theta(a | s)) \cdot A(s, a')] \\ &= \eta \cdot \pi_\theta(a | s) \cdot \left[(1 - \pi_\theta(a | s)) \cdot A(s, a) - \sum_{a' \in \mathcal{A}, a' \neq a} \pi_\theta(a' | s) \cdot A(s, a') \right] \\ &= \eta \cdot \pi_\theta(a | s) \cdot \left[A(s, a) - \underbrace{\sum_{a' \in \mathcal{A}} \pi_\theta(a' | s) \cdot A(s, a')}_{\text{Lemma 3}} \right] \\ &= \eta \cdot \pi_\theta(a | s) \cdot [A(s, a) - 0] \\ &= \eta \cdot \pi_\theta(a | s) \cdot A(s, a) \end{aligned}$$

E.4 Proof for Theorem 2

Theorem 2: Let the actor policy π_θ be tabular softmax policy, and π_θ is updated via natural policy gradient [Kakade \(2001\)](#), the difference of information entropy given state s between two consecutive steps satisfies

$$\mathcal{H}(\pi_\theta^{k+1} | s) - \mathcal{H}(\pi_\theta^k | s) \approx -\eta \cdot \text{Cov}_{a \sim \pi_\theta^k(\cdot | s)} (\log \pi_\theta^k(a | s), A(s, a))$$

Proof.

According to Lemma 1, we first derive the difference of logits z in natural policy gradient. We learn from [\(Agarwal et al., 2021\)](#) that, when we are updating policy using natural policy gradient via gradient backtracking, $z_{s,a}^{k+1} - z_{s,a}^k$ satisfies,

$$z_{s,a}^{k+1} - z_{s,a}^k = \eta \cdot A(s, a)$$

Applying this into Lemma 1, we have

$$\mathcal{H}(\pi_\theta^{k+1} | s) - \mathcal{H}(\pi_\theta^k | s) \approx -\eta \cdot \text{Cov}_{a \sim \pi_\theta^k(\cdot | s)} (\log \pi_\theta^k(a | s), A(s, a))$$