

提问：现在有没有感觉这种解释似乎是站不住的，如果重要性权重的调整本身并无太大作用，那么无论将其设计为 token-level 还是 response-level，又有什么本质区别呢？

Group Sequence Policy Optimization

Chujie Zheng* Shixuan Liu Mingze Li Xiong-Hui Chen Bowen Yu*
Chang Gao Kai Dang Yuqiong Liu Rui Men An Yang Jingren Zhou
Junyang Lin
Qwen Team, Alibaba Inc.

Abstract

This paper introduces Group Sequence Policy Optimization (GSPO), our stable, efficient, and performant reinforcement learning algorithm for training large language models. Unlike previous algorithms that adopt token-level importance ratios, GSPO defines the importance ratio based on sequence likelihood and performs sequence-level clipping, rewarding, and optimization. We demonstrate that GSPO achieves superior training efficiency and performance compared to the GRPO algorithm, notably stabilizes Mixture-of-Experts (MoE) RL training, and has the potential for simplifying the design of RL infrastructure. These merits of GSPO have contributed to the remarkable improvements in the latest Qwen3 models.

GSPO 基于序列似然定义重要性比率，并执行序列级别的剪裁、奖励和优化

尤其能稳定混合专家 (MoE) 强化学习 (RL) 的训练过程

1 Introduction

Reinforcement learning (RL) has emerged as a pivotal paradigm for scaling language models (OpenAI, 2024; DeepSeek-AI, 2025; Qwen, 2025b;a). Through large-scale RL, language models develop the capability to tackle sophisticated problems, such as competition-level mathematics and programming, by undertaking deeper and longer reasoning processes.

To successfully scale RL with greater computational investment, the foremost prerequisite is maintaining stable and robust training dynamics. However, current state-of-the-art RL algorithms, exemplified by GRPO (Shao et al., 2024), exhibit severe stability issues when training gigantic language models, often resulting in catastrophic and irreversible model collapse (Qwen, 2025a; MiniMax, 2025). This instability hinders efforts to push the capability boundaries of language models through continued RL training.

要成功扩展强化学习 (RL) 的规模并增加计算投入，首要前提是保持稳定且稳健的训练动态。

在训练巨型语言模型时，常会导致灾难性且不可逆的模型崩溃

这种不稳定性阻碍了通过持续强化学习训练来突破语言模型能力边界的努力。

我们发现 GRPO 的不稳定性源于其算法设计中重要性采样权重的根本性误用和无效性

这会引入高方差训练噪声，该噪声随着响应长度的增加而逐步累积，并通过削波机制进一步放大，最终导致模型崩溃。

GSPO 本质上解决了大型专家混合 (MoE) 模型在强化学习 (RL) 训练中的稳定性挑战，无需采用复杂的稳定化策略，并展现出简化强化学习基础设施的潜力。

In this paper, we identify that the instability of GRPO stems from the fundamental misapplication and invalidation of importance sampling weights in its algorithmic design. This introduces high-variance training noise that progressively accumulates with increased response length and is further amplified by the clipping mechanism, ultimately precipitating model collapse.

To address these core limitations, we propose Group Sequence Policy Optimization (GSPO), a new RL algorithm for training large language models. The key innovation of GSPO lies in its theoretically grounded definition of importance ratio based on sequence likelihood (Zheng et al., 2023), aligning with the basic principle of importance sampling. Additionally, GSPO computes the normalized rewards as the advantages of multiple responses to a query, ensuring the alignment between sequence-level rewarding and optimization. 其基于sequence似然的重要率定义在理论上与重要性抽样的基本原理相一致。

Our empirical evaluation demonstrates the significant superiority of GSPO over GRPO in training stability, efficiency, and performance. Critically, GSPO has inherently resolved the stability challenges in the RL training of large Mixture-of-Experts (MoE) models, eliminating the need for complex stabilization strategies, and shows the potential for simplifying RL infrastructure. These merits of GSPO ultimately contributed to the exceptional performance improvements in the latest Qwen3 models. We envision GSPO as a robust and scalable algorithmic foundation that will enable the continued advancement of large-scale RL training with language models.

2 Preliminaries

Notation In this paper, an autoregressive language model parameterized by θ is defined as a policy π_θ . We use x to denote a query and $\mathcal{D}$ as the query set. Given a response y to a query x , its likelihood under

*Corresponding authors.

the policy π_θ is denoted as $\pi_\theta(y|x) = \prod_{t=1}^{|y|} \pi_\theta(y_t|x, y_{<t})$ where $|y|$ denotes the number of tokens in y . A query-response pair (x, y) can be scored by a verifier r , resulting in a reward $r(x, y) \in [0, 1]$.

Proximal Policy Optimization (PPO) Using samples generated from the old policy $\pi_{\theta_{\text{old}}}$, PPO (Schulman et al., 2017) constrains the policy update within a proximal region of the old policy through the clipping mechanism. Specifically, PPO employs the following objective for policy optimization (we omit the KL regularization term hereinafter for brevity, as it is not the focus of this paper):

$$\mathcal{J}_{\text{PPO}}(\theta) = \mathbb{E}_{x \sim \mathcal{D}, y \sim \pi_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{|y|} \sum_{t=1}^{|y|} \min \left(w_t(\theta) \hat{A}_t, \text{clip}(w_t(\theta), 1 - \epsilon, 1 + \epsilon) \hat{A}_t \right) \right], \quad (1)$$

where the importance ratio of the token y_t is defined as $w_t(\theta) = \frac{\pi_\theta(y_t|x, y_{<t})}{\pi_{\theta_{\text{old}}}(y_t|x, y_{<t})}$, the advantage $\hat{A}_t$ of y_t is estimated by another value model, and ϵ is the clipping range of importance ratios.

The core challenge of PPO in practice lies in its heavy reliance on the value model. Specifically, the value model usually has a similar size to the policy model, introducing a considerable memory and computational burden. Furthermore, the algorithmic effectiveness hinges on the reliability of its value estimate. While acquiring a reliable value model is inherently challenging, ensuring its scalability to longer responses and more complex tasks presents an even greater challenge.

Group Relative Policy Optimization (GRPO) GRPO (Shao et al., 2024) bypasses the need for the value model by computing the relative advantage of each response within a group of responses to the same query. Specifically, GRPO optimizes the following objective:

$$\mathcal{J}_{\text{GRPO}}(\theta) = \mathbb{E}_{x \sim \mathcal{D}, \{y_i\}_{i=1}^G \sim \pi_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{G} \sum_{i=1}^G \frac{1}{|y_i|} \sum_{t=1}^{|y_i|} \min \left(w_{i,t}(\theta) \hat{A}_{i,t}, \text{clip}(w_{i,t}(\theta), 1 - \epsilon, 1 + \epsilon) \hat{A}_{i,t} \right) \right], \quad (2)$$

where G is the number of generated responses to each query x (i.e., the group size), and the importance ratio $w_{i,t}(\theta)$ and advantage $\hat{A}_{i,t}$ of token $y_{i,t}$ are:

$$w_{i,t}(\theta) = \frac{\pi_\theta(y_{i,t}|x, y_{i,<t})}{\pi_{\theta_{\text{old}}}(y_{i,t}|x, y_{i,<t})}, \quad \hat{A}_{i,t} = \hat{A}_i = \frac{r(x, y_i) - \text{mean}(\{r(x, y_i)\}_{i=1}^G)}{\text{std}(\{r(x, y_i)\}_{i=1}^G)}, \quad (3)$$

respectively, where all the tokens in y_i share the same advantage as $\hat{A}_i$.

3 Motivation

The growth in model size, sparsity (e.g., in Mixture-of-Experts models), and response length necessitates a large rollout batch size to maximize hardware utilization during RL. To improve sample efficiency, it is standard practice to partition a large batch of rollout data into multiple mini-batches for gradient updates. This procedure inevitably introduces an off-policy learning setting, where responses y are sampled from an old policy $\pi_{\theta_{\text{old}}}$ rather than the current policy π_θ being optimized. This also explains the necessity of the clipping mechanism in PPO and GRPO, which prevents overly “off-policy” samples from being involved in gradient estimation.

While mechanisms like clipping aim to manage this off-policy discrepancy, we identify a more fundamental issue in GRPO: its objective is ill-posed. This problem becomes particularly acute when training large models on long-response tasks, leading to catastrophic model collapse. The ill-posed nature of the GRPO objective stems from a misapplication of importance sampling weights. The principle of importance sampling is to estimate the expectation of a function f under a target distribution π_{tar} by re-weighting samples drawn from a behavior distribution π_{beh} :

$$\mathbb{E}_{z \sim \pi_{\text{tar}}} [f(z)] = \mathbb{E}_{z \sim \pi_{\text{beh}}} \left[\frac{\pi_{\text{tar}}(z)}{\pi_{\text{beh}}(z)} f(z) \right]. \quad (4)$$

Crucially, this relies on averaging over multiple samples ($N \gg 1$) from the behavior distribution π_{beh} for the importance weight $\frac{\pi_{\text{tar}}(z)}{\pi_{\text{beh}}(z)}$ to effectively correct for the distributional mismatch. 有效校正分布失配

In contrast, GRPO applies the importance weight $\frac{\pi_\theta(y_{i,t}|x, y_{i,<t})}{\pi_{\theta_{\text{old}}}(y_{i,t}|x, y_{i,<t})}$ at each token position t . Since this weight is based on a single sample $y_{i,t}$ from each next-token distribution $\pi_{\theta_{\text{old}}}(\cdot|x, y_{i,<t})$, it fails to perform the intended distribution-correction role. Instead, it introduces high-variance noise into the training

它未能发挥预期的分布校正作用。

通过剪切机制将策略更新限制在旧策略的邻近区域内。

建立可靠的价值模型本身具有挑战性，而确保其可扩展性以应对更长的响应时间和更复杂的任务则面临更大的挑战。

为提高样本效率，将大批量展开数据分割为多个小批量以进行梯度更新是标准做法。

GRPO目标的不稳定性源于重要性采样权重的误用。

该效应在长序列中被累积，并因剪切机制而加剧

gradients, which accumulates over long sequences and is exacerbated by the clipping mechanism. We have empirically observed that this can lead to model collapse that is often irreversible. Once the collapse occurs, resuming training is unavailing, even when reverting to a previous checkpoint and meticulously tuning hyperparameters (e.g., the clipping ranges), extending generation length, or switching the RL queries.

优化目标的单位应与奖励单位相匹配

The above observation suggests a fundamental issue in GRPO’s design. The failure of the token-level importance weight points to a core principle: **the unit of optimization objective should match the unit of reward**. Since the reward is granted to the entire sequence, applying off-policy correction at the token level appears problematic. This motivates us to forego the token-level objective and explore utilizing importance weights and performing optimization directly at the *sequence level*.

由于奖励是授予整个序列的，因此在token-level应用离策略校正显得存在问题。

4 Algorithm

这促使我们放弃token-level的目标，转而探索利用重要性权重并在sequence-level直接进行优化。

4.1 GSPO: Group Sequence Policy Optimization 从token-level转向sequence-level

While the token-level importance weight $\frac{\pi_{\theta}(y_{i,t}|x, y_{i,<t})}{\pi_{\theta_{\text{old}}}(y_{i,t}|x, y_{i,<t})}$ is problematic in GRPO, we observe that in the context of language generation, the sequence-level importance weight $\frac{\pi_{\theta}(y|x)}{\pi_{\theta_{\text{old}}}(y|x)}$ has a clear theoretical meaning: it reflects how far the response y sampled from $\pi_{\theta_{\text{old}}}(\cdot|x)$ deviates from $\pi_{\theta}(\cdot|x)$, which naturally aligns with the sequence-level reward and can also serve as a meaningful indicator of the clipping mechanism. 它反映了从 $\pi_{\theta_{\text{old}}}(\cdot|x)$ 中采样的响应 y 与 $\pi_{\theta}(\cdot|x)$ 的偏离程度

这与序列水平的奖励自然对齐，同时也能作为剪切机制的有效指标

Based on this straightforward observation, we propose the **Group Sequence Policy Optimization (GSPO)** algorithm. GSPO employs the following sequence-level optimization objective:

$$\mathcal{J}_{\text{GSPO}}(\theta) = \mathbb{E}_{x \sim \mathcal{D}, \{y_i\}_{i=1}^G \sim \pi_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{G} \sum_{i=1}^G \min \left(s_i(\theta) \hat{A}_i, \text{clip}(s_i(\theta), 1 - \varepsilon, 1 + \varepsilon) \hat{A}_i \right) \right], \quad (5)$$

where we adopt the group-based advantage estimation:

$$\hat{A}_i = \frac{r(x, y_i) - \text{mean}(\{r(x, y_i)\}_{i=1}^G)}{\text{std}(\{r(x, y_i)\}_{i=1}^G)}, \quad (6)$$

and define the importance ratio $s_i(\theta)$ based on sequence likelihood (Zheng et al., 2023):

$$s_i(\theta) = \left(\frac{\pi_{\theta}(y_i|x)}{\pi_{\theta_{\text{old}}}(y_i|x)} \right)^{\frac{1}{|y_i|}} = \exp \left(\frac{1}{|y_i|} \sum_{t=1}^{|y_i|} \log \frac{\pi_{\theta}(y_{i,t}|x, y_{i,<t})}{\pi_{\theta_{\text{old}}}(y_{i,t}|x, y_{i,<t})} \right). \quad (7)$$

Therefore, GSPO applies clipping to entire responses instead of individual tokens to exclude the overly “off-policy” samples from gradient estimation, which matches both the sequence-level rewarding and optimization. Note that we adopt length normalization in $s_i(\theta)$ to reduce the variance and to control $s_i(\theta)$ within a unified numerical range. Otherwise, the likelihood changes of a few tokens can result in dramatic fluctuations of the sequence-level importance ratio, and the importance ratios of responses with different lengths will require varying clipping ranges. We also note that the clipping ranges in GSPO and in previous algorithms (e.g., GRPO) typically differ in order of magnitude due to the distinct definitions of importance ratios. 我们还注意到，由于重要性比率的定义不同，GSPO 和以前的算法（如 GRPO）中的剪切范围通常相差一个数量级。

GSPO 对整个响应而非单个标记进行剪切，以排除梯度估计中过度“偏离策略”的样本，这与序列级奖励和优化机制相匹配

否则，少数标记的似然性变化可能导致序列水平重要性比率的剧烈波动

不同长度响应的重要性比值将需要不同的截断范围

4.2 Gradient Analysis

We can derive the gradient of the GSPO objective as follows (clipping is omitted for brevity):

$$\nabla_{\theta} \mathcal{J}_{\text{GSPO}}(\theta) = \nabla_{\theta} \mathbb{E}_{x \sim \mathcal{D}, \{y_i\}_{i=1}^G \sim \pi_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{G} \sum_{i=1}^G s_i(\theta) \hat{A}_i \right] \quad (8)$$

$$= \mathbb{E}_{x \sim \mathcal{D}, \{y_i\}_{i=1}^G \sim \pi_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{G} \sum_{i=1}^G s_i(\theta) \hat{A}_i \cdot \nabla_{\theta} \log s_i(\theta) \right] \quad (9)$$

$$= \mathbb{E}_{x \sim \mathcal{D}, \{y_i\}_{i=1}^G \sim \pi_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{G} \sum_{i=1}^G \left(\frac{\pi_{\theta}(y_i|x)}{\pi_{\theta_{\text{old}}}(y_i|x)} \right)^{\frac{1}{|y_i|}} \hat{A}_i \cdot \frac{1}{|y_i|} \sum_{t=1}^{|y_i|} \nabla_{\theta} \log \pi_{\theta}(y_{i,t}|x, y_{i,<t}) \right]. \quad (10)$$

For comparison, the gradient of the GRPO objective is as follows (note that $\hat{A}_{i,t} = \hat{A}_i$):

$$\nabla_{\theta} \mathcal{J}_{\text{GRPO}}(\theta) = \nabla_{\theta} \mathbb{E}_{x \sim \mathcal{D}, \{y_i\}_{i=1}^G \sim \pi_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{G} \sum_{i=1}^G \frac{1}{|y_i|} \sum_{t=1}^{|y_i|} w_{i,t}(\theta) \hat{A}_{i,t} \right] \quad (11)$$

$$= \mathbb{E}_{x \sim \mathcal{D}, \{y_i\}_{i=1}^G \sim \pi_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{G} \sum_{i=1}^G \hat{A}_i \cdot \frac{1}{|y_i|} \sum_{t=1}^{|y_i|} \frac{\pi_{\theta}(y_{i,t}|x, y_{i,<t})}{\pi_{\theta_{\text{old}}}(y_{i,t}|x, y_{i,<t})} \nabla_{\theta} \log \pi_{\theta}(y_{i,t}|x, y_{i,<t}) \right] \quad (12)$$

Therefore, the fundamental distinction between GSPO and GRPO lies in *how they weight the gradients of the log likelihoods of tokens*. In GRPO, the tokens are weighted according to their respective “importance weight” $\frac{\pi_{\theta}(y_{i,t}|x, y_{i,<t})}{\pi_{\theta_{\text{old}}}(y_{i,t}|x, y_{i,<t})}$. However, these unequal weights, which can vary among $(0, 1 + \varepsilon]$ (for $\hat{A}_i > 0$) or $[1 - \varepsilon, +\infty)$ (for $\hat{A}_i < 0$), are not negligible, and their impact can accumulate and lead to unpredictable consequences as training progresses. In contrast, GSPO weights all the tokens in a response equally, eliminating this instability factor of GRPO. GSPO 对响应中的所有 token 赋予权重, 消除了 GRPO 的这种不稳定性因素。

他们如何权衡 token 对数似然梯度的权重

4.3 GSPO-token: A Token-level Objective Variant

在多轮强化学习 (multi-turn RL) 等场景中 我们可能需要更精细的优势调整 In scenarios like multi-turn RL, we may desire a finer-grained advantage adjustment than the sequence level. To this end, we introduce a token-level objective variant of GSPO, namely **GSPO-token**, to allow token-wise advantage customization:

$$\mathcal{J}_{\text{GSPO-token}}(\theta) = \mathbb{E}_{x \sim \mathcal{D}, \{y_i\}_{i=1}^G \sim \pi_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{G} \sum_{i=1}^G \frac{1}{|y_i|} \sum_{t=1}^{|y_i|} \min(s_{i,t}(\theta) \hat{A}_{i,t}, \text{clip}(s_{i,t}(\theta), 1 - \varepsilon, 1 + \varepsilon) \hat{A}_{i,t}) \right], \quad (13)$$

where

$$s_{i,t}(\theta) = \text{sg}[s_i(\theta)] \cdot \frac{\pi_{\theta}(y_{i,t}|x, y_{i,<t})}{\text{sg}[\pi_{\theta}(y_{i,t}|x, y_{i,<t})]}, \quad (14)$$

$\text{sg}[\cdot]$ 仅表示取数值但停止梯度更新, 对应于 PyTorch 中的 detach 操作

and $\text{sg}[\cdot]$ denotes only taking the numerical value but stopping the gradient, corresponding to the detach operation in PyTorch. The gradient of GSPO-token can be derived as:

$$\nabla_{\theta} \mathcal{J}_{\text{GSPO-token}}(\theta) = \nabla_{\theta} \mathbb{E}_{x \sim \mathcal{D}, \{y_i\}_{i=1}^G \sim \pi_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{G} \sum_{i=1}^G \frac{1}{|y_i|} \sum_{t=1}^{|y_i|} s_{i,t}(\theta) \hat{A}_{i,t} \right] \quad (15)$$

$$= \mathbb{E}_{x \sim \mathcal{D}, \{y_i\}_{i=1}^G \sim \pi_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{G} \sum_{i=1}^G s_i(\theta) \cdot \frac{1}{|y_i|} \sum_{t=1}^{|y_i|} \hat{A}_{i,t} \frac{\nabla_{\theta} \pi_{\theta}(y_{i,t}|x, y_{i,<t})}{\pi_{\theta}(y_{i,t}|x, y_{i,<t})} \right] \quad (16)$$

$$= \mathbb{E}_{x \sim \mathcal{D}, \{y_i\}_{i=1}^G \sim \pi_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{G} \sum_{i=1}^G \left(\frac{\pi_{\theta}(y_i|x)}{\pi_{\theta_{\text{old}}}(y_i|x)} \right)^{\frac{1}{|y_i|}} \cdot \frac{1}{|y_i|} \sum_{t=1}^{|y_i|} \hat{A}_{i,t} \nabla_{\theta} \log \pi_{\theta}(y_{i,t}|x, y_{i,<t}) \right]. \quad (17)$$

数值上等于

Note that the term $\frac{\pi_{\theta}(y_i|x)}{\pi_{\theta_{\text{old}}}(y_i|x)}$ has a numerical value of 1, so $s_{i,t}(\theta)$ is numerically equal to $s_i(\theta)$.

Comparing Equation (5) and (13), and Equation (10) and (17), GSPO-token and GSPO are numerically identical in the optimization objective, clipping condition, and theoretical gradient when we set the advantages of all the tokens in the response y_i to the same value (i.e., $\hat{A}_{i,t} = \hat{A}_i$), while GSPO-token enjoys the higher flexibility of adjusting the advantages per token.

GSPO-token 和 GSPO 在优化目标、剪裁条件和理论梯度上是数值上相同的, 当我们把响应 y_i 中所有 token 的优势设置为相同的值时 (即 $A_{i,t} = A_i$), 而 GSPO-token 具有更高的灵活性, 可以调整每个 token 的优势。

5 Experiments and Discussion

5.1 Empirical Results

We experiment with a cold-start model fine-tuned from Qwen3-30B-A3B-Base, and report the training reward curves as well as the model performance curves on the AIME'24 (average Pass@1 over 32 samplings), LiveCodeBench (202410-202502, average Pass@1 over 8 samplings), and CodeForces (Elo Rating) benchmarks. During the RL training, each batch of rollout data is partitioned into four mini-batches for gradient updates. In GSPO, we set the left and right clipping ranges in Equation (5) to $3e-4$ and $4e-4$, respectively. We compare against GRPO as the baseline and set the left and right clipping ranges in Equation (2) to 0.2 and 0.27, respectively, which we have carefully tuned to ensure a fair comparison.

我们使用从 Qwen3-30B-A3B-Base 微调的冷启动模型进行实验, 并报告了在 AIME '24 (32 次采样平均 Pass@1)、LiveCodeBench (202410-202502 8 次采样平均 Pass@1) 和 CodeForces (Elo Rating) 基准测试上的训练奖励曲线及模型性能曲线。在强化学习训练过程中, 每批部署数据被分割成四个小批次以进行梯度更新。在 GSPO 中, 我们将公式 (5) 中的左右剪切范围分别设置为 $3e-4$ 和 $4e-4$ 。我们将 GRPO 作为基线进行对比, 并将公式 (2) 中的左右剪切范围分别设置为 0.2 和 0.27, 这些参数经过仔细调整以确保公平比较。

注意，GRPO 需要路由重播训练策略以实现 MoE RL 的正常收敛，我们将在第 5.3 节中进一步讨论，而 GSPO 已经消除了对这一策略的需求。

Note that GRPO necessitates the Routing Replay training strategy for the normal convergence of MoE RL, which we will additionally discuss in § 5.3, while GSPO has obviated the need for this strategy.

Figure 1 shows that the training with GSPO proceeds stably throughout. We observe that **GSPO can deliver continuous performance improvement through increasing the training compute, regularly updating the query set, and extending the generation length**. Moreover, GSPO also demonstrates superior training efficiency over GRPO, achieving better training accuracy and benchmark performance under the same training compute and consumed queries. Finally, we have successfully applied GSPO to the RL training of the latest Qwen3 models, strongly proving the efficacy of GSPO in unleashing the power of RL scaling for large language models.

我们观察到 GSPO 可以通过增加训练计算、定期更新查询集和延长生成长度来提供持续的性能改进。

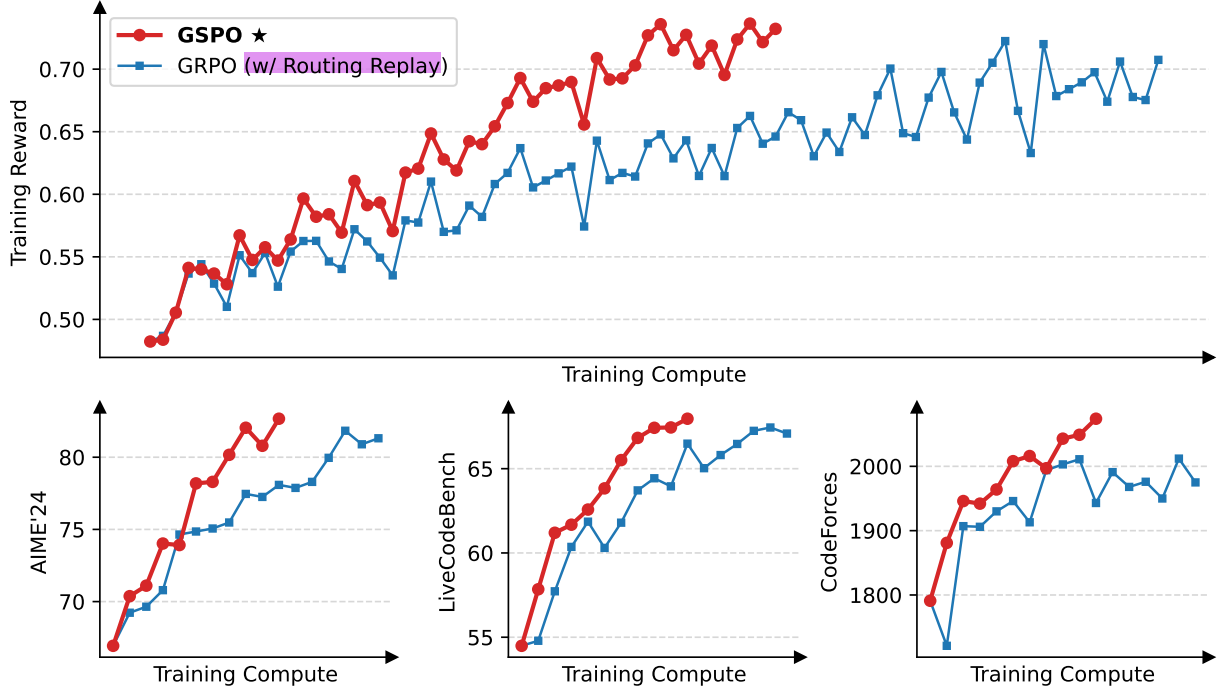



Figure 1: Training curves of a cold-start model fine-tuned from Qwen3-30B-A3B-Base. GSPO possesses remarkably higher training efficiency than GRPO.

5.2 Curious Observation on Clipping Fractions

GSPO 与 GRPO 的核心区别是——GSPO 把“整段回答”直接裁剪，而不是像 GRPO 那样逐 token 裁剪。

A key distinction of GSPO compared to GRPO is its practice of **clipping entire responses rather than individual tokens**. Particularly, as shown in Figure 2, we observe a difference of two orders of magnitude in the fractions of clipped tokens between GSPO and GRPO (while adjusting the clipping ranges does not alter the disparity in magnitude). However, despite clipping significantly more tokens and consequently using fewer for training (or gradient estimation), GSPO still achieves higher training efficiency than GRPO. This counter-intuitive finding — that clipping a much larger fraction of tokens leads to superior training efficiency — further indicates that GRPO’s token-level gradient estimates are inherently noisy and inefficient for sample exploitation. In contrast, GSPO’s sequence-level approach provides a more reliable and effective learning signal.

然而，尽管剪切了更多的标记，从而减少了用于训练（或梯度估计）的标记，GSPO 仍然比 GRPO 实现了更高的训练效率。

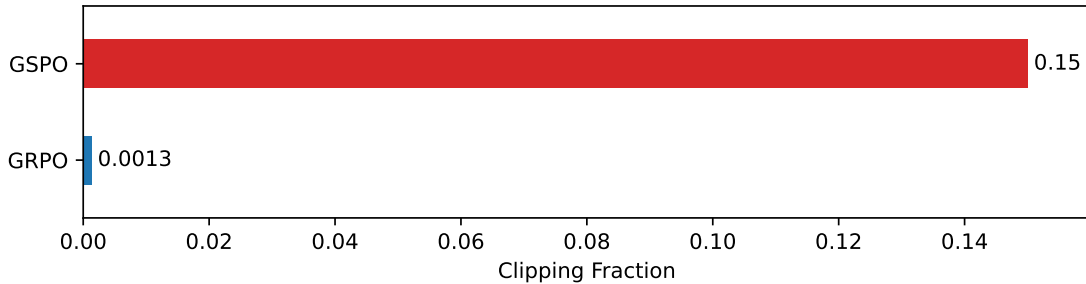

这一反直觉的发现——截取更大比例的标记会导致训练效率提升

Figure 2: Average fractions of clipped tokens over the RL training of GSPO and GRPO.

5.3 Benefit of GSPO for MoE Training

与密集模型的强化学习（RL）训练相比，多模态增强（MoE）模型的稀疏激活特性带来了独特的稳定性挑战。

Background Compared to the RL training of dense models, the sparse activation nature of MoE models introduces unique stability challenges. In particular, we found that when adopting the GRPO algorithm, the *expert-activation volatility* of MoE models can prevent RL training from converging properly. To be specific, after one or more gradient updates, the experts activated for the same response can change significantly. For example, with the 48-layer Qwen3-30B-A3B-Base model, after each RL gradient update and for the same rollout sample, there are roughly 10% of the experts activated under the new policy π_θ that are different from those under the old policy $\pi_{\theta_{old}}$. This phenomenon, which becomes more prominent in deeper MoE models, makes the token-level importance ratios $w_{i,t}(\theta) = \frac{\pi_\theta(y_{i,t}|x, y_{i,<t})}{\pi_{\theta_{old}}(y_{i,t}|x, y_{i,<t})}$ fluctuate drastically and further invalidates them, as discussed in § 3 and 4.2, consequently hindering the normal convergence of RL training.

我们发现，当采用 GRPO 算法时，MoE 模型的专家激活波动性可以防止 RL 训练正常收敛。

这一现象在更深层的 MoE 模型中表现得更为显著。

如第3节和第4.2节所述，这使得令牌级重要性比率 $w_{i,t}(\theta)$ 剧烈波动并进一步失效，从而阻碍了强化学习训练的正常收敛。

我们缓存激活的专家在 $\pi_{\theta_{old}}$ 中，并在计算重要性比率 $w_{i,t}(\theta)$ 时在 π_θ 中“重放”这些路由模式。

Our Previous Approach To tackle this challenge, we previously employed the **Routing Replay** training strategy. Specifically, we cache the activated experts in $\pi_{\theta_{old}}$ and “replay” these routing modes in π_θ when computing the importance ratios $w_{i,t}(\theta) = \frac{\pi_\theta(y_{i,t}|x, y_{i,<t})}{\pi_{\theta_{old}}(y_{i,t}|x, y_{i,<t})}$. In this way, for each token $y_{i,t}$, $\pi_\theta(y_{i,t}|x, y_{i,<t})$ and $\pi_{\theta_{old}}(y_{i,t}|x, y_{i,<t})$ share the same activated network, so that we can restore the stability of the token-level importance ratios and ensure optimization of the consistent activated network across gradient updates. Figure 3 demonstrates that Routing Replay serves as an essential technique in the normal convergence of the GRPO training of MoE models.

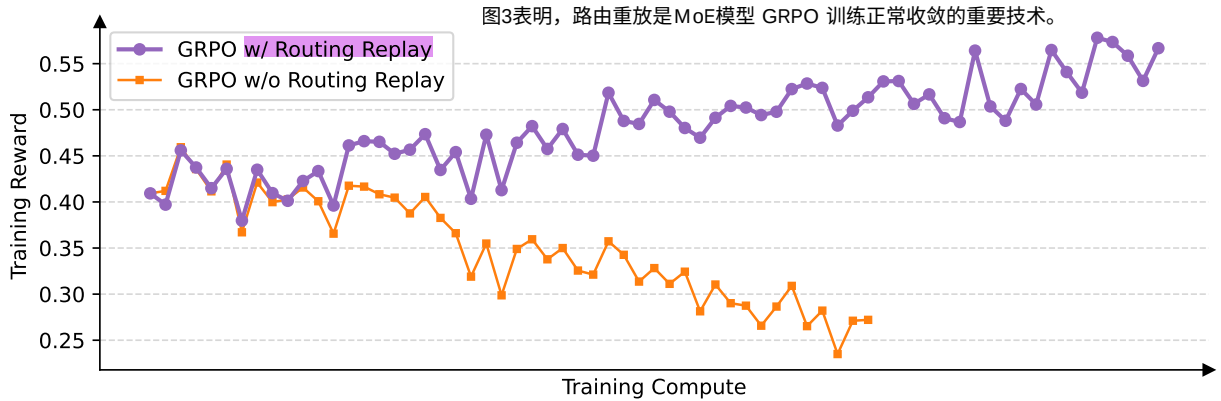


Figure 3: The Routing Replay strategy plays a critical role in the normal convergence of the GRPO training of MoE models.

尽管路由重放使 MoE 模型的 GRPO 训练能够正确收敛，但其重用路由模式的做法会带来额外的内存和通信开销，而且还会限制 MoE 模型的实际容量。

Benefit of GSPO Although Routing Replay enables the GRPO training of MoE models to converge properly, its practice of reusing routing modes incurs additional memory and communication overhead and can also limit the actual capacity of the MoE model. In contrast, as shown in Figure 1, GSPO eliminates the dependency on Routing Replay and is fully capable of computing the importance ratios $s_i(\theta)$ conventionally, converging normally, and optimizing stably. The key insight is that GSPO focuses only on the sequence likelihood (i.e., $\pi_\theta(y_i|x)$) and is not sensitive to the individual token likelihood (i.e., $\pi_\theta(y_{i,t}|x, y_{i,<t})$). Since the MoE model always maintains its language modeling capability, the sequence likelihood will not fluctuate drastically. In summary, GSPO fundamentally resolves the expert-activation volatility issue in MoE models, obviating the need for complex workarounds like Routing Replay. This not only simplifies and stabilizes the training process but also allows the model to leverage its full capacity without artificial constraints.

GSPO 消除了对路由重播的依赖，并且能够完全计算出重要性比率 $s_i(\theta)$ ，通常情况下，它会正常收敛，并且稳定地优化。

由于 MoE 模型始终保持其语言建模能力，序列似然不会剧烈波动。

GSPO 从根本上解决了教育模型中的专家激活波动性问题，无需采用路由重放等复杂变通方案。

5.4 Benefit of GSPO for RL Infrastructure

Given the precision discrepancies between training engines (e.g., Megatron) and inference engines (e.g., SGLang and vLLM), in practice, we typically use the training engine to recompute the likelihoods of sampled responses under the old policy $\pi_{\theta_{old}}$. However, GSPO uses only sequence-level, rather than token-level, likelihoods for optimization, and intuitively, the former is much more tolerant of precision discrepancies. Hence, GSPO makes it possible to directly use the likelihoods returned by the inference engine for optimization, thereby avoiding the need for recomputation with the training engine. This can be especially beneficial in scenarios like partial rollout and multi-turn RL and in the training-inference disaggregated frameworks.

考虑到训练引擎（如 Megatron）和推理引擎（如 SGLang 和 vLLM）之间的精度差异，在实践中，我们通常使用训练引擎在旧策略 $\pi_{\theta_{old}}$ 下重新计算采样响应的可能性。

然而，GSPO 仅使用序列水平的似然性，而非标记水平的似然性进行优化，直观地说，前者对精确度差异的容忍度要高得多。

因此，GSPO 可以直接利用推理引擎返回的似然值进行优化，从而避免了使用训练引擎重新计算的必要性。

这在部分部署和多轮强化学习（RL）等场景中尤为有益，同时适用于训练-推理分离框架。

与 GRPO 相比，GSPO 展现出显著更优的训练稳定性、效率和性能，尤其在大规模模型增强（MoE）模型的强化学习训练中效果突出，为最新版 Qwen3 模型的卓越性能提升奠定了基础。

6 Conclusion

We propose Group Sequence Policy Optimization (GSPO), a new reinforcement learning algorithm for training large language models. Following the basic principle of importance sampling, GSPO defines importance ratios based on sequence likelihood and performs sequence-level clipping, rewarding, and optimization. GSPO demonstrates notably superior training stability, efficiency, and performance compared to GRPO and exhibits particular efficacy for the large-scale RL training of MoE models, laying the foundation for the exceptional improvements in the latest Qwen3 models. With GSPO as a scalable algorithmic cornerstone, we will continue to scale RL and look forward to the resulting fundamental advances in intelligence.

References

- DeepSeek-AI. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025.
- MiniMax. Minimax-m1: Scaling test-time compute efficiently with lightning attention. *arXiv preprint arXiv:2506.13585*, 2025.
- OpenAI. Learning to reason with LLMs, 2024. URL <https://openai.com/index/learning-to-reason-with-llms/>.
- Team Qwen. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025a.
- Team Qwen. Qwq-32b: Embracing the power of reinforcement learning, March 2025b. URL <https://qwenlm.github.io/blog/qwq-32b/>.
- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, Y. K. Li, Y. Wu, and Daya Guo. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
- Chujie Zheng, Pei Ke, Zheng Zhang, and Minlie Huang. Click: Controllable text generation with sequence likelihood contrastive learning. In *Findings of the Association for Computational Linguistics: ACL 2023*, 2023. URL <https://aclanthology.org/2023.findings-acl.65/>.