

A COMEDY OF ESTIMATORS: ON KL REGULARIZATION IN RL TRAINING OF LLMs

Vedant Shah^{*1,2} Johan Obando-Ceron^{*1,2} Vineet Jain^{*1,3} Brian Bartoldson⁵
 Bhavya Kailkhura⁵ Sarthak Mittal^{1,2} Glen Berseth^{1,2,7} Pablo Samuel Castro^{1,2}
 Yoshua Bengio^{1,2,4,7} Nikolay Malkin^{6,8} Moksh Jain^{†1,2} Siddarth Venkatraman^{†1,2}
 Aaron Courville^{†1,2,7}

^{*}Equal contribution ¹Mila – Québec AI Institute ²Université de Montréal ³McGill University

⁴LawZero ⁵LLNL ⁶University of Edinburgh ⁷CIFAR AI Chair ⁸CIFAR Fellow

[†] Equal senior contribution

{ vedant.shah, johan.ceron, jain.vineet, mittalsa, glen.berseth }
 { pablo-samuel.castro, yoshua.bengio, moksh.jain, } @mila.quebec
 { siddarth.venkatraman, courvila }
 { bartoldson1, kailkhura1 } @llnl.gov, nmalkin@ed.ac.uk

ABSTRACT

The reasoning performance of large language models (LLMs) can be substantially improved by training them with reinforcement learning (RL). The RL objective for LLM training involves a regularization term, which is the reverse Kullback-Leibler (KL) divergence between the trained policy and the reference policy. Since computing the KL divergence exactly is intractable, various estimators are used in practice to estimate it from on-policy samples. Despite its wide adoption, including in several open-source libraries, **there is no systematic study analyzing the numerous ways of incorporating KL estimators in the objective and their effect on the downstream performance of RL-trained models.** Recent works show that **prevailing practices for incorporating KL regularization do not provide correct gradients for stated objectives, creating a discrepancy between the objective and its implementation.** **In this paper, we further analyze these practices and study the gradients of several estimators configurations, revealing how design choices shape gradient bias.** We substantiate these findings with empirical observations by RL fine-tuning Qwen2.5-7B, Llama-3.1-8B-Instruct and Qwen3-4B-Instruct-2507 with different configurations and **evaluating their performance on both in- and out-of-distribution tasks.** **Through our analysis, we observe that, in on-policy settings: (1) estimator configurations with biased gradients can result in training instabilities; and (2) using estimator configurations resulting in unbiased gradients leads to better performance on in-domain as well as out-of-domain tasks. We also investigate the performance resulting from different KL configurations in off-policy settings and observe that KL regularization can help stabilize off-policy RL training resulting from asynchronous setups. Overall, our findings provide useful takeaways for using KL-regularized objectives during RL post-training of LLMs.**

1 INTRODUCTION

Reinforcement learning (RL) has become an indispensable component of present-day post-training pipelines for large language models (LLM). RL fine-tuning of LLMs was initially popularized for human preference alignment and instruction-following (Ouyang et al., 2022). Since then, RL has played a critical role in reasoning-oriented post-training of LLMs. Recent work (Jaech et al., 2024; Guo et al., 2025) has shown that training LLMs as RL policies on verifiable reasoning tasks such as mathematics and coding leads to a substantial performance improvements. Subsequently, there has been rapid progress in approaches for reasoning-oriented RL training of LLMs. For instance, the

performance of DeepSeek-R1 (Guo et al., 2025) is matched by much smaller models (Yang et al., 2025). At the same time, this progress has been accompanied by inconsistent design choices and implementation errors in open source RL fine-tuning pipelines (Tang & Munos, 2025; Zhang et al., 2025).

One such design choice is the use of Kullback-Leibler (KL) divergence between the trained policy and the base policy as a regularization term in the objective (Shao et al., 2024; Ouyang et al., 2022). This regularization ensures that the policy explores within the space of coherent sequences by constraining it within the support of the base model, mitigating problems such as language drift, reward over-optimization (Gao et al., 2023) or catastrophic forgetting (McCloskey & Cohen, 1989; Qi et al., 2024) of the information present in the base model. Specifically, the *reverse* KL divergence is used for this regularization so that the learned policy assigns high probability mass to a narrow set of high-reward trajectories. This is opposed to the forward KL divergence, which tends to maintain probability mass over the entire support of the base model at the expense of performance. A regularization coefficient β controls the trade-off between reward maximization and proximity to the base model. However, it is intractable to compute the reverse KL divergence exactly owing to the high-dimensionality of the space of possible sequences. As a result, different sample-based estimators of the reverse KL divergence are used in practice (Schulman, 2020; Zhang et al., 2025; Amini et al., 2025).

In addition to differences in their approximations, these estimators may be incorporated into the objective in different ways: previous work on RLHF with PPO (Ouyang et al., 2022) adds the KL penalty to the task reward (*i.e.*, no direct gradients); methods such as GRPO (Shao et al., 2024; Guo et al., 2025) popularized adding the KL term directly to the loss. The choice of the estimator, regularization coefficient, and whether it is added to the reward or directly to the loss can have a significant effect on the training stability, convergence rate, and out-of-distribution generalization of the trained models. Moreover, Tang & Munos (2025) identified that some of these choices lead to biased estimates of the true gradient. For example, using the KL estimator in the loss function, as popularized by GRPO, results in biased gradients and therefore does not optimize the intended reverse KL-regularized objective. These issues have propagated to widely used public libraries, leading to potentially incorrect results when using KL regularization (Sheng et al., 2025; von Werra et al., 2020; Hu et al., 2024; Cui et al., 2025). These findings highlight that while KL regularization is ubiquitous in RL training of LLMs, the implementation details are poorly understood and often overlooked.

In this work, we attempt to fill this gap by providing a systematic empirical exploration of the space of some design choices associated with the practical use of KL regularization. We study this in the context of reinforcement learning with verifiable rewards (RLVR; Trung et al., 2024; Lambert et al., 2025), which has become the dominant paradigm for improving the reasoning abilities of LLMs. Specifically, we investigate two commonly used *unbiased* estimators of reverse KL divergence in an on-policy setting – the naïve or **K1** estimator, and the Schulman or the **K3** estimator (Schulman, 2020). **First**, we analytically study the bias of the gradients with respect to the true gradient of *sequence-level* reverse KL divergence, when these estimates are added to the reward versus when directly added to the loss (§3, Table 1). Next, we empirically investigate the bias of gradient estimates in each case in a synthetic setting (§3.3), substantiating our prior discussion. Finally, we present empirical results studying how these choices affect RL fine-tuning of Qwen2.5-7B (Yang et al., 2024) and Llama-3.1-8B-Instruct (Touvron et al., 2023) on a mathematical reasoning task in on-policy settings, across different values of the KL regularization coefficient β , and study both in- and out-of-domain performance of the resulting models (§4.1). We also study the effect of KL-regularization in highly asynchronous training setting (Noukhovitch et al., 2024; Bartoldson et al., 2025), which is preferable in practice owing to its efficiency. We train Qwen3-4B-Instruct-2507 (Yang et al., 2025) with RL on a mathematical reasoning task and a general reasoning task under high asynchronicity. In summary, our key findings are as follows.

Key observations:

- Unbiased estimates of the sequence level reverse KL divergence can result in *biased* gradients depending on their usage.
- Configurations inducing biased gradients can lead to unstable training and even precipitate complete collapse.
- Configurations that lead to unbiased gradient estimates result in better-performing models, across both in-domain and out-of-domain evaluation tasks.
- KL-regularization can stabilize learning from highly off-policy data in asynchronous setups.

2 BACKGROUND

We study the problem of fine-tuning a base language model π_{ref} with reinforcement learning. Given a reward function $R(\cdot)$ and a set of observations $\mathcal{D}$ comprising question-answer pairs (x, y) , RL fine-tuning of LLMs optimizes the following objective

$$\max_{\theta} \mathbb{E}_{(x,y) \sim \mathcal{D}} \left[\mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} [R(y_{1:T}, y)] - \beta \text{KL}(\pi_{\theta}(\cdot|x) \parallel \pi_{\text{ref}}(\cdot|x)) \right], \quad (1)$$

where β is a hyperparameter that controls the weight of the KL divergence penalty, π_{θ} is the RL policy initialized at π_{ref} and $y_{1:T}$ denotes solutions generated by the model conditioned on the question, i.e. $y_{1:T} \sim \pi_{\theta}(\cdot|x)$. **Since both the sampling of $y_{1:T}$ and the definition of R are non-differentiable, the objective is optimized using policy gradient methods such as PPO (Ouyang et al., 2022) or GRPO (Shao et al., 2024).**

The reward function R can be a learned model trained on human feedback data (Ouyang et al., 2022) or can be an oracle verifier for tasks such as math, games, and code. **We focus on the latter setting, commonly termed Reinforcement Learning with Verifiable Rewards (RLVR).** An example of a verifiable reward function for math is a comparison against the ground truth answer $R(y_{1:T}, y) = \mathbb{1}_{\text{Extract}(y_{1:T})=y}$, where $\text{Extract}(\cdot)$ pulls the solution from a `\boxed{\cdot}` format. In general this could be any reward model with y specifying the meta-data required for reward computation.

The objective in (1) incentivizes the policy π_{θ} to maximize the expected reward while remaining close to the base model π_{ref} . Within the context of LLMs, π_{θ} is constrained to remain close to the reference model π_{ref} to avoid over-optimization and catastrophic forgetting of the general capabilities of the base policy (Gao et al., 2023). The constraint is enforced via a *reverse* KL divergence penalty in the objective which is an expectation under the learned policy π_{θ} :

$$\text{KL}(\pi_{\theta}(\cdot|x) \parallel \pi_{\text{ref}}(\cdot|x)) = \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} \left[\log \frac{\pi_{\theta}(y_{1:T}|x)}{\pi_{\text{ref}}(y_{1:T}|x)} \right] \quad (2)$$

Additionally, a control variate in the form of a *baseline* $b(x, y, y_{1:T})$ is subtracted from the reward to reduce variance during training, resulting in the *advantage* $A(x, y, y_{1:T}) = R(x, y, y_{1:T}) - b(x, y, y_{1:T})$ ¹. Replacing the reward with the advantage we get the final learning objective.

$$\max_{\theta} \mathbb{E}_{(x,y) \sim \mathcal{D}} \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} [A(x, y, y_{1:T})] - \beta D_{\text{KL}}(\pi_{\theta}(\cdot|x) \parallel \pi_{\text{ref}}(\cdot|x)) \quad (3)$$

Group Region Policy Optimization (GRPO) style algorithms (Shao et al., 2024; Guo et al., 2025; Ahmadian et al., 2024; Yu et al., 2025) are the most widely used family of algorithms for training π_{θ} in the context of RLVR. To compute the advantage $\hat{A}$, these algorithms use a group of samples $\{o_1, o_2, \dots, o_G\}$ for each prompt $x \in \mathcal{D}$. Like proximal policy optimization (PPO; Schulman et al., 2017), a set of samples are generated from the policy and used to make updates over minibatches, introducing a delay between the sampling policy ($\pi_{\theta_{\text{old}}}$) and the policy being trained (π_{θ}).

$$\begin{aligned} \mathcal{J}_{\text{GRPO}}(\theta) = & \mathbb{E}_{\{o_i\}_{i=1}^G \sim \pi_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{G} \sum_{i=1}^G \left\{ \frac{1}{|o_i|} \sum_{t=1}^{|o_i|} \min \left[\frac{\pi_{\theta}(o_{i,t} | x, o_{i,<t})}{\pi_{\theta_{\text{old}}}(o_{i,t} | x, o_{i,<t})} \hat{A}_{i,t}, \right. \right. \\ & \left. \left. \text{clip} \left(\frac{\pi_{\theta}(o_{i,t} | x, o_{i,<t})}{\pi_{\theta_{\text{old}}}(o_{i,t} | x, o_{i,<t})}, 1 - \varepsilon, 1 + \varepsilon \right) \hat{A}_{i,t} \right\} - \beta D_{\text{KL}}(\pi_{\theta}(\cdot|x) \parallel \pi_{\text{ref}}(\cdot|x)) \right] \end{aligned} \quad (4)$$

¹The baseline is chosen to have an expected value of 0 under the policy and does not affect the optima.

Table 1: **Summary of estimators considered in this study and the bias of their gradients with respect to the true gradient of sequence level reverse KL divergence in on-policy settings.** We study 4 settings, including the commonly used **K1 estimator in reward** and **K3 estimator in loss**. All configurations except using **K1** in reward lead to biased gradients. In two of the cases of biased gradients, we observe training instabilities or collapses when they are used in RL fine-tuning of LLMs. $\mathbf{r} = \frac{\pi_{\text{ref}}(y_t | x, y_{<t})}{\pi_{\theta}(y_t | x, y_{<t})}$ in the expressions given.

Estimator	Expression	Position	Unbiased Grad. Est. (§3)	Behavior (§4.1)
K1	$-\log \mathbf{r}$	Reward	✓	Stable
		Loss	✗	Training Instabilities
K3	$r - 1 - \log r$	Reward	✗	Training collapse
		Loss	✗	Stable

where $\frac{\pi_{\theta}(o_{i,t} | x, o_{i,<t})}{\pi_{\theta_{\text{old}}}(o_{i,t} | x, o_{i,<t})}$ is the importance sampling ratio $\omega_{i,t}$, G is the total number of sequences sampled per *group*, and ε is a constant hyperparameter controlling the trust region for policy updates (Schulman et al., 2017). Notably, **GRPO includes the KL term into the loss function instead of adding it to the reward.**

3 OVERVIEW OF KL ESTIMATORS AND THEIR GRADIENTS

In this work, we are interested in estimating the reverse KL divergence between the *sequence-level distributions* $\pi_{\theta}(y_{1:T} | x)$ and $\pi_{\text{ref}}(y_{1:T} | x)$. It is commonly estimated by decomposing into token-level estimates (Tang & Munos, 2025). For a generic sequence-level reverse KL divergence estimator $\widehat{\text{KL}}$,

$$D_{\text{KL}}(\pi_{\theta} \parallel \pi_{\text{ref}}) = \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot | x)} [\widehat{\text{KL}}] = \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot | x)} \left[\sum_{t=1}^T \widehat{\text{KL}}_t \right], \quad (5)$$

where $\widehat{\text{KL}}_t$ is the estimator defined on the *token-level distributions* $\pi_{\theta}(y_t | x, y_{<t})$ and $\pi_{\text{ref}}(y_t | x, y_{<t})$. Henceforth, any reference to an estimator implies reference to the use of the token-level version $\widehat{\text{KL}}_t$. The gradient of the expectation of $\widehat{\text{KL}}$, under sequences sampled from π_{θ} can then be written as

$$\nabla_{\theta} \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot | x)} [\widehat{\text{KL}}] = \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot | x)} \left[\sum_{t=1}^T \nabla_{\theta} \widehat{\text{KL}}_t + \sum_{t=1}^T \widehat{\text{KL}}_t \nabla_{\theta} \log \pi_{\theta}(y_{1:T} | x) \right]. \quad (6)$$

Such gradient estimators have been previously studied in Ranganath et al. (2014); Tang & Munos (2025) and Zhang et al. (2025). See §F.2 for a derivation of (6). Next, we discuss two ways of using the estimator in the context of RL training of LLMs. We restrict our primary analysis in this section to on-policy sampling (i.e., $\omega_t = 1$). While the analysis and conclusions from this section do not necessarily hold in off-policy setting, we later show that empirical observations in the case of off-policy sampling are consistent with those for on-policy sampling.

3.1 PLACEMENT OF THE KL REGULARIZATION

We now discuss the different ways KL estimators have been used in the RL objective – namely, adding the estimator to the reward, and adding it directly to the loss objective.

Reward. An estimator is added to the reward by applying a stop-gradient operation on the KL estimate and adding it to the token-level task score. The advantage is then computed as follows:

$$\mathbf{r}_t = \mathbf{s}_t - \beta \text{sg} [\widehat{\text{KL}}_t], \quad A_t = \sum_{t=1}^T \mathbf{r}_t - b = R - \beta \sum_{t=1}^T \text{sg} [\widehat{\text{KL}}_t] - b, \quad (7)$$

where $\mathbf{s}_t$ is the token-level task score, usually 0 for intermediate tokens and either 1 or 0 for the final token depending on whether the sequence led to the correct answer, A_t is the advantage assigned at token t , $R = \sum_{t=1}^T \mathbf{s}_t$, and b is the advantage baseline. The gradient of the objective $J(\theta)$ is:

$$\nabla_{\theta} J(\theta) = \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot | x)} \left[(R - \beta \sum_{t=1}^T \widehat{\text{KL}}_t - b) \nabla_{\theta} \log \pi_{\theta}(y_{1:T} | x) \right]. \quad (8)$$

Loss. This refers to adding the KL estimator directly to the loss, popularized by GRPO (Guo et al., 2025; Shao et al., 2024). Automatic differentiation, which is commonly used in practice, cannot backpropagate through the sampling process used to compute the KL estimate. Thus, the gradient of the objective is computed as:

$$\nabla_{\theta} J(\theta) = \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} \left[(R - b) \nabla_{\theta} \log \pi_{\theta}(y_{1:T} | x) - \beta \sum_{t=1}^T \nabla_{\theta} \widehat{\text{KL}}_t \right] \quad (9)$$

Note that the gradient contribution of the KL estimator when used in the reward is $\sum_{t=1}^T \widehat{\text{KL}}_t \nabla_{\theta} \log \pi_{\theta}(y_{1:T} | x)$ and when used in the loss is $\sum_{t=1}^T \nabla_{\theta} \widehat{\text{KL}}_t$, scaled by β in both cases. Therefore, in the general case, both of these terms in isolation are biased with respect to the correct gradient as stated in (6). In the case of on-policy sampling, we can recover the correct gradient upto a normalizing factor, by adding the estimator to both the reward and the loss in case of on-policy training ($\omega_t = 1$).

3.2 INSPECTING KL ESTIMATORS

The correct gradient for the sequence-level reverse KL divergence is given by

$$\nabla_{\theta} \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} [\widehat{\text{KL}}] = \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} \left[\log \frac{\pi_{\theta}(y_{1:T} | x)}{\pi_{\text{ref}}(y_{1:T} | x)} \nabla_{\theta} \log \pi_{\theta}(y_{1:T} | x) \right]. \quad (10)$$

We now carefully examine two estimators commonly used in RL training of LLMs, namely the naïve or K1 estimator, and the Schulman or K3 estimator (Schulman, 2020). For each estimator, we derive the gradient of its expectation when used in reward and in loss, and determine the bias relative to the true gradient in (10).

3.2.1 K1 ESTIMATOR

The K1 estimator is the Monte Carlo estimate of the log-ratio of likelihoods under the current and reference policies, with samples from the current training policy. We can write K1 as the sum of token-level log ratios, which we denote by K1_t

$$\text{K1} = \sum_{t=1}^T \text{K1}_t = \sum_{t=1}^T \log \frac{\pi_{\theta}(y_t | x, y_{<t})}{\pi_{\text{ref}}(y_t | x, y_{<t})} \quad (11)$$

We now analyze the gradients resulting from using K1 estimator, both in the case of adding to the reward (Equation (8)) and the loss (Equation (9)). We refer the reader to §F.3 for a derivation of the gradients in two configurations.

Reward. Note that $\sum_{t=1}^T \text{K1}_t = \log \frac{\pi_{\theta}(y_{1:T}|x)}{\pi_{\text{ref}}(y_{1:T}|x)}$. The expected gradient (under π_{θ}) of the K1 estimator when used in the reward is unbiased with respect to the reverse KL gradient. The gradient of K1-in-reward is shown below.

$$\nabla_{\theta} \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} \left[\sum_{t=1}^T \text{K1}_t \right] = \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} \left[\log \frac{\pi_{\theta}(y_{1:T} | x)}{\pi_{\text{ref}}(y_{1:T} | x)} \nabla_{\theta} \log \pi_{\theta}(y_{1:T} | x) \right] \quad (12)$$

Loss. Adding K1 to the loss results in the gradient being zero in expectation, and therefore, is biased.

$$\nabla_{\theta} \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} \left[\sum_{t=1}^T \text{K1}_t \right] = \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} \left[\nabla_{\theta} \log \frac{\pi_{\theta}(y_{1:T} | x)}{\pi_{\text{ref}}(y_{1:T} | x)} \right] = 0 \quad (13)$$

K1 is a special case where the gradient of the expectation of the estimator obtained from adding KL estimator in the reward results in an unbiased estimator. This is because the first term of equation Equation (6) is zero in expectation for the K1 estimator as shown in (13).

3.2.2 K3 ESTIMATOR

The K3 estimator, similar to the K1 estimator, is unbiased (see §F.4 for a proof). However, it also has a lower variance and thus is often preferred over K1 in practice. We can write K3 as:

$$\text{K3} = \sum_{t=1}^T \text{K3}_t = \sum_{t=1}^T \frac{\pi_{\text{ref}}(y_t | x, y_{<t})}{\pi_{\theta}(y_t | x, y_{<t})} - 1 - \log \frac{\pi_{\text{ref}}(y_t | x, y_{<t})}{\pi_{\theta}(y_t | x, y_{<t})}. \quad (14)$$

Below, we state the gradient of the expectation of the estimator when K3 is used in reward and loss. We refer the reader to §F.4 for a derivation of the gradients in two configurations for K3.

Reward. The gradient of the expectation of the KL estimate when K3 is used in the reward is

$$\nabla_{\theta} \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} \left[\sum_{t=1}^T K3_t \right] = \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} \left[\sum_{t=1}^T \left(\frac{\pi_{\text{ref}}(y_t|x, y_{<t})}{\pi_{\theta}(y_t|x, y_{<t})} + \log \frac{\pi_{\theta}(y_t|x, y_{<t})}{\pi_{\text{ref}}(y_t|x, y_{<t})} \right) \nabla_{\theta} \log \pi_{\theta}(y_{1:T} | x) \right] \quad (15)$$

The gradient is biased due to the term $\mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} \left[\sum_{t=1}^T \frac{\pi_{\text{ref}}(y_t|x, y_{<t})}{\pi_{\theta}(y_t|x, y_{<t})} \nabla_{\theta} \log \pi_{\theta}(y_{1:T} | x) \right]$.

Loss. The gradient of the expectation of the KL estimate when K3 is used in the loss is given below. This is the version used in the implementations of some of the most popular RL algorithms for LLMs, such as GRPO (Shao et al., 2024; Guo et al., 2025). It is a biased estimate of the true reverse KL gradient shown in (6).

$$\nabla_{\theta} \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} \left[\sum_{t=1}^T K3_t \right] = \mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} \left[\sum_{t=1}^T \left(-\frac{\pi_{\text{ref}}(y_t | x, y_{<t})}{\pi_{\theta}(y_t | x, y_{<t})} \right) \nabla_{\theta} \log \pi_{\theta}(y_t | x, y_{<t}) \right] \quad (16)$$

Table 1 summarizes the two estimators and the biasedness of their gradients in different settings. Note that none of the four KL configurations listed above would give an unbiased sequence level reverse KL gradient estimate in off-policy settings. This is because the per token gradient corresponding to KL in reward in that case would be $\omega_t \sum_{t=1}^T \widehat{KL}_t \nabla_{\theta} \log \pi_{\theta}(y_t | x, y_{<t})$. GRPO (Guo et al., 2025) does not propose using importance sampling ratio while adding KL to the loss even when computed from off-policy samples. Thus, adding the two terms does not give the unbiased sequence-level gradient estimate $\omega_s \sum_{t=1}^T \widehat{KL}_t \nabla_{\theta} \log \pi_{\theta}(y_{1:T} | x)$ where ω_s is the sequence level importance sampling ratio. Zhang et al. (2025) note that an unbiased gradient estimate of the token-level reverse KL gradient can be induced by multiplying a token-level importance sampling ratio ω_t with the KL estimate, when added to the loss directly. We leave the implementation and analysis of an unbiased sequence level reverse KL gradient estimate in off-policy settings for future work.

3.3 PARAMETRIC AUTOREGRESSIVE MODEL: AN ILLUSTRATIVE EXAMPLE

We first study the bias in the gradients of the KL estimators in a minimal parametric autoregressive model. We define reference models A and B over binary sequences, each factorizing into Bernoulli conditionals over each token in the sequence (conditioned on the previous tokens):

$$A_{\theta}(Y) = \prod_{t=1}^T (p_t^A)^{y_t} (1 - p_t^A)^{1-y_t}, p_t^A = \sigma(a + b c_{t-1}), c_{t-1} = \sum_{k=1}^{t-1} y_k \quad (17)$$

$$B_{\phi}(Y) = \prod_{t=1}^T (p_t^B)^{y_t} (1 - p_t^B)^{1-y_t}, p_t^B = \sigma(\tilde{a} + \tilde{b} c_{t-1}), c_{t-1} = \sum_{k=1}^{t-1} y_k \quad (18)$$

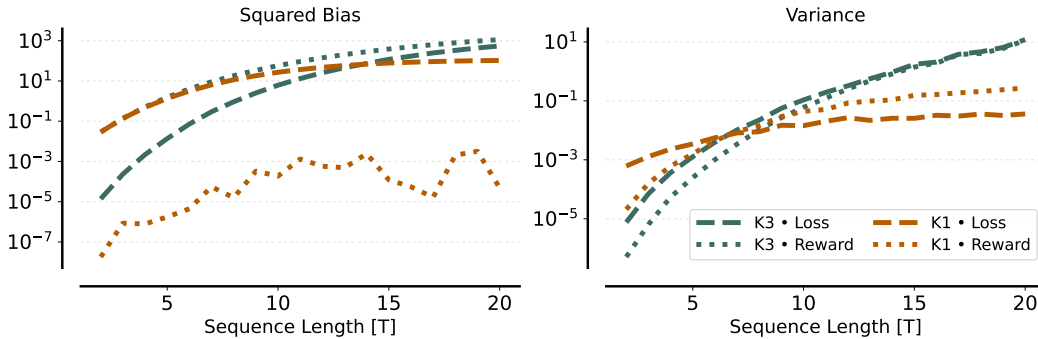


Figure 1: The bias and variance of expected gradients with respect to the parameters of A, in different configurations (logarithmic scale). While all estimators are unbiased, the expected gradients are unbiased only in the case of K1 estimator when used in reward. K3 estimator when used in reward exhibits the highest bias. While K1 estimator when used in loss has relatively lower variance, it also suffers from high bias.

where Y is a binary sequence, $a, b, \tilde{a}$ and $\tilde{b}$ are the parameters of distributions A and B , $c_0 = 0$, $y_t \in \{0, 1\}$ and σ represents the sigmoid function. The reverse KL $D_{\text{KL}}(A \parallel B)$ and its gradient with respect to a and b admit closed-form expressions (see §C).

We compute the KL divergence with different estimators and their gradients when used as reward and in the loss as discussed in §3, using 200 trials each with $N = 1000$ sequences of lengths T sampled from A . We illustrate the bias and variance of the gradient estimates of the different configurations in Fig. 1. Note the logarithmic scale of the plots. We observe that the bias of the gradient of the K1 estimator added to the reward remains low. On the other hand, the gradients associated with the K3 estimator in the loss and the reward both show high bias and variance. These results validate the conclusions from §3.

4 RL FINE-TUNING OF LLMs

In this section, we complement our analysis in §3 with an empirical study on the effect of various configurations of KL estimators when training LLMs using RL. We aim to empirically investigate the following:

- (§4.1) How do the various KL configuration discussed in §3 affect the downstream performance of LLMs trained using on-policy RL in both in- and out-of-domain tasks?
- (§4.2) How do different KL configurations affect the downstream performance of models when used in an asynchronous RL (i.e. off-policy) setup.
- (§4.3) How does correcting the biased gradient estimates in on-policy RL by adding KL to both reward and loss (as discussed in §3.1) affect the downstream performance of models trained using RL?

4.1 EFFECT OF KL CONFIGURATIONS IN ON-POLICY RL

Experimental Setup. We (on-policy) RL fine-tune Qwen2.5-7B and Llama-3.1-8B-Instruct models on the training subset of Hendrycks MATH (Hendrycks et al., 2021) (henceforth referred to as MATH) consisting of 7500 problems using different KL configurations, across different values of the β coefficient. In order to restrict our study on the effect of the KL estimators, we opt to use REINFORCE leave-one-out advantage baseline (Ahmadian et al., 2024, RLOO) in our experiments, coupled with a normalization with respect to the total number of tokens in the sampled response batch. During training, we set both total training batch size and mini-batch size to 256 (i.e. number of policy update steps per sampled batch = 1), to avoid any off-policy updates and sample 5 rollouts per prompt (i.e. group size $G = 4$) during training. We evaluate the models on 2 different in-domain tasks, namely MATH500 (Lightman et al., 2023) (500 examples) and MATH² (Shah et al., 2024) (210 examples) and 3 out-of-domain tasks – MMLU college physics (118 examples), college chemistry (113 examples) and college biology (165 rows) subsets (Hendrycks et al., 2020). The tasks are selected to analyze the effect of different estimator configurations on reasoning intensive tasks as well as tasks involving other non-reasoning aspects such as knowledge recall. We report the Pass@1 score of the model on the complete MATH test set (5000 examples) for training progress, and report mean@32 accuracy across 3 seeds on the final evaluation tasks. We use default chat-templates while fine-tuning and evaluating models. Qwen2.5-7B (non-RL fine-tuned) is evaluated both with and without the chat template. More details about the experimental setup are discussed in §B.

Observation 1: Adding K1 estimator to the loss can lead to training instabilities.

As shown in (13), adding $K1_t$ to the loss results in a biased estimate of the reverse KL gradient, since the term is zero in expectation. Intuitively, RL fine-tuning with $K1_t$ with any coefficient β should perform similar to RL fine-tuning without any KL penalty ($\beta = 0$). To verify this empirically, we fine-tune Qwen2.5-7B (Yang et al., 2024) and Llama-3.1-8B-Instruct (Touvron et al., 2023) with $\beta = 0.05, 0.1, 0.3$ and 1 and compare them against RL fine-tuning with $\beta = 0$. Fig. 2 shows Pass@1 performance of models on MATH test set over the course of training.

We observe training instabilities with $\beta = 0.3$ and 1 for Qwen models (Fig. 2 (left)) and all β except 0.1 for Llama models (Fig. 2 (right)). A potential explanation is that the term $\sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(y_t | x, y_{<t})$, despite having an expectation of 0, adds variance to the optimization, leading to instabilities. Additionally, we observe that moving away from the default setting of fully on-policy updates, to

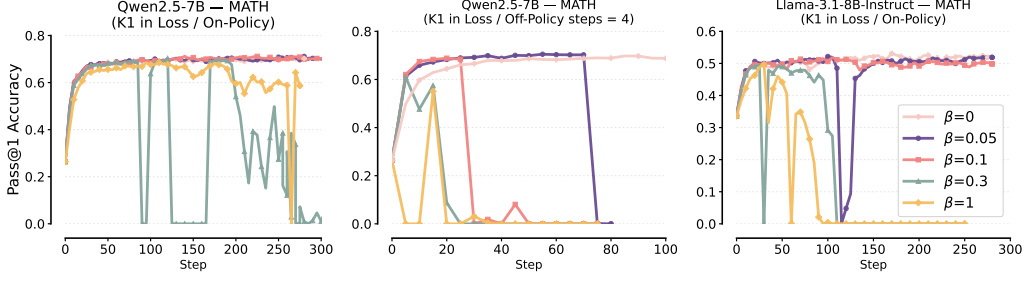


Figure 2: **Training Instabilities when using K1 in loss.** Pass@1 performance for [Left] training Qwen2.5-7B with K1, leads to training instabilities for $\beta = 0.1$ and 1. [Center] Training Qwen2.5-7B with 4 policy update steps per sampled batch accentuates the instabilities owing to the increased off-policy, leading to definitive training collapse in all cases. [Right] Training Llama-3.1-8B-Instruct with K1, in loss leads to instabilities for all β except 0.1.

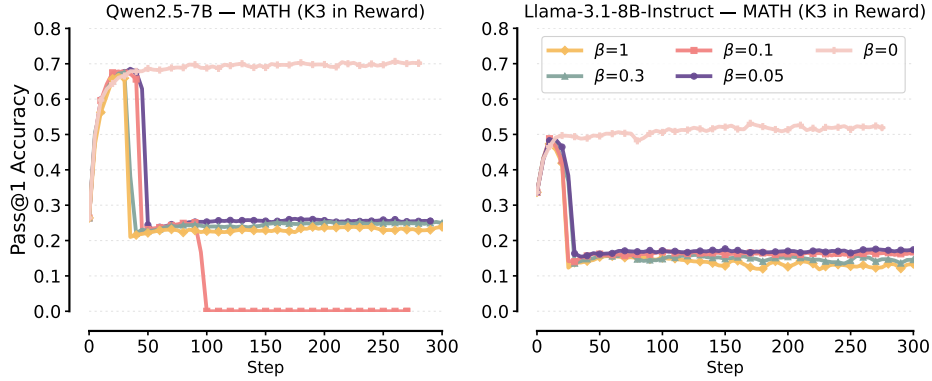


Figure 3: **Collapse in the case of adding K3 to the reward.** Pass@1 performance for [Left] Qwen2.5-7B trained on MATH train dataset [Right] Llama-3.1-8B-Instruct trained on MATH train dataset with K3-in-reward. The collapse may be attributed to high bias and variance of the configuration.

slightly off-policy updates (4 minibatch updates over each sampled batch) (Fig. 2 (center)) accentuates the instabilities and leads to consistent training collapse across all β even for Qwen models. Further, in cases where the training is stable, i.e., Qwen2.5-7B trained with $\beta = 0.05$ and 0.1, the performance is similar to training without any KL as expected. Qwen2.5-7B models seem to be more robust to variance as compared to Llama-3.1-Models.

Observation 2: Adding K3 estimator to the reward leads to training collapse.

Another case of biased gradient estimate is K3 used in the reward. From eq. (15) we observe that adding token-level K3 to rewards leads to a bias term of

$$\mathbb{E}_{y_{1:T} \sim \pi_{\theta}(\cdot|x)} \left[\sum_{t=1}^T \frac{\pi_{\text{ref}}(y_t | x, y_{<t})}{\pi_{\theta}(y_t | x, y_{<t})} \nabla_{\theta} \log \pi_{\theta}(y_{1:T} | x) \right] \quad (19)$$

This bias is illustrated in Fig. 1 for the parametric autoregressive model §3.3. To validate this with LLMs, we RL fine-tune Qwen2.5-7B and Llama-3.1-8B-Instruct models with $\beta = 0.05, 0.1, 0.3$ and 1. Fig. 3 shows that this biased gradient estimate leads to unpredictable behavior leading to complete or partial collapse of the training for all β .

Observation 3: Unbiased gradient estimator results in better out-of-distribution performance as compared to biased estimators with stable training behaviors.

The final setting leading to a biased expected gradient of the sequence level reverse KL is when K3 is used in the loss eq. (16). Surprisingly, despite the bias, using K3 in the loss exhibits stable training of the policy. Fig. 4 (Left) reports the in-distribution performance of Qwen2.5-7B models

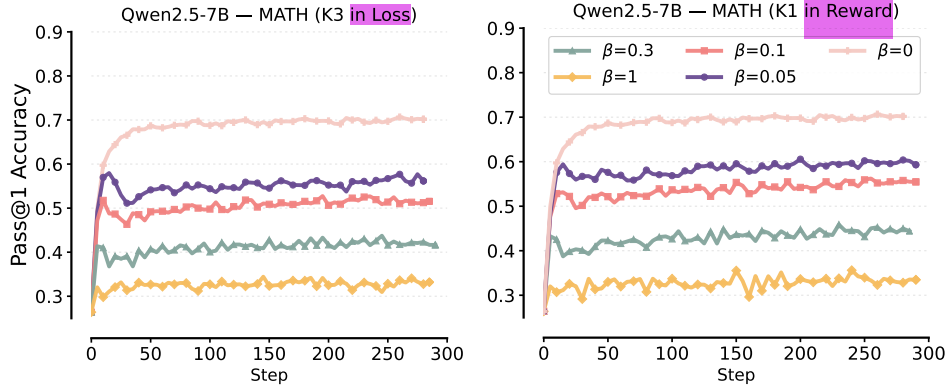


Figure 4: **Pass@1 performance on MATH test set with K3-in-loss (biased; Left) and K1-in-reward (unbiased; Right).** Although biased with respect to reverse KL, K3-in-loss yields stable training. In both cases, lower β values lead to higher performance.

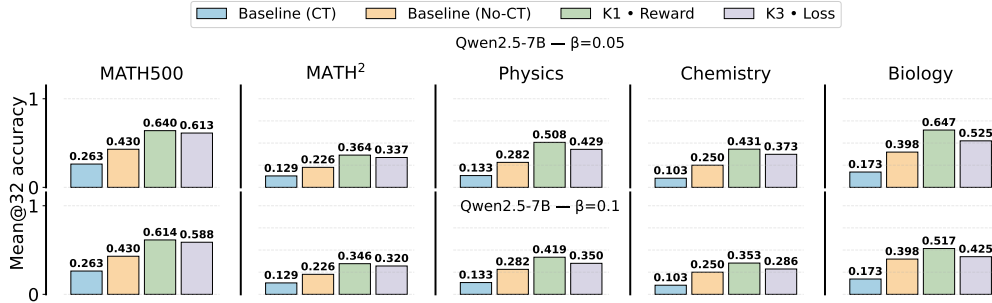


Figure 5: **Comparison of Qwen2.5-7B trained with two stable estimator configurations - K1 in reward and K3 in loss.** Baseline (CT) refers to the performance of base Qwen2.5-7B when prompted with a chat template. Baseline (No-CT) represents the performance when it is prompted with a chat template. K1 in reward (unbiased gradient performs the best on both in-domain and out-of-domain tasks). Increasing β consistently deteriorates performance.

(evaluated on MATH test dataset) for different β during training. This may be explained by the observation that the gradient estimate (16) in this case is a sum of unbiased gradient estimates of the forward KL divergences computed at the token level, making this configuration equivalent to a stable forward KL-based logit distillation objective trained on-policy, with the base model as a teacher. Note that using K3 in loss is a popular configuration used with policy optimization algorithms such as GRPO (Shao et al., 2024; Guo et al., 2025). Comparing to Fig. 4 (Right), the in-distribution performance in this biased case is similar to the performance when training with the unbiased gradient estimator setting of adding K1 to the reward.

Further, we compare the downstream performance of the models trained with K3 in loss and K1 in reward. We train Qwen2.5-7B and Llama-3.1-8B-Instruct models with different estimator configurations for 250 steps on MATH train data, and compare the performance of different configurations on a wide range of evaluation tasks as shown in Fig. 5 and Fig. 6 (similar results for $\beta = 0.3$ and $\beta = 1$ can be found in §D.1).

We observe that using K1 in reward (i.e. unbiased gradient estimate) outperforms using K3 in loss (i.e. biased gradient estimate). While the performance gains are consistent across all tasks and both models, we observe that the gains are more pronounced in out-of-domain tasks for Qwen-2.5-7B, with an average relative improvement of 19.06% across MMLU college-physics, college-chemistry and college-biology, as compared to an average relative improvement of only 6.21% on in-domain tasks across MATH500 and MATH², for $\beta = 0.05$. On the other hand, the gains are more pronounced in-domain (average relative improvement of 15.94%) than out of domain (average relative improvement of only 3.65%). Similar trends hold for $\beta = 0.1$ as well. Consistent performance

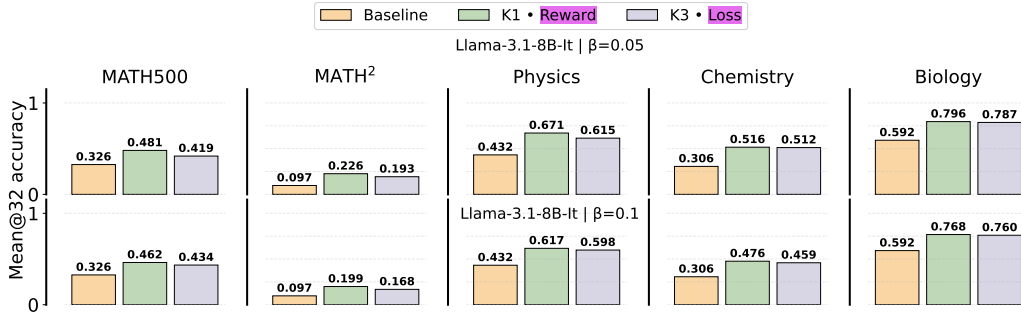


Figure 6: **Comparison of Llama-3.1-8B-Instruct trained with two stable estimator configurations - K1 in reward and K3 in loss.** Baseline refers to the performance of base Llama-3.1-8B-Instruct (prompted with chat template). K1 in reward (unbiased gradient performs the beats on both in-domain and out-of-domain tasks. Increasing β deteriorates performance across the board.

improvements in the case of unbiased estimated gradient implementations over biased estimated gradient implementations demonstrate the importance of using correct gradient estimates while incorporating KL-based regularization.

4.2 EFFECT OF KL CONFIGURATIONS IN ASYNCHRONOUS RL

While as noted in §3, all four KL configurations discussed give biased sequence level KL gradient updates in off-policy settings, we study the performance of the four configurations empirically. We use an asynchronous RL setup (Noukhovitch et al., 2024; Bartoldson et al., 2025) which is commonly used for large scale RL training runs in order to reduce latency. The asynchronous policy updates give rise to off-policyness.

Experimental Setup We train Qwen2.5-7B on MATH and Qwen3-4B-Instruct-2507 (Yang et al., 2025) on Countdown (Stojanovski et al., 2025), with Dr. GRPO (Liu et al., 2025) at a high async level of 10. We use a learning rate of 10^{-6} , sample 16 rollouts per prompt and a training batch size of 512, and train for upto 400 steps, with $\beta = 0.005$ in both settings. Rest of the experimental setup remains the same as in the synchronous experiments.

Figure 7 shows the test performance across different KL configurations in case of both Qwen2.5-7B + MATH and Qwen3-4B-Instruct-2507 + Countdown combinations, during the course of training. For the former, the plot shows performance on MATH500 test set whereas for the latter, the plot shows the performance on a held out set of countdown. Figure 8 shows the performance of the final checkpoints finetuned with K1 in reward, and K3 in loss (the two stable settings) on other in-domain and out-of-domain evaluation sets. Note that the performance gap between No KL training and KL regularized training can be closed by using regular reference policy resets as noted in Bartoldson et al. (2025).

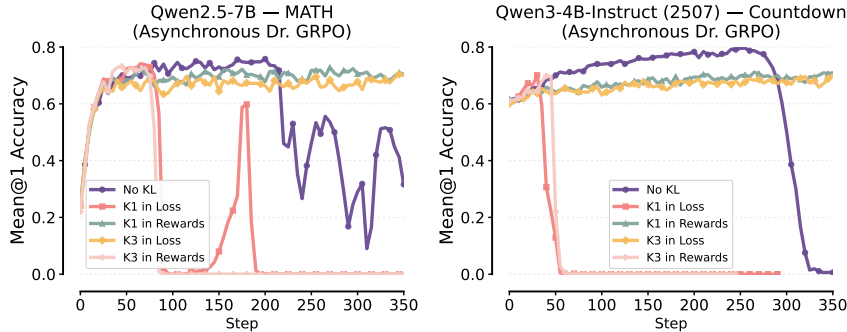


Figure 7: **Comparison of different KL configurations in asynchronous RL setting (async level = 10).** Using K1 in reward and K3 in loss show stable training as opposed to using no KL regularization, K1 in loss and K3 in reward.

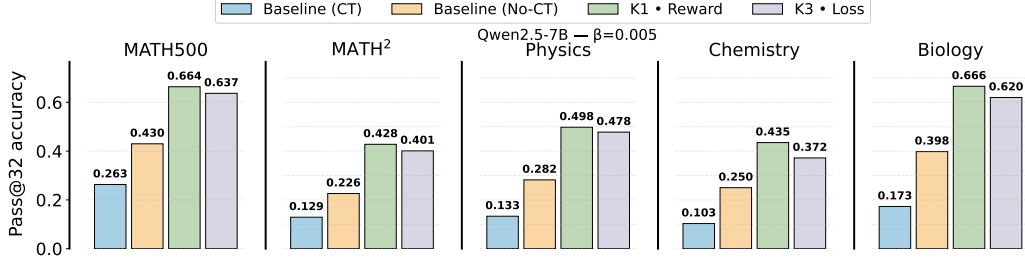


Figure 8: **Comparison of Qwen2.5-7B trained on MATH dataset in asynchronous setting with the two stable configurations - K1 in reward and K3 in loss.** Consistent with the observations in synchronous settings, K1 in reward outperforms K3 in loss across all considered evaluation tasks.

Our observations are two fold:

- In highly asynchronous settings, K1 in reward and K3 in loss, both help stabilize the training in cases where it is otherwise unstable in the absence of any KL regularization.
- **Surprisingly** staying consistent with observations in the case of on-policy RL, the use of K1 in loss and K3 in reward show training instabilities whereas the use K1 in reward and K3 in loss show stable training. In evaluation, K1 in reward outperforms K3 in loss.

4.3 EFFECT OF USING CORRECT GRADIENT ESTIMATORS

As noted in §3.1 adding the KL penalty in both reward as well as loss in on-policy settings would result in unbiased gradient estimates, regardless of the estimator. We test this empirically by training Qwen2.5-7B on MATH, completely on-policy ($\omega = 1$), using K1 and K3 added to both reward and loss and $\beta = 0.1$ for 150 training steps. All other experimental details remain the same. We compare the performance of these models against other estimator configurations training for the same number of steps. Results are presented in Figure 9. We observe that unbiased gradient estimators always outperform the biased K3-in-loss.

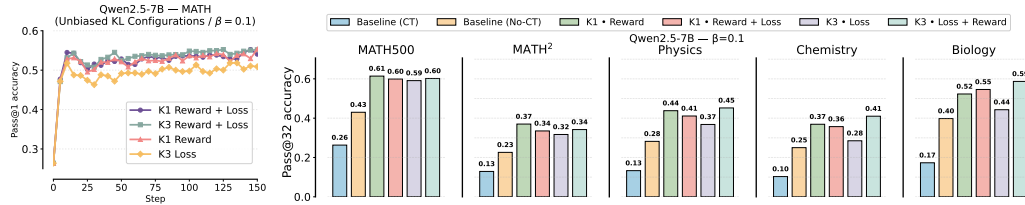


Figure 9: **[Left] Train time performance of Qwen2.5-7B with different KL configurations ($\beta = 0.1$) on MATH test.** The configurations that give unbiased gradients perform similarly, and better than K3 in loss. **[Right] Performance of different KL configurations across several evaluation tasks.** Configurations resulting in unbiased gradients, (K1 in reward, K1 in reward and loss and K3 in reward and loss), always outperform the biased configuration (K3 in loss).

5 CONCLUSION

We conduct a study of how different KL estimators, and their placement within the RL objective, affect the stability and performance of RL fine-tuning of LLMs. We consistently find that implementations with biased reverse KL divergence gradient estimates perform unpredictably: at worst leading to training collapses and at best still underperforming implementations with unbiased gradient estimates. While the K3 estimator in the loss, commonly used in GRPO, remains generally stable, it consistently underperforms the naïve K1 in reward configuration. These results all suggest that unbiased gradient configurations should serve as the default for stable and generalizable RL post-training. Updating parameters with a step that is not the gradient of the desired objective, if it is not a gradient field, is a recipe for instability, as stable behavior near an optimum is not guaranteed. **However, the prevalence of these incorrect estimators in the literature and in implementations, and the fact that they sometimes work well, suggests that there is a lack of awareness of these issues.** We hope that our systematic study will help clarify these issues for the community.

ACKNOWLEDGMENTS

The authors thank Anirudh Goyal, Michael Noukhovitch and Emiliano Penaloza for interesting discussions and helpful comments.

The research was enabled in part by computational resources provided by the Digital Research Alliance of Canada (<https://alliancecan.ca>), Mila (<https://mila.quebec>), NVIDIA, and the National Energy Research Scientific Computing Center, a DOE Office of Science User Facility supported by the Office of Science of the U.S. Department of Energy under Contract No. DE-AC02-05CH11231 using NERSC award ASCR-ERCAP0032802 and NERSC award ASCR-ERCAP0032812.

AA and YB acknowledge funding from National Sciences and Engineering Council of Canada (NSERC) and the Canadian Institute for Advanced Research (CIFAR). AA acknowledges funding from AI for Math and Google, supporting the VS and JO graduate programs. GL acknowledges support from NSERC Discovery Grant RGPIN-2018-04821, the Canada Research Chair in Neural Computations and Interfacing, and a Canada-CIFAR AI Chair. GB acknowledges funding from NSERC and CIFAR. NM acknowledges support from the CIFAR Learning in Machines and Brains program. VS was supported by a UNIQUE for a partial duration of the work. MJ is supported by a FRQNT Doctoral Fellowship (<https://doi.org/10.69777/366694>). SM acknowledges funding from FRQNT Doctoral Fellowship (<https://doi.org/10.69777/372208>).

This manuscript has been authored by Lawrence Livermore National Security, LLC under Contract No. DE-AC52-07NA27344 with the U.S. Department of Energy. This material is based upon work supported by the Department of Energy (LLNL-LDRD Program under Project No. 24-ERD-058, LLNL-CONF-2014473), Office of Science, Office of Advanced Scientific Computing Research. The United States Government retains, and the publisher, by accepting the article for publication, acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this manuscript, or allow others to do so, for United States Government purposes.

REPRODUCIBILITY STATEMENT

We provide all the details to reproduce our results in §4.1 and §B.

LLM USE

LLMs were used to assist in writing code for experiments in the paper. No LLMs were used to assist with writing and formatting of the paper.

REFERENCES

- Arash Ahmadian, Chris Cremer, Matthias Gallé, Marzieh Fadaee, Julia Kreutzer, Olivier Pietquin, Ahmet Üstün, and Sara Hooker. Back to basics: Revisiting reinforce style optimization for learning from human feedback in llms. *arXiv preprint arXiv:2402.14740*, 2024.
- Afra Amini, Tim Vieira, and Ryan Cotterell. Better estimation of the kl divergence between language models. *arXiv preprint arXiv:2504.10637*, 2025.
- Brian R Bartoldson, Siddarth Venkatraman, James Diffenderfer, Moksh Jain, Tal Ben-Nun, Seanie Lee, Minsu Kim, Johan Obando-Ceron, Yoshua Bengio, and Bhavya Kailkhura. Trajectory balance with asynchrony: Decoupling exploration and learning for fast, scalable llm post-training. *arXiv preprint arXiv:2503.18929*, 2025.
- Stella Biderman, Hailey Schoelkopf, Lintang Sutawika, Leo Gao, Jonathan Tow, Baber Abbasi, Alham Fikri Aji, Pawan Sasanka Ammanamanchi, Sidney Black, Jordan Clive, et al. Lessons from the trenches on reproducible evaluation of language models. *arXiv preprint arXiv:2405.14782*, 2024.
- Shiyi Cao, Sumanth Hegde, Dacheng Li, Tyler Griggs, Shu Liu, Eric Tang, Jiayi Pan, Xingyao Wang, Akshay Malik, Graham Neubig, Kourosh Hakhmaneshi, Richard Liaw, Philipp Moritz, Matei Zaharia, Joseph E. Gonzalez, and Ion Stoica. Skyrl-v0: Train real-world long-horizon agents via reinforcement learning, 2025.

- Paul F Christiano, Jan Leike, Tom Brown, Miljan Martic, Shane Legg, and Dario Amodei. Deep reinforcement learning from human preferences. *Advances in neural information processing systems*, 30, 2017.
- Ganqu Cui, Lifan Yuan, Zefan Wang, Hanbin Wang, Wendi Li, Bingxiang He, Yuchen Fan, Tianyu Yu, Qixin Xu, Weize Chen, et al. Process reinforcement through implicit rewards. *arXiv preprint arXiv:2502.01456*, 2025. URL <https://arxiv.org/abs/2502.01456>.
- Leo Gao, John Schulman, and Jacob Hilton. Scaling laws for reward model overoptimization. In *International Conference on Machine Learning*, pp. 10835–10866. PMLR, 2023.
- Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, Xiaokang Zhang, Xingkai Yu, Yu Wu, Z. F. Wu, Zhibin Gou, Zhihong Shao, Zhuoshu Li, Ziyi Gao, Aixin Liu, Bing Xue, Bingxuan Wang, Bochao Wu, Bei Feng, Chengda Lu, Chenggang Zhao, Chengqi Deng, Chenyu Zhang, Chong Ruan, Damai Dai, Deli Chen, Dongjie Ji, Erhang Li, Fangyun Lin, Fucong Dai, Fuli Luo, Guangbo Hao, Guanting Chen, Guowei Li, H. Zhang, Han Bao, Hanwei Xu, Haocheng Wang, Honghui Ding, Huajian Xin, Huazuo Gao, Hui Qu, Hui Li, Jianzhong Guo, Jiashi Li, Jiawei Wang, Jingchang Chen, Jingyang Yuan, Junjie Qiu, Junlong Li, J. L. Cai, Jiaqi Ni, Jian Liang, Jin Chen, Kai Dong, Kai Hu, Kaige Gao, Kang Guan, Kexin Huang, Kuai Yu, Lean Wang, Lecong Zhang, Liang Zhao, Litong Wang, Liyue Zhang, Lei Xu, Leyi Xia, Mingchuan Zhang, Minghua Zhang, Minghui Tang, Meng Li, Miaojuan Wang, Mingming Li, Ning Tian, Panpan Huang, Peng Zhang, Qiancheng Wang, Qinyu Chen, Qiushi Du, Ruiqi Ge, Ruisong Zhang, Ruizhe Pan, Runji Wang, R. J. Chen, R. L. Jin, Ruyi Chen, Shanghao Lu, Shangyan Zhou, Shanhuang Chen, Shengfeng Ye, Shiyu Wang, Shuiping Yu, Shunfeng Zhou, Shuting Pan, S. S. Li, Shuang Zhou, Shaoqing Wu, Shengfeng Ye, Tao Yun, Tian Pei, Tianyu Sun, T. Wang, Wangding Zeng, Wanbiao Zhao, Wen Liu, Wenfeng Liang, Wenjun Gao, Wenqin Yu, Wentao Zhang, W. L. Xiao, Wei An, Xiaodong Liu, Xiaohan Wang, Xiaokang Chen, Xiaotao Nie, Xin Cheng, Xin Liu, Xin Xie, Xingchao Liu, Xinyu Yang, Xinyuan Li, Xuecheng Su, Xuheng Lin, X. Q. Li, Xiangyue Jin, Xiaojin Shen, Xiaosha Chen, Xiaowen Sun, Xiaoxiang Wang, Xinnan Song, Xinyi Zhou, Xianzu Wang, Xinxia Shan, Y. K. Li, Y. Q. Wang, Y. X. Wei, Yang Zhang, Yanhong Xu, Yao Li, Yao Zhao, Yaofeng Sun, Yaohui Wang, Yi Yu, Yichao Zhang, Yifan Shi, Yiliang Xiong, Ying He, Yishi Piao, Yisong Wang, Yixuan Tan, Yiyang Ma, Yiyuan Liu, Yongqiang Guo, Yuan Ou, Yuduan Wang, Yue Gong, Yuheng Zou, Yujia He, Yunfan Xiong, Yuxiang Luo, Yuxiang You, Yuxuan Liu, Yuyang Zhou, Y. X. Zhu, Yanhong Xu, Yanping Huang, Yaohui Li, Yi Zheng, Yuchen Zhu, Yunxian Ma, Ying Tang, Yukun Zha, Yuting Yan, Z. Z. Ren, Zehui Ren, Zhangli Sha, Zhe Fu, Zhean Xu, Zhenda Xie, Zhengyan Zhang, Zhewen Hao, Zhicheng Ma, Zhigang Yan, Zhiyu Wu, Zihui Gu, Zijia Zhu, Zijun Liu, Zilin Li, Ziwei Xie, Ziyang Song, Zizheng Pan, Zhen Huang, Zhipeng Xu, Zhongyu Zhang, and Zhen Zhang. Deepseek-r1 incentivizes reasoning in llms through reinforcement learning. *Nature*, 645(8081):633–638, 2025.
- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. *arXiv preprint arXiv:2009.03300*, 2020.
- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset, 2021.
- Jian Hu, Xibin Wu, Weixun Wang, Xianyu, Dehao Zhang, and Yu Cao. Openrlhf: An easy-to-use, scalable and high-performance rlhf framework. *arXiv preprint arXiv:2405.11143*, 2024. doi: 10.48550/arXiv.2405.11143. URL <https://arxiv.org/abs/2405.11143>.
- Prime Intellect. Prime-rl, 2025. URL <https://github.com/PrimeIntellect-ai/prime-rl>.
- Aaron Jaech, Adam Kalai, Adam Lerer, Adam Richardson, Ahmed El-Kishky, Aiden Low, Alec Helyar, Aleksander Madry, Alex Beutel, Alex Carney, et al. Openai o1 system card. *arXiv preprint arXiv:2412.16720*, 2024.

- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361*, 2020.
- Amirhossein Kazemnejad, Milad Aghajohari, Eva Portelance, Alessandro Sordoni, Siva Reddy, Aaron Courville, and Nicolas Le Roux. VinePPO: Unlocking RL potential for LLM reasoning through refined credit assignment, 2025. URL <https://openreview.net/forum?id=5mJrGtXVwz>.
- Tomasz Korbak, Ethan Perez, and Christopher L Buckley. RL with kl penalties is better viewed as bayesian inference. *arXiv preprint arXiv:2205.11275*, 2022.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with pagedattention. In *Proceedings of the 29th symposium on operating systems principles*, pp. 611–626, 2023.
- Nathan Lambert. *Reinforcement Learning from Human Feedback*. Online, 2025. URL <https://rlhfbook.com>.
- Nathan Lambert, Jacob Morrison, Valentina Pyatkin, Shengyi Huang, Hamish Ivison, Faeze Brahman, Lester James Validad Miranda, Alisa Liu, Nouha Dziri, Xinxin Lyu, Yuling Gu, Saumya Malik, Victoria Graf, Jena D. Hwang, Jiangjiang Yang, Ronan Le Bras, Øyvind Taffjord, Christopher Wilhelm, Luca Soldaini, Noah A. Smith, Yizhong Wang, Pradeep Dasigi, and Hannaneh Hajishirzi. Tulu 3: Pushing frontiers in open language model post-training. In *Second Conference on Language Modeling*, 2025. URL <https://openreview.net/forum?id=ilUgBfHHpH>.
- Ziniu Li, Tian Xu, Yushun Zhang, Zhihang Lin, Yang Yu, Ruoyu Sun, and Zhi-Quan Luo. Remax: A simple, effective, and efficient reinforcement learning method for aligning large language models. *arXiv preprint arXiv:2310.10505*, 2023.
- Hunter Lightman, Vineet Kosaraju, Yuri Burda, Harrison Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. Let’s verify step by step. In *The Twelfth International Conference on Learning Representations*, 2023.
- Zichen Liu, Changyu Chen, Wenjun Li, Penghui Qi, Tianyu Pang, Chao Du, Wee Sun Lee, and Min Lin. Understanding rl-zero-like training: A critical perspective. *arXiv preprint arXiv:2503.20783*, 2025.
- Michael McCloskey and Neal J Cohen. Catastrophic interference in connectionist networks: The sequential learning problem. In *Psychology of learning and motivation*, volume 24, pp. 109–165. Elsevier, 1989.
- Michael Noukhovitch, Shengyi Huang, Sophie Xhonneux, Arian Hosseini, Rishabh Agarwal, and Aaron Courville. Asynchronous rlhf: Faster and more efficient off-policy rl for language models. *arXiv preprint arXiv:2410.18252*, 2024.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35: 27730–27744, 2022.
- Guilherme Penedo, Hynek Kydlíček, Anton Lozhkov, Margaret Mitchell, Colin A Raffel, Leandro Von Werra, Thomas Wolf, et al. The fineweb datasets: Decanting the web for the finest text data at scale. *Advances in Neural Information Processing Systems*, 37:30811–30849, 2024.
- Jan Peters, Katharina Mulling, and Yasemin Altun. Relative entropy policy search. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 24, pp. 1607–1612, 2010.
- Biqing Qi, Pengfei Li, Fangyuan Li, Junqi Gao, Kaiyan Zhang, and Bowen Zhou. Online dpo: Online direct preference optimization with fast-slow chasing. *arXiv preprint arXiv:2406.05534*, 2024.

- Rajesh Ranganath, Sean Gerrish, and David Blei. Black box variational inference. In *Artificial intelligence and statistics*, pp. 814–822. PMLR, 2014.
- J. Schulman. Approximating kl divergence, 2020. URL <http://joschu.net/blog/kl-approx.html>.
- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- Vedant Shah, Dingli Yu, Kaifeng Lyu, Simon Park, Jiatong Yu, Yinghui He, Nan Rosemary Ke, Michael Mozer, Yoshua Bengio, Sanjeev Arora, et al. Ai-assisted generation of difficult math questions. *arXiv preprint arXiv:2407.21009*, 2024.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, YK Li, Yang Wu, et al. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
- Guangming Sheng, Chi Zhang, Zilingfeng Ye, Xibin Wu, Wang Zhang, Ru Zhang, Yanghua Peng, Haibin Lin, and Chuan Wu. Hybridflow: A flexible and efficient rlhf framework. In *Proceedings of the Twentieth European Conference on Computer Systems*, pp. 1279–1297, 2025.
- Nisan Stiennon, Long Ouyang, Jeffrey Wu, Daniel Ziegler, Ryan Lowe, Chelsea Voss, Alec Radford, Dario Amodei, and Paul F Christiano. Learning to summarize with human feedback. *Advances in neural information processing systems*, 33:3008–3021, 2020.
- Zafir Stojanovski, Oliver Stanley, Joe Sharratt, Richard Jones, Abdulhakeem Adefioye, Jean Kadour, and Andreas Köpf. Reasoning gym: Reasoning environments for reinforcement learning with verifiable rewards. *arXiv preprint arXiv:2505.24760*, 2025.
- Yunhao Tang and Rémi Munos. On a few pitfalls in kl divergence gradient estimation for rl. *arXiv preprint arXiv:2506.09477*, 2025.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- Luong Trung, Xinbo Zhang, Zhanming Jie, Peng Sun, Xiaoran Jin, and Hang Li. Reft: Reasoning with reinforced fine-tuning. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 7601–7614, 2024.
- Jean Vassoyan, Nathanaël Beau, and Roman Plaud. Ignore the kl penalty! boosting exploration on critical tokens to enhance rl fine-tuning. *arXiv preprint arXiv:2502.06533*, 2025.
- Leandro von Werra, Younes Belkada, Lewis Tunstall, Edward Beeching, Tristan Thrush, Nathan Lambert, Shengyi Huang, Kashif Rasul, and Quentin Gallouédec. Trl: Transformer reinforcement learning. <https://github.com/huggingface/trl>, 2020.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35:24824–24837, 2022.
- Taiqiang Wu, Chaofan Tao, Jiahao Wang, Runming Yang, Zhe Zhao, and Ngai Wong. Rethinking kullback-leibler divergence in knowledge distillation for large language models. *arXiv preprint arXiv:2404.02657*, 2024.
- An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, et al. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025.
- Qwen An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Guanting Dong, Haoran Wei, Huan Lin, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiaxin Yang, Jingren Zhou, Junyang Lin, Kai Dang, Keming Lu, Keqin Bao, Kexin Yang, Le Yu, Mei Li, Mingfeng Xue, Pei Zhang, Qin Zhu, Rui Men, Runji Lin, Tianhao Li, Tingyu Xia, Xingzhang Ren, Xuancheng Ren, Yang Fan, Yang Su, Yi-Chao

- Zhang, Yunyang Wan, Yuqi Liu, Zeyu Cui, Zhenru Zhang, Zihan Qiu, Shanghaoran Quan, and Zekun Wang. Qwen2.5 technical report. *ArXiv*, abs/2412.15115, 2024. URL <https://api.semanticscholar.org/CorpusID:274859421>.
- Qiyang Yu, Zheng Zhang, Ruofei Zhu, Yufeng Yuan, Xiaochen Zuo, Yu Yue, Weinan Dai, Tiantian Fan, Gaohong Liu, Lingjun Liu, et al. Dapo: An open-source llm reinforcement learning system at scale. *arXiv preprint arXiv:2503.14476*, 2025.
- Yifan Zhang, Yifeng Liu, Huizhuo Yuan, Yang Yuan, Quanquan Gu, and Andrew C Yao. On the design of kl-regularized policy gradient algorithms for llm reasoning. *arXiv preprint arXiv:2505.17508*, 2025.
- Chujie Zheng, Shixuan Liu, Mingze Li, Xiong-Hui Chen, Bowen Yu, Chang Gao, Kai Dang, Yuqiong Liu, Rui Men, An Yang, et al. Group sequence policy optimization. *arXiv preprint arXiv:2507.18071*, 2025.
- Daniel M Ziegler, Nisan Stiennon, Jeffrey Wu, Tom B Brown, Alec Radford, Dario Amodei, Paul Christiano, and Geoffrey Irving. Fine-tuning language models from human preferences. *arXiv preprint arXiv:1909.08593*, 2019.

Appendix

A	Related work	18
B	Experimental setup - Further details	18
C	Reverse KL and gradients for parametric autoregressive model	19
D	Further empirical analysis	19
D.1	Evaluation results for $\beta = 0.3$ and 1	19
D.2	Further results with Off Policy training	19
D.3	Further analysis for K1 -in-reward and K3 -in-loss	19
E	K1 in reward in different libraries	19
F	Mathematical Details and Derivations	20
F.1	True gradient	21
F.2	Path-wise and score function derivatives	21
F.3	K1 estimator	21
F.4	K3 estimator	22

A RELATED WORK

Over the past few years, researchers have explored a variety of strategies to strengthen the reasoning capabilities of LLMs. Broadly, these strategies fall into three categories: *pre-training*, which equips models with general reasoning ability through large-scale unsupervised learning (Kaplan et al., 2020); *fine-tuning*, which adapts models on curated reasoning-oriented datasets (Hendrycks et al., 2020; Wei et al., 2022; Shao et al., 2024; Grattafiori et al., 2024; Touvron et al., 2023); and *prompting*, which improves reasoning through carefully designed input strategies without altering model parameters (Wei et al., 2022; Lightman et al., 2023). We focus on fine-tuning methods, and in particular investigate how KL-based interventions affect reasoning performance across models and datasets.

While fine-tuning can improve task-specific reasoning, a central challenge is *catastrophic forgetting*; models may lose general abilities acquired during pre-training when optimized on narrow domains (Ouyang et al., 2022). Aggressive fine-tuning on small or biased datasets can also cause overfitting or undesirable behaviors. To address these risks, researchers employ regularization methods (Korbak et al., 2022; Peters et al., 2010; Schulman, 2020). Common practices include using smaller learning rates, freezing subsets of parameters, or mixing in pre-training data during fine-tuning (Touvron et al., 2023; Grattafiori et al., 2024; Penedo et al., 2024).

A particularly effective regularization technique is the use of *Kullback–Leibler (KL) divergence* penalties. KL regularization is widely used in reinforcement learning from human feedback (RLHF), where it serves as a safety mechanism to prevent the fine-tuned model from drifting too far from the base model (Christiano et al., 2017; Ziegler et al., 2019; Ouyang et al., 2022; Stiennon et al., 2020; Lambert, 2025). In RLHF, the fine-tuned model (policy) is optimized to maximize a reward model score *minus* a KL penalty that measures divergence from the base LM distribution. This prevents reward hacking and ensures outputs remain fluent and human-like.

RL with KL control is used explicitly to strengthen *reasoning*. In mathematical reasoning, Guo et al. (2025); Shao et al. (2024) introduce GRPO (a critic-free PPO variant) and *add the KL term directly to the loss*, reporting substantial gains on GSM8K and MATH. Sequence-level objectives that preserve the KL-shaped reward also appear competitive for preference-tuned reasoning models, with RLOO showing robustness across tasks and reduced sensitivity to KL settings compared to PPO (Ahmadian et al., 2024; Li et al., 2023; Zheng et al., 2025; Yu et al., 2025; Kazemnejad et al., 2025).

Although the role of KL regularization is widely acknowledged as important for reasoning fine-tuning, few works have systematically explored it in depth. Recent theoretical analyses underscore both the promise and the limitations of KL-based interventions. Amini et al. (2025) propose improved estimation techniques for KL between LLMs, Zhang et al. (2025) investigate the design of KL-regularized policy gradient algorithms specifically for reasoning, Wu et al. (2024) revisit KL in the context of knowledge distillation for LLMs, and Vassoyan et al. (2025) argue that ignoring KL penalties on critical tokens can boost exploration in RL fine-tuning. Tang & Munos (2025) further analyze pitfalls in gradient estimation. All these studies suggest that while KL constraints are effective safeguards, their implications for reasoning insufficiently understood, motivating our investigation.

B EXPERIMENTAL SETUP - FURTHER DETAILS

For the finetuning Qwen2.5-7B and Llama-3.1-8B-Instruct in completely on-policy or 4 step off-policy settings, we set the learning rate to 10^{-6} , number of rollouts per prompt $K = 5$, maximum response length to 1024, *temperature* = 1.0. We RL finetune the models on 2 GPU nodes consisting of 4 A100s (80GB) each using ver1 (Sheng et al., 2025). For the asynchronous RL finetuning experiments, we finetune Qwen3-4B-Instruct-2507 on 1 node with 4 80GB A100s, and Qwen2.5-7B on 2 nodes having a total of 8 80GB A100s. We use Prime-RL (Intellect, 2025) for the async finetuning and use a batch size of 512, maximum response length of 4096 and number of rollouts per prompt (K) of 16. For evaluation, we use lm-eval-harness (Biderman et al., 2024), using vLLM (Kwon et al., 2023) for inference with *top_p* = 1.0, *temperature* = 1.0 and *min_p* = 1.0.

C REVERSE KL AND GRADIENTS FOR PARAMETRIC AUTOREGRESSIVE MODEL

The closed-form expressions for the reverse KL divergence and its gradient, corresponding to parametric autoregressive model in §3.3 can be written as

$$D_{\text{KL}}(A\|B) = \mathbb{E}_{Y \sim A} \left[\log A_{\theta}(Y) - \log B_{\phi}(Y) \right] \quad (20)$$

$$\frac{\partial}{\partial a} D_{\text{KL}}(A\|B) = \mathbb{E}_{Y \sim A} \left[\sum_{t=1}^T (y_t - p_t^A) (\log A_{\theta}(Y) - \log B_{\phi}(Y)) \right], \quad (21)$$

$$\frac{\partial}{\partial b} D_{\text{KL}}(A\|B) = \mathbb{E}_{Y \sim A} \left[\sum_{t=1}^T (y_t - p_t^A) c_{t-1} (\log A_{\theta}(Y) - \log B_{\phi}(Y)) \right]. \quad (22)$$

D FURTHER EMPIRICAL ANALYSIS

In this section, we provide additional experimental to further support the claims discussed in the main paper.

D.1 EVALUATION RESULTS FOR $\beta = 0.3$ AND 1

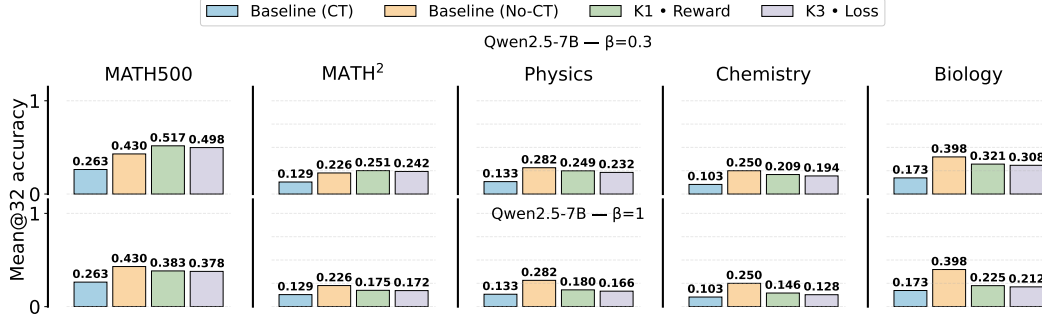


Figure 10: **Comparison of Qwen2.5-7B trained with two stable estimator configurations - K1 in reward and K3 in loss.** Baseline (CT) refers to the performance of base Qwen2.5-7B when prompted with a chat template. Baseline (No-CT) represents the performance when it is prompted with a chat template. **K1** in Loss (unbiased gradient performs the beats on both in-domain and out-of-domain tasks. Increasing β consistently deteriorates performance.

D.2 FURTHER RESULTS WITH OFF POLICY TRAINING

Figure 11 shows the performance of Qwen2.5-7B on MATH test set, while being finetuned on MATH training data, with a training batch size of 1024 and a mini-batch size of 256, i.e. $\omega \neq 1$, using **K1**-in-reward. Despite the off-policy, the training is stable as opposed to **K1**-in-loss and **K3**-in-reward with $\omega \neq 1$, where the training instabilities are accentuated as compared to the on-policy case.

D.3 FURTHER ANALYSIS FOR **K1**-IN-REWARD AND **K3**-IN-LOSS

In an attempt to understand the performance difference between **K3**-in-loss and **K1**-in-reward, we plot two metrics: (1) the sequence level forward KL divergence between the reference policy π_{ref} and the training policy π_{θ} , and (2) the entropy of the training policy π_{θ} . We compute these metrics for different checkpoints of Qwen2.5-7B while being trained on MATH, on one in-distribution task - MATH test dataset and one out-of-domain task - MMLU Biology. The results are shown in Figure 12. We observe that the forward KL divergence remains lower in the case of **K3**-in-loss whereas entropy stays lower for **K1**-in-reward. However, these observations do not directly explain the performance differences between **K1**-in-reward and **K3**-in-loss and further analysis needs to be carried out.

E K1 IN REWARD IN DIFFERENT LIBRARIES

Table 2 lists the arguments to be included while submitting the training scripts to use the unbiased K1 in reward configuration discussed in this work for three popular libraries - VeRL (Sheng et al.,

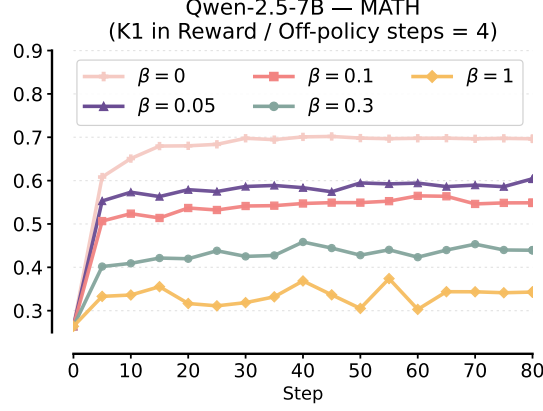


Figure 11: RL Finetuning Qwen2.5-7B with **K1**-in-reward, total training batch size of 1024 and mini-batch size of 256. The training remains stable as opposed to configurations leading to biased gradients which result where the instabilities are accentuated as compared to on-policy training.

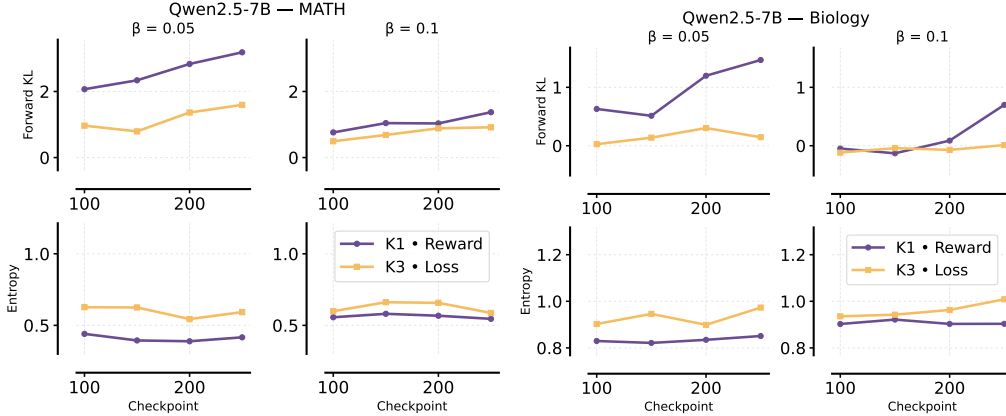


Figure 12: Sequence level forward KL with respect to the base policy and entropy across different training checkpoints, computed on MATH test dataset and MMLU Biology dataset

2025), OpenRLHF (Hu et al., 2024) and SkyRL (Cao et al., 2025). Another popular library under consideration - Prime-RL (Intellect, 2025) seems to have removed the previously used KL in loss term entirely.

Library	Arguments
VeRL	<code>algorithm.use_kl_in_reward=True, algorithm.kl_penalty="kl"</code>
OpenRLHF	<code>DO NOT set --use_kl_loss, --kl_estimator="k1"</code>
SkyRL	<code>trainer.algorithm.kl_estimator_type="k1", trainer.algorithm.use_kl_in_reward=True</code>

Table 2: KL regularization configuration across different libraries.

F MATHEMATICAL DETAILS AND DERIVATIONS

Notation. We first define the notation used for the analysis into the bias of the estimators and their corresponding gradients.

Symbol	Description
π_θ	policy trained using RL
π_{ref}	reference policy
x	prompt
$y_{1:T}$	generated response with T tokens
y_t	token at position t of response $y_{1:T}$
K1	naïve estimator of $D_{\text{KL}}(\pi_\theta \pi_{\text{ref}})$
K3	Schulman estimator of $D_{\text{KL}}(\pi_\theta \pi_{\text{ref}})$
K1_t	naïve estimator of $D_{\text{KL}}(\pi_\theta \pi_{\text{ref}})$ at token t
K3_t	Schulman estimator of $D_{\text{KL}}(\pi_\theta \pi_{\text{ref}})$ at token t

Table 3: Notation table.

F.1 TRUE GRADIENT

We want to estimate the gradient of the KL divergence between π_θ and π_{ref} that are defined over entire sequences of tokens. Specifically, we want:

$$\nabla_\theta \mathbb{KL}(\pi_\theta(\cdot | x) || \pi_{\text{ref}}(\cdot | x)) = \nabla_\theta \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot | x)} \left[\log \frac{\pi_\theta(y_{1:T} | x)}{\pi_{\text{ref}}(y_{1:T} | x)} \right] \quad (23)$$

$$= \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot | x)} \left[\log \frac{\pi_\theta(y_{1:T} | x)}{\pi_{\text{ref}}(y_{1:T} | x)} \nabla_\theta \log \pi_\theta(y_{1:T} | x) \right]. \quad (24)$$

This is the true *sequence*-level gradient of the KL divergence. Every gradient estimator we use henceforth aims to estimate this true gradient.

F.2 PATH-WISE AND SCORE FUNCTION DERIVATIVES

We show how the gradient of the KL estimator, or any other function, decomposes into a *path-wise* derivative corresponding to the gradient of the estimator inside the expectation, and the *score function* derivative arising from the θ -dependent sampling in the expectation.

$$\nabla_\theta \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot | x)} \left[\widehat{\text{KL}} \right] \quad (25)$$

$$= \nabla_\theta \sum_{y_{1:T}} \widehat{\text{KL}} \cdot \pi_\theta(y_{1:T} | x) \quad (26)$$

$$= \sum_{y_{1:T}} \left(\nabla_\theta \widehat{\text{KL}} \right) \cdot \pi_\theta(y_{1:T} | x) + \sum_{y_{1:T}} \widehat{\text{KL}} \cdot (\nabla_\theta \pi_\theta(y_{1:T} | x)) \quad (27)$$

$$= \underbrace{\mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot | x)} \nabla_\theta \left[\widehat{\text{KL}} \right]}_{\text{path-wise derivative}} + \underbrace{\mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot | x)} \left[\widehat{\text{KL}} \cdot \nabla_\theta \log \pi_\theta(y_{1:T} | x) \right]}_{\text{score function derivative}} \quad (28)$$

$$= \underbrace{\mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot | x)} \left[\sum_t \nabla_\theta \widehat{\text{KL}}_t \right]}_{\text{Pathwise}} + \underbrace{\mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot | x)} \left[\left(\sum_t \widehat{\text{KL}}_t \right) \cdot \nabla_\theta \log \pi_\theta(y_{1:T} | x) \right]}_{\text{Score function}}, \quad (29)$$

where in the last line we write the KL divergence estimator as the sum of estimators at each individual token. Note that the path-wise derivative corresponds to using the estimator directly in the loss (and backpropagating through it), whereas the score function derivative corresponds to adding the estimator to the reward.

F.3 K1 ESTIMATOR

The K1 estimator for a sequence $y_{1:T}$ can be written as:

$$\text{K1} = \sum_{t=1}^T \text{K1}_t = \sum_{t=1}^T \log \frac{\pi_\theta(y_t | x, y_{<t})}{\pi_{\text{ref}}(y_t | x, y_{<t})}. \quad (30)$$

It is easy to see that this is an unbiased estimator of $D_{\text{KL}}(\pi_\theta \| \pi_{\text{ref}})$.

To analyze the gradient of **K1**, we calculate the path-wise derivative and the score function derivative separately.

Path-wise derivative. The path-wise derivative of **K1** evaluates to zero under expectation.

$$\mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} \left[\nabla_\theta \sum_t \mathbf{K1}_t \right] = 0. \quad (31)$$

Score function derivative. The score function derivative of **K1** is an unbiased estimate of the true gradient in Equation (24).

$$\begin{aligned} & \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} \left[\left(\sum_t \mathbf{K1}_t \right) \cdot \nabla_\theta \log \pi_\theta(y_{1:T} | x) \right] \\ &= \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} \left[\log \frac{\pi_\theta(y_{1:T} | x)}{\pi_{\text{ref}}(y_{1:T} | x)} \nabla_\theta \log \pi_\theta(y_{1:T} | x) \right]. \end{aligned} \quad (32)$$

Therefore, adding **K1** estimator to the reward results in an unbiased estimate of the gradient of the KL-regularized RL objective, whereas using **K1** in the loss directly does not. In fact, since the path-wise derivative of **K1** is zero in expectation, in principle, using it in the loss should be equivalent to optimizing the RL objective without KL regularization (*i.e.*, $\beta = 0$). In practice, however, using this term in the loss introduces some variance that can hurt the optimization. We also note that we can reduce the variance of the score function derivative by removing the past tokens from the inner sum, since their contribution to the gradient will be zero in expectation.

Takeaway for **K1:**

- Adding **K1** to the reward gives us an unbiased estimate of the gradient of the KL-regularized RL objective.
- Using **K1** in loss results in a biased estimate of the true gradient and is equivalent to using no KL-regularization, but can introduce some variance in practice.

F.4 **K3** ESTIMATOR

The **K3** estimator for a sequence $y_{1:T}$ can be written as:

$$\mathbf{K3} = \sum_{t=1}^T \mathbf{K3}_t = \sum_{t=1}^T \left(\frac{\pi_{\text{ref}}(y_t | y_{<t}, x)}{\pi_\theta(y_t | y_{<t}, x)} - 1 - \log \frac{\pi_{\text{ref}}(y_t | y_{<t}, x)}{\pi_\theta(y_t | y_{<t}, x)} \right). \quad (33)$$

We first show that **K3** is an unbiased estimator of $D_{\text{KL}}(\pi_\theta \| \pi_{\text{ref}})$:

$$\mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} [\mathbf{K3}] \quad (34)$$

$$= \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} \left[\sum_t \left(\frac{\pi_{\text{ref}}(y_t | x, y_{<t})}{\pi_\theta(y_t | x, y_{<t})} - 1 - \log \frac{\pi_{\text{ref}}(y_t | x, y_{<t})}{\pi_\theta(y_t | x, y_{<t})} \right) \right] \quad (35)$$

$$= \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} \left[\sum_t \frac{\pi_{\text{ref}}(y_t | x, y_{<t})}{\pi_\theta(y_t | x, y_{<t})} \right] - T + \mathbb{E}_{y_{1:T} \sim \pi_\theta} \left[\log \frac{\pi_\theta(y_{1:T} | x)}{\pi_{\text{ref}}(y_{1:T} | x)} \right] \quad (36)$$

$$= D_{\text{KL}}(\pi_\theta \| \pi_{\text{ref}}) \quad (37)$$

We again calculate the path-wise and the score function derivatives of **K3** separately.

Path-wise derivative. The path-wise derivative of **K3** is a biased estimate of the true gradient in Equation (24).

$$\mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} [\nabla_\theta \mathbf{K3}_t] \quad (38)$$

$$= \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} \left[\nabla_\theta \sum_t \left(\frac{\pi_{\text{ref}}(y_t | x, y_{<t})}{\pi_\theta(y_t | x, y_{<t})} - 1 - \log \frac{\pi_{\text{ref}}(y_t | x, y_{<t})}{\pi_\theta(y_t | x, y_{<t})} \right) \right] \quad (39)$$

$$= -\mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} \left[\sum_t \frac{\pi_{\text{ref}}(y_t | x, y_{<t})}{\pi_\theta(y_t | x, y_{<t})} \nabla_\theta \log \pi_\theta(y_t | x, y_{<t}) \right] + \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} [\nabla_\theta \mathbf{K1}] \quad (40)$$

$$= -\mathbb{E}_{y_{<t} \sim \pi_\theta(\cdot|x), y_t \sim \pi_{\text{ref}}(\cdot|x, y_{<t})} \left[\sum_t \nabla_\theta \log \pi_\theta(y_t | x, y_{<t}) \right] \quad (41)$$

The above expression resembles the gradient of the *forward* KL divergence at the token level, except that the samples are drawn from $\pi_\theta(\cdot|x)$ instead of $\pi_{\text{ref}}(\cdot|x)$.

Score function derivative. The score function derivative of **K3** also is a biased estimate of the true gradient in Equation (24).

$$\begin{aligned} & \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} \left[\left(\sum_{t=1}^T \mathbf{K3}_t \right) \cdot \nabla_\theta \log \pi_\theta(y_{1:T} | x) \right] \\ &= \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} \left[\left(\sum_t \left(\frac{\pi_{\text{ref}}(y_t | x, y_{<t})}{\pi_\theta(y_t | x, y_{<t})} - 1 - \log \frac{\pi_{\text{ref}}(y_t | x, y_{<t})}{\pi_\theta(y_t | x, y_{<t})} \right) \right) \nabla_\theta \log \pi_\theta(y_{1:T} | x) \right] \end{aligned} \quad (42)$$

$$\begin{aligned} &= \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} \left[\sum_t \frac{\pi_{\text{ref}}(y_t | x, y_{<t})}{\pi_\theta(y_t | x, y_{<t})} \nabla_\theta \log \pi_\theta(y_{1:T} | x) \right] \\ &+ \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} \left[\log \frac{\pi_\theta(y_{1:T} | x)}{\pi_{\text{ref}}(y_{1:T} | x)} \nabla_\theta \log \pi_\theta(y_{1:T} | x) \right] \end{aligned} \quad (43)$$

$$\begin{aligned} &= \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} \left[\sum_t \sum_s \frac{\pi_{\text{ref}}(y_t | x, y_{<t})}{\pi_\theta(y_t | x, y_{<t})} \nabla_\theta \log \pi_\theta(y_s | y_{<s}, x) \right] \\ &+ \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} \left[\log \frac{\pi_\theta(y_{1:T} | x)}{\pi_{\text{ref}}(y_{1:T} | x)} \nabla_\theta \log \pi_\theta(y_{1:T} | x) \right] \end{aligned} \quad (44)$$

$$= -\mathbb{E}_{y_{<t} \sim \pi_\theta(\cdot|x)} \left[\sum_t \nabla_\theta \text{KL}(\pi_{\text{ref}}(\cdot | x, y_{<t}) \parallel \pi_\theta(\cdot | x, y_{<t})) \right] + \mathbb{E}_{y_{1:T} \sim \pi_\theta(\cdot|x)} [\mathbf{K1} \cdot \nabla_\theta \log \pi_\theta(y_{1:T} | x)] . \quad (45)$$

where in Equation 44 the terms corresponding to $s < t$ and $s > t$ reduce to 0. The first term in Equation (45) represents the bias with respect to the true gradient. Therefore, using **K3** either in loss or added to the reward results in a biased estimate of the true gradient.

We note that the path-wise derivative of **K3** corresponds to the regularization term used in GRPO (Shao et al., 2024), a popular RL algorithm used for training LLMs.

Takeaway for **K3:** Adding **K3** to the reward or using it in the loss results in a biased estimate of the gradient of the KL-regularized RL objective.