

如果你也曾为RLHF（基于人类反馈的强化学习）过程中奖励上升但模型表现反而下降、或是训练过程突然崩溃而头疼，那么这篇文章或许能为你拨开迷雾。

Stabilizing Reinforcement Learning with LLMs: Formulation and Practices

Chujie Zheng* Kai Dang Bowen Yu* Mingze Li Huiqiang Jiang
Junrong Lin Yuqiong Liu Hao Lin Chencan Wu Feng Hu
An Yang Jingren Zhou Junyang Lin

Qwen Team, Alibaba Inc.

optimizing sequence-level rewards via token-level objectives

Abstract

This paper proposes a novel formulation for reinforcement learning (RL) with large language models, explaining why and under what conditions the true **sequence-level** reward can be optimized via a surrogate **token-level** objective in policy gradient methods such as REINFORCE. Specifically, through a first-order approximation, we show that this surrogate becomes increasingly valid **only when** both the training–inference discrepancy and policy staleness are minimized. **This insight provides a principled explanation for the crucial role of several widely adopted techniques in stabilizing RL training, including importance sampling correction, clipping, and particularly Routing Replay for Mixture-of-Experts (MoE) models.** Through extensive experiments with a 30B MoE model totaling hundreds of thousands of GPU hours, we show that for **on-policy training**, the basic policy gradient algorithm with importance sampling correction achieves the highest training stability. **When off-policy updates are introduced to accelerate convergence, combining clipping and Routing Replay becomes essential to mitigate the instability caused by policy staleness. Notably, once training is stabilized, prolonged optimization consistently yields comparable final performance regardless of cold-start initialization.** We hope that the shared insights and the developed recipes for stable RL training will facilitate future research.

我们证明，只有当训练-推理差异和策略陈旧性均被最小化时，该替代指标才逐渐变得有效

在on-policy训练中，采用重要性采样校正的基本策略梯度算法获得了最高的训练稳定性。

为加速收敛引入off-policy更新时，需将剪枝与路由重放相结合，以缓解策略陈旧引发的不稳定性。

一旦训练趋于稳定，无论冷启动初始化如何，持续优化均能产生可比的最终性能。

1 Introduction

Reinforcement learning (RL) has become a key technical paradigm for enhancing large language models’ (LLMs) ability to tackle complex problem-solving tasks (OpenAI, 2024; Guo et al., 2025; Yang et al., 2025), while a stable training process¹ is crucial for successfully scaling RL. Due to the contextual nature of language, RL with LLMs usually employs sequence-level rewards, i.e., a scalar score assigned based on the complete model response. However, mainstream RL algorithms, such as REINFORCE and GRPO, typically employ token-level optimization objectives. This mismatch **between the reward (assigned at the sequence level) and the optimization unit (typically at the token level)** raises concerns about the soundness and training stability of such approaches, while some studies have proposed directly adopting **sequence-level optimization objectives** (Zheng et al., 2025; Liu et al., 2025a). In particular, **token-level optimization objectives** also pose unique challenges for RL training with Mixture-of-Experts (MoE) models. For instance, the dynamic expert routing mechanism can invalidate the token-level importance sampling ratios in MoE models (Zheng et al., 2025). However, **it remains unclear whether optimizing sequence-level rewards using token-level objectives is justified**, and if so, to what extent (or under what conditions) such an approach is valid.

目前尚不清楚使用token-level目标来优化sequence-level奖励是否合理，若合理，则该方法的有效性程度（或适用条件）如何。

特别是，标记级优化目标也为基于专家混合（MoE）模型的强化学习（RL）训练带来了独特挑战。

In this paper, we propose a novel formulation for RL with LLMs. The key insight is that, to optimize the expected sequence-level reward, we can employ a surrogate token-level objective as its **first-order approximation**. Specifically, this approximation is likely to hold only when both (1) the **numerical discrepancy between the training and inference engines** (i.e., the training–inference discrepancy) and (2) the discrepancy **between the rollout policy that samples responses and the target policy to be optimized** (i.e., policy staleness) are minimized. This insight provides a principled explanation of **how several**

*Corresponding authors.

¹By *stable training*, we refer to a training process in which model performance steadily improves over training steps—reflected in both the training reward and benchmark scores—and, crucially, the model’s internal state evolves smoothly and without abrupt shifts. The model state can be monitored via a set of diagnostic metrics, including the training–inference KL divergence and entropy reported in our later experiments (§ 4). Stable training implies that the model can consistently improve in a healthy manner throughout extended or multi-stage training, with a lower risk of unexpected behaviors.

techniques for stabilizing RL training work. For example, (1) the importance sampling weight is an inherent component of the surrogate token-level objective under the first-order approximation; (2) the clipping mechanism can restrain policy staleness by preventing aggressive policy updates; (3) for MoE models, the Routing Replay approach (Zheng et al., 2025; Ma et al., 2025), which fixes the routed experts during policy optimization, can reduce both the training–inference discrepancy and policy staleness.

To empirically validate our insight and investigate practical recipes for stable RL training, we conduct extensive experiments with a 30B MoE model, amounting to hundreds of thousands of GPU hours. Our main conclusions include: (1) For on-policy training², the basic policy gradient algorithm with importance sampling correction yields the highest training stability; (2) When off-policy updates are introduced to accelerate convergence, i.e., a large batch of responses is split into mini-batches for multiple gradient updates, combining clipping and Routing Replay becomes necessary to mitigate instability caused by policy staleness; (3) Once training is stabilized, models with different cold-start initializations consistently achieve comparable final performance. This motivates future work to focus more on RL itself rather than overly on the specifics of cold-start initialization, as differences arising from the latter are expected to vanish given prolonged RL training.

In summary, this paper makes contributions along two axes:

- 理论：
 - Theoretically, we propose a novel formulation for reinforcement learning with LLMs, revealing the conditions under which optimizing sequence-level rewards via token-level objectives is justified. Specifically, the validity of the underlying first-order approximation hinges on jointly minimizing the training–inference discrepancy and policy staleness.
- 经验：
 - Empirically, through extensive experiments with MoE models spanning hundreds of thousands of GPU hours, we demonstrate that several techniques that preserve the validity of the first-order approximation consistently exhibit practical efficacy in stabilizing RL training, particularly the Routing Replay approach tailored for MoE models. We hope that the developed recipes for stable RL training will facilitate future research.

2 Formulation for Reinforcement Learning with LLMs

2.1 Notation

$$\text{sequence-level: } \pi_{\theta}(y|x) = |y| * \text{token-level: } \pi_{\theta}(y_t|x, y_{<t})$$

We define an autoregressive LLM parameterized by θ as a policy π_{θ} . We use x to denote an input prompt and $\mathcal{D}$ as the prompt set. Under the policy π_{θ} , the likelihood of a response y to a prompt x is denoted as $\pi_{\theta}(y|x) = \prod_{t=1}^{|y|} \pi_{\theta}(y_t|x, y_{<t})$ where $|y|$ is the number of tokens in y . Given the contextual nature of language, we focus on the sequence-level reward setting, where a whole response y is assigned a single scalar reward $R(x, y)$. We do not consider the value-based setting (e.g., PPO, Schulman et al. 2017), where policy optimization is steered by a value model that assigns scalar scores to each token in a response y . This is because we found it inherently difficult (if not impossible) to devise general and scalable approaches to obtaining reliable value models.

这是因为我们发现，设计出通用且可扩展的可靠价值模型方法本质上具有困难性（即便并非完全不可能）。

2.2 Expected Sequence-level Reward is Hard to Directly Optimize

Our formulation starts from the true sequence-level reward that we aim to maximize:

$$\mathcal{J}^{\text{seq}}(\theta) = \mathbb{E}_{x \sim \mathcal{D}, y \sim \pi_{\theta}(\cdot|x)} [R(x, y)],$$

由于response通常不是在训练引擎中采样（例如Megatron和FSDP），而是在推理引擎中（例如SGLang和vLLM），

where π_{θ} is the target policy to be optimized. Since the responses are typically not sampled in the training engine (e.g., Megatron and FSDP) but instead in the inference engine (e.g., SGLang and vLLM), we adopt the importance sampling (IS) trick to do a simple transformation: 我们采用重要性抽样（IS）技巧进行简单转换：

$$\mathcal{J}^{\text{seq}}(\theta) = \mathbb{E}_{x \sim \mathcal{D}, y \sim \pi_{\theta}(\cdot|x)} [R(x, y)] = \mathbb{E}_{x \sim \mathcal{D}, y \sim \mu_{\theta_{\text{old}}}(\cdot|x)} \left[\underbrace{\frac{\pi_{\theta}(y|x)}{\mu_{\theta_{\text{old}}}(y|x)}}_{\text{sequence-level IS weight}} R(x, y) \right], \quad (1)$$

where $\mu_{\theta_{\text{old}}}$ denotes the rollout policy that samples responses. Note that we use the notation μ to distinguish the policy in the inference engine from the policy (notated as π) in the training engine, as

²In this paper, we use the term *on-policy* to indicate that the rollout policy that samples responses is identical to the target policy to be optimized using these responses (omitting the training–inference discrepancy), while *off-policy* indicates that the two policies are different. 忽略训练-推理差异

there typically exists a numerical discrepancy between training and inference engines (Yao et al., 2025). The sequence-level objective in Equation (1) has the following gradient:

$$\begin{aligned}\nabla_{\theta} \mathcal{J}^{\text{seq}}(\theta) &= \mathbb{E}_{x \sim \mathcal{D}, y \sim \mu_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{\pi_{\theta}(y|x)}{\mu_{\theta_{\text{old}}}(y|x)} R(x, y) \nabla_{\theta} \log \pi_{\theta}(y|x) \right] \\ &= \mathbb{E}_{x \sim \mathcal{D}, y \sim \mu_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{\pi_{\theta}(y|x)}{\mu_{\theta_{\text{old}}}(y|x)} R(x, y) \sum_{t=1}^{|y|} \nabla_{\theta} \log \pi_{\theta}(y_t|x, y_{<t}) \right].\end{aligned}\quad (2)$$

However, this gradient is usually intractable to utilize due to the large numerical range and high variance of sequence likelihood (i.e., $\pi_{\theta}(y|x)$ and $\mu_{\theta_{\text{old}}}(y|x)$), making it difficult to directly optimize the sequence-level objective in Equation (1). 由于序列似然值的数值范围较大且方差较高, 该梯度通常难以利用, 这使得难以直接优化方程(1)中的sequence-level的目标

2.3 Token-level Objective as a First-order Approximation to Sequence-level Objective

The critical step in our formulation is to consider the following surrogate token-level objective:

$$\mathcal{J}^{\text{token}}(\theta) = \mathbb{E}_{x \sim \mathcal{D}, y \sim \mu_{\theta_{\text{old}}}(\cdot|x)} \left[\sum_{t=1}^{|y|} \underbrace{\frac{\pi_{\theta}(y_t|x, y_{<t})}{\mu_{\theta_{\text{old}}}(y_t|x, y_{<t})}}_{\text{token-level IS weight}} R(x, y) \right], \quad (3)$$

with the following gradient:

$$\nabla_{\theta} \mathcal{J}^{\text{token}}(\theta) = \mathbb{E}_{x \sim \mathcal{D}, y \sim \mu_{\theta_{\text{old}}}(\cdot|x)} \left[\sum_{t=1}^{|y|} \frac{\pi_{\theta}(y_t|x, y_{<t})}{\mu_{\theta_{\text{old}}}(y_t|x, y_{<t})} R(x, y) \nabla_{\theta} \log \pi_{\theta}(y_t|x, y_{<t}) \right]. \quad (4)$$

which is actually the basic policy gradient algorithm (i.e., REINFORCE) equipped with a token-level IS weight. The core insight here is that we can view the token-level optimization objective in Equation (3) as a first-order approximation to the sequence-level objective in Equation (1) that we truly aim to optimize. To be specific, suppose π_{θ} and $\mu_{\theta_{\text{old}}}$ are slightly different, let $\frac{\pi_{\theta}(y_t|x, y_{<t})}{\mu_{\theta_{\text{old}}}(y_t|x, y_{<t})} = 1 + \delta_t$ where δ_t is a small quantity. We have the following approximation:

$$\frac{\pi_{\theta}(y|x)}{\mu_{\theta_{\text{old}}}(y|x)} = \prod_{t=1}^{|y|} (1 + \delta_t) \approx 1 + \sum_{t=1}^{|y|} \delta_t + O(\delta^2) \approx 1 + \sum_{t=1}^{|y|} \delta_t,$$

where the rightmost derivation neglects second-order and higher-order small terms like $\delta_i \delta_j$. So we have:

$$\begin{aligned}\nabla_{\theta} \mathcal{J}^{\text{seq}}(\theta) &= \mathbb{E}_{x \sim \mathcal{D}, y \sim \mu_{\theta_{\text{old}}}(\cdot|x)} \left[R(x, y) \nabla_{\theta} \left(\frac{\pi_{\theta}(y|x)}{\mu_{\theta_{\text{old}}}(y|x)} \right) \right] \quad : \text{sequence-level} \\ &\approx \mathbb{E}_{x \sim \mathcal{D}, y \sim \mu_{\theta_{\text{old}}}(\cdot|x)} \left[R(x, y) \nabla_{\theta} \left(1 + \sum_{t=1}^{|y|} \delta_t \right) \right] \\ &= \mathbb{E}_{x \sim \mathcal{D}, y \sim \mu_{\theta_{\text{old}}}(\cdot|x)} \left[R(x, y) \nabla_{\theta} \left(\sum_{t=1}^{|y|} \frac{\pi_{\theta}(y_t|x, y_{<t})}{\mu_{\theta_{\text{old}}}(y_t|x, y_{<t})} \right) \right] \quad : \text{token-level} \\ &= \nabla_{\theta} \mathcal{J}^{\text{token}}(\theta).\end{aligned}$$

This is why we say that Equation (3) is a first-order approximation to Equation (1). Therefore, when π_{θ} is close to $\mu_{\theta_{\text{old}}}$, we can improve the sequence-level objective in Equation (1) by updating the model parameters θ with the gradient in Equation (4). 当 π_{θ} 和 π_{old} 相近时, 可以通过更新token-level的梯度来改进sequence-level的目标目标。

2.4 Conditions for First-order Approximation to Hold

For the first-order approximation to hold, we require that the target policy π_{θ} and the rollout policy $\mu_{\theta_{\text{old}}}$ are close, which, however, is less intuitive. To be clear, given x and for each token y_t , we rewrite its IS weight as:

$$\frac{\pi_{\theta}(y_t|x, y_{<t})}{\mu_{\theta_{\text{old}}}(y_t|x, y_{<t})} = \underbrace{\frac{\pi_{\theta_{\text{old}}}(y_t|x, y_{<t})}{\mu_{\theta_{\text{old}}}(y_t|x, y_{<t})}}_{\text{training-inference discrepancy}} \times \underbrace{\frac{\pi_{\theta}(y_t|x, y_{<t})}{\pi_{\theta_{\text{old}}}(y_t|x, y_{<t})}}_{\text{policy staleness}}, \quad (5)$$

where $\pi_{\theta_{\text{old}}}$ denotes the rollout policy computed by the training engine, differing from the one $\mu_{\theta_{\text{old}}}$ in the inference engine. Therefore, from the decomposition in Equation (5), the gap between π_{θ} and $\mu_{\theta_{\text{old}}}$ comes from two aspects: the *training–inference discrepancy* and *policy staleness*.

- Regarding the **training–inference discrepancy**—i.e., the numerical differences between training and inference engines—the causes are usually complex and heavily tied to the underlying infrastructure. For example, training and inference engines typically employ different computational kernels for peak performance, which would yield inconsistent outputs given the same model input. Even within a single engine, particularly the inference side, batch-invariant kernels (He and Lab, 2025) are often disabled for maximizing throughput, so the same model input can still receive variant outputs. In the case of MoE models, the training–inference discrepancy is further amplified by inconsistent expert routing, which we will discuss detailedly in § 3.
- Regarding **policy staleness**—i.e., the discrepancy between the rollout policy that samples responses and the target policy to be optimized—it usually arises from the trade-offs made to improve training efficiency and computational utilization. Since the rollout stage in RL is typically bounded in time by the generation length, to accelerate convergence through increased computational resources, we often split a large batch of sampled responses into mini-batches for multiple gradient updates. Consequently, mini-batches consumed later may exhibit greater policy staleness. In asynchronous RL frameworks, a single response can be generated sequentially by multiple model versions, which also introduces policy staleness. 多个模型版本可依次生成单一响应，这也导致了策略陈旧性。

与底层基础设施相关。

采用不同的计算内核

特别是在推理端，为最大化吞吐量，批量不变核（He and Lab, 2025）通常会被禁用。

其通常源于为提高训练效率和计算利用率而做出的权衡取舍

通过增加计算资源加速收敛

Therefore, to ensure the validity of the first-order approximation that underlies the surrogate token-level objective in Equation (3), we should, in principle, narrow the gap between π_{θ} and $\mu_{\theta_{\text{old}}}$ from two directions: *reducing the numerical discrepancy between training and inference engines*, and *controlling policy staleness within a moderate range*. 原则上，我们应该从两个方向缩小 π_{θ} 和 $\mu_{\theta_{\text{old}}}$ 之间的差距：

3 Challenge for Mixture of Experts, and Routing Replay

3.1 Expert Routing Hinders First-order Approximation to Hold

对于专家混合（MoE）模型，一阶近似成立的条件变得不那么直接了。

When it comes to Mixture-of-Experts (MoE) models (Guo et al., 2025; Yang et al., 2025), the conditions for the first-order approximation to hold become less straightforward. Specifically, during the forward pass of generating each token, MoE models dynamically select and activate only a small subset of expert parameters via the expert routing mechanism. Incorporating expert routing into Equation (5), we can write the token-level IS weight for an MoE model as: 将专家路由整合到公式(5)中，我们可以将多模态增强（MoE）模型的标记级IS权重表示为：

$$\frac{\pi_{\theta}(y_t|x, y_{<t})}{\mu_{\theta_{\text{old}}}(y_t|x, y_{<t})} = \frac{\pi_{\theta}(y_t|x, y_{<t}, e_t^{\pi})}{\mu_{\theta_{\text{old}}}(y_t|x, y_{<t}, e_{\text{old}, t}^{\mu})} = \underbrace{\frac{\pi_{\theta_{\text{old}}}(y_t|x, y_{<t}, e_{\text{old}, t}^{\pi})}{\mu_{\theta_{\text{old}}}(y_t|x, y_{<t}, e_{\text{old}, t}^{\mu})}}_{\text{training–inference discrepancy}} \times \underbrace{\frac{\pi_{\theta}(y_t|x, y_{<t}, e_t^{\pi})}{\pi_{\theta_{\text{old}}}(y_t|x, y_{<t}, e_{\text{old}, t}^{\pi})}}_{\text{policy staleness}}, \quad (6)$$

where e^{π} and e^{μ} denote the routed experts in the training and inference engines, respectively, and the subscript “old” corresponds to the rollout policy. 下标 “old” 对应于输出策略。

At this point, the challenge of reinforcement learning with MoE models becomes clear: expert routing is entangled with the training–inference discrepancy and policy staleness, increasing the likelihood that the first-order approximation underlying the surrogate token-level optimization objective in Equation (3) breaks down. More specifically, the training–inference discrepancy can cause inconsistent routed experts in the training and inference engines (i.e., $e_{\text{old}, t}^{\pi}$ versus $e_{\text{old}, t}^{\mu}$) given the same model parameters and input. This divergence in expert routing, in turn, further amplifies the discrepancy in final outputs. Furthermore, policy staleness manifests not only in changes in the model parameters (i.e., θ versus θ_{old}) but also in shifts of routed experts (i.e., e_t^{π} versus $e_{\text{old}, t}^{\pi}$), which can heavily alter the resulting policy defined by activated parameters. 策略陈旧不仅体现在模型参数的变化上（即 θ 与 θ_{old} ），还体现在路由专家的转移上，这可能会极大地改变由激活参数定义的结果策略。

3.2 Routing Replay Restores First-order Approximation, Yet May Introduce Bias

Identifying that expert routing undermines the validity of the first-order approximation in MoE models, we can eliminate this impact through the Routing Replay (Zheng et al., 2025) approach. The core idea of Routing Replay is to stabilize RL training of MoE models by fixing the routed experts during policy optimization, thereby enabling the model to be optimized like a dense one. Upon Equation (6), we formalize the following two concrete implementations of Routing Replay, namely *Vanilla Routing Replay* and *Rollout Routing Replay*:

在公式(6)中，我们正式提出路由重放的两种具体实现方式，即传统路由重放和rollout路由重放：

因此，后续消耗的迷你批次可能表现出更高的策略陈旧性。

通过重放机制，重点缓解专家路由对策略陈旧性的影响

- **Vanilla Routing Replay (R2)** (Zheng et al., 2025) focuses on mitigating the impact of expert routing on policy staleness by replaying, during gradient updates, the routed experts determined by the rollout policy in the training engine (i.e., $e_{old,t}^\pi$): 在训练引擎中根据rollout略确定路由由专家

$$\frac{\pi_{\theta}^{R2}(y_t|x, y_{<t})}{\mu_{old}(y_t|x, y_{<t})} = \frac{\pi_{\theta}(y_t|x, y_{<t}, e_{old,t}^\pi)}{\mu_{old}(y_t|x, y_{<t}, e_{old,t}^\pi)} = \frac{\pi_{\theta_{old}}(y_t|x, y_{<t}, e_{old,t}^\pi)}{\mu_{old}(y_t|x, y_{<t}, e_{old,t}^\pi)} \times \underbrace{\frac{\pi_{\theta}(y_t|x, y_{<t}, e_{old,t}^\pi)}{\pi_{\theta_{old}}(y_t|x, y_{<t}, e_{old,t}^\pi)}}_{\text{policy staleness} \downarrow}.$$

旨在通过均匀重放来减少专家路由对training-inference差异的影响

- **Rollout Routing Replay (R3)** (Ma et al., 2025) aims to reduce the impact of expert routing on the training-inference discrepancy by uniformly replaying, within the training engine, the routed experts determined by the rollout policy in the inference engine (i.e., $e_{old,t}^\mu$), which also simultaneously mitigates the impact of expert routing on policy staleness: 同时缓解专家路由对策略陈旧性的影响

$$\frac{\pi_{\theta}^{R3}(y_t|x, y_{<t})}{\mu_{old}(y_t|x, y_{<t})} = \frac{\pi_{\theta}(y_t|x, y_{<t}, e_{old,t}^\mu)}{\mu_{old}(y_t|x, y_{<t}, e_{old,t}^\mu)} = \underbrace{\frac{\pi_{\theta_{old}}(y_t|x, y_{<t}, e_{old,t}^\mu)}{\mu_{old}(y_t|x, y_{<t}, e_{old,t}^\mu)}}_{\text{training-inference discrepancy} \downarrow} \times \underbrace{\frac{\pi_{\theta}(y_t|x, y_{<t}, e_{old,t}^\mu)}{\pi_{\theta_{old}}(y_t|x, y_{<t}, e_{old,t}^\mu)}}_{\text{policy staleness} \downarrow}.$$

Therefore, Routing Replay intuitively restores the validity of the first-order approximation in MoE models by reducing the training-inference discrepancy (in R3) and alleviating policy staleness (in R2 and R3). However, we point out that it also implicitly biases the target policy, as suggested by the notations π_{θ}^{R2} and π_{θ}^{R3} . Specifically, the original target policy we aim to optimize in Equation (3) is π_{θ} , where the likelihood of each token y_t should be governed by the *naturally*-routed experts e_t^π . However, Routing Replay constrains the routed experts to be $e_{old,t}^\pi$ or $e_{old,t}^\mu$, leading to another target policy π_{θ}^{R2} or π_{θ}^{R3} that deviates from the original π_{θ} defined by e_t^π . In particular, when we split a large batch into mini-batches for multiple gradient updates, R2 and R3 can possess different degrees of bias, as shown in Table 1. The key difference is that R2 does not alter the original target policy in the first mini-batch, which we conjecture may lead to R2 and R3 exhibiting different performance, especially when the ratio between batch size and mini-batch size (i.e., the degree of off-policiness) is varied.

我们指出，这也会隐性地对目标策略产生偏差。

具体而言，我们在公式(3)中希望优化的原始目标策略是 π_{θ} ，其中每个标记 y_t 的似然度应由自然路由的专家 e 控制。

关键区别在于R2在首个小批量中未修改原始目标策略，我们推测这可能导致R2与R3表现差异，尤其当批量大小与小批量大小的比例（即偏离策略的程度）发生变化时。

Table 1: Comparison between R2 and R3 in how they alter the original target policy π_{θ} . 它们如何改变原始目标策略 π

	First mini-batch	Non-first mini-batch
R2 (replaying $e_{old,t}^\pi$)	$e_{old,t}^\pi = e_t^\pi$, target policy is <u>not altered</u>	$e_{old,t}^\pi \neq e_t^\pi$, target policy is altered
R3 (replaying $e_{old,t}^\mu$)	$e_{old,t}^\mu \neq e_t^\pi$, target policy is <u>altered</u>	$e_{old,t}^\mu \neq e_t^\pi$, target policy is altered

然而，要明确评估路由重放（RoutingReplay）的利弊是否相互抵消仍存在困难

Nevertheless, it is difficult to definitively assess whether the advantages or disadvantages of Routing Replay outweigh each other. Altering routed experts, while introducing bias into the optimization objective, also makes the first-order approximation—on which the altered token-level objective using π_{θ}^{R2} or π_{θ}^{R3} as the target policy relies—more likely to hold. We need further experiments to validate the practical utility of Routing Replay.

改变路由专家的同时，在优化目标中引入偏置，也使得一阶近似——即使用 π_{R2} 或 π_{R3} 作为目标策略的改变后的token-level目标所依赖的——更有可能成立。

4 Empirical Analyses

首先，我们对原始奖励数据应用GRPO群组标准化（Shao等，2024），作为每个响应 y 的优势估计值

4.1 MiniRL: A Minimalist Baseline Algorithm极简基线算法

In our experiments, we employ two minimal modifications to the REINFORCE optimization objective in Equation (3) as a minimalist baseline algorithm. First, we apply group-normalization (Shao et al., 2024) to the raw rewards as the advantage estimate for each response y : $\hat{A}(x, y) = R(x, y) - \mathbb{E}_{y' \sim \mu_{old}(\cdot|x)} [R(x, y')]$, which also lowers the variance of the raw rewards. Second, we adopt the clipping mechanism in PPO (Schulman et al., 2017) that prevents aggressive policy updates by stopping gradients for certain tokens, which can hopefully restrain policy staleness. We follow the decoupled PPO approach (Hilton et al., 2022) and use $\pi_{\theta_{old}}$ as the proximal policy to decide whether to clip the token y_t based on the ratio of $\pi_{\theta}(y_t|x, y_{<t})$ and $\pi_{\theta_{old}}(y_t|x, y_{<t})$ ³. The obtained minimalist baseline algorithm, which we call **MiniRL**, is

通过停止特定token的梯度更新，防止激进的策略更新

³While there are alternative clipping strategies, such as clipping a whole response based on the ratio of sequence likelihood (Zheng et al., 2025), we found that the current clipping strategy has worked decently. Therefore, we leave

as follows:

$$\mathcal{J}_{\text{MiniRL}}(\theta) = \mathbb{E}_{x \sim \mathcal{D}, y \sim \mu_{\theta_{\text{old}}}(\cdot|x)} \left[\sum_{t=1}^{|y|} M_t \text{sg} \left[\frac{\pi_{\theta}(y_t|x, y_{<t})}{\mu_{\theta_{\text{old}}}(y_t|x, y_{<t})} \right] \hat{A}(x, y) \log \pi_{\theta}(y_t|x, y_{<t}) \right], \quad (7)$$

$$M_t = \begin{cases} 0 & \text{if } \hat{A}(x, y) > 0 \text{ and } r_t > 1 + \epsilon_{\text{high}}, \\ 0 & \text{if } \hat{A}(x, y) < 0 \text{ and } r_t < 1 - \epsilon_{\text{low}}, \\ 1 & \text{otherwise,} \end{cases} \quad r_t = \frac{\pi_{\theta}(y_t|x, y_{<t})}{\pi_{\theta_{\text{old}}}(y_t|x, y_{<t})},$$

where **sg** denotes the operation of stopping gradient. It is noteworthy that MiniRL is adopted as the baseline algorithm to maintain consistency—as closely as possible—in gradient with the surrogate token-level objective in Equation 3, which has been justified by our formulation in § 2. In Appendix A, we will provide a comparison of MiniRL against other algorithms such as GRPO (Shao et al., 2024) and CISPO (Chen et al., 2025). All our experiments will be implemented based on MiniRL.

4.2 Experimental Setup

We conduct experiments on the mathematical reasoning task, where the model response is compared with the ground truth answer and then assigned a binary reward (i.e., $R(x, y) \in \{0, 1\}$). We curate 4,096 math problems with verified answers as the prompt set for RL training. We report the average accuracy over 32 sampled responses on the HMMT25, AIME25, and AIME24 benchmarks, each consisting of 30 competition-level math problems (90 in total).

竞争水平数学问题

We experiment with a cold-start model fine-tuned from Qwen3-30B-A3B-Base. We adopt the setting of FP8 inference and BF16 training, providing a stress test for algorithmic correctness where the inference precision is lower than the training and the training-inference discrepancy is large. Besides the training reward, we also report the dynamics of two metrics: (1) the token-level entropy of the target policy, approximated by:

$$\text{熵: } \mathbb{H}[\pi_{\theta}] \approx \mathbb{E}_{x \sim \mathcal{D}, y_{<t} \sim \mu_{\theta_{\text{old}}}(\cdot|x)} \left[- \sum_{w \in \mathcal{V}} \pi_{\theta}(w|x, y_{<t}) \log \pi_{\theta}(w|x, y_{<t}) \right],$$

where $\mathcal{V}$ denotes the vocabulary, and (2) the KL divergence between the rollout policies in the inference and training engines, calculated as:

推理引擎与训练引擎中展开策略之间的KL散度，计算公式为：

$$\text{KL散度: } \mathbb{D}_{\text{KL}}[\mu_{\theta_{\text{old}}} \parallel \pi_{\theta_{\text{old}}}] = \mathbb{E}_{x \sim \mathcal{D}, y_t \sim \mu_{\theta_{\text{old}}}(\cdot|x, y_{<t})} \left[\log \frac{\mu_{\theta_{\text{old}}}(y_t|x, y_{<t})}{\pi_{\theta_{\text{old}}}(y_t|x, y_{<t})} \right].$$

We report the latter metric because recent work (Yao et al., 2025; Liu et al., 2025a) has revealed that the instability or collapse in RL training is often accompanied by a sharp increase in the training-inference discrepancy. 我们报告后一项指标，因为近期研究 (Yao等, 2025; Liu等, 2025a) 表明，强化学习 (RL) 在训练-推理中的不一致性急剧增加时伴随着出现不稳定性和collapse。

To conduct controlled experiments, we employ the standard synchronous RL framework. In each global step, we first sample a batch of B prompts and sample G responses for each prompt using the rollout policy in the inference engine. Then, we split the responses into N mini-batches and apply N gradient updates in the training engine. The finally updated policy in this global step is used as the new rollout policy in the next global step. Across all experimental runs, we use the same mini-batch size of 1,024 responses ($B = 64$ and $G = 16$) for each gradient update. 我们为每次梯度更新采用相同的1,024个响应的小批量大小 ($B = 64, G = 16$)。

此全局步骤中最终更新的策略将作为下一全局步骤的新部署策略

For other hyperparameters, we set the maximum generation length to 32,768, and set ϵ_{high} to 0.27 and ϵ_{low} to 0.2 in MiniRL. We additionally apply the Truncated Importance Sampling (TIS) trick (Yao et al., 2025) to the token-level IS weight in MiniRL, with the truncation threshold set to 5. Our experiments total hundreds of thousands of GPU hours, and the consumed compute can be estimated as 5 ~ 6 GPU hours per gradient step. 消耗的计算量可估算为每个梯度步长5至6个GPU小时。

4.3 Results of On-policy Training

我们首先在全局批量大小等于小批量大小的在线策略训练条件下，验证基于token-level优化目标的一阶近似有效性是否与训练稳定性相关。

We first verify, under on-policy training where the global batch size equals the mini-batch size, whether the validity of the first-order approximation underlying the token-level optimization objective is correlated with training stability. Under this on-policy setting where $\theta = \theta_{\text{old}}$, MiniRL degenerates to the following basic policy gradient algorithm: 在on-policy时 $\theta = \theta_{\text{old}}$, MiniRL退化为以下基本策略梯度算法：

$$\mathcal{J}_{\text{MiniRL}}(\theta) = \mathbb{E}_{x \sim \mathcal{D}, y \sim \mu_{\theta_{\text{old}}}(\cdot|x)} \left[\sum_{t=1}^{|y|} \frac{\pi_{\theta_{\text{old}}}(y_t|x, y_{<t})}{\mu_{\theta_{\text{old}}}(y_t|x, y_{<t})} \hat{A}(x, y) \log \pi_{\theta}(y_t|x, y_{<t}) \right],$$

the study of clipping or masking strategies for future work. Similarly, exploring better advantage estimates $\hat{A}(x, y)$ may also be helpful, but falls outside the scope of this work.

此处的IS权重仅用于校正训练与推理之间的差异

so the IS weight here serves only as a correction for the training–inference discrepancy. We notice that existing RL algorithms, such as GRPO and CISPO, often employ length normalization in their optimization objectives, and their original objectives do not consider IS correction for the training–inference discrepancy. We thus include the following two ablated variants of MiniRL in our experiments:

其原始目标未考虑针对训练干扰差异的IS校正。

$$\mathcal{J}_{\text{MiniRL}}^{\text{w_length-norm}}(\theta) = \mathbb{E}_{x \sim \mathcal{D}, y \sim \mu_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{|y|} \sum_{t=1}^{|y|} \frac{\pi_{\theta_{\text{old}}}(y_t|x, y_{<t})}{\mu_{\theta_{\text{old}}}(y_t|x, y_{<t})} \hat{A}(x, y) \log \pi_{\theta}(y_t|x, y_{<t}) \right],$$

which additionally employs length normalization, and

$$\text{无IS: } \mathcal{J}_{\text{MiniRL}}^{\text{wo_train-infer-is}}(\theta) = \mathbb{E}_{x \sim \mathcal{D}, y \sim \mu_{\theta_{\text{old}}}(\cdot|x)} \left[\sum_{t=1}^{|y|} \hat{A}(x, y) \log \pi_{\theta}(y_t|x, y_{<t}) \right]$$

需注意的是，这两个变体已不再满足前述的一阶近似条件，因为它们的梯度既不等于也不与方程(1)中真实sequence-level目标函数的梯度呈线性相关（忽略反归一化）。

which omits the IS correction for the training–inference discrepancy. Note that the two variants have no longer satisfied the aforementioned first-order approximation, as their gradients are neither equal to nor linearly correlated with the gradient of the true sequence-level objective in Equation (1) (ignoring the reward normalization). We also equip MiniRL and the two variants with R3 (R2 is inapplicable here, see Table 1) for comparison.

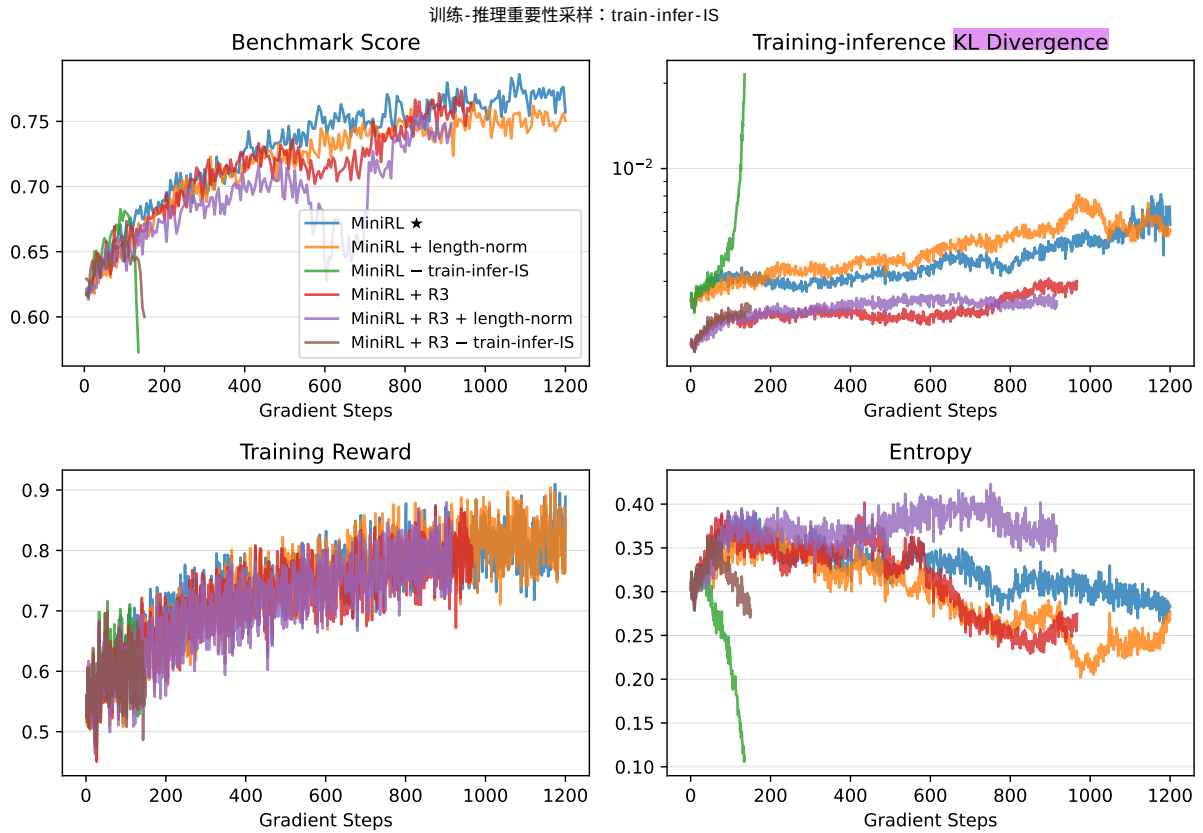


Figure 1: Results of on-policy training with gbs (global batch size) = mbs (mini-batch size) = 1,024.

From Figure 1, we draw the following observations and conclusions:

- MiniRL, i.e., the basic policy gradient algorithm with IS correction, achieves the best performance and training stability. 达到最佳性能和训练稳定性。
- Adding length normalization leads to suboptimal performance⁴, although training remains stable. This is as expected, since length normalization invalidates the first-order approximation to the true expected sequence-level reward, resulting in a biased token-level optimization objective.
- Removing the training–inference IS correction causes rapid training collapse and a sharp drop in entropy. This confirms that the IS weight is an inherent component of the first-order approximation, and omitting it immediately invalidates the token-level optimization objective.

由于长度归一化会抵消对真实期望sequence-level奖励的一阶近似，从而导致token-level优化目标产生偏差。

⁴Our conclusion regarding length normalization aligns with that of Liu et al. (2025b), albeit with a markedly different motivation.

- Applying R3 in on-policy training does not yield performance gains, despite effectively reducing the training-inference discrepancy (as reflected by the training-inference KL divergence). Moreover, combining R3 with length normalization even degrades the benchmark score further, and applying R3 without the training-inference IS correction still fails rapidly⁵. This empirically confirms our speculation in § 3.2—that Routing Replay can alter the original target policy and introduce bias into the optimization objective. (Routing Replay) 会改变原始目标策略，并在优化目标中引入偏差。

如训练-推理KL散度所示

These results demonstrate that, in designing token-level optimization objectives, only those that preserve the validity of the first-order approximation to the expected sequence-level reward lead to improved training stability and performance. This also validates the soundness of our proposed formulation.

这些结果表明，在设计标记级优化目标时，只有那些能保持对预期序列级奖励的一阶近似有效性的目标，才能提升训练的稳定性性能。这也验证了我们所提出公式的合理性。

4.4 Results of Off-policy Training

The inference time in RL is typically bounded by the generation length and cannot be accelerated by increasing computational resources. To leverage increased compute for faster convergence, a common practice is to introduce off-policy updates. Within a synchronous RL framework, this means that a large batch of responses is split into N mini-batches for multiple gradient updates. To investigate the recipes for stable RL training under off-policy settings, we experiment with three levels of off-policiness: with the mini-batch size fixed at 1,024 responses, the global batch size is varied to 2,048, 4,096, and 8,192, corresponding to $N = 2, 4$, and 8, respectively. With MiniRL as the baseline, we compare the following methods: MiniRL (no clipping), MiniRL + R2 (no clipping), MiniRL + R2, and MiniRL + R3.

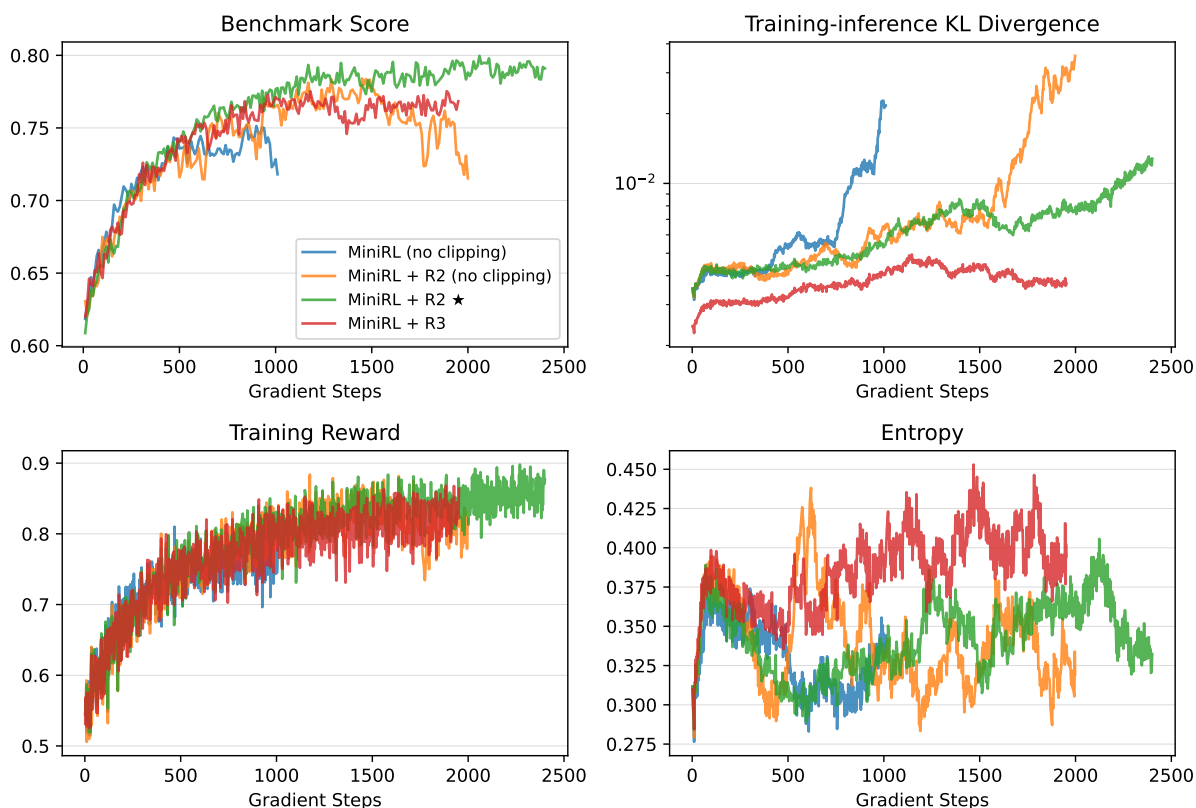


Figure 2: Results of off-policy training with $gbs = 2 \times mbs = 2,048$.

mbs (mini-batch size)
gbs (gradient batch size)

每两次mini-batch的梯度被累积后，再更新一次参数

From Figures 2 to 4, we draw the following observations and conclusions:

- Once off-policy updates are introduced, both Routing Replay and clipping become essential for stable training. As shown in Figures 2 and 3, omitting either Routing Replay or clipping causes training to collapse prematurely, thereby degrading peak performance. This indicates that Routing

⁵Our findings regarding R3 under the on-policy setting contradict those reported in Ma et al. (2025), which may stem from two factors: (1) They only validate R3 on small-scale experiments, with a maximum of 180 global steps; (2) Our FP8 inference setting imposes a more stringent stress test on algorithmic correctness, which cannot be adequately captured under their BF16 inference setting.

若省略路由回放或剪枝操作，会导致链路过早崩溃，从而降低峰值性能

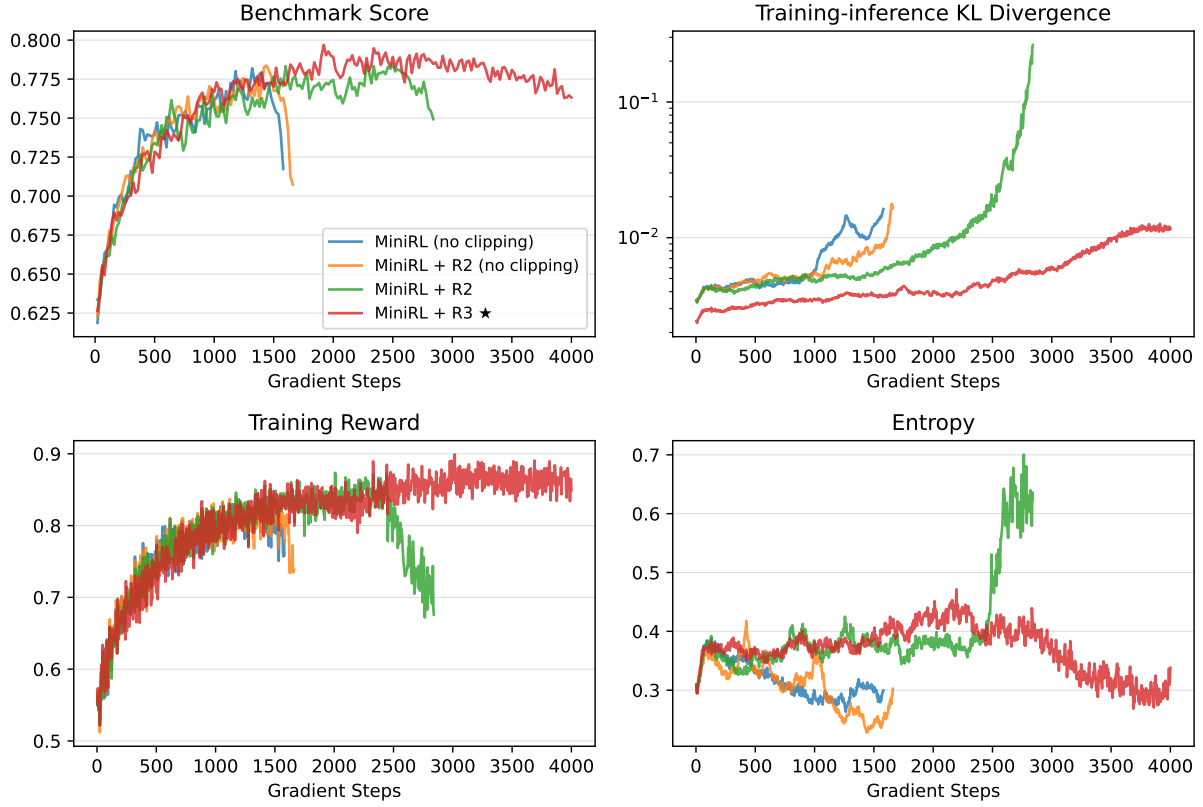


Figure 3: Results of off-policy training with $\text{gbs} = 4 \times \text{mbs} = 4,096$.

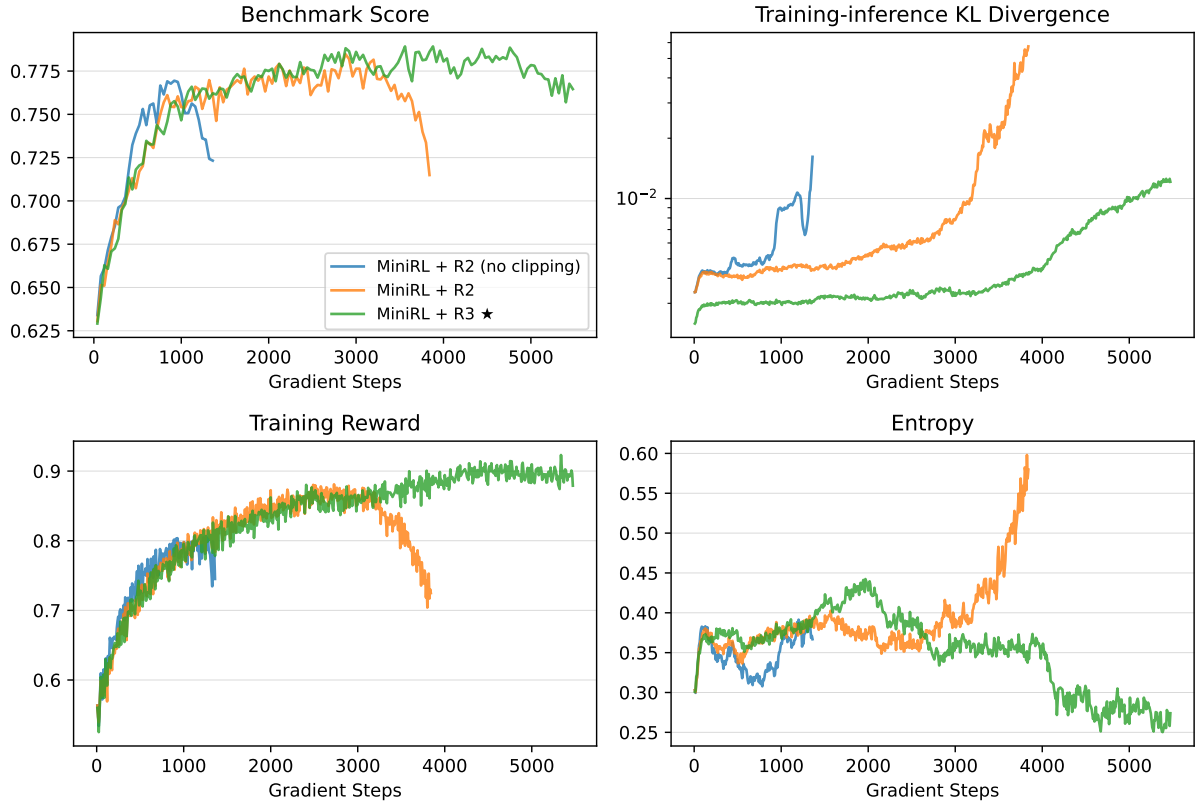


Figure 4: Results of off-policy training with $\text{gbs} = 8 \times \text{mbs} = 8,192$.

Replay alleviates the impact of expert routing, and the clipping mechanism also effectively prevents aggressive policy updates, thereby both restraining policy staleness.

- When **off-policiness is small** ($\text{gbs} = 2 \times \text{mbs}$), R2 outperforms R3, while when **off-policiness is large** ($\text{gbs} = 4 \times \text{mbs}$ and $\text{gbs} = 8 \times \text{mbs}$), R3 surpasses R2. Notably, under high off-policiness, R2 fails to sustain stable training, and its peak performance achieved before training collapse is also slightly lower than that of R3. Combining our analysis in § 3.2—particularly that R2 leaves the target policy of the first mini-batch unchanged while R3 alters it—and the on-policy experimental results in § 4.3, we hypothesize that when off-policiness is small, the detrimental impact of R3’s alteration to the target policy outweighs its benefit in preserving the validity of the first-order approximation, while under larger off-policiness, the opposite holds true.

我们发现路由重放 (Routing Replay) 和剪枝 (clipping) 对于稳定的离线策略训练是必要的

In summary, we find that Routing Replay and clipping are necessary for stable off-policy training. When off-policiness is small, R2 is sufficient and more effective at stabilizing RL training for MoE models, whereas R3 becomes necessary under larger off-policiness.

我们假设, 当偏离策略性较小时, R3 的改变对目标政策的负面影响超过了其在保持一阶近似有效性方面的益处; 而在较大的偏离策略性下, 情况则相反。

tao:不认同

4.5 Results of Varying Cold-start Initializations

Recall the motivation for stabilizing RL training: given a base model, once we can reach its performance limit through sufficiently long RL training, we can *reliably* enhance the model’s capabilities by investing computational resources into RL. To this end, we investigate **whether models initialized with different cold-start data can achieve similar performance** when trained using a stable RL recipe. We compare three versions of cold-start data distilled from three frontier models: Qwen3-Max-Thinking-Preview, DeepSeek-R1-0528, and gpt-oss-120b (high mode). We report results based on an early-experimental small Qwen3Next MoE model, trained with a global batch size of 4,096, a mini-batch size of 2,048 ($B = 128, G = 16, N = 2$), and a generation length of 65,536 tokens. We employ MiniRL + R2 as the training recipe.

当偏离策略性较小时, R2足以且更有效地稳定MoE模型的强化学习训练, 而当偏离策略性较大时, R3则成为必要条件。

基于基础模型, 一旦我们通过足够长时间的强化学习 (RL) 训练达到其性能极限, 即可通过向强化学习投入计算资源来可靠地提升模型能力。

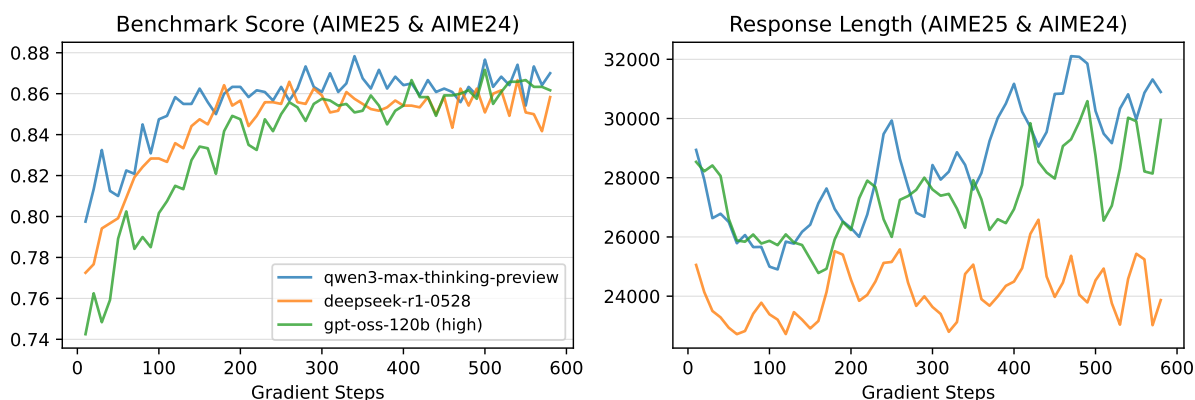


Figure 5: Results of varying cold-start initializations.

In Figure 5, we show that the three cold-start initializations consistently achieve comparable final performance, which encourages us to focus more on RL itself rather than overly on the specifics of cold-start initialization. Furthermore, comparing Figures 1 to 4, we find that both on-policy and off-policy training—once stabilized—also consistently achieve similar peak performance. **These results further suggest that stable training plays a decisive role in successfully scaling RL.**

这些结果进一步表明, 稳定的训练在成功扩展强化学习 (RL) 中起着决定性作用。

5 Conclusion

We propose a new formulation for reinforcement learning with LLMs, viewing the token-level optimization objective as a first-order approximation to the true expected sequence-level reward. Through extensive experiments, we demonstrate that techniques that preserve the validity of this first-order approximation—such as importance sampling correction, clipping, and Routing Replay for MoE models—all effectively stabilize RL training. We further investigate recipes for stable RL training across varying degrees of off-policiness and show that, once training is stabilized, the same base model consistently converges to similar performance with prolonged RL. We hope that the insights and empirical results shared in this paper will inspire and facilitate future research.

将标记级优化目标视为真实期望序列级奖励的一阶近似。通过大量实验, 我们证明了保持这一近似有效性的技术——如重要性采样校正、剪枝以及模型增强 (MoE) 模型的路由重放——均能有效稳定强化学习训练。

References

- Aili Chen, Aonian Li, Bangwei Gong, Binyang Jiang, Bo Fei, Bo Yang, Boji Shan, Changqing Yu, Chao Wang, Cheng Zhu, et al. Minimax-m1: Scaling test-time compute efficiently with lightning attention. *arXiv preprint arXiv:2506.13585*, 2025.
- Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, et al. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025.
- Horace He and Thinking Machines Lab. Defeating nondeterminism in llm inference. *Thinking Machines Lab: Connectionism*, 2025. doi: 10.64434/tml.20250910. <https://thinkingmachines.ai/blog/defeating-nondeterminism-in-llm-inference/>.
- Jacob Hilton, Karl Cobbe, and John Schulman. Batch size-invariance for policy optimization. In *Advances in Neural Information Processing Systems*, 2022. URL <https://openreview.net/forum?id=1XuZaxEaI7>.
- Jiacai Liu, Yingru Li, Yuqian Fu, Jiawei Wang, Qian Liu, and Yu Shen. **When speed kills stability: Demystifying RL collapse from the training-inference mismatch**, September 2025a. URL <https://richardli.xyz/rl-collapse>.
- Zichen Liu, Changyu Chen, Wenjun Li, Penghui Qi, Tianyu Pang, Chao Du, Wee Sun Lee, and Min Lin. Understanding r1-zero-like training: A critical perspective. *arXiv preprint arXiv:2503.20783*, 2025b.
- Wenhan Ma, Hailin Zhang, Liang Zhao, Yifan Song, Yudong Wang, Zhifang Sui, and Fuli Luo. Stabilizing moe reinforcement learning by aligning training and inference routers. *arXiv preprint arXiv:2510.11370*, 2025.
- OpenAI. Learning to reason with LLMs, 2024. URL <https://openai.com/index/learning-to-reason-with-llms/>.
- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, Y. K. Li, Y. Wu, and Daya Guo. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
- An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, et al. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025.
- Feng Yao, Liyuan Liu, Dinghuai Zhang, Chengyu Dong, Jingbo Shang, and Jianfeng Gao. Your efficient rl framework secretly brings you off-policy rl training, August 2025. URL <https://fengyao.notion.site/off-policy-rl>.
- Chujie Zheng, Shixuan Liu, Mingze Li, Xiong-Hui Chen, Bowen Yu, Chang Gao, Kai Dang, Yuqiong Liu, Rui Men, An Yang, et al. **Group sequence policy optimization**. *arXiv preprint arXiv:2507.18071*, 2025.

A Comparison of MiniRL against GRPO and CISPO

We compare the optimization objective of MiniRL against those of GRPO (Shao et al., 2024) and CISPO (Chen et al., 2025). With the notations in this paper, GRPO employs the following objective:

$$\mathcal{J}_{\text{GRPO}}(\theta) = \mathbb{E}_{x \sim \mathcal{D}, \{y_i\}_{i=1}^G \sim \mu_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{G} \sum_{i=1}^G \frac{1}{|y_i|} \sum_{t=1}^{|y_i|} \min \left(r_{i,t}(\theta) \hat{A}_{i,t}, \text{clip}(r_{i,t}(\theta), 1 - \epsilon_{\text{low}}, 1 + \epsilon_{\text{high}}) \hat{A}_{i,t} \right) \right],$$

and CISPO is as follows:

$$\mathcal{J}_{\text{CISPO}}(\theta) = \mathbb{E}_{x \sim \mathcal{D}, y \sim \mu_{\theta_{\text{old}}}(\cdot|x)} \left[\frac{1}{\sum_{i=1}^G |y_i|} \sum_{i=1}^G \sum_{t=1}^{|y_i|} \text{sg} \left[\text{clip}(r_{i,t}(\theta), 1 - \epsilon_{\text{low}}, 1 + \epsilon_{\text{high}}) \right] \hat{A}_{i,t} \log \pi_{\theta}(y_t|x, y_{<t}) \right],$$

它们与 MiniRL 的主要区别包括以下几点：

- (1) 它们最初的目标并未考虑训练-推理差异；
- (2) 它们都采用了长度归一化，我们在第4.3节中证明这会破坏对真实期望序列级奖励的一阶近似，并可能导致偏置的标记级优化目标和次优性能
- (3) CISPO 没有对某些标记的梯度进行剪切，我们在第4.4节中证明这可能导致训练不稳定。

where in both objectives:

$$r_{i,t}(\theta) = \frac{\pi_{\theta}(y_{i,t}|x, y_{i,<t})}{\pi_{\theta_{\text{old}}}(y_{i,t}|x, y_{i,<t})}, \quad \hat{A}_{i,t} = \frac{R(x, y_i) - \text{mean}(\{R(x, y_i)\}_{i=1}^G)}{\text{std}(\{R(x, y_i)\}_{i=1}^G)}.$$

Their key differences from MiniRL include the following: (1) Their original objectives do not consider the training-inference discrepancy; (2) They both employ length normalization, which we show in § 4.3 invalidates the first-order approximation to the true expected sequence-level reward and can lead to a biased token-level optimization objective and suboptimal performance; (3) CISPO does not clip the gradient of certain tokens, which we show in § 4.4 can result in unstable training.

B Detailed Benchmark Results

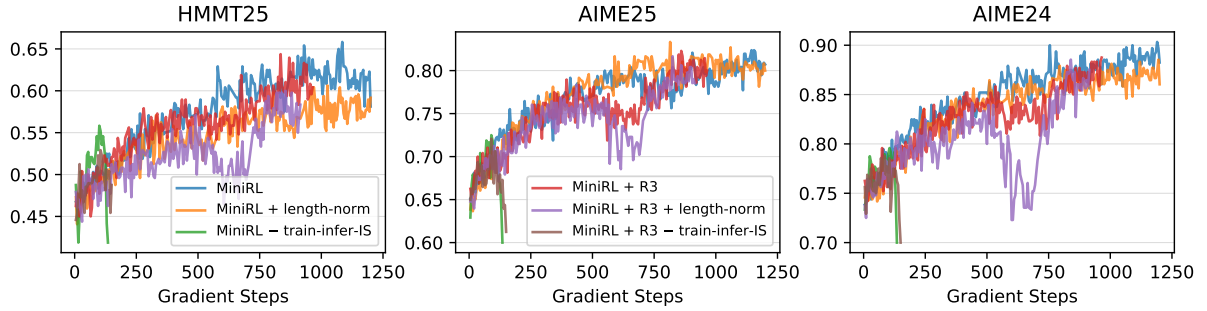


Figure 6: Detailed benchmark results of on-policy training with $\text{gbs} = \text{mbs} = 1,024$.

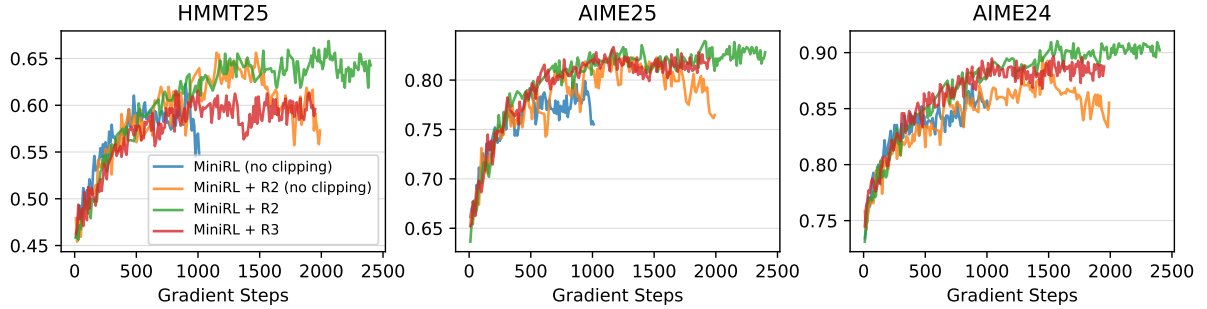


Figure 7: Detailed benchmark results of off-policy training with $\text{gbs} = 2 \times \text{mbs} = 2,048$.

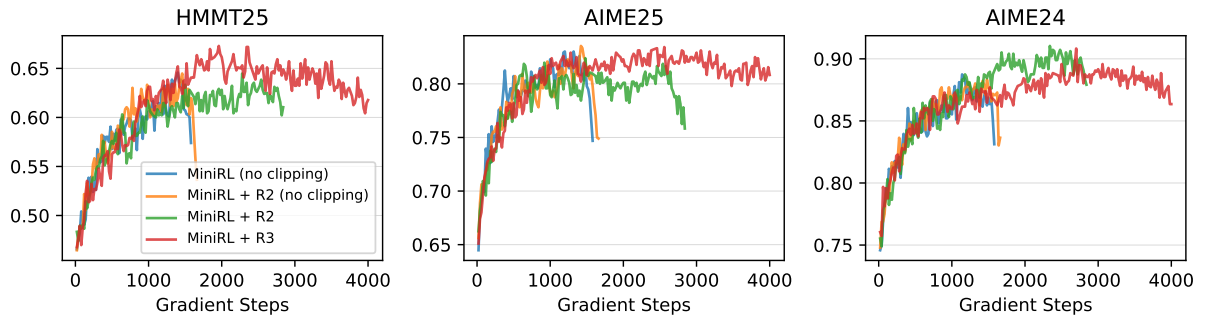


Figure 8: Detailed benchmark results of off-policy training with $\text{gbs} = 4 \times \text{mbs} = 4,096$.

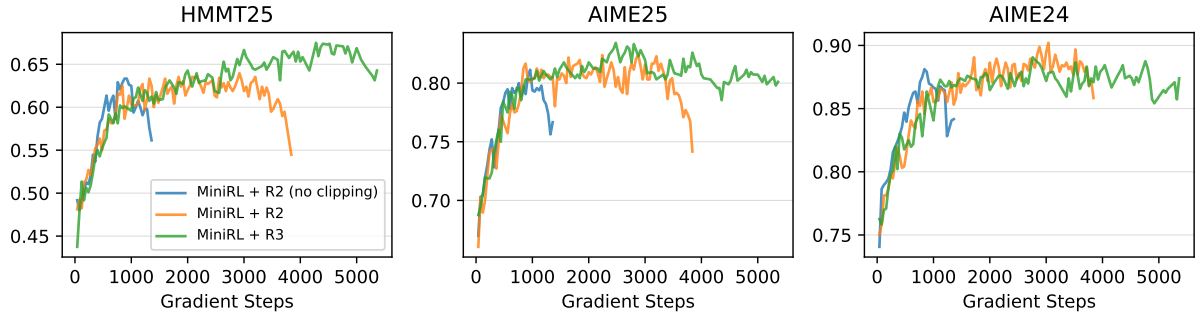


Figure 9: Detailed benchmark results of off-policy training with $\text{gbs} = 8 \times \text{mbs} = 8,192$.

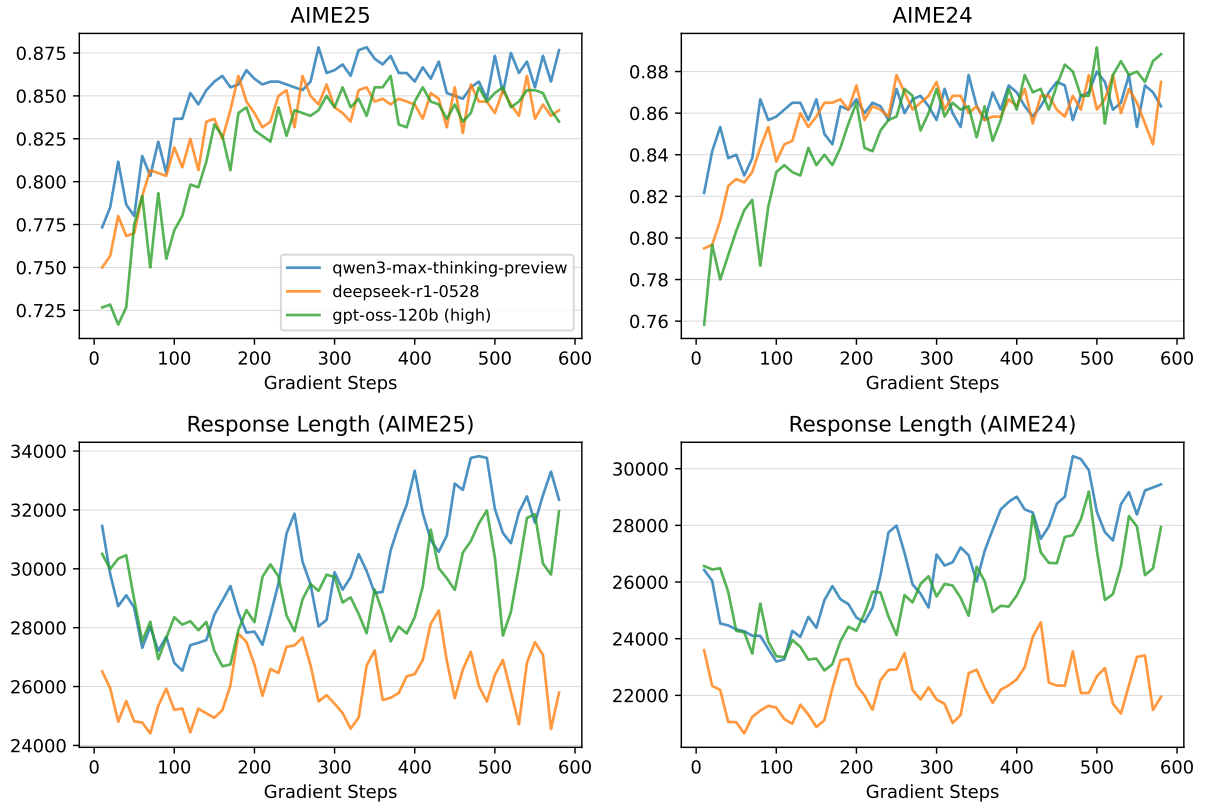


Figure 10: Detailed benchmark results of varying cold-start initializations.