

Harnessing Uncertainty: Entropy-Modulated Policy Gradients for Long-Horizon LLM Agents

Jiawei Wang[§], Jiakai Liu[§], Yuqian Fu[§], Yingru Li, Xintao Wang[§], Yuan Lin[§], Yu Yue[§], Lin Zhang, Yang Wang^{§,†}, Ke Wang^{§,†}

ByteDance

[§]Work done at ByteDance Seed, [†]Corresponding authors

Abstract

研究背景
在长时域任务中，基于大型语言模型（LLM）的智能体面临一个重大挑战，即稀疏的、基于结果的奖励使得很难为中间步骤分配信用。以往的方法主要集中在通过传统强化学习技术（如逆强化学习）或使用过程奖励模型来逐步反馈，从而创建密集奖励信号以指导学习。

In long-horizon tasks, recent agents based on Large Language Models (LLMs) face a significant challenge that sparse, outcome-based rewards make it difficult to assign credit to intermediate steps. Previous methods mainly focus on creating dense reward signals to guide learning, either through traditional reinforcement learning techniques like inverse reinforcement learning or by using Process Reward Models for step-by-step feedback. In this paper, we identify a fundamental problem in the learning dynamics of LLMs: the magnitude of policy gradients is inherently coupled with the entropy, which leads to inefficient small updates for confident correct actions and potentially destabilizes large updates for uncertain ones. To resolve this, we propose Entropy-Modulated Policy Gradients (EMPG), a framework that re-calibrates the learning signal based on step-wise uncertainty and the final task outcome. EMPG amplifies updates for confident correct actions, penalizes confident errors, and attenuates updates from uncertain steps to stabilize exploration. We further introduce a bonus term for future clarity that encourages agents to find more predictable solution paths. Through comprehensive experiments on three challenging agent tasks, WebShop, ALFWorld, and Deep Search, we demonstrate that EMPG achieves substantial performance gains and significantly outperforms strong policy gradient baselines.

政策梯度的幅度与熵存在本质关联

导致对确信正确动作的小幅更新效率低下，并可能使对不确定动作的大幅更新失稳

Date: September 12, 2025

Correspondence: Yang Wang at wangyang.127@bytedance.com, Ke Wang at wangke@bytedance.com

Project Page: <https://empgseed-seed.github.io/>

1 Introduction

基于结果的奖励稀疏性

The advent of Large Language Models (LLMs) has catalyzed the development of autonomous agents that are capable of tackling complex, multi-step tasks [32, 39]. However, a fundamental challenge persists in training these agents for long-horizon tasks: the sparsity of outcome-based rewards. In many realistic scenarios, such as web navigation [38], software engineering [41], and deep search [2], feedback is only available at the end of the complete generation. This makes it difficult to assign appropriate credit for standard reinforcement learning (RL) algorithms to discern the crucial intermediate steps. 这使得难以通过标准强化学习（RL）算法的适当归因来识别关键中间步骤。

To solve the problem of the sparse reward challenge, prior work has explored two primary directions: implicit reward guidance and explicit step-wise supervision. The first involves traditional reinforcement learning techniques aimed at creating densified reward signals. Methods like reward shaping [22], intrinsic motivation based on state novelty or curiosity [3, 23], and inverse reinforcement learning [7, 48] attempt to estimate the value of intermediate actions. However, these approaches often struggle to scale. They are either computationally prohibitive, ill-suited for the vast,

隐式奖励引导与显式分步监督。

第一种方法采用传统强化学习技术，旨在生成密集化的奖励信号。

诸如奖励塑造[22]、基于状态新颖性或好奇心的内在动机[3,23]以及逆向强化学习[7,48]等方法，旨在评估中间动作的价值。

它们要么计算成本过高，要么不适合处理海量数据

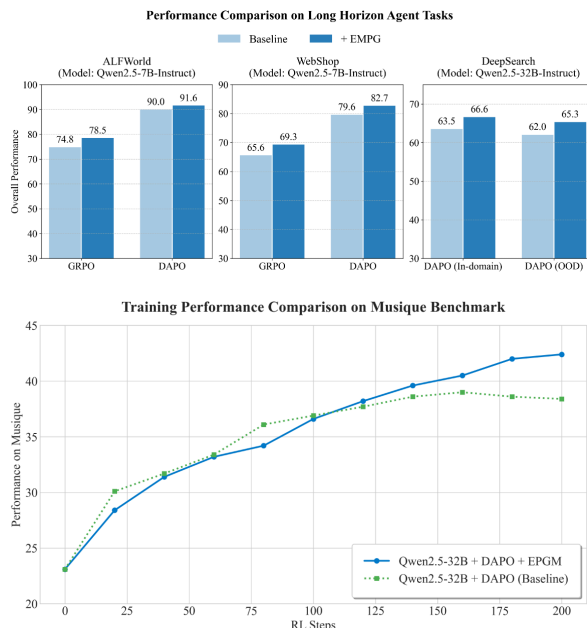
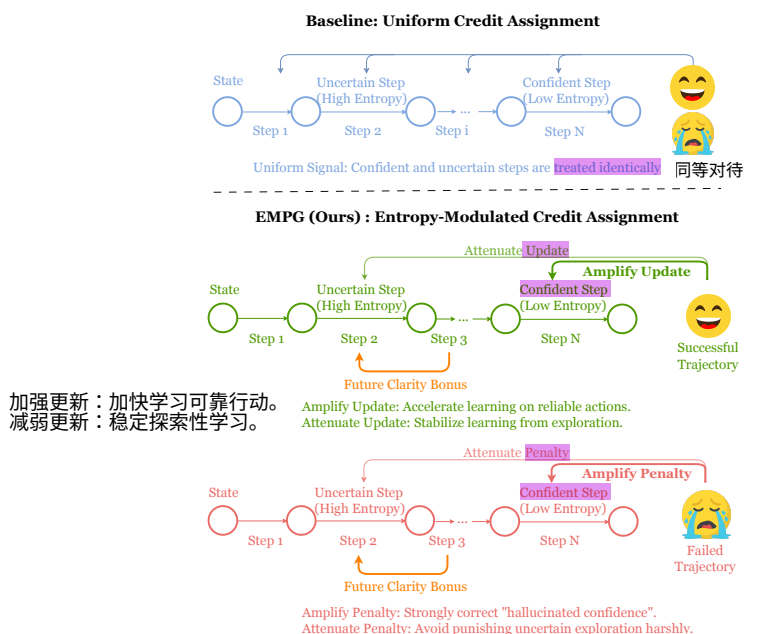


Figure 1 Overview of the EMPG mechanism and its algorithm performance. **Left:** Conceptual diagram contrasting the uniform credit assignment of baseline methods with EMPG’s confidence-modulated signal. **Right:** Final performance comparison on key long-horizon benchmarks showing EMPG’s superiority, along with the training dynamics on Musique that highlight its ability to achieve sustained improvement and avoid the baseline’s performance plateau.

combinatorially complex state and action spaces inherent to LLM-driven agent tasks, or heavily reliant on human prior knowledge. The second line of research, particularly successful in structured reasoning domains, employs Process Reward Models (PRMs) [20] to provide step-by-step feedback. Yet, PRMs suffer from significant drawbacks: they demand prohibitive human annotation costs to build, are susceptible to noise when trained on synthetic data, and often exhibit poor generalization to out-of-distribution problems. These limitations are exacerbated in complex, interactive agent tasks where defining a single "correct" step is itself a non-trivial, context-dependent challenge, making the application of PRMs impractical.

作为大语言模型推理任务中的直接学习信号

Policy entropy is a cornerstone concept in RL, traditionally used to balance the exploration-exploitation trade-off. Recently, it has been repurposed as a direct learning signal in LLM reasoning tasks, where minimizing entropy is used as an unsupervised objective to increase the model’s certainty [1, 9]. While effective in some contexts, this approach is vulnerable to the critical issue of "hallucinated confidence," where the model becomes confidently incorrect [45]. More recent efforts use entropy not as a reward, but as a modulator. For instance, Seed-GRPO [4] leverages semantic uncertainty to down-weight the advantage of high-entropy responses in mathematical reasoning, while Cheng et al. [5] proposes shaping the advantage function with token-level entropy to improve long-form generation. However, these efforts are restricted to single-turn, generative reasoning tasks, operating at either the token-level or response-level. It remains underexplored how to leverage agents’ intrinsic uncertainty for credit assignment in long-horizon, multi-step decision-making.

如何利用代理人的内在不确定性来实现多步决策的长期信用分配，目前还缺乏深入的研究。

Our work begins by analyzing the fundamental dynamics of the policy gradient itself. We formally show that for a standard softmax policy, the expected norm of the score function is a monotonic function of the policy’s entropy (Proposition 1). In simple terms, high-entropy (uncertain) actions naturally produce large gradients, while low-entropy (confident) actions produce small ones. This inherent behavior presents a dual challenge for learning: 1) confident and correct steps, which should be strongly reinforced, receive small updates, limiting learning speed, and 2) uncertain exploratory steps can introduce large, noisy gradients that destabilize training. This reveals a critical need to explicitly re-calibrate the learning signal based on an action’s uncertainty.

这揭示了一个关键需求：需根据动作的不确定性显式地重新校准学习信号。

To address this, we propose Entropy-Modulated Policy Gradients (EMPG), a framework that reshapes the learning

高熵（不确定性）动作自然会产生较大的梯度，而低熵（确定性）动作则会生成较小的梯度

采用过程奖励模型 (PRMs) [20] 提供分步反馈

他们要求构建时需承担高昂的人工标注成本

在复杂交互式智能体任务中，这些局限性会进一步加剧，因为界定单一“正确”步骤本身就是一个非平凡的、依赖于上下文的挑战，这使得概率规则模型 (PRMs) 的应用变得不切实际。

模型被确认为错误

Seed-GRPO [4] 利用语义不确定性来降低数学推理中高熵响应的优势，

Cheng等人[5]提出通过标记级熵对优势函数进行塑形，以提升长文本生成效果。

然而，这些努力仅限于单轮生成推理任务，且仅在标记级别或响应级别进行操作。

将熵最小化作为无监督目标以提高模型的确定性

该方法易受“幻觉性自信”这一关键问题的影响

近期研究尝试将熵作为调节因子而非奖励机制。

landscape by directly adapting to this dynamic, as illustrated in Figure 1. Instead of naively rewarding low entropy, EMPG introduces *Self-Calibrating Gradient Scaling* mechanism, which dynamically modulates the policy gradient based on step-wise uncertainty: 1) *for confident and correct actions*, it amplifies the updates, while 2) *for uncertain steps*, it attenuates updates to ensure stable exploration. Furthermore, to encourage agents to find predictable solution paths, EMPG introduces “*future clarity*”, an additional bonus term in the advantage function that provides an intrinsic signal for actions that lead to less uncertain subsequent states. This guides agents to perform purposeful exploration, steering them away from chaotic or unpromising high-entropy trajectories toward states with greater clarity about the next steps. This dual approach enables EMPG to forge a dense, informative, and well-calibrated learning signal from sparse external feedback. To validate our framework, we conduct extensive experiments on challenging long-horizon agent benchmarks such as WebShop [38], ALFWorld [29], and Deep Search [2], demonstrating the effectiveness and scalability of our approach across models of various sizes.

Our key contributions are as follows: 这种双重方法使 EMPG 能够从稀疏的外部反馈中锻造出密集、信息丰富且校准良好的学习信号

- We first identify and formalize a fundamental challenge in policy gradient methods: *the inherent coupling of gradient magnitude and policy entropy*. This dynamic leads to inefficient learning for confident actions and instability from uncertain ones, *motivating the need for explicit signal re-calibration*. 促使需要对显式信号进行重新校准
- We introduce Entropy-Modulated Policy Gradients, a framework designed to solve this problem. EMPG combines *Self-Calibrating Gradient Scaling* to correct the flawed gradient dynamics *with a Future Clarity Bonus to promote exploration towards more predictable states*. 通过未来清晰度奖励机制，推动探索进程向更可预测的状态发展。
- Extensive experiments on demanding agent tasks (WebShop, ALFWorld, Deep Search) show that EMPG substantially outperforms strong baselines like GRPO and DAPO.

2 Related Work

2.1 LLM-based Autonomous Agents

The advent of LLMs has catalyzed the development of sophisticated autonomous agents capable of performing complex, multi-step tasks that were previously unattainable. Specialized agents have been designed for diverse applications, including software development (e.g., coding agents [12, 41]), information retrieval (search agents [10, 18]), and complex web interactions (browser-use agents [6, 36, 38]). For training these agentic models, reinforcement learning has proven to be a powerful and essential paradigm. Recent research on RL-based agents, such as Search-R1 [13], SWE-RL [33], and WebAgent-R1 [34], has demonstrated that RL can effectively enhance agent performance and enable learning in highly interactive and dynamic environments. Despite these successes, a fundamental problem remains to be fully addressed: *the difficulty of credit assignment in long-horizon tasks*. The multi-step nature of these problems, where a reward signal is often only available upon completion, hinders the efficiency and stability of the training process.

长期任务信用分配的困难

奖励信号通常仅在任务完成后方可获取，这会阻碍训练过程的效率与稳定性。

2.2 Reinforcement Learning from Internal Feedback

克服稀疏外部奖励的挑战

To overcome the challenges of sparse external rewards, recent studies have explored using internal feedback, generated by the model itself, to create denser training signals. This approach often leverages unsupervised signals derived from model uncertainty [1, 43, 46] or self-consistency [42, 49], frequently quantified by policy entropy. However, the role of entropy has been interpreted in conflicting ways. Some studies argue that correct responses typically exhibit lower entropy, thus proposing unsupervised entropy minimization as a method to improve performance [1, 9]. Conversely, other works suggest that high entropy encourages exploratory reasoning. For instance, SEED-GRPO [4] uses semantic entropy to modulate policy updates for diversity, while others explicitly incorporate policy entropy into the advantage term to promote exploration [5, 30]. Recently, EDGE-GRPO [44] proposes entropy modulation in single-turn mathematical reasoning. Similar to our method, they modulate policy gradients by amplifying updates for confident correct responses and attenuating updates for incorrect or uncertain ones. However, EMPG fundamentally differs from EDGE-GRPO in both motivation and scope: First, while EDGE-GRPO focuses on correcting confidence misalignment within a single-turn mathematical reasoning, EMPG is specifically designed for the multi-step credit assignment problem in long-horizon tasks. Second, towards the challenges in multi-turn long-horizon tasks, EMPG dynamically assigns credit across the entire trajectory to amplify the crucial steps.

“未来清晰度”是优势函数中的附加奖励项

降低后续不确定性的状态

该指南指导agent进行有目的的探索

引导它们偏离混乱或前景不明的高熵轨迹，转向对下一步行动更清晰的状态。

梯度大小与策略熵的内在耦合性

该方法通常利用源自模型不确定性[1, 43, 46]或自洽性[42, 49]的无监督信号，这些信号通常通过策略熵进行量化。

高熵鼓励探索性推理

SEED-GRPO [4] 使用语义熵来调节策略更新以实现多样性

其他研究则明确将策略熵纳入优势项以促进探索

EDGE-GRPO [44]提出了单轮数学推理中的熵调制。

与我们的方法类似，他们通过放大对确信正确响应的更新幅度并减弱对错误或不确定响应的更新幅度来调节策略梯度。

EDGE-GRPO 专注于纠正单轮数学推理中的信心错位，

3

EMPG 是专门为长期任务中的多步骤信用分配问题设计的

EMPG 在整个轨迹中动态分配信用，以放大关键步骤。

然而，熵的作用一直存在相互矛盾的解释。

3 Preliminaries

3.1 Policy Optimization in Reinforcement Learning

Our work is grounded in policy gradient methods, which seek to optimize a policy π_θ parameterized by θ to maximize the expected reward objective:

$$\mathcal{J}(\pi_\theta) := \mathbb{E}_{\tau \sim \pi_\theta}[R(\tau)] \quad (1)$$

where τ is a trajectory sampled under policy π_θ and $R(\tau)$ is its total return. The policy gradient theorem allows for direct optimization of this objective via gradient ascent. The gradient is estimated as an expectation over trajectories:

$$\nabla_\theta \mathcal{J}(\pi_\theta) = \mathbb{E}_{\tau \sim \pi_\theta} \left[\sum_{t=0}^T A(s_t, a_t) \nabla_\theta \log \pi_\theta(a_t | s_t) \right] \quad (2)$$

where s_t and a_t are the state and action at time step t , respectively.

A key challenge in estimating this gradient is its inherently high variance. To mitigate this, an advantage function, $A(s_t, a_t)$, is used to measure the relative quality of an action. This advantage is typically estimated using a learned value model, which predicts the expected return from a given state [25]. However, this approach has significant drawbacks. The value model is often comparable in size to the policy model, introducing substantial memory and computational overhead. Furthermore, the effectiveness of the algorithm hinges on the reliability of its value estimates, which are inherently difficult to learn accurately [15, 21], especially for complex tasks with long response horizons. Due to these challenges, value-free methods, which estimate the advantage directly from sampled trajectories without a learned value function, have become increasingly popular [27, 40]. Our work is also grounded in this value-free paradigm, foregoing a value model to improve training efficiency and stability.

3.2 RL Framework for Long-Horizon Agent Tasks

We formalize the long-horizon task as a standard reinforcement learning problem. An LLM agent interacts with an environment over a trajectory $\tau = (s_0, a_0, r_0, \dots, s_T, a_T, r_T)$. The reward signal is sparse, with $r_t = 0$ for all non-terminal steps. Assuming an undiscounted setting ($\gamma = 1$), the trajectory return $R(\tau)$ is thus determined solely by the final outcome:

$$R(\tau) = \sum_{t=0}^T \gamma^t r_t = r_T \in \{0, 1\} \quad (3)$$

In our work, a single step corresponds to a complete "reason-then-act" cycle (e.g., as in ReAct [39]), forming a multi-step decision-making process. This sparse-reward, long-horizon setting epitomizes two fundamental RL challenges: the credit assignment problem and the exploration problem.

3.3 Strategies for Learning from Sparse Outcome-Based Rewards

To enable effective learning from sparse, outcome-based rewards in long-horizon tasks, several powerful strategies have emerged that form the foundation of modern LLM RL.

- **Trust Region Learning.** Proximal Policy Optimization (PPO) [25] serves as the bedrock algorithm. Its primary innovation is not credit assignment, but ensuring training stability. It achieves this by constraining policy updates within a trust region, using a clipped objective on the probability ratio $\rho_t(\theta) = \frac{\pi_\theta(a_t | s_t)}{\pi_{\theta_{\text{old}}}(a_t | s_t)}$. When applied to sparse reward tasks, PPO's effectiveness fundamentally depends on the quality of its advantage estimates, which implicitly perform the task of credit assignment [15].
- **Group-Based Advantage Estimation.** Group Relative Policy Optimization (GRPO) [27] builds upon this foundation with a direct solution for credit assignment. It addresses the high variance of the policy gradient inherent in sparse rewards by sampling multiple responses (M) and computing a Z-score-like advantage:

$$A_{ij} = \frac{r(x_i, y_{ij}) - \text{mean}_{k=1}^M(r(x_i, y_{ik}))}{\text{std}_{k=1}^M(r(x_i, y_{ik})) + \epsilon}$$

该方法通过采样多个响应 (M) 并计算类似 Z 分数的优势值, 解决了稀疏奖励中固有的策略梯度方差问题。

Here, $r(x_i, y_{ij})$ is the final outcome-based reward for the j -th response, and ϵ is a small constant added for numerical stability. This comparative evaluation effectively identifies the best-in-batch responses, providing a robust signal.

该比较评估有效识别了批次内最佳response, 提供了稳健的信号。

- **Adaptive Data Curation.** Decoupled Clip and Dynamic Sampling Policy Optimization (DAPO) [40] further refines the learning process by curating the data itself. It addresses failure modes in GRPO by filtering and resampling trajectories to form more informative training batches. By focusing updates on a buffer of high-quality samples, it improves the efficiency of learning from the sparse reward signal.

它通过过滤和重采样轨迹来形成更具信息量的训练批次, 从而解决GRPO中的失效模式

While powerful, these strategies share a common reliance on processing external, outcome-based reward signals. As they are primarily designed for single-turn generation, they treat entire action sequences as monolithic blocks. When applied to interactive agent tasks, this leads to a coarse, trajectory-level credit assignment that fails to pinpoint which specific actions in a long sequence were critical for success. This approach ignores the rich, intrinsic signals available at each step of the generative process. Our work diverges by proposing a new paradigm that peers inside the model, leveraging its intrinsic, step-wise uncertainty.

这些策略均依赖于对外部、基于结果的奖励信号的处理。

通过将更新聚焦于高质量样本, 可提高从稀疏奖励信号中学习的效率。

他们将整个动作序列视为整体模块

不能准确指出在漫长过程中哪些具体行动对成功至关重要。

具有阻碍稳定高效学习的内在动力

梯度的大小与策略的熵存在固有耦合

提出一种新型范式, 即深入模型内部, 利用其内在的逐步不确定性, 从而与现有方法形成差异。

3.4 Theoretical Motivation: A Two-Part Re-Calibration of Policy Gradients

Our approach is motivated by a fundamental analysis of the relationship between a policy's gradient and its predictive uncertainty. Standard policy gradients, while effective, possess an inherent dynamic that can hinder stable and efficient learning. Specifically, the magnitude of the gradient is inherently coupled with the policy's entropy, often leading to inefficiently small updates for confident actions and potentially destabilizing large updates for uncertain ones. This dynamic, which we aim to re-calibrate, is formally characterized by the following proposition.

再校准

Proposition 1. For a policy π_θ parameterized by a softmax over logits $z_\theta(s)$, the expected squared L2-norm of the score function $\nabla_{z_\theta} \log \pi_\theta(a|s)$ with respect to the logits is a direct function of the policy's Rényi-2 entropy [24], $H_2(\pi)$:

$$\mathbb{E}_{a \sim \pi_\theta(\cdot|s)} [\|\nabla_{z_\theta(s)} \log \pi_\theta(a|s)\|^2] = 1 - \exp(-H_2(\pi)) \quad (5)$$

A detailed proof is provided in Appendix A.

该方法基于不同政策熵度量指标之间已建立的关联关系

Equation (5), which builds upon established relationships between different measures of policy entropy (e.g., in Li [19]), proves that the expected gradient norm is monotonically coupled with policy entropy. This presents a dual challenge: 1) a confident and correct step should be reinforced strongly, but its naturally small gradient limits its impact; and 2) the large gradients from highly uncertain exploratory steps can introduce noise and destabilize training. Our first component, Self-Calibrating Gradient Scaling, directly addresses this by re-calibrating the magnitude of the update based on current-step uncertainty.

我们的方法源于对政策梯度与其预测不确定性之间关系的基本分析

证明了期望梯度范数与策略熵呈单调耦合关系

通过根据当前步骤的不确定性重新校准更新幅度, 直接解决了这一问题。

However, re-calibrating the update magnitude is only half the solution. A truly effective learning signal must also guide the agent in a useful direction. This motivates our second component, the Future Clarity Bonus, which can be conceptually justified through the lens of information theory. By providing an intrinsic motivation for the agent to seek low-entropy next states, the bonus encourages actions that yield high Information Gain about the optimal future path. This corresponds to a local, step-wise objective of minimizing the policy's entropy at the next state:

真正有效的学习信号还必须引导智能体朝着有益的方向发展。

这可以通过信息论的视角在概念上得到合理解释

$$\min_{a_t} H(\pi_\theta(s_{t+1})). \quad (6)$$

This objective, which aligns with established principles like the Empowerment framework [16], imbues the agent with a generalizable meta-skill: to actively seek clarity in the face of ambiguity.

赋予智能体一种可泛化的元技能: 在面对模糊性时主动寻求清晰性。

In summary, EMPG provides a complete, two-part re-calibration of the learning signal. The gradient scaling module ensures each update has an appropriate magnitude, while the future clarity bonus provides a principled intrinsic motivation that shapes the policy's direction towards robust and predictable solution paths.

梯度缩放模块确保每次更新具有适当的幅度

4 Entropy-Modulated Policy Gradients

而未来清晰度奖励则提供了一种原则性的内在动机, 这种动机塑造了政策朝着稳健且可预测的解决方案路径发展的方向。

Building on the theoretical motivation established in our preliminaries, we introduce Entropy-Modulated Policy Gradients (EMPG), a framework designed to re-calibrate the learning dynamics of policy gradients for long-horizon agent tasks. As shown in Section 3.4, standard policy gradients are inherently biased towards applying smaller updates to confident

EMPG 的设计是为了抵消这种行为，使从稀疏的、基于结果的奖励中学习更有效、更稳定。

(low-entropy) steps and larger updates to uncertain (high-entropy) ones. EMPG is engineered to counteract this behavior, enabling more efficient and stable learning from sparse, outcome-based rewards.

4.1 Quantifying Step-Level Uncertainty 量化agent在每个决策步骤中的置信度。

The core of our method is to quantify the agent's confidence at each decision-making step. While various uncertainty measures exist, we opt for a practical and computationally efficient proxy: the average token-level entropy over a single "reason-then-act" step. For a step $step_t$ composed of tokens $\{w_1, \dots, w_m\}$, the step-level entropy H_t is:

$$H_t = -\frac{1}{m} \sum_{j=1}^m \sum_{v \in V} p(v|w_{<j}) \log p(v|w_{<j}) \quad (7)$$

where $p(v|w_{<j})$ is the probability of token v from the vocabulary V , as provided by the LLM's policy π_θ . A lower H_t indicates higher confidence in the generated step, corresponding to a lower-entropy state in the sense of Proposition 1.

While we use policy entropy for its computational efficiency, future work could explore alternative uncertainty estimators, such as those derived from Monte Carlo dropout or the variance in logits from an ensemble of model heads. However, we believe entropy provides the most direct link to the gradient dynamics analyzed in Proposition 1, making it the most theoretically grounded choice for our framework.

4.2 The Modulated Advantage for Gradient Re-Calibrating

In the sparse reward setting, a standard RL advantage function provides a uniform learning signal for all steps within a single trajectory. While simple, this approach overlooks the varying contributions of different steps and their impact on learning stability. To address this, we introduce a novel, modulated advantage estimate, A_{mod} , for each step t in a trajectory τ_i :

$$A_{\text{mod}}(i, t) = \underbrace{A^{(i)} \cdot g(H_t^{(i)})}_{\text{self-calibrating gradient scaling}} + \underbrace{\zeta \cdot f(H_{t+1}^{(i)})}_{\text{future clarity bonus}} \quad (8)$$

This formulation fundamentally re-calibrates the learning signal through two complementary forms of **advantage shaping**. The first term utilizes a step-level entropy-based function $g(H_t^{(i)})$ to dynamically reweight the trajectory's shared advantage $A^{(i)}$, thereby achieving a more granular and confidence-aware gradient update. The second term, a **future clarity bonus**, is an additive shaping signal that encourages the agent to select actions that lead to a more predictable and less ambiguous future state. Together, these two mechanisms transform a coarse, trajectory-level signal into a rich and precise learning signal for each step, which we analyze further in the following sections.

这两种机制共同作用，将粗略的轨迹级信号转化为每个步骤中丰富且精确的学习信号，我们将在后续章节中对此进行进一步分析。
Self-Calibrating Gradient Scaling $g(H)$. To counteract the natural gradient dynamics, the scaling function $g(H)$ is designed to be self-calibrating and adaptive. It achieves this by enforcing the constraint that the mean of $g(H_t^{(i)})$ over any given mini-batch is normalized to one. Mathematically, for a mini-batch of size N_B , this constraint is given by:

其通过强制执行约束条件实现这一目标，即对任意给定小批量数据中 $g(H(i)t)$ 的均值进行归一化处理，使其等于1。

$$\frac{1}{\sum_{i=1}^{N_B} T_i} \sum_{i=1}^{N_B} \sum_{t=1}^{T_i} g(H_t^{(i)}) = 1 \quad (9)$$

This principled design ensures the modulation redistributes the learning signal rather than simply inflating or deflating it, offering stability, adaptivity, and a reduction in hyperparameters. We implement this by normalizing a base exponential function by its mean over the mini-batch: 我们通过将基础指数函数在小批量数据上归一化得到其均值来实现这一过程：

$$g(H_t^{(i)}) = \frac{\exp(-k \cdot H_{\text{norm},t}^{(i)})}{\frac{1}{\sum_{j=1}^{N_B} T_j} \sum_{j=1}^{N_B} \sum_{t'=1}^{T_j} \exp(-k \cdot H_{\text{norm},t'}^{(i)})} \quad (10)$$

For a **confident step** ($H_t^{(i)}$ is lower than the batch average), $g(H_t^{(i)}) > 1$, which **amplifies its gradient**. This accelerates convergence for confident and correct decisions ($A^{(i)} > 0$) and provides a strong corrective penalty for **confident errors** ($A^{(i)} < 0$), combating "hallucinated confidence". Conversely, for an **uncertain step** ($H_t^{(i)}$ is higher than average), $g(H_t^{(i)}) < 1$, which **attenuates its gradient**, preventing noisy updates from high-entropy exploration from destabilizing the policy.

这加速了对确信且正确决策的收敛 ($A(i) > 0$)，并对确信错误 ($A(i) < 0$) 提供了强有力的纠正性惩罚，从而对抗“幻觉性确信”。

对于不确定的步骤 ($H(i)t$ 高于平均水平)， $g(H(i)t) < 1$ ，这会减弱其梯度，防止高熵探索中的噪声更新导致策略失稳。

我们选择了一种实用且计算效率高的替代指标

单个“推理-行动”步骤中的平均标记级熵

我们认为熵提供了与命题1中分析的梯度动力学最直接的联系，使其成为我们框架中理论基础最坚实的选项。

尽管该方法简单，但其忽略了不同步骤的差异性贡献及其对学习稳定性的影响。

该公式通过两种互补的优势塑造形式从根本上重新校准学习信号

第一项采用基于步长熵的函数 $g(H(i)t)$ ，对轨迹的共享优势 A 进行动态加权调整。

从而实现更精细且具有置信度感知的梯度更新

该原则性设计确保调整过程对学习信号进行重新分配，而非简单地放大或抑制信号，从而提供稳定性、适应性并减少超参数。

Algorithm 1 Entropy-Modulated Policy Gradients (EMPG)

```
1: Initialize: Policy  $\pi_\theta$ .
2: for each training iteration do
3:   Collect a batch of trajectories  $\mathcal{B} = \{\tau_i\}$  by running policy  $\pi_\theta$ .
4:   Calculate outcome-based advantages  $A^{(i)}$  for each trajectory  $\tau_i \in \mathcal{B}$ .
5:   Compute all step-level entropies  $\{H_t\}$  for all steps in the batch.
6:   Normalize all entropies  $\{H_t\}$  to  $\{H_{\text{norm},t}\}$  using batch min-max scaling.
7:   Compute the self-calibrating scaling factors  $\{g(H_t)\}$  for all steps using Eq. 10.
8:   for each step  $t$  in each trajectory  $\tau_i$  do
9:     Calculate future clarity bonus  $f(H_{t+1}^{(i)})$  using Eq. 11.
10:    Compute modulated advantage  $A_{\text{mod}}(i, t)$  using Eq. 8.
11:   end for
12:   Normalize the batch of all modulated advantages to get  $\{A_{\text{final}}(i, t)\}$ .
13:   Update policy parameters  $\theta$  using policy gradients with  $\{A_{\text{final}}(i, t)\}$ .
14: end for
```

EMPG 还鼓励智能体寻找全局稳定且可预测的解决方案路径。

Future Clarity Bonus $f(H)$. Beyond re-calibrating individual step updates, EMPG also encourages the agent to find globally stable and predictable solution paths. The second term in Eq. 8 serves as an intrinsic motivation for this goal:

$$f(H_{t+1}^{(i)}) = \exp(-k' \cdot H_{\text{norm},t+1}^{(i)}) \quad (11)$$

该术语增加的正向奖励与下一步的置信度（低熵）成正比

This term adds a positive bonus proportional to the confidence (low entropy) of the next step. Weighted by the hyperparameter $\zeta > 0$, this "future clarity" bonus actively guides the agent away from states of high confusion and towards sequences of high-quality, unambiguous decisions. 这种“未来清晰度”优势能主动引导智能体避免陷入高度混乱的状态，转而形成高质量、无歧义的决策序列。

4.3 Normalization Procedures

为确保调制函数 $g(H)$ 在统一规模上运行，我们采用最小-最大缩放法对每个训练批次中的步长熵进行归一化处理。

Batch-Level Entropy Normalization. To ensure the modulation function $g(H)$ operates on a consistent scale, we normalize step-level entropies within each training batch using min-max scaling. This stateless approach allows the normalization to adapt dynamically to the policy’s evolving confidence level. For each entropy value H_t in the batch:

$$H_{\text{norm},t}^{(i)} = \frac{H_t^{(i)} - \min_{\text{batch}}(H)}{\max_{\text{batch}}(H) - \min_{\text{batch}}(H) + \epsilon} \quad (12)$$

这种无状态方法使归一化过程能够动态适应策略置信度水平的演变。对于批次中的每个熵值 H_t ：

Final Advantage Normalization. After computing the modulated advantage A_{mod} for all steps in a batch, we perform a final batch-level normalization (zero mean). This standard variance reduction technique, which is crucial for stable policy updates, is achieved by subtracting the mean of A_{mod} over the mini-batch of size N_B :

$$A_{\text{final}}(i, t) = A_{\text{mod}}(i, t) - \frac{1}{N_B} \sum_{j=1}^{N_B} \sum_{t_j=1}^{T_j} A_{\text{mod}}(j, t_j) \quad (13)$$

这种标准的方差缩减技术对于稳定策略更新至关重要，其实现方式是通过将 A_{mod} 的均值从大小为 N_B 的迷你批次中减去：

The overall EMPG algorithm is summarized in Algorithm 1, with an implementation provided in the appendix E. Furthermore, we provide a rigorous theoretical derivation for the EMPG update rule in Appendix B.

我们在附录B中提供了 EMPG 更新规则的严格理论推导。

5 Experiments

5.1 Experimental Setup

Tasks and Benchmarks. We evaluate our method on three challenging long-horizon agent benchmarks featuring sparse, binary success rewards: WebShop [38], a web navigation task requiring complex instruction following; ALFWorld [29], a text-based environment combining instruction following with common-sense reasoning; and Deep Search [13], a multi-step information retrieval and synthesis task. For Deep Search, we further categorize the evaluation sets into in-domain (ID) and out-of-domain (OOD) to assess generalization.

Models and Agent Framework. Our agent employs the ReAct paradigm [39], where the LLM first generates a thought before producing an action. For WebShop and ALFWorld, we use Qwen2.5-1.5B-Instruct and Qwen2.5-7B-Instruct to compare our results with existing work. For the more complex Deep Search task, we use the powerful Qwen2.5-32B-Instruct model to conduct in-depth analysis.

Baselines and Implementation. We compare EMPG against strong policy gradient baselines: GRPO [27] and DAPO [40]. Our method, EMPG, is implemented as an advantage modulation module that is applied directly on top of these baselines. This allows us to fairly measure the benefits of leveraging intrinsic uncertainty signals. For the WebShop and ALFWorld benchmarks, we based our implementation on the public codebase of GiGPO [8] for a fair comparison. For the DeepSearch benchmark, we curated a training dataset of 17k instances by filtering from several sources, including WebWalker [35], HotpotQA [37], 2WikiMultiHopQA [11], NaturalQuestions [17], and TriviaQA [14].

5.2 Main Results

Our comprehensive experiments demonstrate that EMPG yields significant and consistent performance improvements across a diverse range of tasks, baselines, and model scales.

Performance on ALFWorld and WebShop. As shown in Table 1, EMPG serves as a robust enhancement to existing policy optimization algorithms. On the Qwen2.5-1.5B model, applying EMPG boosts the average success rate of GRPO on ALFWorld by +8.1 points and DAPO by +7.3 points. This effectiveness scales to the larger Qwen2.5-7B model, where EMPG again improves both baselines on ALFWorld and elevates the DAPO success rate on WebShop to an impressive 82.7%. These results confirm that EMPG is highly compatible and provides reliable gains for different RL backbones.

Performance and Scalability on Deep Search. To investigate the scalability of our approach on more powerful models and complex retrieval tasks, we evaluated EMPG on the Deep Search benchmark using the Qwen2.5-32B-Instruct model. The results, presented in Table 2, further validate our method. Applying EMPG to the strong DAPO baseline boosts the overall average score from 62.0 to 65.3, a substantial improvement of +3.3 points. This performance gain is notably robust, with EMPG improving the in-domain average by +3.1 points and demonstrating even stronger generalization with a +3.9 point gain on out-of-domain tasks.

综合来看，所有三个基准测试的结果都证实了 EMPG 是训练大型语言模型代理的一种多功能且可扩展的增强方法。无论底层强化学习算法如何、任务性质如何或基础模型规模如何，它都能持续提升性能，验证了我们的核心假设：利用内在不确定性是学习稀疏奖励的强大工具。

Summary. Taken together, the results across all three benchmarks confirm that EMPG is a versatile and scalable enhancement for training LLM agents. It consistently improves performance regardless of the underlying RL algorithm, the nature of the task, or the size of the base model, validating our core hypothesis that leveraging intrinsic uncertainty is a powerful tool for learning from sparse rewards.

5.3 Analysis

重点关注三个关键问题：

(1) EMPG 的核心组件各自有何贡献？(2) EMPG 如何随时间影响学习过程？(3) 为什么对熵进行步骤级分析至关重要？

To understand the mechanisms behind EMPG’s effectiveness, we conduct a series of in-depth analyses focusing on three key questions: (1) What are the individual contributions of EMPG’s core components? (2) How does EMPG affect the learning process over time? (3) Why is a step-level analysis of entropy crucial?

消融研究与推广分析。为解析本方法两大核心组件的贡献度，我们基于 Deep Search 基准测试结果开展了详尽的消融实验，具体数据详见表2。

Ablation Study and Generalization Analysis. To dissect the contributions of our method’s two main components, we perform a detailed ablation study using the results from the Deep Search benchmark, as presented in Table 2. The study reveals a distinct and complementary duality in their roles, which stems from how they shape the policy during training. The Future Clarity Bonus acts as a powerful exploitation signal during training. By reinforcing known, high-quality decision sequences within the training data, it helps the model master the in-domain distribution, leading to a strong performance gain of +2.6 points on ID tasks. Conversely, the Self-Calibrating Gradient Scaling serves as a powerful regularization mechanism during training, teaching the model how to behave when it is uncertain. By attenuating updates for high-entropy steps, it produces a final policy that is inherently more robust and less brittle. This learned robustness is then observed during testing on out-of-domain tasks, where the model faces novel inputs that induce high uncertainty. Because the policy has learned not to overreact in such situations, it exhibits superior generalization, providing a robust gain of +3.9 points on OOD tasks. This demonstrates that EMPG is not merely overfitting; instead, by learning a fundamental skill of how to handle uncertainty, it acquires a more resilient problem-solving approach that

该研究揭示了其角色中一种独特且互补的二元性，这种二元性源于他们在培训期间对政策的塑造方式。

通过减弱高熵步骤的更新，最终生成的策略本质上更具鲁棒性且不易受干扰。

这种学习鲁棒性随后在域外任务测试中显现，此时模型面临引发高度不确定性的新输入。

由于该策略已经学会在这种情况下不要过度反应，它表现出优越的泛化能力，在 OOD 任务上提供了+3.9点的稳健增益

Table 1 Performance on ALFWorld and WebShop. Results are averaged over 3 random seeds. For ALFWorld, we report the average success rate (%) for each subtask as well as the overall result. For WebShop, we report both the average score and the average success rate (%). Methods marked with * are our reproduced results. The remaining results are adopted from GiGPO [8].

Method	ALFWorld							WebShop	
	Pick	Look	Clean	Heat	Cool	Pick2	All	Score	Succ.
<i>Base: Closed-Source Model</i>									
Prompting GPT-4o	75.3	60.8	31.2	56.7	21.6	49.8	48.0	31.8	23.7
Prompting Gemini-2.5-Pro	92.8	63.3	62.1	69.0	26.6	58.7	60.3	42.5	35.9
<i>Base: Qwen2.5-1.5B-Instruct</i>									
Prompting Qwen2.5	5.9	5.5	3.3	9.7	4.2	0.0	4.1	23.1	5.2
Prompting ReAct	17.4	20.5	15.7	6.2	7.7	2.0	12.8	40.1	11.3
Prompting Reflexion	35.3	22.2	21.7	13.6	19.4	3.7	21.8	55.8	21.9
RL Training PPO (with critic)	64.8	40.5	57.1	60.6	46.4	47.4	54.4	73.8	51.5
RL Training RLOO	88.3	52.8	71.0	62.8	66.4	56.9	69.7	73.9	52.1
RL Training GRPO*	87.9	40.0	78.1	35.7	65.2	44.4	65.6	78.0	58.2
with EMPG*	85.5	33.5	78.9	76.2	74.7	69.1	73.7 (+8.1)	80.4	60.8 (+2.6)
RL Training DAPO*	88.1	61.4	82.5	90.1	83.9	69.5	80.8	85.9	73.2
with EMPG*	97.7	80.7	87.5	87.0	88.3	80.0	88.1 (+7.3)	86.8	73.8 (+0.6)
<i>Base: Qwen2.5-7B-Instruct</i>									
Prompting Qwen2.5	33.4	21.6	19.3	6.9	2.8	3.2	14.8	26.4	7.8
Prompting ReAct	48.5	35.4	34.3	13.2	18.2	17.6	31.2	46.2	19.5
Prompting Reflexion	62.0	41.6	44.9	30.9	36.3	23.8	42.7	58.1	28.8
RL Training PPO (with critic)	92.3	64.0	92.5	89.5	80.3	68.8	80.4	81.4	68.7
RL Training RLOO	87.6	78.2	87.3	81.3	71.9	48.9	75.5	80.3	65.7
RL Training GRPO*	88.8	43.7	88.1	70.3	77.7	56.8	74.8	77.8	65.6
with EMPG*	92.9	75.2	74.8	86.3	73.7	65.3	78.5 (+3.7)	81.0	69.3 (+3.7)
RL Training DAPO*	98.9	86.1	94.9	83.2	81.4	90.1	90.0	90.6	79.6
with EMPG*	99.0	86.8	97.3	94.9	75.8	90.3	91.6 (+1.6)	92.0	82.7 (+3.1)

generalizes effectively. Crucially, the full EMPG model, which integrates both mechanisms, demonstrates a powerful synergy: the model learns to efficiently exploit known patterns while being robust to novel ones.

增强训练稳定性

Enhancing Training Stability. Beyond improving sample efficiency, EMPG also significantly enhances the stability and robustness of the training process. A common failure mode in online RL fine-tuning is "policy collapse," where the agent's policy diverges late in training, leading to a catastrophic drop in performance. We visualize this phenomenon by tracking the KL Loss during training, as shown in Figure 2. The DAPO baseline agent initially learns effectively, but its KL Loss becomes highly erratic after approximately 240 training steps, indicating severe instability. In contrast, the EMPG-enhanced agent maintains a low and stable KL Loss throughout the entire training run. This demonstrates that EMPG's mechanisms, particularly the self-calibrating gradient scaling, effectively regularize the policy updates, preventing the overly aggressive changes that can lead to divergence and ensuring a more reliable convergence to a high-performance policy. To ensure a fair comparison, **we select the checkpoint at 220 steps for both the baseline and EMPG for final evaluation.** Despite this, our method could continue to improve its performance with further training.

本研究与既往分析[31]的不同之处在于，我们聚焦于“推理-行为”step-level的熵，而非token level。

Step-Level vs. Token-Level Entropy Dynamics. Our work diverges from prior analyses [31] by focusing on entropy at the "reason-act" step level rather than the token level. To validate this choice, **we investigate whether the token-level observation—that RL updates primarily affect high-entropy tokens—holds at the step level.** We analyze over 9,000 steps on ALFWorld and plot the average entropy change for steps, binned by their initial entropy percentile (Figure 3). Our findings are significant: **unlike at the token level, even steps with very low initial entropy (e.g., the 15%-20% percentile) still undergo substantial average entropy changes.** This shows the dynamics do not transfer; a confident step can still require significant policy updates. This key finding underscores the importance of our step-centric approach and motivates the design of EMPG to modulate updates across the entire confidence spectrum.

明确揭示了EMPG在克服基线方法性能局限性中的关键作用。

Analysis of Learning Dynamics. An analysis of the learning dynamics, presented in Figure D.1, clearly reveals EMPG's critical role in overcoming the performance limitations of baseline methods. Across all experiments on both the ALFWorld and WebShop benchmarks, **the baseline agents consistently reach a distinct performance plateau, where their**

这表明动态特性不会转移；即使信心度提升，仍需进行重大政策更新。这一关键发现强调了我们以step为中心的方法的重要性，并激励 EMPG 的设计来调节整个信心谱系的更新。

但其KL损失在约240个训练步骤后变得高度不规则，表明存在严重不稳定。

这表明 EMPG 的机制，特别是自校准梯度缩放，有效地规范了策略更新，防止了可能导致发散的过度激进的更改，并确保了更可靠的收敛到高性能策略。

我们研究了token level的观察结果——即强化学习（RL）更新主要影响高熵token——是否在step level成立。

我们分析了ALFWorld上的9,000多个步骤，并按初始熵百分位数分组绘制了步骤的平均熵变。

与标记层面不同，即使初始熵极低的步骤（例如15%-20%百分位数）仍会发生显著的平均熵变化

Table 2 Main results on Deep Search tasks, categorized by domain. EMPG demonstrates strong performance on both in-domain (ID) and out-of-domain (OOD) datasets, with a particularly notable gain in generalization to OOD tasks.

Method	In-domain (ID)				Out-of-domain (OOD)			Overall
	WebWalker	HotpotQA	2wiki	Avg.	Musique	Bamboogle	Avg.	Avg.
Qwen2.5-32B-Instruct								
DAPO (Baseline)	55.1	66.4	68.9	63.5	38.8	80.8	59.8	62.0
<i>Ablation Studies</i>								
+ Gradient Scaling	54.9	68.8	67.4	63.7	41.0	86.4	63.7	63.7
+ Future Bonus	60.6	69.7	67.9	66.1	40.4	82.4	61.4	64.2
+ EMPG (Ours)	57.5	71.2	71.0	66.6	41.8	84.8	63.7	65.3
Gain vs. Baseline	(+2.4)	(+4.8)	(+2.1)	(+3.1)	(+3.0)	(+4.0)	(+3.9)	(+3.3)

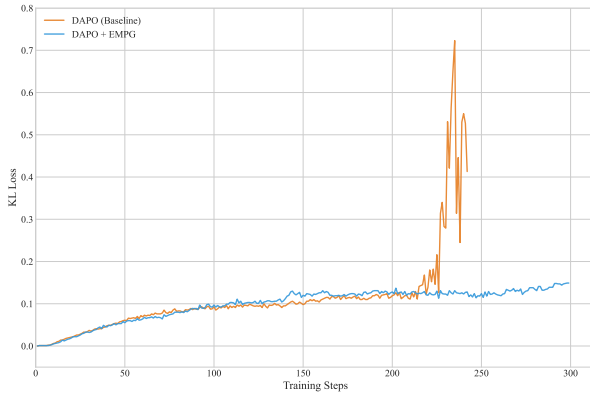


Figure 2 KL Loss dynamics during training for the Qwen2.5-32B-Instruct model. The DAPO baseline (orange) suffers from late-stage instability, evidenced by the sharp, erratic spike in KL Loss. The EMPG-enhanced model (blue) remains stable throughout, showcasing its robustness.

他们学习停滞不前，成功率不再提升

learning stagnates and the success rate ceases to improve. In stark contrast, the EMPG-enhanced agents decisively break through this performance ceiling. By providing a richer and more effective learning signal, EMPG enables the agents to sustain their learning momentum, pushing beyond the baseline’s peak and ultimately converging to a significantly higher final success rate. This demonstrates that EMPG is not just accelerating learning, but is fundamentally guiding the agent to discover superior policies that are otherwise inaccessible, effectively escaping the local optima where the baseline methods become trapped.

EMPG 使智能体能够持续保持学习势头，突破基准峰值，最终收敛至显著更高的最终成功率。

6 Conclusion

这表明 EMPG 不仅仅是加速学习，而是从根本上引导代理发现其他方法无法访问的优越策略，有效地逃离了基线方法陷入的局部最优。

In this work, we introduced Entropy-Modulated Policy Gradients (EMPG), a novel and principled framework to alleviate the long-standing credit assignment problem in long-horizon LLM agent training. By leveraging the intrinsic uncertainty of the agent’s “reasoning-action” steps, EMPG dynamically re-calibrates the policy gradient, moving beyond the limitations of sparse, end-of-task rewards. Our method directly addresses the dual challenges of standard policy gradients: it amplifies updates for confident and correct actions, strongly penalizes confident but incorrect steps, and attenuates updates for uncertain steps to promote stability. Through comprehensive experiments on challenging benchmarks, including WebShop, ALFWorld, and Deep Search, we demonstrated substantial performance gains over strong baselines like GRPO and DAPO. More fundamentally, our work addresses a general challenge inherent in policy gradient methods operating in high-dimensional action spaces: the “entropy-gradient coupling” problem. We frame EMPG not as a domain-specific technique but as a general-purpose method for variance reduction and credit assignment, using the policy’s own uncertainty as an adaptive, step-level baseline.

在这项工作中，我们引入了熵调制策略梯度（EMPG），这是一种新颖且有原则的框架，旨在解决长期大语言模型代理训练中长期存在的信用分配问题。通过利用代理“推理-行动”步骤的内在不确定性，EMPG 动态地重新校准策略梯度，超越了稀疏任务结束奖励的局限性。我们的方法直接应对了标准策略梯度的双重挑战：放大大自信且正确动作的更新，强烈惩罚自信但错误的步骤，并减弱不确定步骤的更新以促进稳定性。通过在 WebShop、ALFWorld 和 Deep Search 等具有挑战性的基准测试上的全面实验，我们展示了相对于 GRPO 和 DAPO 等强基线的显著性能提升。更根本的是，我们的工作解决了在高维动作空间中运行的策略梯度方法固有的普遍挑战：“熵梯度耦合”问题。我们将 EMPG 定义为一种通用方法，用于方差减少和信用分配，利用策略自身的不确定性作为自适应的、步骤级别的基线，而不是特定领域的技术。

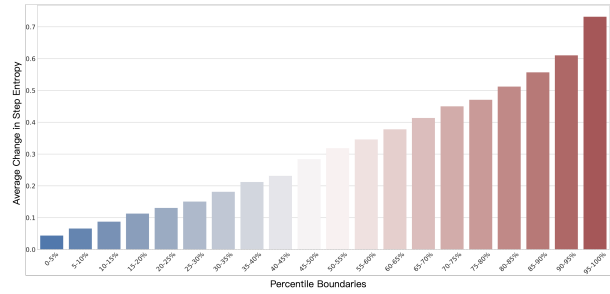


Figure 3 Average entropy change after RL fine-tuning within each 5% entropy percentile range. Unlike token-level findings, even low-entropy steps undergo significant changes, validating our step-level analysis.

Our findings suggest that an agent’s intrinsic uncertainty is a powerful, yet underexplored, signal for self-supervision in complex decision-making processes. EMPG provides a scalable alternative to costly process-based reward models, forging a dense, informative learning signal from minimal external feedback. For future work, we plan to explore the application of EMPG to other long-horizon tasks, such as embodied AI and multi-agent collaboration. We believe that this work lays a foundational stone for developing more efficient, robust, and self-correcting autonomous agents.

我们的研究结果表明，智能体的内在不确定性是复杂决策过程中自我监督的一个强大但未被充分探索的信号。EMPG 提供了一种可扩展的替代方案，以低成本的过程奖励模型为基础，从最少的外部反馈中生成密集且信息丰富的学习信号。未来的工作中，我们计划探索 EMPG 在其他长期任务中的应用，例如具身人工智能和多智能体协作。我们相信，这项工作为开发更高效、更稳健、更自我校正的自主智能体奠定了基础。

References

- [1] Shivam Agarwal, Zimin Zhang, Lifan Yuan, Jiawei Han, and Hao Peng. The unreasonable effectiveness of entropy minimization in llm reasoning. [arXiv preprint arXiv:2505.15134](#), 2025.
- [2] Salaheddin Alzubi, Creston Brooks, Purva Chiniya, Edoardo Contente, Chiara von Gerlach, Lucas Irwin, Yihan Jiang, Arda Kaz, Windsor Nguyen, Sewoong Oh, et al. Open deep search: Democratizing search with open-source reasoning agents. [arXiv preprint arXiv:2503.20201](#), 2025.
- [3] Marc Bellemare, Sriram Srinivasan, Georg Ostrovski, Tom Schaul, David Saxton, and Remi Munos. Unifying count-based exploration and intrinsic motivation. [Advances in neural information processing systems](#), 29, 2016.
- [4] Minghan Chen, Guikun Chen, Wenguan Wang, and Yi Yang. Seed-grpo: Semantic entropy enhanced grpo for uncertainty-aware policy optimization. [arXiv preprint arXiv:2505.12346](#), 2025.
- [5] Daixuan Cheng, Shaohan Huang, Xuekai Zhu, Bo Dai, Wayne Xin Zhao, Zhenliang Zhang, and Furu Wei. Reasoning with exploration: An entropy perspective. [arXiv preprint arXiv:2506.14758](#), 2025.
- [6] Xiang Deng, Yu Gu, Boyuan Zheng, Shijie Chen, Sam Stevens, Boshi Wang, Huan Sun, and Yu Su. Mind2web: Towards a generalist agent for the web. In [Advances in Neural Information Processing Systems](#), 2023.
- [7] Zhirui Deng, Zhicheng Dou, Yutao Zhu, Ji-Rong Wen, Ruibin Xiong, Mang Wang, and Weipeng Chen. From novice to expert: Llm agent policy optimization via step-wise reinforcement learning. [arXiv preprint arXiv:2411.03817](#), 2024.
- [8] Lang Feng, Zhenghai Xue, Tingcong Liu, and Bo An. Group-in-group policy optimization for llm agent training. [arXiv preprint arXiv:2505.10978](#), 2025.
- [9] Zitian Gao, Lynx Chen, Joey Zhou, and Bryan Dai. One-shot entropy minimization. [arXiv preprint arXiv:2505.20282](#), 2025.
- [10] Yichen He, Guanhua Huang, Peiyuan Feng, Yuan Lin, Yuchen Zhang, Hang Li, et al. Pasa: An llm agent for comprehensive academic paper search. [arXiv preprint arXiv:2501.10120](#), 2025.
- [11] Xanh Ho, Anh-Khoa Duong Nguyen, Saku Sugawara, and Akiko Aizawa. Constructing a multi-hop qa dataset for comprehensive evaluation of reasoning steps. [arXiv preprint arXiv:2011.01060](#), 2020.
- [12] Carlos E Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik Narasimhan. Swe-bench: Can language models resolve real-world github issues? [arXiv preprint arXiv:2310.06770](#), 2023.
- [13] Bowen Jin, Hansi Zeng, Zhenrui Yue, Jinsung Yoon, Sercan Arik, Dong Wang, Hamed Zamani, and Jiawei Han. Search-r1: Training llms to reason and leverage search engines with reinforcement learning. [arXiv preprint arXiv:2503.09516](#), 2025.
- [14] Mandar Joshi, Eunsol Choi, Daniel S Weld, and Luke Zettlemoyer. Triviaqa: A large scale distantly supervised challenge dataset for reading comprehension. [arXiv preprint arXiv:1705.03551](#), 2017.
- [15] Amirhossein Kazemnejad, Milad Aghajohari, Eva Portelance, Alessandro Sordoni, Siva Reddy, Aaron Courville, and Nicolas Le Roux. Vineppo: Accurate credit assignment in rl for llm mathematical reasoning. In [The 4th Workshop on Mathematical Reasoning and AI at NeurIPS’24](#), 2024.
- [16] Alexander S Klyubin, Daniel Polani, and Chrystopher L Nehaniv. Empowerment: A universal agent-centric measure of control. In [IEEE Congress on Evolutionary Computation](#), 2005.
- [17] Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, et al. Natural questions: a benchmark for question answering research. [Transactions of the Association for Computational Linguistics](#), 2019.
- [18] Xiaoxi Li, Guanting Dong, Jiajie Jin, Yuyao Zhang, Yujia Zhou, Yutao Zhu, Peitian Zhang, and Zhicheng Dou. Search-o1: Agentic search-enhanced large reasoning models. [arXiv preprint arXiv:2501.05366](#), 2025.
- [19] Yingru Li. Logit dynamics in softmax policy gradient methods. [arXiv preprint arXiv:2506.12912](#), 2025.
- [20] Hunter Lightman, Vineet Kosaraju, Yuri Burda, Harrison Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. Let’s verify step by step. In [International Conference on Learning Representations](#), 2023.
- [21] Jiakai Liu, Chaojie Wang, Chris Yuhao Liu, Liang Zeng, Rui Yan, Yiwon Sun, Yang Liu, and Yahui Zhou. Improving multi-step reasoning abilities of large language models with direct advantage policy optimization. [arXiv preprint arXiv:2412.18279](#), 2024.
- [22] Andrew Y Ng, Daishi Harada, and Stuart Russell. Policy invariance under reward transformations: Theory and application to reward shaping. In [International Conference on Machine Learning](#), 1999.

- [23] Deepak Pathak, Pulkit Agrawal, Alexei A Efros, and Trevor Darrell. Curiosity-driven exploration by self-supervised prediction. In *International Conference on Machine Learning*, 2017.
- [24] Alfréd Rényi. On measures of entropy and information. In *Proceedings of the fourth Berkeley symposium on mathematical statistics and probability*, volume 1: contributions to the theory of statistics, 1961.
- [25] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- [26] ByteDance Seed, Jiaze Chen, Tiantian Fan, Xin Liu, Lingjun Liu, Zhiqi Lin, Mingxuan Wang, Chengyi Wang, Xiangpeng Wei, Wenyuan Xu, et al. Seed1. 5-thinking: Advancing superb reasoning models with reinforcement learning. *arXiv preprint arXiv:2504.13914*, 2025.
- [27] Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, YK Li, Yang Wu, et al. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
- [28] Guangming Sheng, Chi Zhang, Zilingfeng Ye, Xibin Wu, Wang Zhang, Ru Zhang, Yanghua Peng, Haibin Lin, and Chuan Wu. Hybridflow: A flexible and efficient rlhf framework. *arXiv preprint arXiv: 2409.19256*, 2024.
- [29] Mohit Shridhar, Xingdi Yuan, Marc-Alexandre Cote, Yonatan Bisk, Adam Trischler, and Matthew Hausknecht. Alfworld: Aligning text and embodied environments for interactive learning. In *International Conference on Learning Representations*, 2021.
- [30] Abdullah Vanlioglu. Entropy-guided sequence weighting for efficient exploration in rl-based llm fine-tuning. *arXiv preprint arXiv:2503.22456*, 2025.
- [31] Shenzi Wang, Le Yu, Chang Gao, Chujie Zheng, Shixuan Liu, Rui Lu, Kai Dang, Xionghui Chen, Jianxin Yang, Zhenru Zhang, Yuqiong Liu, An Yang, Andrew Zhao, Yang Yue, Shiji Song, Bowen Yu, Gao Huang, and Junyang Lin. Beyond the 80/20 rule: High-entropy minority tokens drive effective reinforcement learning for llm reasoning. *arXiv preprint arXiv:2506.01939*, 2025.
- [32] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. In *Advances in neural information processing systems*, 2022.
- [33] Yuxiang Wei, Olivier Duchenne, Jade Copet, Quentin Carbonneaux, Lingming Zhang, Daniel Fried, Gabriel Synnaeve, Rishabh Singh, and Sida I Wang. Swe-rl: Advancing llm reasoning via reinforcement learning on open software evolution. *arXiv preprint arXiv:2502.18449*, 2025.
- [34] Zhepei Wei, Wenlin Yao, Yao Liu, Weizhi Zhang, Qin Lu, Liang Qiu, Changlong Yu, Puyang Xu, Chao Zhang, Bing Yin, et al. Webagent-rl: Training web agents via end-to-end multi-turn reinforcement learning. *arXiv preprint arXiv:2505.16421*, 2025.
- [35] Jialong Wu, Wenbiao Yin, Yong Jiang, Zhenglin Wang, Zekun Xi, Runnan Fang, Linhai Zhang, Yulan He, Deyu Zhou, Pengjun Xie, et al. Webwalker: Benchmarking llms in web traversal. *arXiv preprint arXiv:2501.07572*, 2025.
- [36] An Yan, Zhengyuan Yang, Wanrong Zhu, Kevin Lin, Linjie Li, Jianfeng Wang, Jianwei Yang, Yiwu Zhong, Julian McAuley, Jianfeng Gao, et al. Gpt-4v in wonderland: Large multimodal models for zero-shot smartphone gui navigation. *arXiv preprint arXiv:2311.07562*, 2023.
- [37] Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William W Cohen, Ruslan Salakhutdinov, and Christopher D Manning. Hotpotqa: A dataset for diverse, explainable multi-hop question answering. *arXiv preprint arXiv:1809.09600*, 2018.
- [38] Shunyu Yao, Howard Chen, John Yang, and Karthik Narasimhan. Webshop: Towards scalable real-world web interaction with grounded language agents. In *Advances in Neural Information Processing Systems*, 2022.
- [39] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. React: Synergizing reasoning and acting in language models. In *International Conference on Learning Representations*, 2023.
- [40] Qiying Yu, Zheng Zhang, Ruofei Zhu, Yufeng Yuan, Xiaochen Zuo, Yu Yue, Tiantian Fan, Gaohong Liu, Lingjun Liu, Xin Liu, Haibin Lin, Zhiqi Lin, Bole Ma, Guangming Sheng, Yuxuan Tong, Chi Zhang, Mofan Zhang, Wang Zhang, Hang Zhu, Jinhua Zhu, Jiaze Chen, Jiangjie Chen, Chengyi Wang, Honglin Yu, Weinan Dai, Yuxuan Song, Xiang Wei, Haodong Zhou, Jingjing Liu, Wei Ma, Ya-Qin Zhang, Lin Yan, Mu Qiao, Yong-Xu Wu, and Mingxuan Wang. Dapo: An open-source llm reinforcement learning system at scale. *arXiv preprint arXiv:2503.14476*, 2025.
- [41] Kechi Zhang, Jia Li, Ge Li, Xianjie Shi, and Zhi Jin. Codeagent: Enhancing code generation with tool-integrated agent systems for real-world repo-level coding challenges. *arXiv preprint arXiv:2401.07339*, 2024.

- [42] Kongcheng Zhang, Qi Yao, Shunyu Liu, Yingjie Wang, Baisheng Lai, Jieping Ye, Mingli Song, and Dacheng Tao. Consistent paths lead to truth: Self-rewarding reinforcement learning for llm reasoning. [arXiv preprint arXiv:2506.08745](#), 2025.
- [43] Qingyang Zhang, Haitao Wu, Changqing Zhang, Peilin Zhao, and Yatao Bian. Right question is already half the answer: Fully unsupervised llm reasoning incentivization. [arXiv preprint arXiv:2504.05812](#), 2025.
- [44] Xingjian Zhang, Siwei Wen, Wenjun Wu, and Lei Huang. [Edge-grpo: Entropy-driven grpo with guided error correction for advantage diversity](#). [arXiv preprint arXiv:2507.21848](#), 2025.
- [45] Yue Zhang, Yafu Li, Leyang Cui, Deng Cai, Lemao Liu, Tingchen Fu, Xinting Huang, Enbo Zhao, Yu Zhang, Yulong Chen, et al. Siren’s song in the ai ocean: A survey on hallucination in large language models. [Computational Linguistics](#), pages 1–45, 2025.
- [46] Xuandong Zhao, Zhewei Kang, Aosong Feng, Sergey Levine, and Dawn Song. Learning to reason without external rewards. [arXiv preprint arXiv:2505.19590](#), 2025.
- [47] Yuxiang Zheng, Dayuan Fu, Xiangkun Hu, Xiaojie Cai, Lyumanshan Ye, Pengrui Lu, and Pengfei Liu. Deepresearcher: Scaling deep research via reinforcement learning in real-world environments. [arXiv preprint arXiv:2504.03160](#), 2025.
- [48] Brian D Ziebart, Andrew L Maas, J Andrew Bagnell, Anind K Dey, et al. Maximum entropy inverse reinforcement learning. In [The Association for the Advancement of Artificial Intelligence](#), 2008.
- [49] Yuxin Zuo, Kaiyan Zhang, Li Sheng, Shang Qu, Ganqu Cui, Xuekai Zhu, Haozhan Li, Yuchen Zhang, Xinwei Long, Ermo Hua, et al. Ttrl: Test-time reinforcement learning. [arXiv preprint arXiv:2504.16084](#), 2025.

Appendix

A Proof of Proposition 1

We aim to prove that $\mathbb{E}_{a_k \sim \pi} [\|\nabla_z \log \pi_k\|^2] = 1 - \sum_{j=1}^{|V|} \pi_j^2$. The proof requires the result for the gradient norm of a single action a_k , which we state as a lemma.

Lemma. The squared L2-norm of the score function with respect to the logits, for a chosen action a_k , is given by: $\|\nabla_z \log \pi_k\|^2 = 1 - 2\pi_k + \sum_{j=1}^{|V|} \pi_j^2$.

Proof of Lemma. Let the logits be $z = (z_1, \dots, z_{|V|})$. The policy is $\pi_k = \exp(z_k) / \sum_j \exp(z_j)$. The partial derivative of the log-probability $\log \pi_k$ with respect to an arbitrary logit z_i is $\frac{\partial \log \pi_k}{\partial z_i} = \delta_{ik} - \pi_i$, where δ_{ik} is the Kronecker delta. The squared L2-norm of the gradient vector $\nabla_z \log \pi_k$ is therefore:

$$\begin{aligned} \|\nabla_z \log \pi_k\|^2 &= \sum_{i=1}^{|V|} (\delta_{ik} - \pi_i)^2 = (1 - \pi_k)^2 + \sum_{i \neq k} (-\pi_i)^2 \\ &= (1 - 2\pi_k + \pi_k^2) + \sum_{i \neq k} \pi_i^2 = 1 - 2\pi_k + \sum_{j=1}^{|V|} \pi_j^2 \end{aligned}$$

■

Proof of Proposition 1. The expectation is taken over all possible choices of action a_k according to the policy distribution π . Using the result from the lemma:

$$\begin{aligned} \mathbb{E}_{k \sim \pi} [\|\nabla_z \log \pi_k\|^2] &= \sum_{k=1}^{|V|} \pi_k \cdot (\|\nabla_z \log \pi_k\|^2) \\ &= \sum_{k=1}^{|V|} \pi_k \left(1 - 2\pi_k + \sum_{j=1}^{|V|} \pi_j^2 \right) \\ &= \sum_{k=1}^{|V|} \pi_k - 2 \sum_{k=1}^{|V|} \pi_k^2 + \sum_{k=1}^{|V|} \pi_k \left(\sum_{j=1}^{|V|} \pi_j^2 \right) \\ &= 1 - 2 \sum_{k=1}^{|V|} \pi_k^2 + \left(\sum_{j=1}^{|V|} \pi_j^2 \right) \left(\sum_{k=1}^{|V|} \pi_k \right) \quad (\text{Factor out constant term}) \\ &= 1 - 2 \sum_{k=1}^{|V|} \pi_k^2 + \left(\sum_{j=1}^{|V|} \pi_j^2 \right) \cdot 1 \\ &= 1 - \sum_{k=1}^{|V|} \pi_k^2 \end{aligned}$$

Recalling the definition of Rényi entropy of order 2, $H_2(\pi) = -\log(\sum_{j=1}^{|V|} \pi_j^2)$, we can identify the term $\sum \pi_j^2$ as the collision probability, which is equivalent to $\exp(-H_2(\pi))$. Substituting this into our result yields the final information-theoretic form:

$$\mathbb{E}_{k \sim \pi} [\|\nabla_z \log \pi_k\|^2] = 1 - \exp(-H_2(\pi))$$

This completes the proof of the proposition. ■

B Theoretical Foundation of the EMPG Update Rule

In this section, we provide a rigorous theoretical justification for the Entropy-Modulated Policy Gradients (EMPG) algorithm. We demonstrate that the EMPG update rule can be formally derived as the gradient of a composite objective function, $J_{\text{EMPG}}(\theta)$. This interpretation substantiates that EMPG is a principled optimization method that reshapes the standard reinforcement learning objective to favor policies that are both effective and robust.

B.1 The Standard Policy Gradient Objective

We begin with the standard objective in policy-based reinforcement learning, which is to maximize the expected total return. In the context of sparse, outcome-based rewards, this objective simplifies to maximizing the expected advantage (return) of a trajectory τ :

$$J(\theta) = \mathbb{E}_{\tau \sim \pi_\theta} [A^{(\tau)}] \quad (14)$$

where $A^{(\tau)}$ is the scalar return for a trajectory τ sampled from the policy π_θ . The gradient of this objective is given by the Policy Gradient Theorem:

$$\nabla_\theta J(\theta) = \mathbb{E}_{\tau \sim \pi_\theta} \left[\left(\sum_{t=0}^{T-1} \nabla_\theta \log \pi_\theta(a_t | s_t) \right) A^{(\tau)} \right] \quad (15)$$

For any single trajectory τ , the gradient estimator is $\mathcal{G}^{(\tau)}(\theta) = A^{(\tau)} \sum_{t=0}^{T-1} \nabla_\theta \log \pi_\theta(a_t | s_t)$. This formulation reveals the core issue identified in Proposition 1: the contribution of each step’s score function, $\nabla_\theta \log \pi_\theta(a_t | s_t)$, is weighted uniformly by the trajectory’s outcome $A^{(\tau)}$, while its norm is intrinsically coupled with the policy entropy H_t .

B.2 The EMPG Composite Objective Function

We posit that EMPG performs gradient ascent on a composite objective function $J_{\text{EMPG}}(\theta)$. This objective augments the standard RL objective with a term that explicitly accounts for policy uncertainty, thereby decoupling the learning signal’s magnitude and direction from the policy’s raw confidence. We define this objective as:

$$J_{\text{EMPG}}(\theta) = J_{\text{extrinsic}}(\theta) + J_{\text{intrinsic}}(\theta) \quad (16)$$

Here, $J_{\text{extrinsic}}(\theta)$ is a re-weighted extrinsic objective that addresses the gradient *magnitude* problem, and $J_{\text{intrinsic}}(\theta)$ is an intrinsic objective that guides the policy’s *direction* towards states of higher certainty.

B.2.1 The Re-weighted Extrinsic Objective

The self-calibrating gradient scaling component of EMPG, $A^{(\tau)} \cdot g(H_t^{(\tau)})$, can be interpreted as performing an update on a modified extrinsic objective. Formally, we define a state-dependent weighting function $\omega(s_t, \theta) = g(H_t^{(\tau)})$, which is a function of the policy’s entropy at state s_t . The gradient update for this component is:

$$\mathcal{G}_{\text{extrinsic}}^{(\tau)}(\theta) = \sum_{t=0}^{T-1} A^{(\tau)} \cdot \omega(s_t^{(\tau)}, \theta) \cdot \nabla_\theta \log \pi_\theta(a_t | s_t) \quad (17)$$

This formulation is equivalent to optimizing the standard objective $J(\theta)$ under a *state-dependent measure*, where the contribution of each state is re-weighted. While deriving a closed-form objective $J_{\text{extrinsic}}(\theta)$ is non-trivial because ω depends on θ in a complex manner (via batch statistics), this interpretation is sufficient to justify the update rule. The weighting function $\omega(s_t, \theta)$ serves as an adaptive, information-theoretic learning rate that directly counteracts the dynamics described in Proposition 1. It amplifies the learning signal for confident (low-entropy) steps and dampens it for uncertain (high-entropy) steps, thus achieving a direct re-calibration of the gradient’s magnitude.

B.2.2 The Intrinsic Clarity Objective

The Future Clarity Bonus can be modeled as the gradient of a well-defined intrinsic objective function. We define an intrinsic reward, r_t^{int} , awarded at step t for transitioning to a state s_{t+1} with high policy clarity:

Definition (Clarity Reward). The intrinsic clarity reward at step t is a function of the policy entropy at the subsequent state s_{t+1} :

$$r_t^{\text{int}}(s_{t+1}; \theta) = \zeta \cdot f(H(\pi_\theta(\cdot|s_{t+1}))) = \zeta \cdot \exp(-k' \cdot H_{\text{norm},t+1}) \quad (18)$$

This reward incentivizes actions that lead to predictable future states. The corresponding intrinsic objective, $J_{\text{intrinsic}}(\theta)$, is the expected cumulative intrinsic reward:

$$J_{\text{intrinsic}}(\theta) = \mathbb{E}_{\tau \sim \pi_\theta} \left[\sum_{t=0}^{T-1} r_t^{\text{int}}(s_{t+1}; \theta) \right] \quad (19)$$

Applying the policy gradient theorem to this objective, and using the immediate intrinsic reward as a one-step advantage estimate (a common form of advantage shaping), yields the gradient:

$$\nabla_\theta J_{\text{intrinsic}}(\theta) = \mathbb{E}_{\tau \sim \pi_\theta} \left[\sum_{t=0}^{T-1} (\nabla_\theta \log \pi_\theta(a_t|s_t)) r_t^{\text{int}}(s_{t+1}; \theta) \right] \quad (20)$$

$$= \mathbb{E}_{\tau_i \sim \pi_\theta} \left[\sum_{t=0}^{T_i-1} (\nabla_\theta \log \pi_\theta(a_t|s_t)) \zeta \cdot f(H_{t+1}^{(\tau)}) \right] \quad (21)$$

This gradient precisely matches the Future Clarity Bonus component of the EMPG update.

B.3 Synthesis: The Full EMPG Gradient

By combining the gradients of the extrinsic and intrinsic objectives, we recover the full EMPG gradient estimator for a single trajectory τ :

$$\mathcal{G}_{\text{EMPG}}^{(\tau)}(\theta) = \mathcal{G}_{\text{extrinsic}}^{(\tau)}(\theta) + \nabla_\theta J_{\text{intrinsic}}(\theta)|_\tau \quad (22)$$

$$= \sum_{t=0}^{T-1} A^{(\tau)} \cdot g(H_t^{(\tau)}) \cdot \nabla_\theta \log \pi_\theta(a_t|s_t) + \sum_{t=0}^{T-1} \zeta \cdot f(H_{t+1}^{(\tau)}) \cdot \nabla_\theta \log \pi_\theta(a_t|s_t) \quad (23)$$

$$= \sum_{t=0}^{T-1} \left(A^{(\tau)} \cdot g(H_t^{(\tau)}) + \zeta \cdot f(H_{t+1}^{(\tau)}) \right) \nabla_\theta \log \pi_\theta(a_t|s_t) \quad (24)$$

This derivation confirms that the EMPG algorithm performs a principled gradient ascent on the composite objective $J_{\text{EMPG}}(\theta)$. This objective function holistically reshapes the optimization landscape by (1) adaptively scaling the extrinsic reward signal to ensure its magnitude is motivationally salient rather than merely a function of policy entropy, and (2) introducing an intrinsic drive towards robust, predictable solution paths. This dual-pronged approach provides a theoretical foundation for why EMPG successfully mitigates the challenges posed by the inherent dynamics of standard policy gradients.

C Experimental Settings

This appendix provides a detailed description of the experimental settings, hardware configurations, and hyperparameter choices for our experiments across the three main benchmarks. Due to the differences in training frameworks and task environments, the settings for WebShop/ALFWorld and Deep Search are described in separate subsections.

C.1 WebShop and ALFWorld Experiments

Our experiments on WebShop and ALFWorld are conducted within the **Verl-Agent** framework, an extension of the **veRL** [28] training codebase specifically designed for training large language model (LLM) agents via reinforcement learning. Verl-Agent provides a powerful and scalable platform for long-horizon, multi-turn RL training by enabling fully customizable per-step input structures, history management, and memory modules. It supports a diverse set of RL algorithms and a rich suite of agent environments, making it highly suitable for our work.

For a fair comparison, all experiments were re-executed on our hardware platform. While the original experiments were performed using H200 GPUs, our work utilized A100 GPUs due to resource constraints. We observed that the original training scripts for the Qwen2.5-1.5B-Instruct model, designed for $2 \times \text{H100}$, would result in out-of-memory errors on A100s. Therefore, we used $4 \times \text{A100}$ GPUs for the 1.5B models and $8 \times \text{A100}$ GPUs for the 7B models. All baselines were re-trained under the same hardware, seeds, and settings to ensure strict comparability. The key hyperparameters for these experiments are summarized in Table 3.

Table 3 Key Hyperparameters for WebShop and ALFWorld Experiments.

Parameter	Value
Actor Learning Rate	1e-6
KL Loss Coefficient	0.01
KL Penalty	low var kl
Entropy Coefficient	0.001
Clip High (DAPO)	0.28
Clip Low (DAPO)	0.2
Clip Low/High (GRPO)	0.2
Batch Size	16
Training Step	150
Rollout Group Size	8
Rollout Temperature	1.0
ζ	0.05
k, k'	1.0
Max Actions (ALFWorld)	50
Max Actions (WebShop)	15
History Observation	2
GPUs	$4 \times \text{A100}$ (1.5B), $8 \times \text{A100}$ (7B)

C.2 Deep Search Experiments

Our experiments on the Deep Search task were conducted using a proprietary RL training framework from ByteDance. The agent was equipped with two primary tools: Bing Search as the search engine and a web viewer tool capable of reading web page content and summarizing long articles.

A key part of the Deep Search training was the data curation process. We constructed a unique training dataset of 17,000 instances by filtering from a variety of public benchmarks, including WebWalker [35], HotpotQA [37], 2WikiMultiHopQA [11], NaturalQuestions [17], and TriviaQA [14]. We gratefully acknowledge the initial data collection and preliminary filtering by the DeepResearcher team [47]. We performed two deeper filtering steps:

1. **Direct Answer Filtering:** We sampled 5 results per question using Doubao-Seed-1.6 (Thinking) [26]. We then filtered out all questions that could be answered directly (where at least one of the 5 results was correct) to ensure the agent learns to use its search tools rather than relying on memorized answers.
2. **Agent Workflow Filtering:** We further filtered the dataset by sampling 8 results using a search workflow built on Doubao-Seed-1.6 (Thinking). We removed data points that were "stably all-correct" to focus the RL training on more challenging instances and improve training efficiency.

The key hyperparameters for the RL training on the Deep Search task are detailed in Table 4.

D Analysis of Learning Dynamics

This section provides a detailed visualization of the learning dynamics, complementing the analysis in the main body of the paper. Figure D.1 illustrates the training progress of EMPG-enhanced agents compared to their baseline counterparts (GRPO and DAPO) on both the WebShop and ALFWorld benchmarks. As shown in the learning curves, the baseline agents consistently hit a performance ceiling, with their success rates stagnating early in the training process. In contrast,

Table 4 Key Hyperparameters for Deep Search Experiments.


Parameter	Value
Actor Learning Rate	1e-6
KL Loss Coefficient	0.001
KL Penalty	low var kl
Entropy Coefficient	0.0
Clip High	0.28
Clip Low	0.2
Batch Size	64
Training Step	220
Rollout Group Size	16
Rollout Temperature	1.0
ζ	0.1
k, k'	1.0
Max Actions	15
GPUs	$32 \times \text{A100}$

our EMPG-enhanced agents overcome this plateau, sustaining their learning momentum to achieve significantly higher final success rates across all settings. This evidence supports our central claim that EMPG provides a more effective learning signal, enabling agents to escape the local optima that trap standard policy gradient methods.


E Algorithm Implementation Details

We provide a PyTorch-style pseudocode implementation for the core logic of our method in Algorithm 2. This function calculates the final modulated advantage, A_{final} , used for the policy update, as detailed in Section 4. The process consists of four main stages:

1. **Step-Level Entropy Collection:** The function first iterates through the batch of trajectories to identify agent action steps (i.e., the “assistant” responses). For each step t , it computes the corresponding step-level entropy H_t by averaging the policy’s token-level entropies for that action.
2. **Modulation Component Calculation:** All collected step entropies $\{H_t\}$ are normalized across the batch using min-max scaling to produce $\{H_{\text{norm},t}\}$ (as per Eq. 12). These normalized values are then used to compute the two key components of our method: the self-calibrating scaling factor $g(H_t)$ (Eq. 10) and the future clarity bonus term $g'(H_{t+1})$ (Eq. 11).
3. **Advantage Modulation:** The function then applies these components to the original outcome-based advantage. For each step, the advantage is scaled by $g(H_t)$ and augmented by the future clarity bonus $\zeta \cdot g'(H_{t+1})$, yielding the modulated advantage A_{mod} as defined in our main formula (Eq. 8).
4. **Final Normalization:** Finally, to reduce variance and ensure stable training, the entire batch of resulting modulated advantages is normalized to have a mean of zero. This produces the final advantage A_{final} (Eq. 13) that is used to compute the policy gradient.

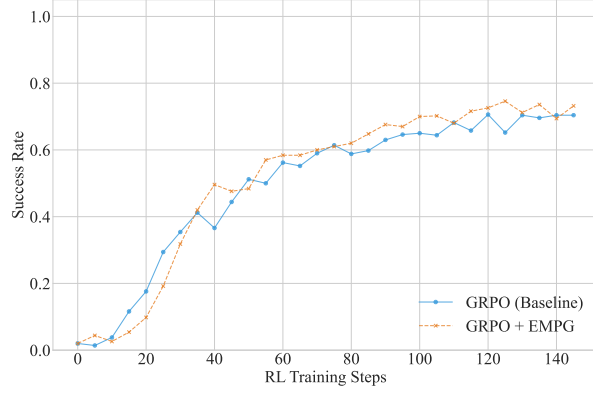


(a) WebShop: GRPO

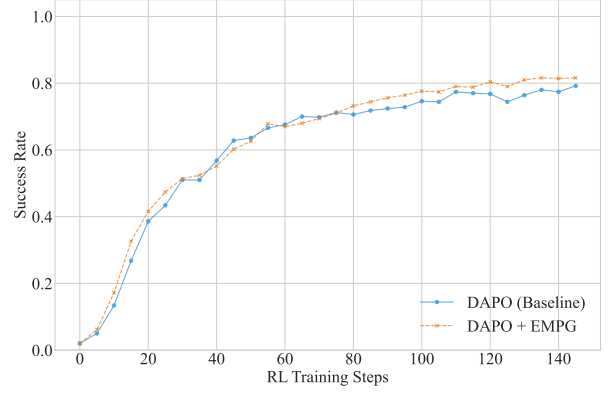

(b) WebShop: DAPO



(c) ALFWorld: GRPO

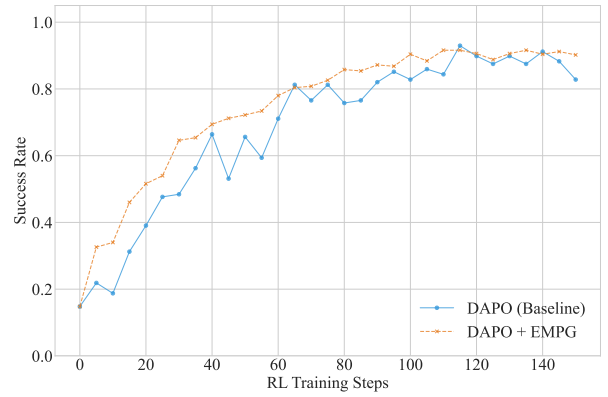

(d) ALFWorld: DAPO

Figure D.1 Learning dynamics comparison for the Qwen2.5-7B-Instruct model on the WebShop and ALFWorld benchmarks (evaluated on the validation set). In all four scenarios, the EMPG-enhanced agents (orange, dashed) demonstrate a superior success rate compared to their respective baselines (blue, solid).

Algorithm 2 PyTorch-Style Pseudocode for EMPG Advantage Calculation

```
1 import numpy as np
2 import torch
3
4 def compute_empg_advantage(tokenizer, batch, k=1.0, k_f=1.0, zeta=0.1):
5     """
6     Args:
7         tokenizer: The tokenizer for identifying response segments.
8         batch: A data batch with 'responses', 'old_entropy', 'advantages'.
9         k (float): Hyperparameter for self-calibrating gradient scaling.
10        k_f (float): Hyperparameter for the future clarity bonus.
11        zeta (float): Hyperparameter for the future clarity bonus.
12    """
13    # --- 1. First Pass: Collect Step-Level Entropies ---
14    all_step_entropies = []
15    # segments_to_modify stores {'sample_idx', 'start', 'end'} for each step
16    segments_to_modify = []
17
18    for i in range(batch.batch_size[0]):
19        # Find "assistant" segments, which correspond to agent steps.
20        token_segments = process_token_sequences(
21            batch.batch['responses'][i],
22            tokenizer.encode("<|im_start|>assistant\n"),
23            tokenizer.encode('<|im_end|>')
24        )
25        for start, end in token_segments:
26            if start >= end: continue
27
28            # Calculate the average token-level entropy for the step
29            step_entropy = batch.batch['old_entropy'][i][start:end].mean().item()
30            all_step_entropies.append(step_entropy)
31            segments_to_modify.append({'sample_idx': i, 'start': start, 'end': end})
32
33    if not all_step_entropies: return
34
35    # --- 2. Calculate Modulated Advantage Components ---
36    H = np.array(all_step_entropies)
37
38    # Batch-level entropy normalization (Eq. 12) with \epsilon = 1e-8
39    min_H, max_H = np.min(H), np.max(H)
40    H_norm = (H - min_H) / (max_H - min_H + 1e-8)
41
42    # Self-calibrating gradient scaling g(H) (Eq. 10)
43    g_H_unnormalized = np.exp(-k * H_norm)
44    mean_g_H = np.mean(g_H_unnormalized)
45    g_H = g_H_unnormalized / (mean_g_H + 1e-8)
46
47    # Future clarity bonus f(H) (Eq. 11)
48    f_H = np.exp(-k_f * H_norm)
49
50    # Convert to tensors for PyTorch operations
51    g_H = torch.tensor(g_H, device=batch.batch['advantages'].device, dtype=torch.float32)
52    f_H = torch.tensor(f_H, device=batch.batch['advantages'].device, dtype=torch.float32)
53
54    # --- 3. Second Pass: Apply Advantage Modulation (Eq. 8) ---
55    step_advantages = []
56    for i, segment in enumerate(segments_to_modify):
57        idx, start, end = segment['sample_idx'], segment['start'], segment['end']
58
59        # Apply self-calibrating gradient scaling
60        batch.batch['advantages'][idx][start:end] *= g_H[i]
61
62        # Add future clarity bonus if there is a next step
63        next_seg = segments_to_modify[i+1] if i+1 < len(segments_to_modify) else None
64        if next_seg and next_seg['sample_idx'] == idx:
65            batch.batch['advantages'][idx][start:end] += zeta * f_H[i+1]
66            step_advantages.append(batch.batch['advantages'][idx][start])
67
68    # --- 4. Final Advantage Normalization (Eq. 7) ---
69    if step_advantages:
70        final_adv_mean = torch.mean(torch.stack(step_advantages))
71        batch.batch['advantages'] -= final_adv_mean
```