

Human-level control through deep reinforcement learning

通过深度强化学习实现人类控制

Volodymyr Mnih^{1*}, Koray Kavukcuoglu^{1*}, David Silver^{1*}, Andrei A. Rusu¹, Joel Veness¹, Marc G. Bellemare¹, Alex Graves¹, Martin Riedmiller¹, Andreas K. Fiedjeland¹, Georg Ostrovski¹, Stig Petersen¹, Charles Beattie¹, Amir Sadik¹, Ioannis Antonoglou¹, Helen King¹, Dharshan Kumaran¹, Daan Wierstra¹, Shane Legg¹ & Demis Hassabis¹

The theory of reinforcement learning provides a normative account¹, deeply rooted in psychological² and neuroscientific³ perspectives on animal behaviour, of how agents may optimize their control of an environment. To use reinforcement learning successfully in situations approaching real-world complexity, however, agents are confronted with a difficult task: they must derive efficient representations of the environment from high-dimensional sensory inputs, and use these to generalize past experience to new situations. Remarkably, humans and other animals seem to solve this problem through a harmonious combination of reinforcement learning and hierarchical sensory processing systems^{4,5}, the former evidenced by a wealth of neural data revealing notable parallels between the phasic signals emitted by dopaminergic neurons and temporal difference reinforcement learning algorithms³. While reinforcement learning agents have achieved some successes in a variety of domains^{6–8}, their applicability has previously been limited to domains in which useful features can be handcrafted, or to domains with fully observed, low-dimensional state spaces. Here we use recent advances in training deep neural networks^{9–11} to develop a novel artificial agent, termed a deep Q-network, that can learn successful policies directly from high-dimensional sensory inputs using end-to-end reinforcement learning. We tested this agent on the challenging domain of classic Atari 2600 games¹². We demonstrate that the deep Q-network agent, receiving only the pixels and the game score as inputs, was able to surpass the performance of all previous algorithms and achieve a level comparable to that of a professional human games tester across a set of 49 games, using the same algorithm, network architecture and hyperparameters. This work bridges the divide between high-dimensional sensory inputs and actions, resulting in the first artificial agent that is capable of learning to excel at a diverse array of challenging tasks.

We set out to create a single algorithm that would be able to develop a wide range of competencies on a varied range of challenging tasks—a central goal of general artificial intelligence¹³ that has eluded previous efforts^{8,14,15}. To achieve this, we developed a novel agent, a deep Q-network (DQN), which is able to combine reinforcement learning with a class of artificial neural network¹⁶ known as deep neural networks. Notably, recent advances in deep neural networks^{9–11}, in which several layers of nodes are used to build up progressively more abstract representations of the data, have made it possible for artificial neural networks to learn concepts such as object categories directly from raw sensory data. We use one particularly successful architecture, the deep convolutional network¹⁷, which uses hierarchical layers of tiled convolutional filters to mimic the effects of receptive fields—inspired by Hubel and Wiesel's seminal work on feedforward processing in early visual cortex¹⁸—thereby exploiting the local spatial correlations present in images, and building in robustness to natural transformations such as changes of viewpoint or scale.

We consider tasks in which the agent interacts with an environment through a sequence of observations, actions and rewards. The goal of the

agent is to select actions in a fashion that maximizes cumulative future reward. More formally, we use a deep convolutional neural network to approximate the optimal action-value function

$$Q^*(s, a) = \max_{\pi} \mathbb{E}_{\pi} [r_t + \gamma r_{t+1} + \gamma^2 r_{t+2} + \dots | s_t = s, a_t = a, \pi],$$

which is the maximum sum of rewards r_t discounted by γ at each time-step t , achievable by a behaviour policy $\pi = P(a|s)$, after making an observation (s) and taking an action (a) (see Methods)¹⁹.

Reinforcement learning is known to be unstable or even to diverge when a nonlinear function approximator such as a neural network is used to represent the action-value (also known as Q) function²⁰. This instability has several causes: the correlations present in the sequence of observations, the fact that small updates to Q may significantly change the policy and therefore change the data distribution, and the correlations between the action-values (Q) and the target values $r + \gamma \max_{a'} Q(s', a')$. We address these instabilities with a novel variant of Q-learning, which uses two key ideas. First, we used a biologically inspired mechanism termed experience replay^{21–23} that randomizes over the data, thereby removing correlations in the observation sequence and smoothing over changes in the data distribution (see below for details). Second, we used an iterative update that adjusts the action-values (Q) towards target values that are only periodically updated, thereby reducing correlations with the target.

While other stable methods exist for training neural networks in the reinforcement learning setting, such as neural fitted Q-iteration²⁴, these methods involve the repeated training of networks *de novo* on hundreds of iterations. Consequently, these methods, unlike our algorithm, are too inefficient to be used successfully with large neural networks. We parameterize an approximate value function $Q(s, a; \theta_i)$ using the deep convolutional neural network shown in Fig. 1, in which θ_i are the parameters (that is, weights) of the Q-network at iteration i . To perform experience replay we store the agent's experiences $e_t = (s_t, a_t, r_t, s_{t+1})$ at each time-step t in a data set $D_t = \{e_1, \dots, e_t\}$. During learning, we apply Q-learning updates, on samples (or minibatches) of experience $(s, a, r, s') \sim U(D)$, drawn uniformly at random from the pool of stored samples. The Q-learning update at iteration i uses the following loss function:

$$L_i(\theta_i) = \mathbb{E}_{(s, a, r, s') \sim U(D)} \left[\left(r + \gamma \max_{a'} Q(s', a'; \theta_i^-) - Q(s, a; \theta_i) \right)^2 \right]$$

in which γ is the discount factor determining the agent's horizon, θ_i are the parameters of the Q-network at iteration i and θ_i^- are the network parameters used to compute the target at iteration i . The target network parameters θ_i^- are only updated with the Q-network parameters (θ_i) every C steps and are held fixed between individual updates (see Methods).

To evaluate our DQN agent, we took advantage of the Atari 2600 platform, which offers a diverse array of tasks ($n = 49$) designed to be

¹Google DeepMind, 5 New Street Square, London EC4A 3TW, UK.

*These authors contributed equally to this work.

强化学习理论为智能体如何优化环境控制提供了规范性解释，这一理论深深植根于动物行为的心理学和神经科学视角。然而要在接近现实复杂度的场景中成功运用强化学习，智能体面临一个艰巨任务：必须从高维感官输入中提取高效的环境表征，并将这些表征用于将过往经验泛化到新情境。值得注意的是，人类和其他动物似乎通过强化学习与分层感官处理系统的和谐结合来解决这一问题——前者通过大量神经数据得以验证，这些数据显示多巴胺能神经元发出的相位信号与时间差强化学习算法存在显著相似性。尽管强化学习智能体已在多个领域取得一定成就，但其应用范围此前仅限于需要人工设计有效特征的领域，或具有完全可观测低维状态空间的领域。本文利用深度神经网络训练的最新进展，开发了一种名为“深度Q网络”的人工智能新模型，该模型能够直接从高维感官输入中通过端到端强化学习学习成功策略。我们在经典雅达利2600游戏这一极具挑战性的领域对这款智能体进行了测试。我们通过实验证明，仅需像素图像和游戏得分作为输入的深度Q网络智能体，在使用相同算法、网络架构和超参数的情况下，经过49款游戏测试后，其表现不仅超越了所有先前算法，更达到了职业级人类游戏测试员的水平。这项研究成功弥合了高维感官输入与动作控制之间的鸿沟，开创了首个能够自主学习并精通多样化复杂任务的人工智能系统。

我们致力于开发一种能够适应多样化挑战性任务的通用算法，旨在实现通用人工智能的核心目标——这一目标在以往研究中始终未能达成。为此，我们研发了一种新型智能体——深度Q网络（DQN），该系统成功将强化学习与被称为深度神经网络的人工神经网络相结合。值得注意的是，近年来深度神经网络技术取得重大突破：通过多层节点构建数据的渐进式抽象表征，使得人工神经网络可以直接从原始感官数据中学习物体类别等概念。我们采用了一种特别成功的架构——深度卷积网络，其层级化的分块卷积滤波器模仿了受Hubel和Wiesel关于视觉皮层前馈处理开创性研究启发的感受野效应，从而有效利用图像中的局部空间关联性，并增强了对视角变化、比例调整等自然变换的鲁棒性。

我们考虑的任务是智能体通过一系列的观察、动作和奖励与环境进行交互。智能体的目标是择能最大化累积未来收益的动作。更准确地说，我们采用深度卷积神经网络来近似最优动作价值函数。

这是在每个时间步 t 通过行为策略 $p_{\pi}(a|s)$ 在做出观察 (s) 并采取行动 (a) 后（见方法）所能实现的最大奖励总和，该奖励经过 γ 的折现处理¹⁹。强化学习在使用神经网络等非线性函数逼近器表示动作价值（即Q函数）时，存在不稳定甚至发散的风险。这种不稳定性主要源于三方面因素：首先，观测序列中存在内在关联性；其次，对Q函数的微小调整可能显著改变策略选择，进而影响数据分布；再者，动作价值 (Q) 与目标值 $(r + \gamma \max_{a'} Q(s, a'))$ 之间存在相关性， a_0 。我们采用了一种创新的Q学习变体来应对这些不稳定性，该方法基于两大核心理念。首先，我们运用了名为经验回放的生物启发机制（详见文献21-23），通过随机化数据处理消除观测序列中的相关性，并平滑数据分布的变化（具体细节见下文）。其次，我们采用迭代更新策略，将动作值 (Q) 逐步调整至仅周期性更新的目标值，从而降低与目标值的相关性。

尽管强化学习领域存在其他稳定的神经网络训练方法（例如神经拟合Q迭代法），但这些方法需要在网络经过数百次迭代后重新训练。因此，与我们的算法不同，这些方法效率低下，在处理大型神经网络时难以奏效。我们采用图1所示的深度卷积神经网络对近似价值函数 $Q(s, a; \theta_i)$ 进行参数化建模，其中 θ_i 表示Q网络在第 i 次迭代中的参数（即权重）。为实现经验回放，我们将智能体在每个时间步 t 的体验数据 $e_t = (s_t, a_t, r_t, s_{t+1})$ 存储在数据集 $D = \{e_1, \dots, e_t\}$ 中。在学习过程中，我们通过从存储样本池中均匀随机抽取的经验样本（或小批量） (s, a, r, s') ，对样本 $U(D)$ 进行Q学习更新。第 i 次迭代的Q学习更新采用以下损失函数：

图1|卷积神经网络示意图。具体架构细节详见方法部分。输入到神经网络的图像由预处理生成的 $84 \times 84 \times 4$ 的图像（图中用蓝色蛇形线标注）构成，随后依次经过三个卷积层处理（注：此处为示意图）。

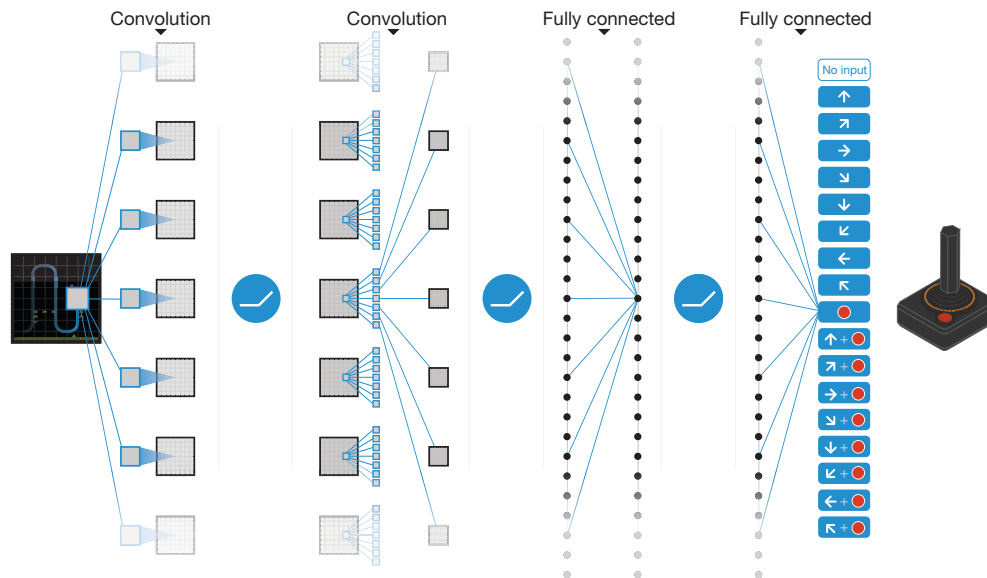


Figure 1 | Schematic illustration of the convolutional neural network. The details of the architecture are explained in the Methods. The input to the neural network consists of an $84 \times 84 \times 4$ image produced by the preprocessing map ϕ , followed by three convolutional layers (note: snaking blue line

symbolizes sliding of each filter across input image) and two fully connected layers with a single output for each valid action. Each hidden layer is followed by a rectifier nonlinearity (that is, $\max(0, x)$).

difficult and engaging for human players. We used the same network architecture, hyperparameter values (see Extended Data Table 1) and learning procedure throughout—taking high-dimensional data (210×160 colour video at 60 Hz) as input—to demonstrate that our approach robustly learns successful policies over a variety of games based solely on sensory inputs with only very minimal prior knowledge (that is, merely the input data were visual images, and the number of actions available in each game, but not their correspondences; see Methods). Notably, our method was able to train large neural networks using a reinforcement learning signal and stochastic gradient descent in a stable manner—illustrated by the temporal evolution of two indices of learning (the agent's average score per episode and average predicted Q-values; see Fig. 2 and Supplementary Discussion for details).

We compared DQN with the best performing methods from the reinforcement learning literature on the 49 games where results were available^{12,15}. In addition to the learned agents, we also report scores for a professional human games tester playing under controlled conditions and a policy that selects actions uniformly at random (Extended Data Table 2 and Fig. 3, denoted by 100% (human) and 0% (random) on y axis; see Methods). Our DQN method outperforms the best existing reinforcement learning methods on 43 of the games without incorporating any of the additional prior knowledge about Atari 2600 games used by other approaches (for example, refs 12, 15). Furthermore, our DQN agent performed at a level that was comparable to that of a professional human games tester across the set of 49 games, achieving more than 75% of the human score on more than half of the games (29 games;

我们采用与人类玩家相同的网络架构、超参数设置（详见扩展数据表1）和训练流程——以高维数据（ 210×160 像素、60Hz 彩色视频）作为输入——证明了我们的方法仅需极少量先验知识（即输入数据仅为视觉图像，且无需了解各游戏动作数量对应关系，详见方法部分），就能在多种游戏中稳健地学习成功策略。值得注意的是，该方法能通过强化学习信号和随机梯度下降稳定训练大型神经网络——这通过两个学习指标的时间演变过程得以体现：智能体的每回合平均得分与预测Q值均值（详见图2及补充讨论）。

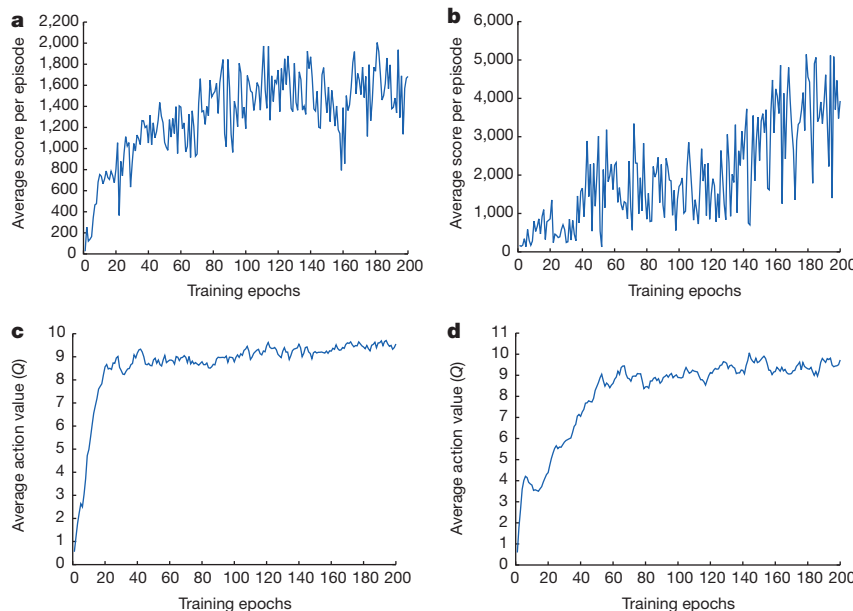


Figure 2 | Training curves tracking the agent's average score and average predicted action-value. **a**, Each point is the average score achieved per episode after the agent is run with ϵ -greedy policy ($\epsilon = 0.05$) for 520 k frames on Space Invaders. **b**, Average score achieved per episode for Seaquest. **c**, Average predicted action-value on a held-out set of states on Space Invaders. Each point

on the curve is the average of the action-value Q computed over the held-out set of states. Note that Q-values are scaled due to clipping of rewards (see Methods). **d**, Average predicted action-value on Seaquest. See Supplementary Discussion for details.

我们在49款有结果数据的游戏里，将DQN与强化学习领域表现最佳的方法进行了对比分析（相关数据见文献12、15）。除训练生成的智能体外，我们还报告了在受控条件下专业人类游戏测试者的得分，以及采用随机均匀选择动作策略的模型表现（详见扩展数据表2和图3，纵轴标注为100%（人类）和0%（随机）；参见方法部分）。我们的DQN方法在43款游戏中超越了现有最佳强化学习方法，且无需整合其他方法使用的关于雅达利2600游戏的额外先验知识（例如参考文献12、15）。此外，在全部49款游戏中，我们的DQN智能体表现水平可与职业人类游戏测试者相媲美，超过半数游戏的得分均达到人类水平的75%以上。

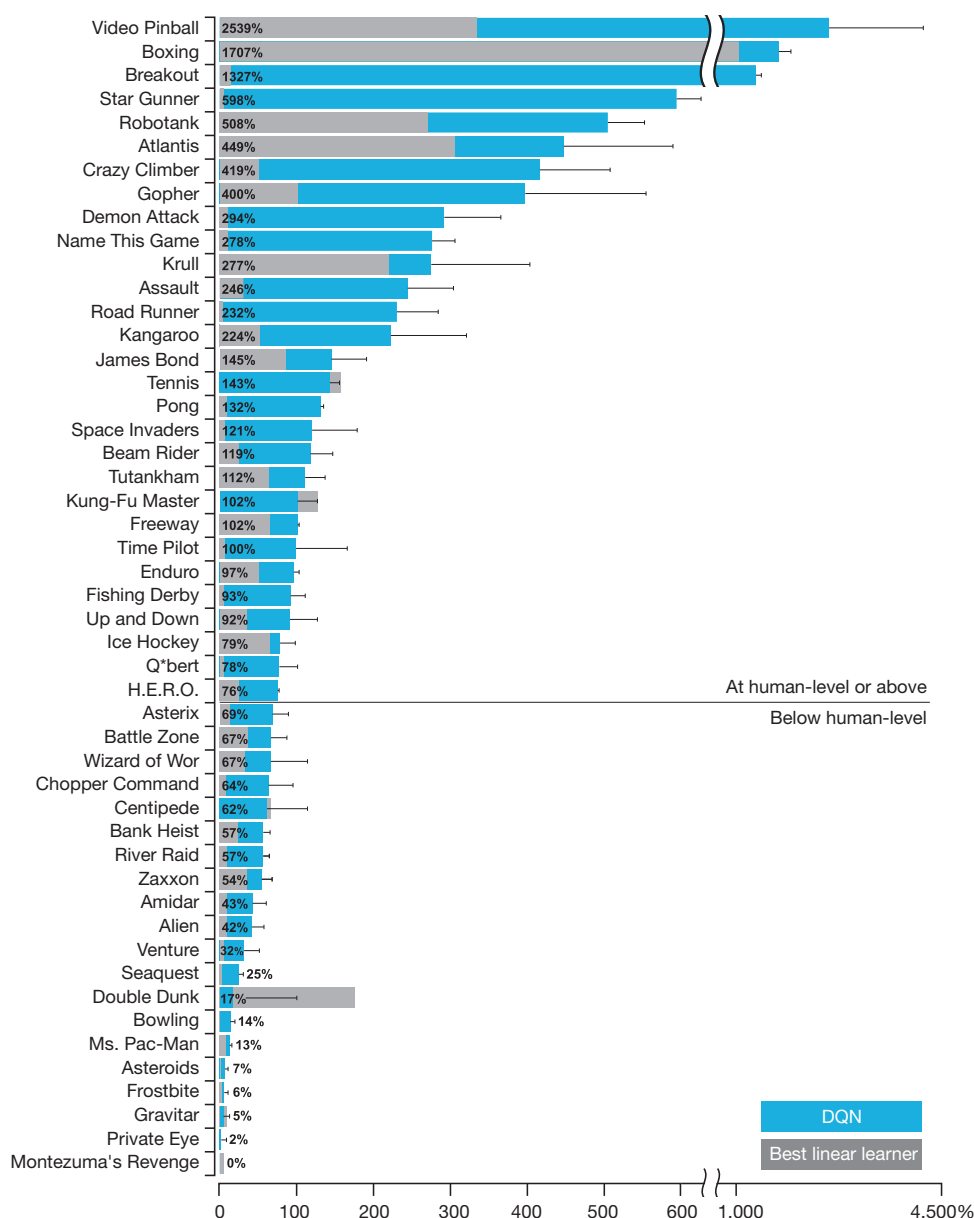


Figure 3 | Comparison of the DQN agent with the best reinforcement learning methods¹⁵ in the literature. The performance of DQN is normalized with respect to a professional human games tester (that is, 100% level) and random play (that is, 0% level). Note that the normalized performance of DQN, expressed as a percentage, is calculated as: $100 \times (\text{DQN score} - \text{random play score}) / (\text{human score} - \text{random play score})$. It can be seen that DQN

outperforms competing methods (also see Extended Data Table 2) in almost all the games, and performs at a level that is broadly comparable with or superior to a professional human games tester (that is, operationalized as a level of 75% or above) in the majority of games. Audio output was disabled for both human players and agents. Error bars indicate s.d. across the 30 evaluation episodes, starting with different initial conditions.

see Fig. 3, Supplementary Discussion and Extended Data Table 2). In additional simulations (see Supplementary Discussion and Extended Data Tables 3 and 4), we demonstrate the importance of the individual core components of the DQN agent—the replay memory, separate target Q-network and deep convolutional network architecture—by disabling them and demonstrating the detrimental effects on performance.

We next examined the representations learned by DQN that underpinned the successful performance of the agent in the context of the game Space Invaders (see Supplementary Video 1 for a demonstration of the performance of DQN), by using a technique developed for the visualization of high-dimensional data called 't-SNE'²²⁵ (Fig. 4). As expected, the t-SNE algorithm tends to map the DQN representation of perceptually similar states to nearby points. Interestingly, we also found instances in which the t-SNE algorithm generated similar embeddings for DQN representations of states that are close in terms of expected reward but

perceptually dissimilar (Fig. 4, bottom right, top left and middle), consistent with the notion that the network is able to learn representations that support adaptive behaviour from high-dimensional sensory inputs. Furthermore, we also show that the representations learned by DQN are able to generalize to data generated from policies other than its own—in simulations where we presented as input to the network game states experienced during human and agent play, recorded the representations of the last hidden layer, and visualized the embeddings generated by the t-SNE algorithm (Extended Data Fig. 1 and Supplementary Discussion). Extended Data Fig. 2 provides an additional illustration of how the representations learned by DQN allow it to accurately predict state and action values.

It is worth noting that the games in which DQN excels are extremely varied in their nature, from side-scrolling shooters (River Raid) to boxing games (Boxing) and three-dimensional car-racing games (Enduro).

图 3|DQN 智能体与文献中最佳强化学习方法的对比。DQN 的表现以专业人类游戏测试员（即 100% 水平）和随机对局（即 0% 水平）为基准进行标准化处理。需注意，DQN 的标准化表现（以百分比表示）计算公式为： $100 \times 3 \text{ (DQN 得分} \times 2 \text{ 次随机对局得分)} \div \text{(人类得分} \times 2 \text{ 次随机对局得分)}$ 。可以看出，DQN 在几乎所有游戏中，该方法均优于其他竞争方案（详见扩展数据表 2），且其表现水平与专业人类游戏测试员基本相当或更胜一筹（即操作化为 75% 及以上等级）。实验中对人类玩家和智能体均关闭了音频输出功能。误差条表示基于 30 个不同初始条件评估回合得出的标准差。

参见图 3、补充讨论和扩展数据表 2）。在额外的模拟实验中（参见补充讨论和扩展数据表 3 和 4），我们通过禁用 DQN 智能体的核心组件——回放记忆、独立的目标 Q 网络和深度卷积神经网络架构——并展示其对性能的负面影响，证明了这些组件的重要性。

接下来，我们通过一种名为‘t-SNE’的高维数据可视化技术（见图 4），对 DQN 学习到的表征进行分析——这些表征支撑了智能体在《太空侵略者》游戏中取得优异表现的基础（具体性能演示请参见补充视频 1）。正如预期，t-SNE 算法会将感知相似状态的 DQN 表征映射到邻近点。有趣的是，我们还发现某些案例中，当两个状态在期望奖励方面相近时，t-SNE 算法生成的嵌入向量却呈现出高度相似性。但是，

从感知差异性（图 4 右下、左上及中间区域）来看，这与网络能够从高维感官输入中学习支持自适应行为的表征这一观点相吻合。此外，我们还发现 DQN 学习到的表征具有泛化能力——在模拟实验中，当我们将人类玩家与智能体对弈过程中产生的游戏状态作为输入时，记录了网络最后一层隐藏层的表征，并通过 t-SNE 算法生成的嵌入向量进行可视化呈现（详见扩展数据图 1 和补充讨论）。扩展数据图 2 进一步展示了 DQN 如何通过其学习到的表征准确预测状态和动作值。

值得注意的是，DQN 擅长的游戏在本质上是多种多样的，从横向卷轴射击游戏（River Raid）到拳击游戏（Boxing）和三维赛车游戏（Enduro）。

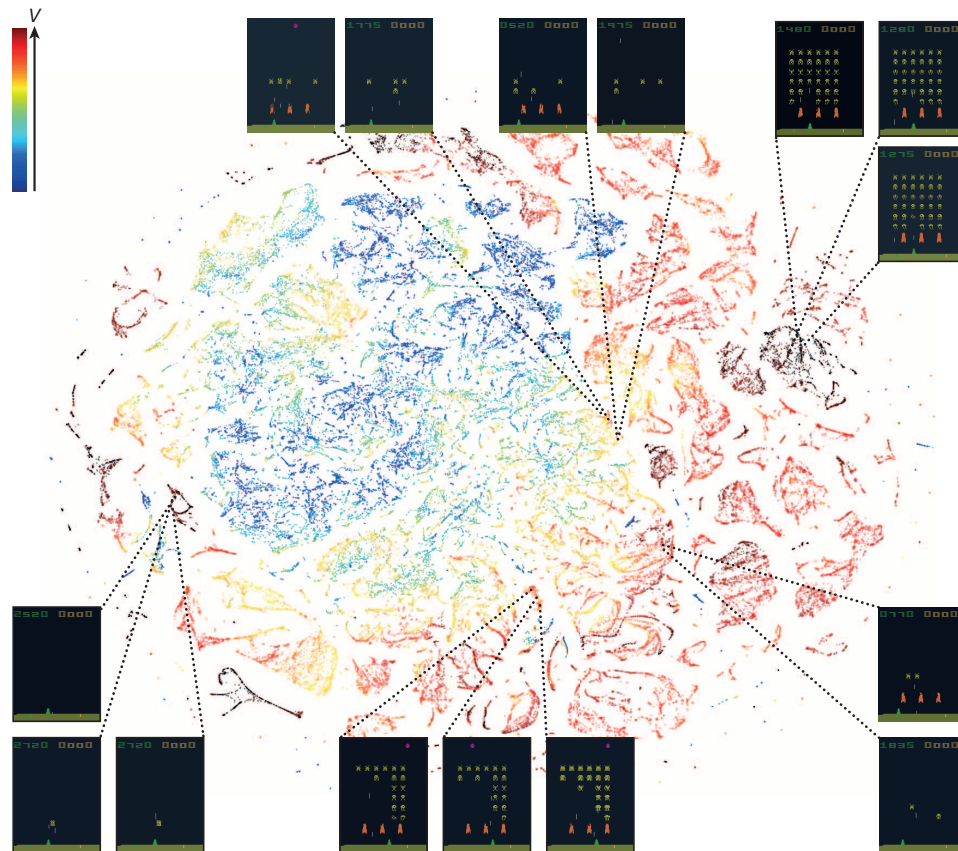


Figure 4 | Two-dimensional t-SNE embedding of the representations in the last hidden layer assigned by DQN to game states experienced while playing Space Invaders. The plot was generated by letting the DQN agent play for 2 h of real game time and running the t-SNE algorithm²⁵ on the last hidden layer representations assigned by DQN to each experienced game state. The points are coloured according to the state values (V , maximum expected reward of a state) predicted by DQN for the corresponding game states (ranging from dark red (highest V) to dark blue (lowest V)). The screenshots corresponding to a selected number of points are shown. The DQN agent

predicts high state values for both full (top right screenshots) and nearly complete screens (bottom left screenshots) because it has learned that completing a screen leads to a new screen full of enemy ships. Partially completed screens (bottom screenshots) are assigned lower state values because less immediate reward is available. The screens shown on the bottom right and top left and middle are less perceptually similar than the other examples but are still mapped to nearby representations and similar values because the orange bunkers do not carry great significance near the end of a level. With permission from Square Enix Limited.

Indeed, in certain games DQN is able to discover a relatively long-term strategy (for example, Breakout: the agent learns the optimal strategy, which is to first dig a tunnel around the side of the wall allowing the ball to be sent around the back to destroy a large number of blocks; see Supplementary Video 2 for illustration of development of DQN's performance over the course of training). Nevertheless, games demanding more temporally extended planning strategies still constitute a major challenge for all existing agents including DQN (for example, Montezuma's Revenge).

In this work, we demonstrate that a single architecture can successfully learn control policies in a range of different environments with only very minimal prior knowledge, receiving only the pixels and the game score as inputs, and using the same algorithm, network architecture and hyperparameters on each game, privy only to the inputs a human player would have. In contrast to previous work^{24,26}, our approach incorporates 'end-to-end' reinforcement learning that uses reward to continuously shape representations within the convolutional network towards salient features of the environment that facilitate value estimation. This principle draws on neurobiological evidence that reward signals during perceptual learning may influence the characteristics of representations within primate visual cortex^{27,28}. Notably, the successful integration of reinforcement learning with deep network architectures was critically dependent on our incorporation of a replay algorithm^{21–23} involving the storage and representation of recently experienced transitions. Convergent evidence suggests that the hippocampus may support the physical

realization of such a process in the mammalian brain, with the time-compressed reactivation of recently experienced trajectories during offline periods^{21,22} (for example, waking rest) providing a putative mechanism by which value functions may be efficiently updated through interactions with the basal ganglia²². In the future, it will be important to explore the potential use of biasing the content of experience replay towards salient events, a phenomenon that characterizes empirically observed hippocampal replay²⁹, and relates to the notion of 'prioritized sweeping'³⁰ in reinforcement learning. Taken together, our work illustrates the power of harnessing state-of-the-art machine learning techniques with biologically inspired mechanisms to create agents that are capable of learning to master a diverse array of challenging tasks.

Online Content Methods, along with any additional Extended Data display items and Source Data, are available in the online version of the paper; references unique to these sections appear only in the online paper.

Received 10 July 2014; accepted 16 January 2015.

1. Sutton, R. & Barto, A. *Reinforcement Learning: An Introduction* (MIT Press, 1998).
2. Thorndike, E. L. *Animal Intelligence: Experimental studies* (Macmillan, 1911).
3. Schultz, W., Dayan, P. & Montague, P. R. A neural substrate of prediction and reward. *Science* **275**, 1593–1599 (1997).
4. Serre, T., Wolf, L. & Poggio, T. Object recognition with features inspired by visual cortex. *Proc. IEEE. Comput. Soc. Conf. Comput. Vis. Pattern. Recognit.* 994–1000 (2005).
5. Fukushima, K. Neocognitron: A self-organizing neural network model for a mechanism of pattern recognition unaffected by shift in position. *Biol. Cybern.* **36**, 193–202 (1980).

图 4 展示了 DQN 在《太空侵略者》游戏中通过最后一层隐藏层生成的表征数据二维 t-SNE 嵌入图。该图表基于 DQN 智能体实际游戏 2 小时的数据，对每个游戏状态对应的隐藏层表征进行 t-SNE 算法处理后生成。各点颜色对应 DQN 预测的状态价值（V，即状态的最大预期奖励），从深红色（最高 V 值）到深蓝色（最低 V 值）渐变呈现。图中展示了用户选择若干数据点对应的屏幕截图。

DQN agent 事实上，在某些游戏中，深度 Q 网络（DQN）能够发现相对长期的策略（例如《打砖块》：智能体学会了最优策略——先在墙边挖一条隧道，让球绕到后方击碎大量砖块；参见补充视频 2 了解 DQN 性能随训练过程的发展）。然而，对于所有现有智能体（包括 DQN）而言，需要长时间规划策略的游戏（例如《蒙特祖玛的复仇》）仍然是一个重大挑战。

本研究证明，单一架构仅需极少先验知识即可在多种不同环境中成功学习控制策略——仅需像素和游戏分数作为输入，在每款游戏中使用相同的算法、网络架构和超参数，仅需掌握人类玩家会拥有的输入信息。与先前研究 24,26 不同，我们的方法整合了“端到端”强化学习，通过奖励机制持续塑造卷积神经网络中的表征，使其聚焦于环境的显著特征以促进价值评估。这一原理借鉴了神经生物学证据：感知学习过程中的奖励信号可能影响灵长类视觉皮层 27,28 中表征的特性。值得注意的是，强化学习与深度网络架构的成功整合，关键在于我们引入了包含近期经验转换存储与表征的回放算法 21–23。多项证据表明，海马体可能支持物理

系统预测完整关卡（右上角截图）和接近完成的关卡（左下角截图）都将获得较高的状态值，这是因为系统已学会完成当前关卡会触发充满敌舰的新关卡。部分完成的关卡（左下角截图）则被赋予较低状态值，因为即时奖励较少。右下、左上和中间区域的关卡在视觉相似度上不如其他示例明显，但由于关卡末尾橙色碉堡并不具有重大意义，这些区域仍会被映射到相邻的表征空间并赋予相近状态值。经史克威尔艾尼克斯有限公司授权使用。

在哺乳动物大脑中实现这种机制时，通过离线期间（例如清醒静息状态）对近期经历轨迹的快速再激活，可能为价值函数通过基底神经节的交互高效更新提供了一种潜在的机械原理。未来研究需要重点探索将经验回放内容偏向显著事件的可能性——这一现象在海马体回放实验中被实证观察到 29，与强化学习中的“优先扫描”概念密切相关 30。综合来看，我们的工作展示了如何通过结合前沿机器学习技术与生物启发机制，创造出能够自主学习并掌握多样化复杂任务的智能体。

在线内容方法，以及任何附加的扩展数据显示项和源数据，均可在在线版本的论文中找到；仅引用这些部分的参考文献只出现在在线论文中。

6. Tesauro, G. Temporal difference learning and TD-Gammon. *Commun. ACM* **38**, 58–68 (1995).
7. Riedmiller, M., Gabel, T., Hafner, R. & Lange, S. Reinforcement learning for robot soccer. *Auton. Robots* **27**, 55–73 (2009).
8. Diuk, C., Cohen, A. & Littman, M. L. An object-oriented representation for efficient reinforcement learning. *Proc. Int. Conf. Mach. Learn.* 240–247 (2008).
9. Bengio, Y. Learning deep architectures for AI. *Foundations and Trends in Machine Learning* **2**, 1–127 (2009).
10. Krizhevsky, A., Sutskever, I. & Hinton, G. ImageNet classification with deep convolutional neural networks. *Adv. Neural Inf. Process. Syst.* **25**, 1106–1114 (2012).
11. Hinton, G. E. & Salakhutdinov, R. R. Reducing the dimensionality of data with neural networks. *Science* **313**, 504–507 (2006).
12. Bellemare, M. G., Naddaf, Y., Veness, J. & Bowling, M. The arcade learning environment: An evaluation platform for general agents. *J. Artif. Intell. Res.* **47**, 253–279 (2013).
13. Legg, S. & Hutter, M. Universal Intelligence: a definition of machine intelligence. *Minds Mach.* **17**, 391–444 (2007).
14. Genesereth, M., Love, N. & Pell, B. General game playing: overview of the AAAI competition. *AI Mag.* **26**, 62–72 (2005).
15. Bellemare, M. G., Veness, J. & Bowling, M. Investigating contingency awareness using Atari 2600 games. *Proc. Conf. AAAI. Artif. Intell.* 864–871 (2012).
16. McClelland, J. L., Rumelhart, D. E. & Group, T. P. R. *Parallel Distributed Processing: Explorations in the Microstructure of Cognition* (MIT Press, 1986).
17. LeCun, Y., Bottou, L., Bengio, Y. & Haffner, P. Gradient-based learning applied to document recognition. *Proc. IEEE* **86**, 2278–2324 (1998).
18. Hubel, D. H. & Wiesel, T. N. Shape and arrangement of columns in cat's striate cortex. *J. Physiol.* **165**, 559–568 (1963).
19. Watkins, C. J. & Dayan, P. Q-learning. *Mach. Learn.* **8**, 279–292 (1992).
20. Tsitsiklis, J. & Roy, B. V. An analysis of temporal-difference learning with function approximation. *IEEE Trans. Automat. Contr.* **42**, 674–690 (1997).
21. McClelland, J. L., McNaughton, B. L. & O'Reilly, R. C. Why there are complementary learning systems in the hippocampus and neocortex: insights from the successes and failures of connectionist models of learning and memory. *Psychol. Rev.* **102**, 419–457 (1995).
22. O'Neill, J., Pleydell-Bouverie, B., Dupret, D. & Csicsvari, J. Play it again: reactivation of waking experience and memory. *Trends Neurosci.* **33**, 220–229 (2010).
23. Lin, L.-J. Reinforcement learning for robots using neural networks. Technical Report, DTIC Document (1993).
24. Riedmiller, M. Neural fitted Q iteration - first experiences with a data efficient neural reinforcement learning method. *Mach. Learn.: ECML*, **3720**, 317–328 (Springer, 2005).
25. Van der Maaten, L. J. P. & Hinton, G. E. Visualizing high-dimensional data using t-SNE. *J. Mach. Learn. Res.* **9**, 2579–2605 (2008).
26. Lange, S. & Riedmiller, M. Deep auto-encoder neural networks in reinforcement learning. *Proc. Int. Jt. Conf. Neural. Netw.* 1–8 (2010).
27. Law, C.-T. & Gold, J. I. Reinforcement learning can account for associative and perceptual learning on a visual decision task. *Nature Neurosci.* **12**, 655 (2009).
28. Sigala, N. & Logothetis, N. K. Visual categorization shapes feature selectivity in the primate temporal cortex. *Nature* **415**, 318–320 (2002).
29. Bendor, D. & Wilson, M. A. Biasing the content of hippocampal replay during sleep. *Nature Neurosci.* **15**, 1439–1444 (2012).
30. Moore, A. & Atkeson, C. Prioritized sweeping: reinforcement learning with less data and less real time. *Mach. Learn.* **13**, 103–130 (1993).

Supplementary Information is available in the online version of the paper.

Acknowledgements We thank G. Hinton, P. Dayan and M. Bowling for discussions, A. Cain and J. Keene for work on the visuals, K. Keller and P. Rogers for help with the visuals, G. Wayne for comments on an earlier version of the manuscript, and the rest of the DeepMind team for their support, ideas and encouragement.

Author Contributions V.M., K.K., D.S., J.V., M.G.B., M.R., A.G., D.W., S.L. and D.H. conceptualized the problem and the technical framework. V.M., K.K., A.A.R. and D.S. developed and tested the algorithms. J.V., S.P., C.B., A.A.R., M.G.B., I.A., A.K.F., G.O. and A.S. created the testing platform. K.K., H.K., S.L. and D.H. managed the project. K.K., D.K., D.H., V.M., D.S., A.G., A.A.R., J.V. and M.G.B. wrote the paper.

Author Information Reprints and permissions information is available at www.nature.com/reprints. The authors declare no competing financial interests. Readers are welcome to comment on the online version of the paper. Correspondence and requests for materials should be addressed to K.K. (korayk@google.com) or D.H. (demishassabis@google.com).

METHODS

Preprocessing. Working directly with raw Atari 2600 frames, which are 210×160 pixel images with a 128-colour palette, can be demanding in terms of computation and memory requirements. We apply a basic preprocessing step aimed at reducing the input dimensionality and dealing with some artefacts of the Atari 2600 emulator. First, to encode a single frame we take the maximum value for each pixel colour value over the frame being encoded and the previous frame. This was necessary to remove flickering that is present in games where some objects appear only in even frames while other objects appear only in odd frames, an artefact caused by the limited number of sprites Atari 2600 can display at once. Second, we then extract the Y channel, also known as luminance, from the RGB frame and rescale it to 84×84 . The function ϕ from algorithm 1 described below applies this preprocessing to the m most recent frames and stacks them to produce the input to the Q-function, in which $m = 4$, although the algorithm is robust to different values of m (for example, 3 or 5).

Code availability. The source code can be accessed at <https://sites.google.com/a/deepmind.com/dqn> for non-commercial uses only.

Model architecture. There are several possible ways of parameterizing Q using a neural network. Because Q maps history-action pairs to scalar estimates of their Q-value, the history and the action have been used as inputs to the neural network by some previous approaches^{24,26}. The main drawback of this type of architecture is that a separate forward pass is required to compute the Q-value of each action, resulting in a cost that scales linearly with the number of actions. We instead use an architecture in which there is a separate output unit for each possible action, and only the state representation is an input to the neural network. The outputs correspond to the predicted Q-values of the individual actions for the input state. The main advantage of this type of architecture is the ability to compute Q-values for all possible actions in a given state with only a single forward pass through the network.

The exact architecture, shown schematically in Fig. 1, is as follows. The input to the neural network consists of an $84 \times 84 \times 4$ image produced by the preprocessing map ϕ . The first hidden layer convolves 32 filters of 8×8 with stride 4 with the input image and applies a rectifier nonlinearity^{31,32}. The second hidden layer convolves 64 filters of 4×4 with stride 2, again followed by a rectifier nonlinearity. This is followed by a third convolutional layer that convolves 64 filters of 3×3 with stride 1 followed by a rectifier. The final hidden layer is fully-connected and consists of 512 rectifier units. The output layer is a fully-connected linear layer with a single output for each valid action. The number of valid actions varied between 4 and 18 on the games we considered.

Training details. We performed experiments on 49 Atari 2600 games where results were available for all other comparable methods^{12,15}. A different network was trained on each game: the same network architecture, learning algorithm and hyperparameter settings (see Extended Data Table 1) were used across all games, showing that our approach is robust enough to work on a variety of games while incorporating only minimal prior knowledge (see below). While we evaluated our agents on unmodified games, we made one change to the reward structure of the games during training only. As the scale of scores varies greatly from game to game, we clipped all positive rewards at 1 and all negative rewards at -1 , leaving 0 rewards unchanged. Clipping the rewards in this manner limits the scale of the error derivatives and makes it easier to use the same learning rate across multiple games. At the same time, it could affect the performance of our agent since it cannot differentiate between rewards of different magnitude. For games where there is a life counter, the Atari 2600 emulator also sends the number of lives left in the game, which is then used to mark the end of an episode during training.

In these experiments, we used the RMSProp (see http://www.cs.toronto.edu/~tijmen/csc321/slides/lecture_slides_lec6.pdf) algorithm with minibatches of size 32. The behaviour policy during training was ϵ -greedy with ϵ annealed linearly from 1.0 to 0.1 over the first million frames, and fixed at 0.1 thereafter. We trained for a total of 50 million frames (that is, around 38 days of game experience in total) and used a replay memory of 1 million most recent frames.

Following previous approaches to playing Atari 2600 games, we also use a simple frame-skipping technique¹⁵. More precisely, the agent sees and selects actions on every k th frame instead of every frame, and its last action is repeated on skipped frames. Because running the emulator forward for one step requires much less computation than having the agent select an action, this technique allows the agent to play roughly k times more games without significantly increasing the runtime. We use $k = 4$ for all games.

The values of all the hyperparameters and optimization parameters were selected by performing an informal search on the games Pong, Breakout, Seaquest, Space Invaders and Beam Rider. We did not perform a systematic grid search owing to the high computational cost. These parameters were then held fixed across all other games. The values and descriptions of all hyperparameters are provided in Extended Data Table 1.

Our experimental setup amounts to using the following minimal prior knowledge: that the input data consisted of visual images (motivating our use of a convolutional deep network), the game-specific score (with no modification), number of actions, although not their correspondences (for example, specification of the up 'button') and the life count.

Evaluation procedure. The trained agents were evaluated by playing each game 30 times for up to 5 min each time with different initial random conditions ('no-op'; see Extended Data Table 1) and an ϵ -greedy policy with $\epsilon = 0.05$. This procedure is adopted to minimize the possibility of overfitting during evaluation. The random agent served as a baseline comparison and chose a random action at 10 Hz which is every sixth frame, repeating its last action on intervening frames. 10 Hz is about the fastest that a human player can select the 'fire' button, and setting the random agent to this frequency avoids spurious baseline scores in a handful of the games. We did also assess the performance of a random agent that selected an action at 60 Hz (that is, every frame). This had a minimal effect: changing the normalized DQN performance by more than 5% in only six games (Boxing, Breakout, Crazy Climber, Demon Attack, Krull and Robotank), and in all these games DQN outperformed the expert human by a considerable margin.

The professional human tester used the same emulator engine as the agents, and played under controlled conditions. The human tester was not allowed to pause, save or reload games. As in the original Atari 2600 environment, the emulator was run at 60 Hz and the audio output was disabled: as such, the sensory input was equated between human player and agents. The human performance is the average reward achieved from around 20 episodes of each game lasting a maximum of 5 min each, following around 2 h of practice playing each game.

Algorithm. We consider tasks in which an agent interacts with an environment, in this case the Atari emulator, in a sequence of actions, observations and rewards. At each time-step the agent selects an action a_t from the set of legal game actions, $\mathcal{A} = \{1, \dots, K\}$. The action is passed to the emulator and modifies its internal state and the game score. In general the environment may be stochastic. The emulator's internal state is not observed by the agent; instead the agent observes an image $x_t \in \mathbb{R}^d$ from the emulator, which is a vector of pixel values representing the current screen. In addition it receives a reward r_t representing the change in game score. Note that in general the game score may depend on the whole previous sequence of actions and observations; feedback about an action may only be received after many thousands of time-steps have elapsed.

Because the agent only observes the current screen, the task is partially observed³³ and many emulator states are perceptually aliased (that is, it is impossible to fully understand the current situation from only the current screen x_t). Therefore, sequences of actions and observations, $s_t = x_1, a_1, x_2, \dots, a_{t-1}, x_t$, are input to the algorithm, which then learns game strategies depending upon these sequences. All sequences in the emulator are assumed to terminate in a finite number of time-steps. This formalism gives rise to a large but finite Markov decision process (MDP) in which each sequence is a distinct state. As a result, we can apply standard reinforcement learning methods for MDPs, simply by using the complete sequence s_t as the state representation at time t .

The goal of the agent is to interact with the emulator by selecting actions in a way that maximizes future rewards. We make the standard assumption that future rewards are discounted by a factor of γ per time-step (γ was set to 0.99 throughout), and

define the future discounted return at time t as $R_t = \sum_{t'=t}^T \gamma^{t'-t} r_{t'}$, in which T is the time-step at which the game terminates. We define the optimal action-value function $Q^*(s, a)$ as the maximum expected return achievable by following any policy, after seeing some sequence s and then taking some action a , $Q^*(s, a) = \max_{\pi} \mathbb{E}[R_t | s_t = s, a_t = a, \pi]$ in which π is a policy mapping sequences to actions (or distributions over actions).

The optimal action-value function obeys an important identity known as the Bellman equation. This is based on the following intuition: if the optimal value $Q^*(s', a')$ of the sequence s' at the next time-step was known for all possible actions a' , then the optimal strategy is to select the action a' maximizing the expected value of $r + \gamma Q^*(s', a')$:

$$Q^*(s, a) = \mathbb{E}_s \left[r + \gamma \max_{a'} Q^*(s', a') | s, a \right]$$

The basic idea behind many reinforcement learning algorithms is to estimate the action-value function by using the Bellman equation as an iterative update, $Q_{i+1}(s, a) = \mathbb{E}_s [r + \gamma \max_{a'} Q_i(s', a') | s, a]$. Such value iteration algorithms converge to the optimal action-value function, $Q_i \rightarrow Q^*$ as $i \rightarrow \infty$. In practice, this basic approach is impractical, because the action-value function is estimated separately for each sequence, without any generalization. Instead, it is common to use a function approximator to estimate the action-value function, $Q(s, a; \theta) \approx Q^*(s, a)$. In the reinforcement learning community this is typically a linear function approximator, but

预处理。直接处理原始 Atari 2600 帧（每帧包含 2103 张 160 像素图像，采用 128 色调色板）在计算和内存需求方面可能面临挑战。我们采用基础预处理步骤以降低输入维度并消除 Atari 2600 模拟器的某些伪影。首先，对单帧进行编码时，我们会取当前帧与前一帧中每个像素颜色值的最大值。此举旨在消除游戏中存在的闪烁现象——某些物体仅出现在偶数帧，而其他物体仅出现在奇数帧，这种伪影源于 Atari 2600 同时显示的精灵数量有限。其次，我们从 RGB 帧中提取 Y 通道（即亮度值），并将其重新缩放至 84×3×84 尺寸。下文算法 1 中描述的 w 函数会对最近 m 帧进行此预处理，并将这些帧堆叠生成 Q 函数的输入数据（其中 m=5×4），尽管该算法对不同 m 值（例如 3 或 5）具有鲁棒性。

代码可用性。源代码可以在 <https://sites.google.com/a/deepmind.com/dqn> 上访问，仅供非商业用途。

模型架构设计。使用神经网络参数化 Q 值存在多种可能方案。由于 Q 函数将历史-动作对映射为其 Q 值的标量估计，先前研究中已有方法 24、26 采用历史数据和动作作为神经网络输入。这类架构的主要缺陷在于需要单独进行前向传播来计算每个动作对应的 Q 值，导致计算成本随动作数量线性增长。我们采用的新型架构为：每个可能动作对应独立输出单元，且仅以状态表示作为神经网络输入。输出结果对应输入状态下各动作的预测 Q 值。该架构的核心优势在于，只需单次前向传播即可完成给定状态下所有可能动作的 Q 值计算。具体架构如图 1 所示，其结构如下：神经网络的输入是通过预处理映射 w 生成的 843×843×4 图像。第一层隐藏层使用步长为 4 的 8×3×8 卷积核对输入图像进行三次卷积，并应用整流非线性激活函数。第二层隐藏层采用步长为 2 的 4×3×4 卷积核进行六十四次卷积，同样接续整流非线性处理。第三层卷积核使用步长为 1 的 3×3×3 卷积核完成六十四次卷积后，也接入整流非线性层。最终隐藏层为全连接层，包含 512 个整流单元。输出层采用全连接线性层，每个有效动作对应一个输出值。在我们研究的游戏场景中，有效动作数量在 4 到 18 个之间变化。

训练细节说明。我们在 49 款雅达利 2600 游戏上进行了实验，这些游戏的训练结果可供所有其他可比方法参考（见文献 12,15）。针对每款游戏分别训练了不同的神经网络：所有游戏均采用相同的网络架构、学习算法和超参数设置（详见扩展数据表 1），这表明我们的方法具有足够的鲁棒性，即使仅结合少量先验知识也能在多种游戏中表现良好（详见下文）。虽然我们使用未修改的游戏进行评估，但在训练过程中对游戏奖励结构做了一处调整。由于不同游戏的得分范围差异显著，我们将所有正向奖励值限制为 1，负向奖励值限制为 21，而 0 分奖励保持不变。这种奖励值裁剪方式既能限制误差导数的幅度，又便于跨游戏统一学习率设置。但需要注意的是，由于无法区分不同量级的奖励，这种调整可能会影响智能体的表现。对于存在生命计数器的游戏，雅达利 2600 模拟器还会发送剩余生命数值，该数值将作为训练过程中剧集结束的判定标准。在这些实验中，我们采用了 RMSProp 算法（参见 http://www.cs.toronto.edu/~tijmen/csc321/slides/lecture_slides_lec6.pdf）算法，其小批量数据集大小为 32 帧）。训练期间的行为策略采用 e-贪婪策略，其中 e 值从 1.0 线性退火至前百万帧的 0.1，之后固定为 0.1。我们总共训练了 5000 万帧（相当于约 38 天的游戏经验），并使用了包含最近 100 万帧的回放缓冲区。在延续以往玩 Atari 2600 游戏的方法基础上，我们还采用了简单的帧跳过技术 15。具体来说，智能体每第 k 帧才会观察并选择动作，而非每帧都进行选择，而其最后一个动作会在跳过的帧上重复执行。由于向前运行模拟器一步所需的计算量远低于智能体选择动作的计算量，这种技术能让智能体在不显著增加运行时间的情况下，完成大约 k 倍的游戏次数。我们为所有游戏设定 k=5 或 4。所有超参数和优化参数的取值均通过非正式搜索《乒乓球》《打砖块》《海底大冒险》《太空侵略者》和《光束骑士》等游戏确定。由于计算成本过高，我们未采用系统性网格搜索法。这些参数在其他所有游戏中保持固定。所有超参数的具体数值及其说明详见扩展数据表 1。

我们的实验设置需要以下基本先验知识：输入数据包含视觉图像（这促使我们使用卷积深度网络）、游戏专用分数（未经修改）、动作数量（但未明确对应关系，例如“up”按钮的具体含义）以及生命值。

评估流程。训练好的智能体通过每局游戏 30 次、每次最长 5 分钟的测试进行评估，初始随机条件采用不同设置（“无操作”模式；详见扩展数据表 1），并使用 e 值为 0.05 的 e-贪婪策略。该流程旨在降低评估过程中过拟合的可能性。随机智能体作为基准对照组，以 10 赫兹的频率随机选择动作——即每隔六帧选择一次动作，并在中间帧重复上次动作。10 赫兹接近人类玩家触发“射击”按钮的最快速度，将随机智能体设定为此频率可避免少数游戏中出现虚假基准分数。我们还评估了以 60 赫兹频率（即每帧选择动作）运行的随机智能体表现。其影响微乎其微：仅在六个游戏（拳击、打砖块、疯狂攀爬者、恶魔攻击、克鲁尔和机器人坦克）中使归一化 DQN 性能变化超过 5%，而这些游戏中 DQN 均大幅优于人类专家。专业人类测试者使用与智能体相同的模拟器引擎，并在受控条件下进行游戏。测试者被禁止暂停、保存或重新加载游戏。如同原始 Atari 2600 环境，模拟器以 60 Hz 频率运行且关闭音频输出：因此，人类玩家与智能体之间的感官输入完全等同。人类表现是通过每款游戏约 20 局（每局最长 5 分钟）的平均得分得出的，每位测试者在每款游戏中经过约 2 小时的练习后完成评估。

算法。我们研究的智能体与环境（此处以雅达利模拟器为例）进行交互的任务，其过程包含一系列动作、观察结果和奖励机制。在每个时间步，智能体会从合法游戏动作集合 $A = \{g_1, \dots, g_K\}$ 中选择一个动作。该动作被传递给模拟器后，将改变其内部状态并影响游戏得分。通常情况下，环境具有随机性特征。智能体无法直接观测模拟器的内部状态，而是通过接收模拟器输出的屏幕图像 R_d 来获取信息——该图像作为像素值向量表示当前屏幕显示内容。此外，智能体还会获得反映游戏得分变化的即时奖励 r_t 。值得注意的是，游戏得分通常取决于之前所有动作和观察结果的累积效应；而某个动作的反馈可能需要经过数千个时间步才能显现。由于智能体只能观察当前屏幕，任务存在部分可观测性问题 33，且许多模拟器状态在感知上存在混淆（即仅凭当前屏幕 x_t 无法完全理解当前情况）。因此，算法会接收由动作序列和观测序列组成的输入序列 $st \sim x_1, a_1, x_2, \dots, at\{1, xt\}$ ，并根据这些序列学习博弈策略。模拟器中的所有序列都被假设会在有限时间步数内终止。这种形式化方法构建了一个规模庞大但有限的马尔可夫决策过程（MDP），其中每个序列都是一个独立状态。因此，我们可以直接使用标准的 MDP 强化学习方法，只需将完整序列 st 作为时间 t 的状态表示即可。智能体的目标是通过选择动作与仿真器进行交互，以最大化未来收益。我们设定标准假设：未来收益每时间步会按系数 c 进行折现（本研究中统一设置为 0.99），并将时间 t 的未来折现回报定义为 $R_t \sim \sum_{t'=t}^{\infty} c^{t'-t} r_{t'}$ （其中 T 表示游戏终止的时间步）。最优动作价值函数 Q_s ， $a_{\delta p}$ 被定义为：当观察到序列 s 并采取动作 a 后，通过任何策略所能获得的最大预期回报，即 $Q_s, a_{\delta p} \sim \max_p R_t Dst \sim s, at \sim a, p \frac{1}{2}$ 其中 p 是将序列映射为动作的策略映射（即动作分布）。最优动作价值函数遵循一个重要的恒等式，即贝尔曼方程。这一结论基于以下直觉：如果已知所有可能动作 a_9 在下一时间步的序列 $s_9 p$ 的最优值 $Q_{s_0} a_{\delta \delta}$ ，那么最优策略就是选择能最大化 $rzc Q_{s_0} a_{\delta \delta p}$ 期望值的动作 a_9 ：

许多强化学习算法的核心思想是通过贝尔曼方程进行迭代更新来估算动作价值函数，即 $Q^s, a_{\delta p} \sim s_0 rzc \max_a Q_i^h s_0, a_{\delta \delta p} Ds, a \frac{1}{2}$ 。这类价值迭代算法最终会收敛到最优的动作价值函数 $Q_i^h Qasi^h$ 。但在实际应用中，这种基础方法并不现实，因为每个序列都需要单独估算动作价值函数，缺乏泛化能力。因此，通常采用函数近似器来估计动作价值函数 $Q_{\delta p} s, a; h < Qs, a_{\delta p}$ 。在强化学习领域，这通常采用线性函数近似器。

sometimes a nonlinear function approximator is used instead, such as a neural network. We refer to a neural network function approximator with weights θ as a Q-network. A Q-network can be trained by adjusting the parameters θ_i at iteration i to reduce the mean-squared error in the Bellman equation, where the optimal target values $r + \gamma \max_{a'} Q^*(s', a')$ are substituted with approximate target values $y = r + \gamma \max_{a'} Q(s', a'; \theta_i^-)$, using parameters θ_i^- from some previous iteration. This leads to a sequence of loss functions $L_i(\theta_i)$ that changes at each iteration i ,

$$\begin{aligned} L_i(\theta_i) &= \mathbb{E}_{s,a,r} [(\mathbb{E}_{s'} [y|s,a] - Q(s,a; \theta_i))^2] \\ &= \mathbb{E}_{s,a,r,s'} [(y - Q(s,a; \theta_i))^2] + \mathbb{E}_{s,a,r} [\mathbb{V}_{s'} [y]]. \end{aligned}$$

Note that the targets depend on the network weights; this is in contrast with the targets used for supervised learning, which are fixed before learning begins. At each stage of optimization, we hold the parameters from the previous iteration θ_i^- fixed when optimizing the i th loss function $L_i(\theta_i)$, resulting in a sequence of well-defined optimization problems. The final term is the variance of the targets, which does not depend on the parameters θ_i that we are currently optimizing, and may therefore be ignored. Differentiating the loss function with respect to the weights we arrive at the following gradient:

$$\nabla_{\theta_i} L(\theta_i) = \mathbb{E}_{s,a,r,s'} \left[\left(r + \gamma \max_{a'} Q(s', a'; \theta_i^-) - Q(s,a; \theta_i) \right) \nabla_{\theta_i} Q(s,a; \theta_i) \right].$$

Rather than computing the full expectations in the above gradient, it is often computationally expedient to optimize the loss function by stochastic gradient descent. The familiar Q-learning algorithm¹⁹ can be recovered in this framework by updating the weights after every time step, replacing the expectations using single samples, and setting $\theta_i^- = \theta_{i-1}$.

Note that this algorithm is model-free: it solves the reinforcement learning task directly using samples from the emulator, without explicitly estimating the reward and transition dynamics $P(r, s' | s, a)$. It is also off-policy: it learns about the greedy policy $a = \arg\max_{a'} Q(s, a'; \theta)$, while following a behaviour distribution that ensures adequate exploration of the state space. In practice, the behaviour distribution is often selected by an ε -greedy policy that follows the greedy policy with probability $1 - \varepsilon$ and selects a random action with probability ε .

Training algorithm for deep Q-networks. The full algorithm for training deep Q-networks is presented in Algorithm 1. The agent selects and executes actions according to an ε -greedy policy based on Q . Because using histories of arbitrary length as inputs to a neural network can be difficult, our Q-function instead works on a fixed length representation of histories produced by the function ϕ described above. The algorithm modifies standard online Q-learning in two ways to make it suitable for training large neural networks without diverging.

First, we use a technique known as experience replay²³ in which we store the agent's experiences at each time-step, $e_t = (s_t, a_t, r_t, s_{t+1})$, in a data set $D_t = \{e_1, \dots, e_t\}$, pooled over many episodes (where the end of an episode occurs when a terminal state is reached) into a replay memory. During the inner loop of the algorithm, we apply Q-learning updates, or minibatch updates, to samples of experience, $(s, a, r, s') \sim U(D)$, drawn at random from the pool of stored samples. This approach has several advantages over standard online Q-learning. First, each step of experience is potentially used in many weight updates, which allows for greater data efficiency. Second, learning directly from consecutive samples is inefficient, owing to the strong correlations between the samples; randomizing the samples breaks these correlations and therefore reduces the variance of the updates. Third, when learning on-policy the current parameters determine the next data sample that the parameters are trained on. For example, if the maximizing action is to move left then the training samples will be dominated by samples from the left-hand side; if the maximizing action then switches to the right then the training distribution will also switch. It is easy to see how unwanted feedback loops may arise and the parameters could get stuck in a poor local minimum, or even diverge catastrophically²⁰. By using experience

replay the behaviour distribution is averaged over many of its previous states, smoothing out learning and avoiding oscillations or divergence in the parameters. Note that when learning by experience replay, it is necessary to learn off-policy (because our current parameters are different to those used to generate the sample), which motivates the choice of Q-learning.

In practice, our algorithm only stores the last N experience tuples in the replay memory, and samples uniformly at random from D when performing updates. This approach is in some respects limited because the memory buffer does not differentiate important transitions and always overwrites with recent transitions owing to the finite memory size N . Similarly, the uniform sampling gives equal importance to all transitions in the replay memory. A more sophisticated sampling strategy might emphasize transitions from which we can learn the most, similar to prioritized sweeping³⁰.

The second modification to online Q-learning aimed at further improving the stability of our method with neural networks is to use a separate network for generating the targets y_j in the Q-learning update. More precisely, every C updates we clone the network Q to obtain a target network $\hat{Q}$ and use $\hat{Q}$ for generating the Q-learning targets y_j for the following C updates to Q . This modification makes the algorithm more stable compared to standard online Q-learning, where an update that increases $Q(s_t, a_t)$ often also increases $Q(s_{t+1}, a)$ for all a and hence also increases the target y_t , possibly leading to oscillations or divergence of the policy. Generating the targets using an older set of parameters adds a delay between the time an update to Q is made and the time the update affects the targets y_j , making divergence or oscillations much more unlikely.

We also found it helpful to clip the error term from the update $r + \gamma \max_{a'} Q(s', a'; \theta_i^-) - Q(s,a; \theta_i)$ to be between -1 and 1 . Because the absolute value loss function $|x|$ has a derivative of -1 for all negative values of x and a derivative of 1 for all positive values of x , clipping the squared error to be between -1 and 1 corresponds to using an absolute value loss function for errors outside of the $(-1, 1)$ interval. This form of error clipping further improved the stability of the algorithm.

Algorithm 1: deep Q-learning with experience replay.

Initialize replay memory D to capacity N

Initialize action-value function Q with random weights θ

Initialize target action-value function $\hat{Q}$ with weights $\theta^- = \theta$

For episode = 1, M **do**

Initialize sequence $s_1 = \{x_1\}$ and preprocessed sequence $\phi_1 = \phi(s_1)$

For $t = 1, T$ **do**

With probability ε select a random action a_t

otherwise select $a_t = \arg\max_a Q(\phi(s_t), a; \theta)$

Execute action a_t in emulator and observe reward r_t and image x_{t+1}

Set $s_{t+1} = s_t, a_t, x_{t+1}$ and preprocess $\phi_{t+1} = \phi(s_{t+1})$

Store transition $(\phi_t, a_t, r_t, \phi_{t+1})$ in D

Sample random minibatch of transitions $(\phi_j, a_j, r_j, \phi_{j+1})$ from D

Set $y_j = \begin{cases} r_j & \text{if episode terminates at step } j+1 \\ r_j + \gamma \max_{a'} \hat{Q}(\phi_{j+1}, a'; \theta^-) & \text{otherwise} \end{cases}$

Perform a gradient descent step on $(y_j - Q(\phi_j, a_j; \theta))^2$ with respect to the network parameters θ

Every C steps reset $\hat{Q} = Q$

End For

End For

31. Jarrett, K., Kavukcuoglu, K., Ranzato, M. A. & LeCun, Y. What is the best multi-stage architecture for object recognition? *Proc. IEEE. Int. Conf. Comput. Vis.* 2146–2153 (2009).
32. Nair, V. & Hinton, G. E. Rectified linear units improve restricted Boltzmann machines. *Proc. Int. Conf. Mach. Learn.* 807–814 (2010).
33. Kaelbling, L. P., Littman, M. L. & Cassandra, A. R. Planning and acting in partially observable stochastic domains. *Artificial Intelligence* **101**, 99–134 (1994).

但是有时会采用非线性函数逼近器替代，例如神经网络。我们将具有权重 h 的神经网络函数逼近器称为 aQ 网络。通过调整第 i 次迭代时的参数 h_i ，可以训练 Q 网络以降低贝尔曼方程中的均方误差。其中最优目标值 $r_{c \max} a_0 Q_{s0}$ 被近似目标值 $y \sim r_{c \max} a_0 Q_{s0}$ ， a_0 所替代， $a_0 \delta P$ 这些参数通过先前迭代获得的 $h(i)$ 进行调整。

这将导致一系列损失函数 $L_i(h_i)$ ，它们在每次迭代 i 时都会发生变化，

需要注意的是，目标函数的参数依赖于网络权重，这与监督学习中使用的固定参数形成鲜明对比。在优化的每个阶段，我们都会将前次迭代的参数 h_i 固定为固定值，用于优化第 i 个损失函数 L_i （记作 h_i ），从而形成一系列定义明确的优化问题。其中最后一项是目标函数的方差，由于该方差不依赖于当前正在优化的参数 h_i ，因此可以忽略不计。通过对权重求导得到损失函数的梯度表达式如下：

相较于在上述梯度计算中进行完整期望值的运算，采用随机梯度下降法优化损失函数通常更具计算效率。在这个框架下，经典的 Q 学习算法 19 可通过以下方式实现：在每个时间步更新权重参数，用单样本替代期望值，并将 $h(i) \sim h_i$ 。

需要特别说明的是，该算法具有无模型特性：它直接通过仿真器的样本来解决强化学习任务，无需显式估计奖励函数和转移动态 $P_{\{r, s_0 D\}}$ ， $a \delta P$ 。同时采用离策略学习机制：在遵循确保充分探索状态空间的行为分布的同时，学习贪婪策略 $a \sim \arg \max a_0 Q \delta P_s, a_0; h$ 。实际应用中，这种行为分布通常由 e -贪心策略选择——该策略以 $1/2e$ 的概率沿用贪婪策略，其余概率则随机选取动作。

深度 Q 网络训练算法。深度 Q 网络的完整训练流程如算法 1 所示。智能体根据基于 Q 值的 e -贪心策略选择并执行动作。由于将任意长度的历史数据输入神经网络存在困难，我们的 Q 函数改用上述函数生成的历史数据固定长度表示进行运算。该算法通过两种方式改进标准在线 Q 学习方法，使其适用于大规模神经网络训练且不易出现发散现象。


首先，我们采用一种称为经验回放的技术（参见文献 23），将智能体在每个时间步 $(e \tau_s(s, a, r_s, s_{s+1}))$ 的体验存储到数据集 $D \tau_s\{e_1, \dots, e \tau\}$ 中，并通过多期序列聚合（当达到终端状态时终止一序列）形成回放记忆库。在算法的内循环阶段，我们会从存储样本池中随机抽取经验样本 (s, a_h, r_s, s_s) 和 $U(D)$ ，并对其执行 Q 学习更新（即小批量更新）。相较于标准在线 Q 学习方法，该方案具有三大优势：其一，每个经验步骤可被多次用于权重更新，显著提升数据利用效率；其二，由于样本间存在强相关性，直接使用连续样本进行学习效率低下，随机化样本可打破这种关联，从而降低更新方差；其三，在策略学习过程中，当前参数将决定后续训练数据的选择。例如，若最大动作是向左移动，则训练样本主要来自左侧区域；若最大动作转向右侧，则训练分布也会相应调整。这种机制容易引发非预期的反馈循环，导致参数陷入局部极小值，甚至出现灾难性偏离 20。

通过使用经验回放技术，行为分布会在大量历史状态上取平均值，这种机制既能平滑学习过程，又能避免参数出现震荡或发散现象。需要特别注意的是，在采用经验回放进行学习时，必须采用离策略学习方式（因为当前使用的参数与生成样本时的参数不同），这正是选择 Q 学习算法的关键原因。

在实际应用中，我们的算法仅在回放缓冲区存储最近的 N 个经验元组，并在执行更新时从 D 中进行均匀随机采样。这种做法存在局限性：由于有限的内存容量 N ，记忆缓冲区无法区分重要状态转移，且始终用近期转移数据覆盖旧数据；同时，均匀采样策略对回放缓冲区中的所有转移赋予同等权重。若采用更复杂的采样策略，可以优先关注那些能提供最大学习价值的转移数据，类似于文献[30]提出的优先级扫描机制。

针对在线 Q 学习方法的第二个改进方案，旨在通过引入神经网络进一步提升算法稳定性，其核心思路是采用独立网络生成 Q 学习更新中的目标值 y_j 。具体而言，在每次 C 次更新时，我们会克隆 Q 网络生成目标网络 Q^* ，并利用该网络为后续 C 次更新生成 Q 学习目标值 y_j 。相较于传统在线 Q 学习算法，这种改进显著增强了系统稳定性——传统方法中每次更新都会提升当前状态 $Q(S_t, A_t)$ 的值，但同时也会同步提升所有 a 对应的 $Q(S_{t+1}, a)$ 值，从而导致目标值 y_j 的波动或策略发散。通过使用旧参数集生成目标值，可在 Q 网络更新与目标值调整之间引入时间延迟，从而大幅降低策略发散或波动的风险。

我们还发现，将误差项限制在 $r_{c \max} a_0 Q_{s0}, a_0; h\{i\} Q_s, a; h_i \delta P$ 的 21 到 1 区间内非常有效。由于绝对值损失函数 $|x|$ 对所有负值 x 导数为 21，而对所有正值 x 导数为 1，因此将平方误差限制在 21 到 1 之间，相当于对超出 (21,1) 区间的误差使用绝对值损失函数。这种误差裁剪方式进一步提升了算法的稳定性。

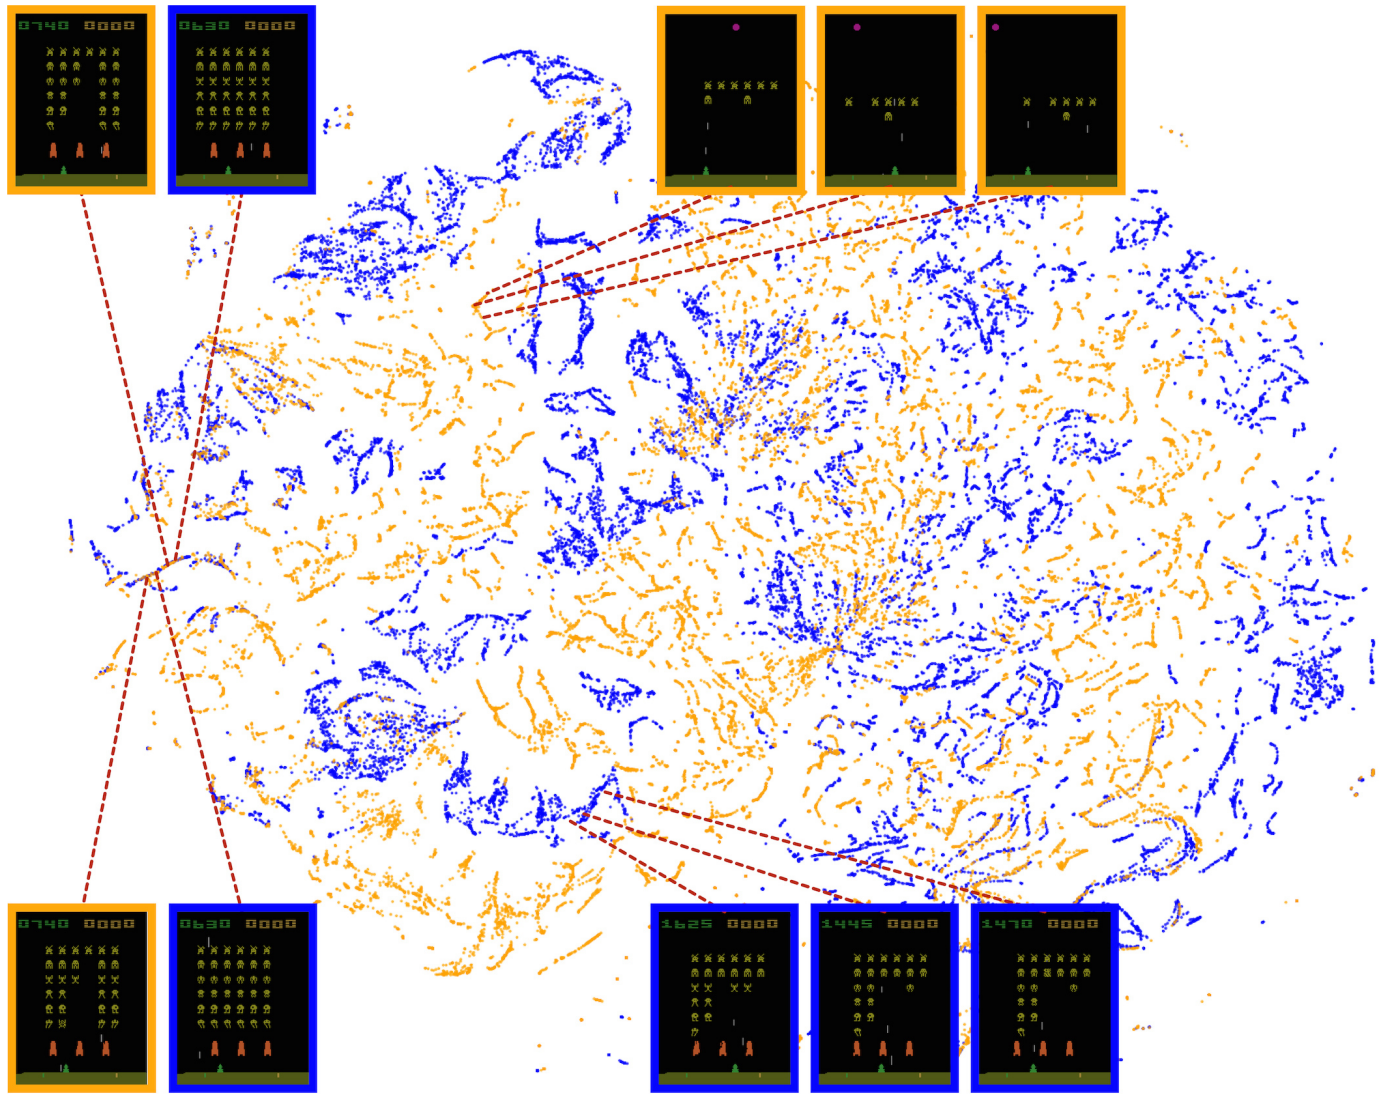


Extended Data Figure 1 | Two-dimensional t-SNE embedding of the representations in the last hidden layer assigned by DQN to game states experienced during a combination of human and agent play in Space Invaders. The plot was generated by running the t-SNE algorithm²⁵ on the last hidden layer representation assigned by DQN to game states experienced during a combination of human (30 min) and agent (2 h) play. The fact that there is similar structure in the two-dimensional embeddings corresponding to the DQN representation of states experienced during human play (orange

points) and DQN play (blue points) suggests that the representations learned by DQN do indeed generalize to data generated from policies other than its own. The presence in the t-SNE embedding of overlapping clusters of points corresponding to the network representation of states experienced during human and agent play shows that the DQN agent also follows sequences of states similar to those found in human play. Screenshots corresponding to selected states are shown (human: orange border; DQN: blue border).

扩展数据图1|DQN在《太空侵略者》游戏中，对人类与智能体联合游戏过程中经历的游戏状态进行最后一层隐藏层表示的二维t-SNE嵌入。该图通过将t-SNE算法²⁵应用于DQN分配的最后一层隐藏层表示生成，对应人类（30分钟）与智能体（2小时）联合游戏期间经历的游戏状态。值得注意的是，两种联合游戏状态下DQN表示对应的二维嵌入结构呈现出高度相似性（橙色点）。

DQN模型的（蓝点数）据表明，其学习到的表征确实能够泛化到其他策略生成的数据。在t-SNE嵌入图中，人类与智能体对弈过程中产生的状态网络表征对应的点簇存在重叠现象，这证明DQN智能体也会遵循与人类对弈相似的状态序列。图示展示了对应特定状态的截图（人类对弈：橙色边框；DQN智能体：蓝色边框）。

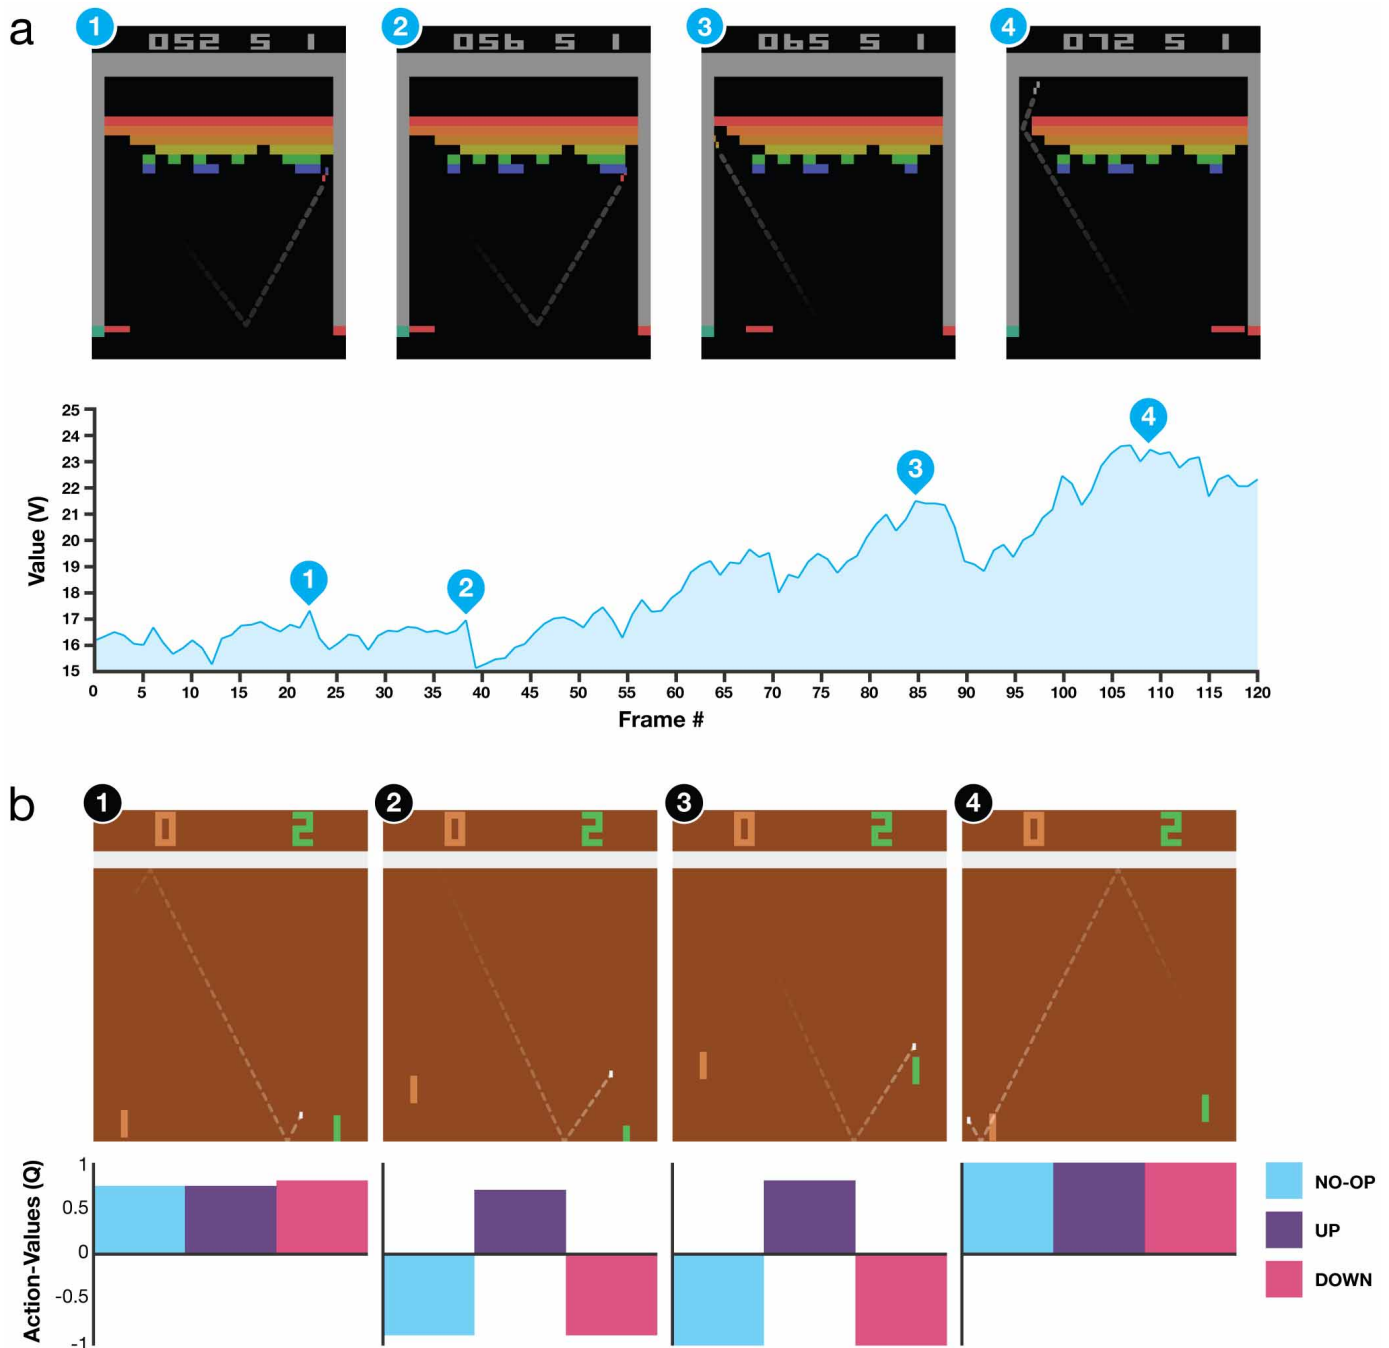

Extended Data Figure 2 | Visualization of learned value functions on two games, Breakout and Pong. **a**, A visualization of the learned value function on the game Breakout. At time points 1 and 2, the state value is predicted to be ~ 17 and the agent is clearing the bricks at the lowest level. Each of the peaks in the value function curve corresponds to a reward obtained by clearing a brick. At time point 3, the agent is about to break through to the top level of bricks and the value increases to ~ 21 in anticipation of breaking out and clearing a large set of bricks. At point 4, the value is above 23 and the agent has broken through. After this point, the ball will bounce at the upper part of the bricks clearing many of them by itself. **b**, A visualization of the learned action-value function on the game Pong. At time point 1, the ball is moving towards the paddle controlled by the agent on the right side of the screen and the values of

all actions are around 0.7, reflecting the expected value of this state based on previous experience. At time point 2, the agent starts moving the paddle towards the ball and the value of the 'up' action stays high while the value of the 'down' action falls to -0.9 . This reflects the fact that pressing 'down' would lead to the agent losing the ball and incurring a reward of -1 . At time point 3, the agent hits the ball by pressing 'up' and the expected reward keeps increasing until time point 4, when the ball reaches the left edge of the screen and the value of all actions reflects that the agent is about to receive a reward of 1. Note, the dashed line shows the past trajectory of the ball purely for illustrative purposes (that is, not shown during the game). With permission from Atari Interactive, Inc.

扩展数据图2 | 两款经典游戏《Breakout》与《Pong》的学习价值函数可视化。a、《Breakout》学习价值函数的可视化呈现。在时间点1和2，系统预测状态值为17，智能体正在清除最低层级的砖块。价值函数曲线中的每个峰值对应清除砖块获得的奖励。时间点3时，智能体即将突破至最高层级的砖块区域，此时价值函数攀升至21，预示着即将突破并清除大量砖块。时间点4时，价值函数已超过23，智能体成功突破砖块层。此后球体将在砖块顶部反弹，并自主清除大量砖块。b、《Pong》学习动作价值函数的可视化呈现。时间点1时，球体正朝屏幕右侧由智能体控制的挡板方向运动。

所有动作的概率值均维持在0.7左右，这反映了基于过往经验对该状态的预期估值。在时间点2，智能体开始向球方向移动球拍，此时“上”动作的数值保持高位，而“下”动作的数值则降至 -0.9 。这说明按下“下”键会导致智能体失去球权，并获得21分的奖励。到时间点3时，智能体通过按下“上”键击中球体，预期奖励持续攀升直至时间点4——当球体抵达屏幕左边缘时，所有动作的数值显示智能体即将获得1分奖励。需要说明的是，虚线所示的球体运动轨迹仅为示意图（即游戏过程中不会出现）。经雅达利互动公司授权使用。

Extended Data Table 1 | List of hyperparameters and their values

Hyperparameter	Value	Description
minibatch size	32	Number of training cases over which each stochastic gradient descent (SGD) update is computed.
replay memory size	1000000	SGD updates are sampled from this number of most recent frames.
agent history length	4	The number of most recent frames experienced by the agent that are given as input to the Q network.
target network update frequency	10000	The frequency (measured in the number of parameter updates) with which the target network is updated (this corresponds to the parameter C from Algorithm 1).
discount factor	0.99	Discount factor gamma used in the Q-learning update.
action repeat	4	Repeat each action selected by the agent this many times. Using a value of 4 results in the agent seeing only every 4th input frame.
update frequency	4	The number of actions selected by the agent between successive SGD updates. Using a value of 4 results in the agent selecting 4 actions between each pair of successive updates.
learning rate	0.00025	The learning rate used by RMSProp.
gradient momentum	0.95	Gradient momentum used by RMSProp.
squared gradient momentum	0.95	Squared gradient (denominator) momentum used by RMSProp.
min squared gradient	0.01	Constant added to the squared gradient in the denominator of the RMSProp update.
initial exploration	1	Initial value of ϵ in ϵ -greedy exploration.
final exploration	0.1	Final value of ϵ in ϵ -greedy exploration.
final exploration frame	1000000	The number of frames over which the initial value of ϵ is linearly annealed to its final value.
replay start size	50000	A uniform random policy is run for this number of frames before learning starts and the resulting experience is used to populate the replay memory.
no-op max	30	Maximum number of "do nothing" actions to be performed by the agent at the start of an episode.

The values of all the hyperparameters were selected by performing an informal search on the games Pong, Breakout, Seaquest, Space Invaders and Beam Rider. We did not perform a systematic grid search owing to the high computational cost, although it is conceivable that even better results could be obtained by systematically tuning the hyperparameter values.

Extended Data Table 2 | Comparison of games scores obtained by DQN agents with methods from the literature^{12,15} and a professional human games tester

Game	Random Play	Best Linear Learner	Contingency (SARSA)	Human	DQN ($\pm$ std)	Normalized DQN (% Human)
Alien	227.8	939.2	103.2	6875	3069 ($\pm$ 1093)	42.7%
Amidar	5.8	103.4	183.6	1676	739.5 ($\pm$ 3024)	43.9%
Assault	222.4	628	537	1496	3359($\pm$ 775)	246.2%
Asterix	210	987.3	1332	8503	6012 ($\pm$ 1744)	70.0%
Asteroids	719.1	907.3	89	13157	1629 ($\pm$ 542)	7.3%
Atlantis	12850	62687	852.9	29028	85641($\pm$ 17600)	449.9%
Bank Heist	14.2	190.8	67.4	734.4	429.7 ($\pm$ 650)	57.7%
Battle Zone	2360	15820	16.2	37800	26300 ($\pm$ 7725)	67.6%
Beam Rider	363.9	929.4	1743	5775	6846 ($\pm$ 1619)	119.8%
Bowling	23.1	43.9	36.4	154.8	42.4 ($\pm$ 88)	14.7%
Boxing	0.1	44	9.8	4.3	71.8 ($\pm$ 8.4)	1707.9%
Breakout	1.7	5.2	6.1	31.8	401.2 ($\pm$ 26.9)	1327.2%
Centipede	2091	8803	4647	11963	8309($\pm$ 5237)	63.0%
Chopper Command	811	1582	16.9	9882	6687 ($\pm$ 2916)	64.8%
Crazy Climber	10781	23411	149.8	35411	114103 ($\pm$ 22797)	419.5%
Demon Attack	152.1	520.5	0	3401	9711 ($\pm$ 2406)	294.2%
Double Dunk	-18.6	-13.1	-16	-15.5	-18.1 ($\pm$ 2.6)	17.1%
Enduro	0	129.1	159.4	309.6	301.8 ($\pm$ 24.6)	97.5%
Fishing Derby	-91.7	-89.5	-85.1	5.5	-0.8 ($\pm$ 19.0)	93.5%
Freeway	0	19.1	19.7	29.6	30.3 ($\pm$ 0.7)	102.4%
Frostbite	65.2	216.9	180.9	4335	328.3 ($\pm$ 250.5)	6.2%
Gopher	257.6	1288	2368	2321	8520 ($\pm$ 3279)	400.4%
Gravitar	173	387.7	429	2672	306.7 ($\pm$ 223.9)	5.3%
H.E.R.O.	1027	6459	7295	25763	19950 ($\pm$ 158)	76.5%
Ice Hockey	-11.2	-9.5	-3.2	0.9	-1.6 ($\pm$ 2.5)	79.3%
James Bond	29	202.8	354.1	406.7	576.7 ($\pm$ 175.5)	145.0%
Kangaroo	52	1622	8.8	3035	6740 ($\pm$ 2959)	224.2%
Krull	1598	3372	3341	2395	3805 ($\pm$ 1033)	277.0%
Kung-Fu Master	258.5	19544	29151	22736	23270 ($\pm$ 5955)	102.4%
Montezuma's Revenge	0	10.7	259	4367	0 ($\pm$ 0)	0.0%
Ms. Pacman	307.3	1692	1227	15693	2311($\pm$ 525)	13.0%
Name This Game	2292	2500	2247	4076	7257 ($\pm$ 547)	278.3%
Pong	-20.7	-19	-17.4	9.3	18.9 ($\pm$ 1.3)	132.0%
Private Eye	24.9	684.3	86	69571	1788 ($\pm$ 5473)	2.5%
Q*Bert	163.9	613.5	960.3	13455	10596 ($\pm$ 3294)	78.5%
River Raid	1339	1904	2650	13513	8316 ($\pm$ 1049)	57.3%
Road Runner	11.5	67.7	89.1	7845	18257 ($\pm$ 4268)	232.9%
Robotank	2.2	28.7	12.4	11.9	51.6 ($\pm$ 4.7)	509.0%
Seaquest	68.4	664.8	675.5	20182	5286($\pm$ 1310)	25.9%
Space Invaders	148	250.1	267.9	1652	1976 ($\pm$ 893)	121.5%
Star Gunner	664	1070	9.4	10250	57997 ($\pm$ 3152)	598.1%
Tennis	-23.8	-0.1	0	-8.9	-2.5 ($\pm$ 1.9)	143.2%
Time Pilot	3568	3741	24.9	5925	5947 ($\pm$ 1600)	100.9%
Tutankham	11.4	114.3	98.2	167.6	186.7 ($\pm$ 41.9)	112.2%
Up and Down	533.4	3533	2449	9082	8456 ($\pm$ 3162)	92.7%
Venture	0	66	0.6	1188	380.0 ($\pm$ 238.6)	32.0%
Video Pinball	16257	16871	19761	17298	42684 ($\pm$ 16287)	2539.4%
Wizard of Wor	563.5	1981	36.9	4757	3393 ($\pm$ 2019)	67.5%
Zaxxon	32.5	3365	21.4	9173	4977 ($\pm$ 1235)	54.1%

Best Linear Learner is the best result obtained by a linear function approximator on different types of hand designed features¹². Contingency (SARSA) agent figures are the results obtained in ref. 15. Note the figures in the last column indicate the performance of DQN relative to the human games tester, expressed as a percentage, that is, $100 \times (\text{DQN score} - \text{random play score}) / (\text{human score} - \text{random play score})$.

Extended Data Table 3 | The effects of replay and separating the target Q-network

Game	With replay, with target Q	With replay, without target Q	Without replay, with target Q	Without replay, without target Q
Breakout	316.8	240.7	10.2	3.2
Enduro	1006.3	831.4	141.9	29.1
River Raid	7446.6	4102.8	2867.7	1453.0
Seaquest	2894.4	822.6	1003.0	275.8
Space Invaders	1088.9	826.3	373.2	302.0

DQN agents were trained for 10 million frames using standard hyperparameters for all possible combinations of turning replay on or off, using or not using a separate target Q-network, and three different learning rates. Each agent was evaluated every 250,000 training frames for 135,000 validation frames and the highest average episode score is reported. Note that these evaluation episodes were not truncated at 5 min leading to higher scores on Enduro than the ones reported in Extended Data Table 2. Note also that the number of training frames was shorter (10 million frames) as compared to the main results presented in Extended Data Table 2 (50 million frames).

Extended Data Table 4 | Comparison of DQN performance with linear function approximator

Game	DQN	Linear
Breakout	316.8	3.00
Enduro	1006.3	62.0
River Raid	7446.6	2346.9
Seaquest	2894.4	656.9
Space Invaders	1088.9	301.3

The performance of the DQN agent is compared with the performance of a linear function approximator on the 5 validation games (that is, where a single linear layer was used instead of the convolutional network, in combination with replay and separate target network). Agents were trained for 10 million frames using standard hyperparameters, and three different learning rates. Each agent was evaluated every 250,000 training frames for 135,000 validation frames and the highest average episode score is reported. Note that these evaluation episodes were not truncated at 5 min leading to higher scores on Enduro than the ones reported in Extended Data Table 2. Note also that the number of training frames was shorter (10 million frames) as compared to the main results presented in Extended Data Table 2 (50 million frames).

在五场验证游戏中，DQN 智能体的性能与线性函数近似器进行了对比（即使用单一线性层替代卷积网络，并结合回放机制和独立目标网络）。智能体采用标准超参数和三种不同学习率训练了 1000 万帧。每个智能体每 25 万帧训练数据进行一次评估，共完成 13.5 万帧验证测试，最终报告最高平均回合得分。需要说明的是，这些评估回合未在 5 分钟时截断，导致耐力赛中的得分高于扩展数据表 2 中报告的数值。此外，本次实验的训练数据量较扩展数据表 2（5000 万帧）中的主要结果有所减少（本次为 1000 万帧）。