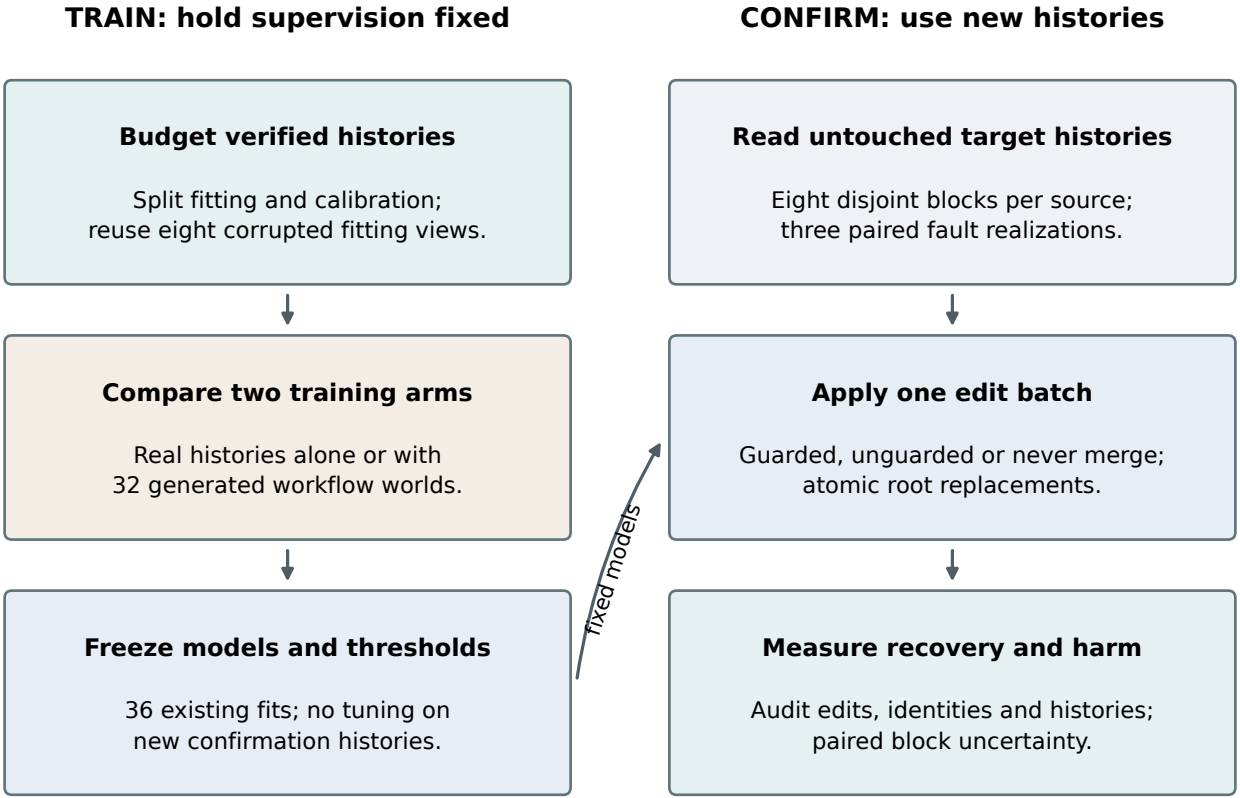
TRAIN: hold supervision fixed
CONFIRM: use new histories
Budget verified histories
Split fitting and calibration;
reuse eight corrupted fitting views.
Read untouched target histories
Eight disjoint blocks per source;
three paired fault realizations.
Compare two training arms
Real histories alone or with
32 generated workflow worlds.
Apply one edit batch
Guarded, unguarded or never merge;
atomic root replacements.
fixed models
Freeze models and thresholds
36 existing fits; no tuning on
new confirmation histories.
Measure recovery and harm
Audit edits, identities and histories;
paired block uncertainty.
Reference identities supervise training; they are unavailable during inference.