Post-training: best score 2.7x → 3.6x the automesher, average 2.3x → 3.5x
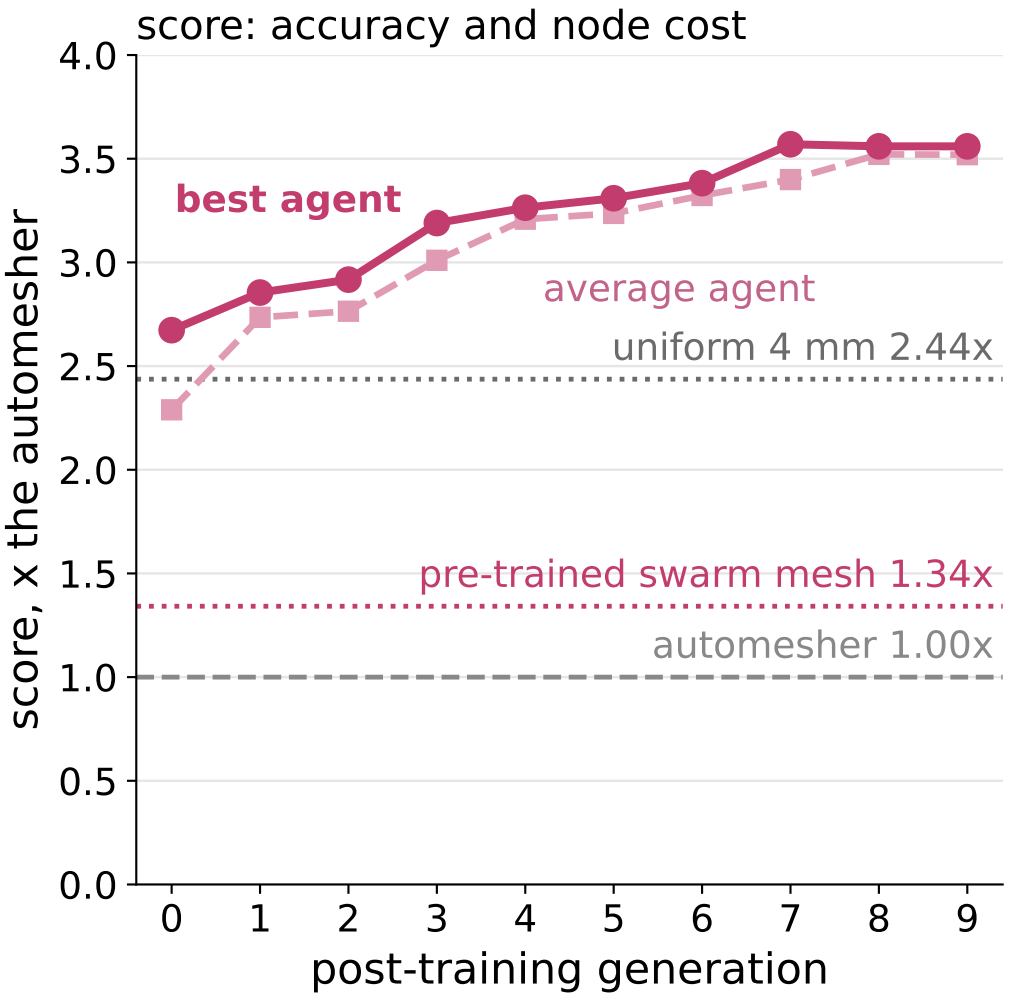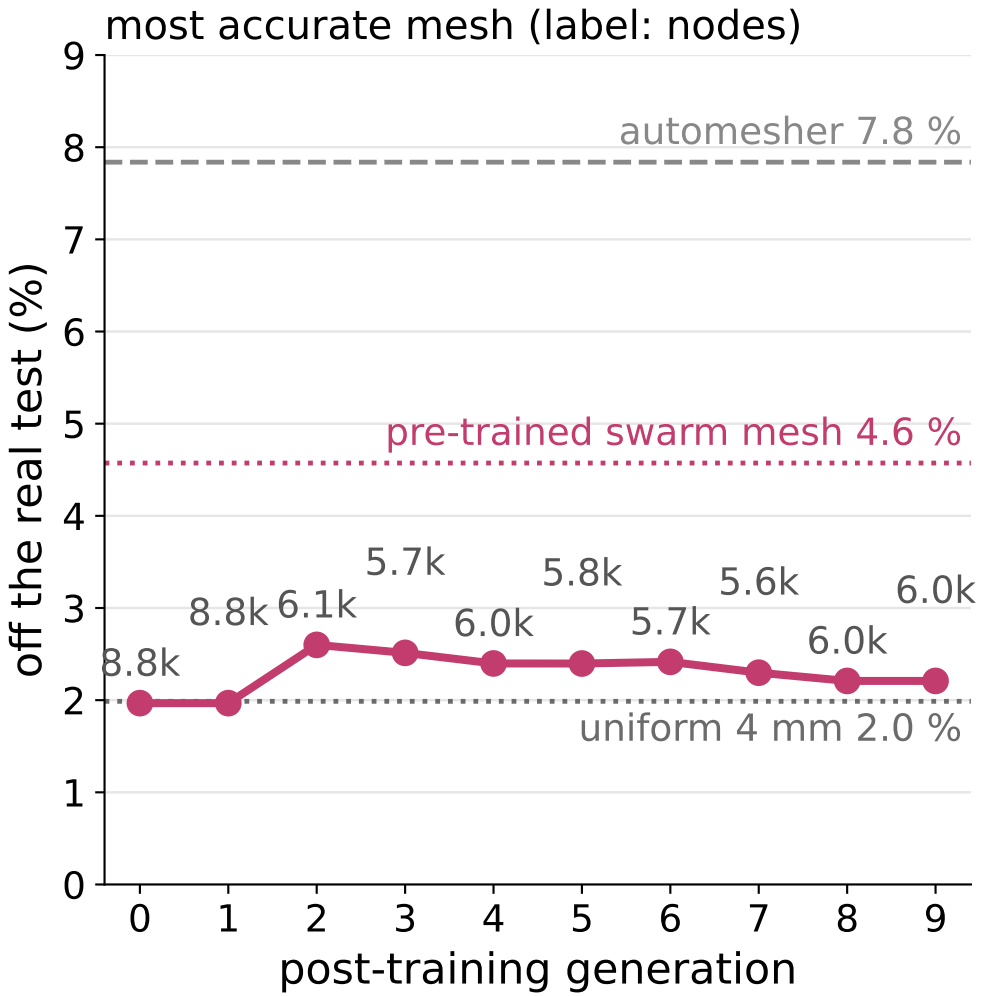
4 agents per generation post-trained on the real test, learned test conditions frozen; score = accuracy gain over the automesher, discounted by node cost (automesher = 1x)