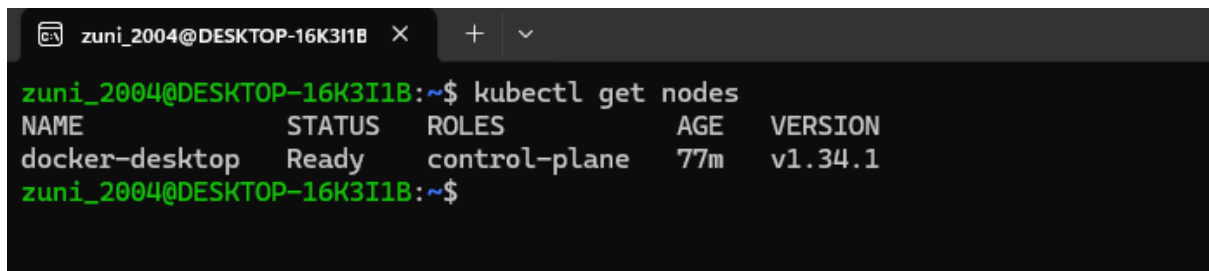
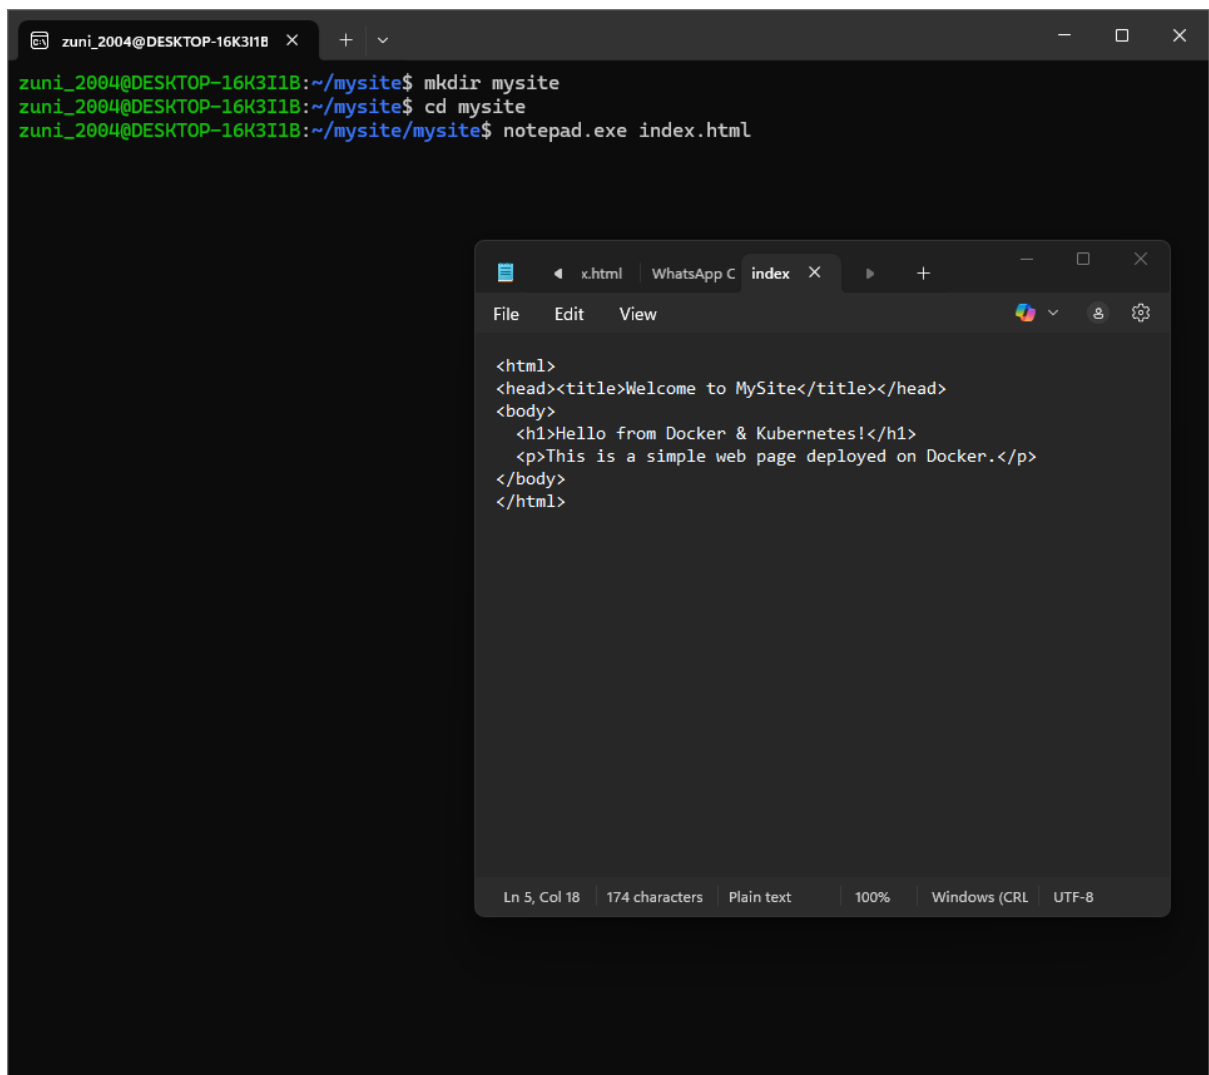


Screenshot #1: Node status

A terminal window with a dark background. The title bar shows 'zuni_2004@DESKTOP-16K3I1B'. The command 'kubectl get nodes' has been executed, resulting in a table of node information.

```
zuni_2004@DESKTOP-16K3I1B:~$ kubectl get nodes
NAME             STATUS    ROLES    AGE   VERSION
docker-desktop   Ready     control-plane  77m   v1.34.1
zuni_2004@DESKTOP-16K3I1B:~$
```


Screenshot #2: Your index.html open in editor

This block contains two screenshots. The top screenshot is a terminal window showing the creation of a directory and a file. The bottom screenshot is a Notepad window showing the content of the created index.html file.

```
zuni_2004@DESKTOP-16K3I1B:~/mysite$ mkdir mysite
zuni_2004@DESKTOP-16K3I1B:~/mysite$ cd mysite
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ notepad.exe index.html
```

```
<html>
<head><title>Welcome to MySite</title></head>
<body>
  <h1>Hello from Docker & Kubernetes!</h1>
  <p>This is a simple web page deployed on Docker.</p>
</body>
</html>
```

Screenshot #3: Dockerfile contents

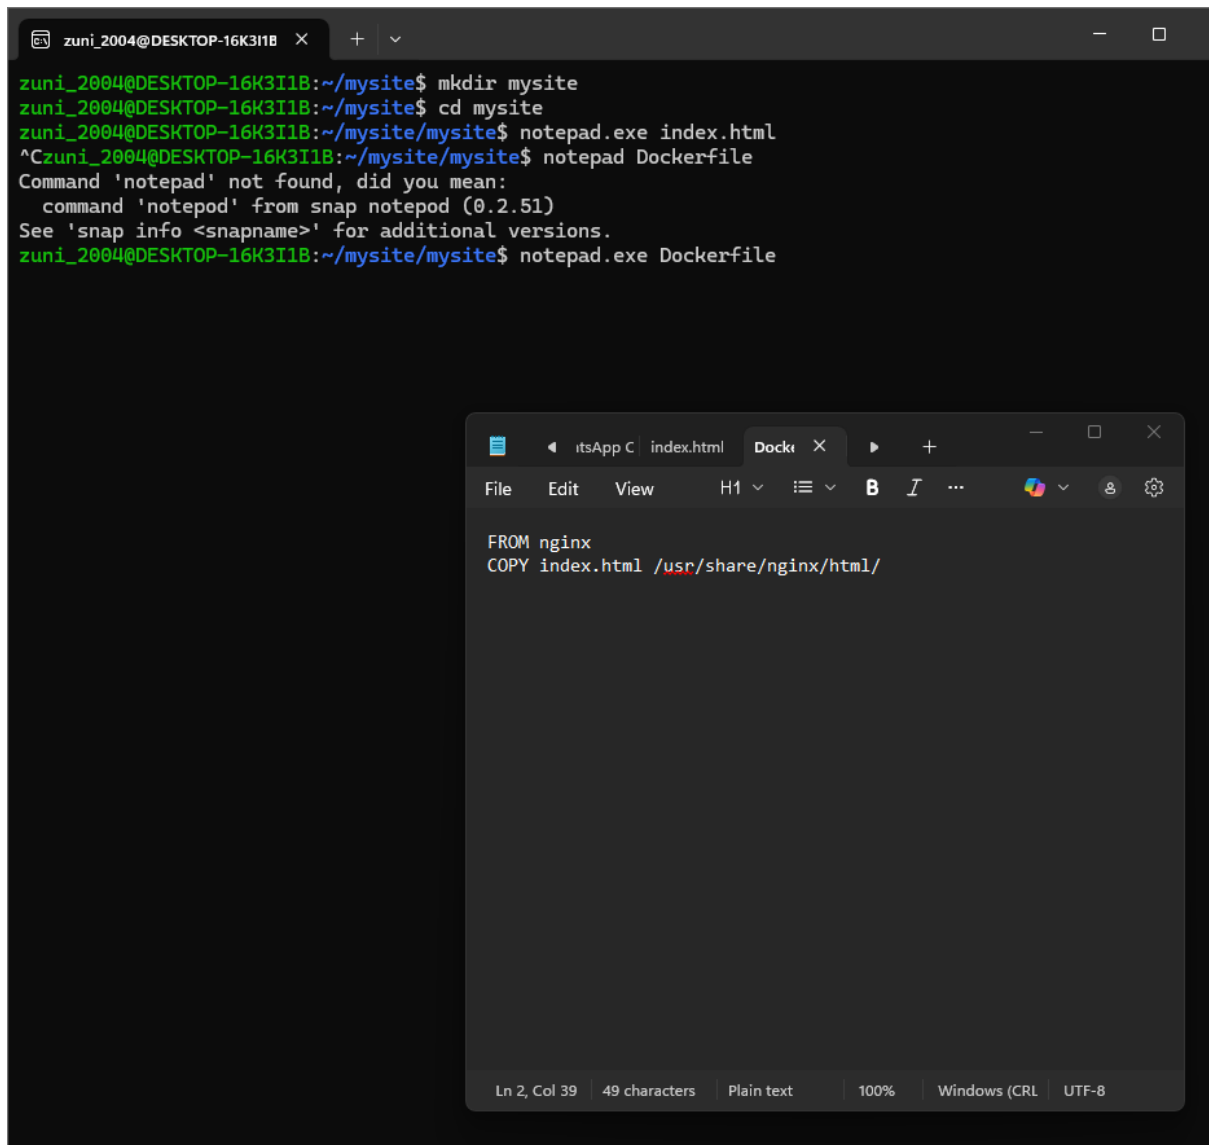

The image shows a terminal window and a code editor. The terminal window, titled 'zuni_2004@DESKTOP-16K3I1B', shows the following commands and output:


```
zuni_2004@DESKTOP-16K3I1B:~/mysite$ mkdir mysite
zuni_2004@DESKTOP-16K3I1B:~/mysite$ cd mysite
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ notepad.exe index.html
^Czuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ notepad Dockerfile
Command 'notepad' not found, did you mean:
  command 'notepad' from snap notepad (0.2.51)
See 'snap info <snapname>' for additional versions.
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ notepad.exe Dockerfile
```

The code editor, titled 'Dockerfile', shows the following content:

```
FROM nginx
COPY index.html /usr/share/nginx/html/
```

The code editor also shows a status bar at the bottom: 'Ln 2, Col 39 | 49 characters | Plain text | 100% | Windows (CRLF) | UTF-8'.

Screenshot #4: Webpage showing “Hello from Docker & Kubernetes!”

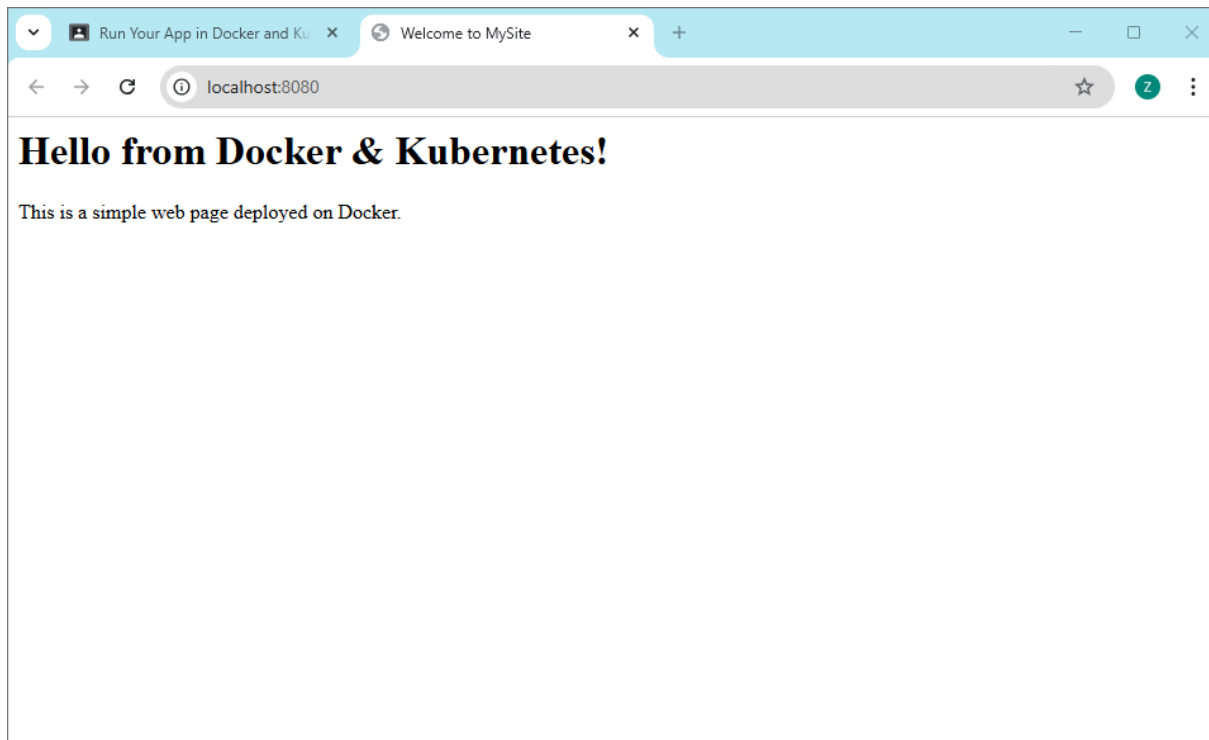

Screenshot #5: Output of docker ps showing container running

```
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ docker run -d -p 8080:80 mysite:v1
d41e1d10707359efbe0d57b26319cf3dee65ac66f95d14abfbc2172d67cd7a2b
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ docker ps
```

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS
d41e1d107073	mysite:v1	"/docker-entrypoint..."	About a minute ago	Up About a minute	0.0.0.0:8080->80/tcp, [::]:8080->80/tcp

```
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ notepad.exe deployment.yaml
```

Screenshot #6: kubectl get pods showing pod in "Running" state

```
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ notepad.exe deployment.yaml
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ kubectl apply -f deployment.yaml
deployment.apps/mysite-deployment created
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ kubectl get pods
```

NAME	READY	STATUS	RESTARTS	AGE
mysite-deployment-59977985f-l46nc	1/1	Running	0	7s

```
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$
```


Screenshot #7: Service list showing NodePort (30001)

```
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ notepad.exe service.yaml
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ kubectl apply -f service.yaml
service/mysite-service created
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ kubectl get svc
```

NAME	TYPE	CLUSTER-IP	EXTERNAL-IP	PORT(S)	AGE
kubernetes	ClusterIP	10.96.0.1	<none>	443/TCP	91m
mysite-service	NodePort	10.111.84.87	<none>	80:30001/TCP	6s

```
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$
```

Screenshot #8: Webpage opened via Kubernetes port (30001)

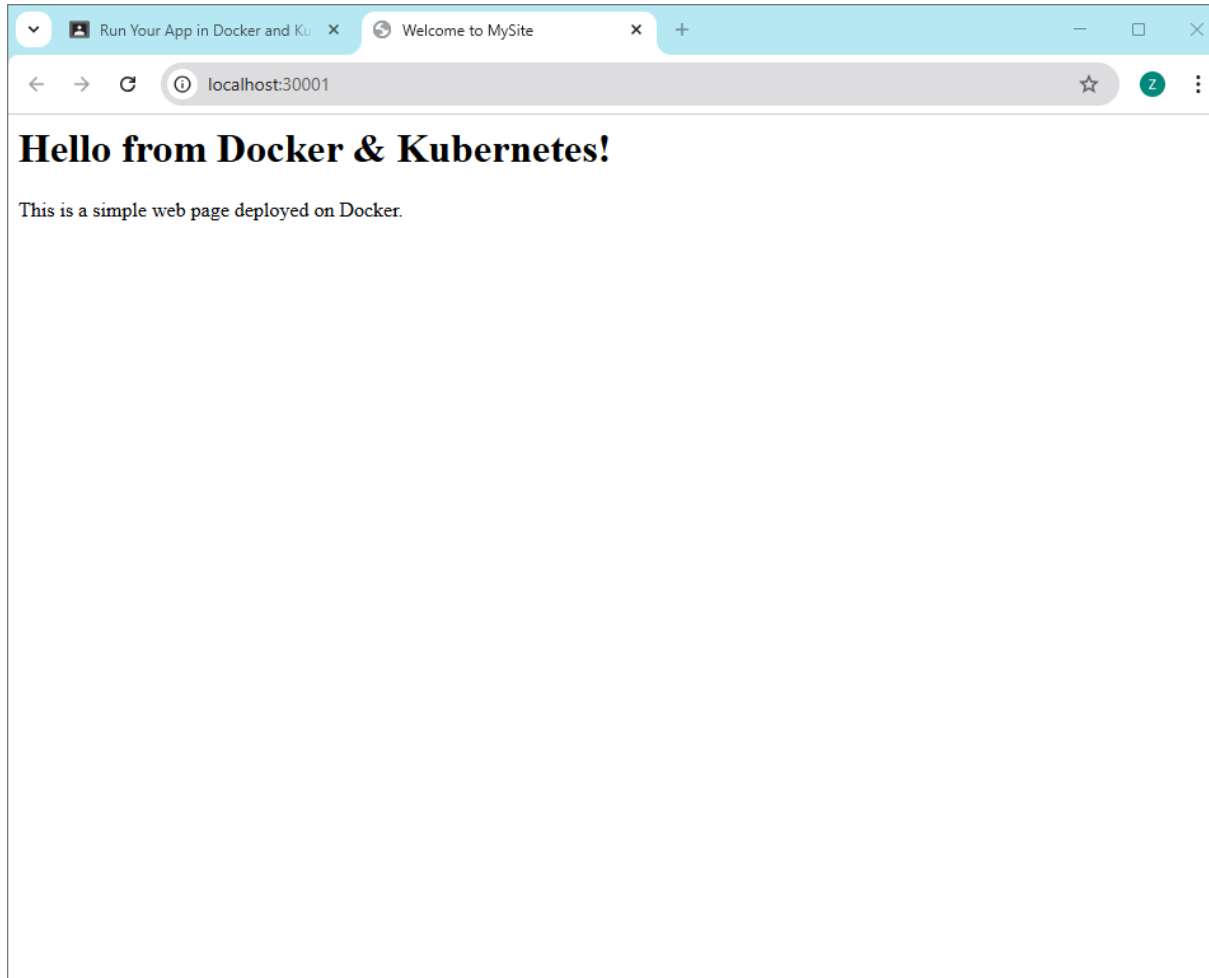

Screenshot #9: Any one of these showing running logs

```
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ kubectl get all
NAME                                READY  STATUS   RESTARTS  AGE
pod/mysite-deployment-59977985f-l46nc 1/1    Running   0          2m45s

NAME                                TYPE          CLUSTER-IP    EXTERNAL-IP  PORT(S)          AGE
service/kubernetes                  ClusterIP     10.96.0.1     <none>        443/TCP          93m
service/mysite-service              NodePort      10.111.84.87  <none>        80:30001/TCP     90s

NAME                                READY  UP-TO-DATE  AVAILABLE  AGE
deployment.apps/mysite-deployment  1/1    1            1          2m45s

NAME                                DESIRED  CURRENT  READY  AGE
replicaset.apps/mysite-deployment-59977985f 1        1        1      2m45s
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ kubectl delete -f service.yaml
kubectl delete -f deployment.yaml
service "mysite-service" deleted from default namespace
deployment.apps "mysite-deployment" deleted from default namespace
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ docker ps -a
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS        PORTS
d41e1d107073   mysite:v1     "/docker-entrypoint..." 6 minutes ago  Up 6 minutes  0.0.0.0:8080->80/tcp
p, [::]:8080->80/tcp   angry_hermann
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ docker stop d41e1d107073
d41e1d107073
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ docker rm d41e1d107073
d41e1d107073
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$
```

Screenshot #10: Output showing resources deleted

```
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$ docker ps -a
kubectl get all
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS        PORTS          NAMES
NAME          TYPE          CLUSTER-IP            EXTERNAL-IP    PORT(S)        AGE
service/kubernetes ClusterIP    10.96.0.1             <none>         443/TCP        96m
zuni_2004@DESKTOP-16K3I1B:~/mysite/mysite$
```