

Prompts for report

<https://gemini.google.com/share/e098cf4c6313ab44>

Figure 1: AWS Architecture

2.1 AWS Architecture Description

The

architecture follows a multi-tier microservices pattern:

Network

Layer: A VPC hosting two subnets. A Public Subnet contains the Internet Gateway and Application Load Balancer (ALB) / Target Groups.

Compute

Layer: Amazon ECS (Elastic Container Service) runs the LMS Docker containers. Cloud9 is used as the development environment (IDE) to build and push images.

Storage

Layer:

- Relational: Amazon RDS (MySQL) resides in the private network scope to store relational data (book/user records).
- Object: Amazon S3 is used to store unstructured data such as book cover images and user profile pictures, reducing the storage burden on the application container.

Security

Layer: Security groups act as virtual firewalls. IAM access is managed via the pre-defined LabRole.

Monitoring

Layer: Amazon CloudWatch aggregates logs from ECS tasks and tracks performance metrics (CPU/Memory usage) to ensure system reliability.

Configuration:

Launched a db.t3.micro instance (Burstable class) to stay within Learner Lab budget limits.

Security:

Configured the security group to allow inbound traffic on port 3306 (MySQL) or 5432 (PostgreSQL) only from the ECS tasks/Security Group.

Constraint

Note: Enhanced monitoring was disabled as per lab restrictions.

Phase 3: Object Storage Setup (S3)

1. Bucket Creation: Created a unique S3 bucket (e.g., lms-static-assets) in the us-east-1 region.

2. Permissions:

- o Disabled "Block All Public

Access" (or configured specific ACLs) to allow the application to retrieve images.

- o Configured Cross-Origin

Resource Sharing (CORS) to allow the web frontend to fetch images directly from the bucket.

3. Integration: Updated the app.py configuration to include AWS_S3_BUCKET_NAME and S3_REGION environment variables.

Phase 4: Development & Container Registry (Cloud9 & ECR)

Environment:

Launched an AWS Cloud9 environment to access the CLI and git.

Source

Control: Cloned the repository: git clone <https://github.com/BSSE-23050/LMS.git>.

container based on
the task definition.

Description: The
"Events" tab in the ECS Service. The log "service has
reached a steady state" serves as proof of a stable and
successful
deployment.

Figure35: Task Definition Blueprint

Description: The
Task Definition details. It shows the container definitions,
including the
image mapping and the environment variables
(DB_HOST, DB_USER) passed to
the container.

PHASE 9: FINAL APPLICATION OUTPUT

Figure36-42: Frontend

PHASE 10: MONITORING & OBSERVABILITY

Figure 43: CloudWatch Log
Streams (Can you make me table of figures to paste

ument text provided, here is the List of Figures formatted into a clear table

Prompts for PPT

LMS Report

DOCX



LMS Project Poster

PDF

I want you to make 4. POWERPOINT PRESENTATION — 10 Marks

Criteria Excellent (9–10) Good (7–8)

Satisfactory (5–6)

Poor (0–4)

Content & Communication

Covers executive summary, problem, architecture, implementation, results.

Covers main areas but missing depth.

Limited details.

Incomplete or unclear.


Visual Quality Clean layout, correct AWS icons, consistent formatting.

Good visuals; minor issues.


Just write the content

Give introduction

Covers executive summary, problem, architecture, implementation, results. (i need only this

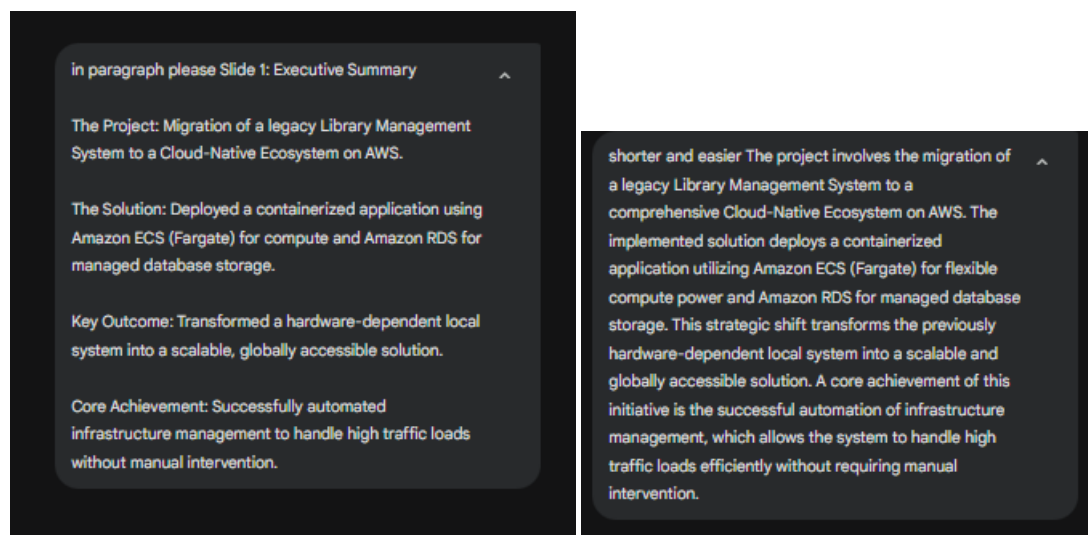

Prompts for poster

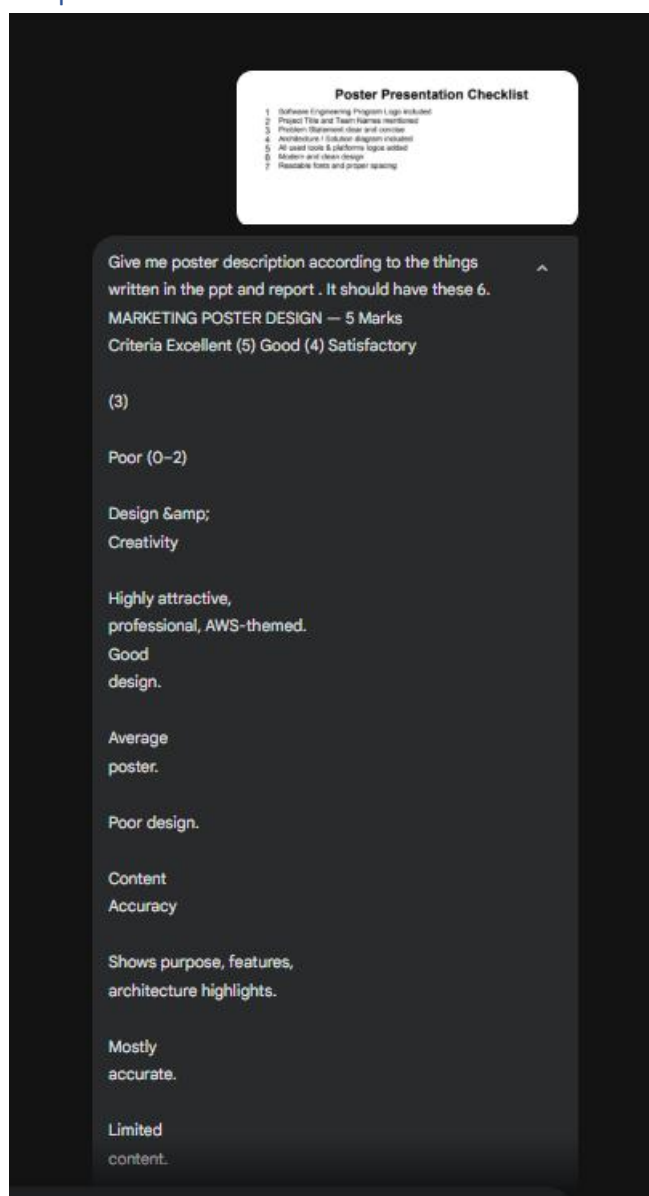

Highly attractive,
professional, AWS-themed.
Good
design.

Average
poster.

Poor design.

Content
Accuracy

Shows purpose, features,
architecture highlights.

Mostly
accurate.

Limited
content.

Missing key
content. Also the things in the pic

easier and simpler

Prompts for code

<https://gemini.google.com/share/7fdec10ab8cc>

<https://gemini.google.com/share/2b4579a91e529519>

can we automate the deployment of our app present in an ec2
instead of ecr

give links for other maanagemennt systems
library managment system


```
//declaration
var express = require('express');
var expressSession = require('express-session');
var bodyParser = require('body-parser');
var app = express();
var port = 3000;

//common controllers
var signup = require('./controllers/signup');
var login = require('./controllers/login');
var logout = require('./controllers/logout');

//admin controllers
var admin = require('./controllers/admin');

//customer controllers
var customer = require('./controllers/customer');

//configure
app.set('view engine', 'ejs');

//middlewares
app.use(bodyParser.urlencoded({extended: false}));
app.use(expressSession({secret: 'my top secret pass',
resave: false, saveUninitialized: true}));
app.use('/css', express.static(__dirname + '/css'));
```



```
        return;  
    }  
    next();  
}  
));  
  
//routes  
app.use('/login', login);  
app.use('/signup', signup);  
app.use('/logout', logout);  
  
//admin routes  
app.use('/admin', admin);  
  
//customer routes  
  
app.use('/customer', customer);  
  
//server start  
app.listen(port, ()=>{  
    console.log(` Server running on port ${port}`);  
});
```

how do i run this

```
PS D:\Downloads\Library-Management-System-Nodejs-master\Library-Management-System-Nodejs-master>
node app.js
```

Server running on port 3000

AggregateError [ECONNREFUSED]:

at internalConnectMultiple (node:net:1139:18)

at afterConnectMultiple (node:net:1714:7)

at Protocol._enqueue (D:\Downloads\Library-Management-System-Nodejs-master\Library-Management-System-Nodejs-master\node_modules\mysql\lib\protocol\Protocol.js:145:48)

at Protocol.handshake (D:\Downloads\Library-Management-System-Nodejs-master\Library-Management-System-Nodejs-master\node_modules\mysql\lib\protocol\Protocol.js:52:23)

at Connection.connect (D:\Downloads\Library-Management-System-Nodejs-master\Library-Management-System-Nodejs-master\node_modules\mysql\lib\Connection.js:130:18)

at Connection._implConnect (D:\Downloads\Library-Management-System-Nodejs-master\Library-Management-System-Nodejs-master\node_modules\mysql\lib\Connection.js:461:10)

at Connection.query (D:\Downloads\Library-Management-System-Nodejs-master\Library-

```
    at D:\Downloads\Library-Management-System-Nodejs-master\Library-Management-System-Nodejs-master\models\userModel.js:6:24
    at Query._callback (D:\Downloads\Library-Management-System-Nodejs-master\Library-Management-System-Nodejs-master\models\config.js:28:5)
    at Sequence.end (D:\Downloads\Library-Management-System-Nodejs-master\Library-Management-System-Nodejs-master\node_modules\mysql\lib\protocol\sequences\Sequence.js:88:24)
    at D:\Downloads\Library-Management-System-Nodejs-master\Library-Management-System-Nodejs-master\node_modules\mysql\lib\protocol\Protocol.js:398:18
    at Array.forEach (<anonymous>)
    at D:\Downloads\Library-Management-System-Nodejs-master\Library-Management-System-Nodejs-master\node_modules\mysql\lib\protocol\Protocol.js:397:13
    at process.processTicksAndRejections (node:internal/process/task_queues:85:11)

Node.js v22.15.0
PS D:\Downloads\Library-Management-System-Nodejs-master\Library-Management-System-Nodejs-master>
^C
```

cant i run it locally

can't we install mysql on windows like in terminal?

Try the new cross-platform PowerShell <https://aka.ms/pscore6>

```
PS C:\Windows\system32> winget install Oracle.MySQL
winget : The term 'winget' is not recognized as the name of a
cmdlet, function, script file, or operable program.
Check the spelling of the name, or if a path was included,
verify that the path is correct and try again.
At line:1 char:1
+ winget install Oracle.MySQL
+ ~~~~~
+ CategoryInfo          : ObjectNotFound: (winget:String) [],
CommandNotFoundException
+ FullyQualifiedErrorId : CommandNotFoundException
```

okay leave it

now i have the project on the laptop
i wanna shift it on aws
using ecr mysql rds etc

im gonna start with iploading to cloud 9 then doing these

done with dockerfile

```
//declaration
var express = require('express');
var expressSession = require('express-session');
var bodyParser = require('body-parser');
var app = express();
var port = 3000;

//common controllers
var signup = require('./controllers/signup');
var login = require('./controllers/login');
var logout = require('./controllers/logout');

//admin controllers
var admin = require('./controllers/admin');

//customer controllers
var customer = require('./controllers/customer');

//configure
app.set('view engine', 'ejs');

//middlewares
app.use(bodyParser.urlencoded({extended: false}));
app.use(expressSession({secret: 'my top secret pass', resave:
false, saveUninitialized: true}));
app.use('/css', express.static(__dirname + '/css'));
app.use('/images', express.static(__dirname + '/images'));

app.use('*', function(req, res, next){
```

```
    if(!req.session.admin && !req.session.customer)
    {
        res.redirect('/login');
        return;
    }
    next();
}
});
```

```
//routes
app.use('/login', login);
app.use('/signup', signup);
app.use('/logout', logout);
```

```
//admin routes
app.use('/admin', admin);
```

```
//customer routes

app.use('/customer', customer);
```

```
//server start
app.listen(port, ()=>{
    console.log(`Server running on port ${port}`);
});
```

this is my app now
give instructions in accordance to it



```
var mysql = require('mysql');
var connection = mysql.createConnection({
  host : 'localhost',
  user : 'root',
  password : '',
  database : 'library_management_system'
});

module.exports = {
  executeQuery: function(sql, sqlParam, callback){
    if(sqlParam == null)
    {
      connection.query(sql, function(error, result){
        if(error)
        {
          console.log(error);
        }
        callback(result);
      });
    }
    else
    {
      connection.query(sql, sqlParam, function(error, result){
        if(error)
        {
          console.log(error);
        }
        callback(result);
      });
    }
  }
};
```

Your request to create DB instance lms-db-instance didn't work.
The DB subnet group doesn't meet Availability Zone (AZ) coverage requirement. Current AZ coverage: us-east-1a. Add subnets to cover at least 2 AZs.

done with rds creation
now lets change the files


```
only bookModel and userModel here
var db = require.main.require('./models/config');

var getAll = (callback) => {
  var sql = "SELECT * FROM books";
  db.executeQuery(sql, null, function(result) {
    callback(result);
  });
};

var searchBy = (searchBy, word, callback) => {
  var sql = "SELECT * FROM books WHERE "+searchBy+" = ?";
  db.executeQuery(sql, [word], function(result) {
    callback(result);
  });
};

var createBook = (book, callback) => {
  var date = new Date();
  var sql = "INSERT INTO books VALUES(null, ?, ?, ?, ?, ?, ?, ?, ?)";
  db.executeQuery(sql, [0, book.genre, book.title,
    book.author, book.publisher, book.edition, book.isbn,
    book.pages, date], function(result) {
    callback(result);
  });
};

var getBook = (id, callback) => {
  var sql = "SELECT * FROM books WHERE book_id=?";
  db.executeQuery(sql, [id], function(result) {
    callback(result[0]);
  });
};
```

```
var updateBook = (id, book, callback) => {
  var sql = "UPDATE books SET genre = ?, title = ?, author = ?,
publisher = ?, edition = ?, isbn = ?, pages = ? WHERE book_id
= ?";
  db.executeQuery(sql, [book.genre, book.title, book.author,
book.publisher, book.edition, book.isbn, book.pages, id],
function(result) {
  callback(result);
});
};

var deleteBook = (id, callback) => {
  var sql = "DELETE FROM books WHERE book_id = ?";
  db.executeQuery(sql, [id], function(result) {
    callback(result);
  });
};

var issueBook = (book_id, customer_id, callback) => {
  var date = new Date();
  var sql = "UPDATE books SET user_id = ?, date_issued = ?
WHERE book_id = ?";
  db.executeQuery(sql, [customer_id, date, book_id],
function(result) {
    callback(result);
  });
};

var unissueBook = (book_id, callback) => {
  var sql = "UPDATE books SET user_id = "", date_issued = "
WHERE book_id = ?";
```

```

    };

    var customerSearch = (searchBy, word, callback) => {
        var sql = "(SELECT * FROM books WHERE "+searchBy+" = ?)";
        AND ((user_id = ") OR (user_id = 0))";
        db.executeQuery(sql, [word], function(result) {
            callback(result);
        });
    };

    var getRequestedBooks = (callback) => {
        var sql = "SELECT * FROM books_request";
        db.executeQuery(sql, null, function(result) {
            callback(result);
        });
    };

    var bookRequestSearch = (searchBy, word, callback) => {
        var sql = "SELECT * FROM books_request WHERE "+searchBy+" = ?";
        db.executeQuery(sql, [word], function(result) {
            callback(result);
        });
    };

    var setIssueDate = (book_id, customer_id, callback) => {
        var date = new Date();
        var sql = "INSERT INTO issue_date VALUES(null, ?, ?, ?)";
        db.executeQuery(sql, [book_id, customer_id, date],
        function(result) {
            callback(result);
        });
    };

```

```

var sql = "SELECT * FROM issue_date";
db.executeQuery(sql, null, function(result) {
    callback(result);
});
};

var totalBorrowed30 = (callback) => {
    var result = new Date();
    var newDate = result.setDate(result.getDate() + 30);
    var sql = "SELECT books.*, issue_date.book_id FROM
issue_date INNER JOIN books ON
issue_date.book_id=books.book_id WHERE (date BETWEEN ?
AND ?)";
    db.executeQuery(sql, [newDate, result], function(result) {
        callback(result);
    });
};

var mostBorrowedBook = (callback) => {
    var sql = "SELECT books.*, issue_date.book_id, COUNT(*)
AS magnitude FROM issue_date INNER JOIN books ON
issue_date.book_id=books.book_id GROUP BY books.isbn
ORDER BY magnitude DESC LIMIT 1";
    db.executeQuery(sql, null, function(result) {
        callback(result[0]);
    });
};

var mostRequestedBook = (callback) => {
    var sql = "SELECT *, COUNT(*) AS magnitude FROM
books_request GROUP BY isbn ORDER BY magnitude DESC

```

```
module.exports = {  
  getAll,  
  searchBy,  
  createBook,  
  getBook,  
  updateBook,  
  deleteBook,  
  issueBook,  
  unissueBook,  
  getIssuedBooks,  
  getUnborrowedBooks,  
  bookRequest,  
  customerSearch,  
  getRequestedBooks,  
  bookRequestSearch,  
  setIssueDate,  
  booksIssuedByCustomer,  
  getAllBorrowedBooks,  
  totalBorrowed30,  
  mostRequestedBook,  
  mostBorrowedBook  
};
```

```
var sql = "UPDATE users SET name = ?, email = ?, phone = ?,  
address = ?, gender = ? WHERE user_id = ?";  
db.executeQuery(sql, [customer.name, customer.email,  
customer.phone, customer.address, customer.gender, id],  
function(result) {  
    callback(result);  
});  
};  
  
var deleteUser = (id, callback) => {  
    var sql = "DELETE FROM users WHERE user_id = ?";  
    db.executeQuery(sql, [id], function(result) {  
        callback(result);  
    });  
};  
  
var getUserBorrow = (id, callback) => {  
    var sql = "SELECT * FROM books WHERE user_id = ?";  
    db.executeQuery(sql, [id], function(result) {  
        callback(result);  
    });  
};  
  
var getUserHistory = (id, callback) => {  
    var sql = "SELECT issue_date.user_id, issue_date.book_id,  
books.title, books.author, books.publisher, books.edition,  
books.isbn, issue_date.date FROM issue_date INNER JOIN  
books ON issue_date.book_id=books.book_id WHERE  
issue_date.user_id=?";  
    db.executeQuery(sql, [id], function(result) {  
        callback(result);  
    });  
};
```

```
var totalBooksBorrowedByCustomer = (id, callback) => {
  var sql = "SELECT books.*, issue_date.book_id FROM
issue_date INNER JOIN books ON
issue_date.book_id=books.book_id WHERE issue_date.user_id
= ?";
  db.executeQuery(sql, [id], function(result) {
    callback(result);
  });
};

module.exports = {
  validateUser,
  createUser,
  getUser,
  updateUser,
  updatePassword,
  getAll,
  searchBy,
  updateCustomer,
  deleteUser,
  getUserBorrow,
  getUserHistory,
  totalBooksBorrowedByCustomer
};
```

there are only 2 models
should i create all the tables?

how should i open the web

voclabs:~/environment/LMS (master) \$ node app.js
Server running on port 3000

Oops

No application seems to be running here!

Amazon Cloud9 can't get you to your requested environment. Here are some suggestions on how to figure out what's going on:

Check that you have access to your environment and are signed into Amazon Cloud9 for the environment.

Check that the server is successfully running on Amazon Cloud9: If the server hit an error, the output window will have a message telling you what it is.

If you're in the middle of debugging code, your server might be paused right now.

The server might be running on a different port; make sure it runs on port 8080.

Click Preview > Preview Running Application.

It should work instantly now. Let me know if you see the login page! i was talking about application that it is running

when i tried to log in:

Failed to load resource: the server responded with a status of 503 () Understand this error

16c61ea95c8148e0ab2ffe5dcb8f26f7.vfs.cloud9.us-east-1.amazonaws.com/?_c9_id=livepreview0&_c9_host=https://us-east-1.console.aws.amazon.com:1 Failed to load resource: the server responded with a status of 503 () Understand this error
default.js:54541 ERROR refreshCredentialsTimerBroken:

Object

log @ default.js:54541 Understand this error

default.js:54541 ERROR refreshCredentialsTimerBroken:

Object

log @ default.js:54541 Understand this error

default.js:54541 ERROR refreshCredentialsTimerBroken:

Object

log @ default.js:54541 Understand this error

default.js:54541 ERROR refreshCredentialsTimerBroken:

Object


```

<%-include('partials/header.html')%>
<link rel="stylesheet" href="../css/signup.css">
<title>Signup page</title>
</head>

<body>
  <div class="container bg-image">
    <div class="row">
      <div class="col-sm-6 signup-form">
        <h1 class="display-4 header">Library Management
System</h1>
        <div class="alert alert-primary" role="alert">
          Sign up now to get access to all the books!
        </div>
        <form class="submit form" method="post">
          <div class="form-group">
            <label for="name">Full Name</label>
            <input type="text" class="form-control"
id="name" placeholder="John Doe" name="name">
          </div>
          <div class="form-row">
            <div class="form-group col-md-6">
              <label for="inputEmail4">Email</label>
              <input type="email" class="form-control"
id="inputEmail4" placeholder="Email" name="email">
            </div>
            <div class="form-group col-md-6">
              <label
for="inputPassword4">Password</label>
              <input type="password" class="form-
control" id="inputPassword4" placeholder="Password">
            </div>
          </div>
        </form>
      </div>
    </div>
  </div>

```

```
db.executeQuery(sql, [id], function(result) {
  callback(result);
});
};

var totalBooksBorrowedByCustomer = (id, callback) => {
  var sql = "SELECT books.*, issue_date.book_id FROM
issue_date INNER JOIN books ON
issue_date.book_id=books.book_id WHERE issue_date.user_id
= ?";
  db.executeQuery(sql, [id], function(result) {
    callback(result);
  });
};

module.exports = {
  validateUser,
  createUser,
  getUser,
  updateUser,
  updatePassword,
  getAll,
  searchBy,
  updateCustomer,
  deleteUser,
  getUserBorrow,
  getUserHistory,
  totalBooksBorrowedByCustomer
};
```

```

var express = require('express');
var router = express.Router();
var userModel = require.main.require('./models/userModel');
var validationRules =
require.main.require('./validation_rules/rules');
var asyncValidator = require('async-validator-2');

router.get('/', (req, res)=>{
  res.render('login.ejs', {errs: []});
});

router.post('/', (req, res)=>{

  var data = {
    email: req.body.email,
    password: req.body.password
  };

  var rules = validationRules.users.login;
  var validator = new asyncValidator(rules);

  validator.validate(data, (errors, fields)=>{
    if(!errors){
      userModel.validateUser(req.body.email,
req.body.password, function(result){
        if(!result){
          res.render('login', {errs: [{message: 'Invalid email or
password'}]}));
        }
        else{
          console.log(result);
          if(result.is_admin == 1){
            // you can do something here with
            // the result
          }
        }
      });
    }
    else {
      console.log(fields);
      res.render('login', {errs: errors});
    }
  });

});

module.exports = router;

```

controller, and I see a potential bug here that will cause problems with your
c.

```
ExtHostSCM#$provideOriginalResource 1 file:///home/ec2-
user/environment/LMS/views/signup.ejs
default.js:54544 INFO ExtHost [log]:
ExtHostSCM#$provideOriginalResource 1 file:///home/ec2-
user/environment/LMS/models/userModel.js
default.js:54544 INFO ExtHost [log]:
ExtHostSCM#$provideOriginalResource 1 file:///home/ec2-
user/environment/LMS/app.js
default.js:54544 INFO ExtHost [log]:
ExtHostSCM#$provideOriginalResource 1 file:///home/ec2-
user/environment/LMS/views/signup.ejs
default.js:54544 INFO Join /LMS/controllers/signup.js
default.js:54544 INFO Joined /LMS/controllers/signup.js
default.js:54544 INFO ExtHost [log]:
ExtHostSCM#$provideOriginalResource 1 file:///home/ec2-
user/environment/LMS/controllers/signup.js
default.js:54544 INFO Join /LMS/controllers/logout.js
default.js:54544 INFO Joined /LMS/controllers/logout.js
default.js:54544 INFO ExtHost [log]:
ExtHostSCM#$provideOriginalResource 1 file:///home/ec2-
user/environment/LMS/controllers/logout.js
default.js:54544 INFO Join /LMS/controllers/login.js
default.js:54544 INFO Joined /LMS/controllers/login.js
default.js:54544 INFO ExtHost [log]:
ExtHostSCM#$provideOriginalResource 1 file:///home/ec2-
user/environment/LMS/controllers/signup.js
default.js:54544 INFO ExtHost [log]:
ExtHostSCM#$provideOriginalResource 1 file:///home/ec2-
user/environment/LMS/models/userModel.js
default.js:54544 INFO ExtHost [log]:
ExtHostSCM#$provideOriginalResource 1 file:///home/ec2-
```

```
fire @ default.js:2856
fire @ default.js:68608
send @ default.js:69004
ApiHandler.callStoredApiFunction @ default.js:56034
call @ default.js:56169
(anonymous) @ default.js:55810
Agent._onMessage @ default.js:55886
EventEmitter.emit @ default.js:55639
onMessage @ default.js:55959
EventEmitter.emit @ bootstrap.js:7063
ReliableSocket.onMessage @ default.js:56213
EventEmitter.emit @ bootstrap.js:7063
ReconnectSocket.onMessage @ default.js:56311
Emitter.emit @ default.js:55287
Socket.onPacket @ default.js:54853
(anonymous) @ default.js:54808
Emitter.emit @ default.js:55287
Transport.onPacket @ default.js:55052
Transport.onData @ default.js:55052
ws.onmessage @ default.js:55479Understand this warning
default.js:54544 INFO ExtHost [log]:
ExtHostSCM#$provideOriginalResource 1 file:///home/ec2-
user/environment/LMS/controllers/login.js
default.js:54544 INFO ExtHost [log]:
ExtHostSCM#$provideOriginalResource 1 file:///home/ec2-
user/environment/LMS/views/customer/home.ejs
```

how do i login as admin

from the **Cloud9 Editor itself** (the IDE), not your application. They are
catchers and internal editor warnings. They are "noise" and you can

```
Error: Failed to lookup view "nothing here" in views directory
"/home/ec2-user/environment/LMS/views"
    at Function.render (/home/ec2-user/environment/LMS/node_modules/express/lib/application.js:580:17)
    at ServerResponse.render (/home/ec2-user/environment/LMS/node_modules/express/lib/response.js:1008:7)
    at /home/ec2-user/environment/LMS/controllers/admin.js:32:49
    at /home/ec2-user/environment/LMS/models/bookModel.js:145:9
    at Query._callback (/home/ec2-user/environment/LMS/models/config.js:19:5)
    at Sequence.end (/home/ec2-user/environment/LMS/node_modules/mysql/lib/protocol/sequences/Sequence.js:88:24)
    at Query._handleFinalResultPacket (/home/ec2-user/environment/LMS/node_modules/mysql/lib/protocol/sequences/Query.js:139:8)
    at Query.EofPacket (/home/ec2-user/environment/LMS/node_modules/mysql/lib/protocol/sequences/Query.js:123:8)
    at Protocol._parsePacket (/home/ec2-user/environment/LMS/node_modules/mysql/lib/protocol/Protocol.js:279:23)
    at Parser.write (/home/ec2-user/environment/LMS/node_modules/mysql/lib/protocol/Parser.js:76:12)
```

```
29|         <div class="alert alert-primary" role="alert">
30|             Most requested book: <span style="float:
right;"><%=mrb.title%> by <%=mrb.author%> | Total:
<%=mrb.magnitude%> times</span>
```

```
Cannot read properties of null (reading 'title')
    at eval (eval at compile (/home/ec2-
user/environment/LMS/node_modules/ejs/lib/ejs.js:618:12),
<anonymous>:30:29)
    at returnedFn (/home/ec2-
user/environment/LMS/node_modules/ejs/lib/ejs.js:653:17)
    at tryHandleCache (/home/ec2-
user/environment/LMS/node_modules/ejs/lib/ejs.js:251:36)
    at exports.renderFile [as engine] (/home/ec2-
user/environment/LMS/node_modules/ejs/lib/ejs.js:482:10)
    at View.render (/home/ec2-
user/environment/LMS/node_modules/express/lib/view.js:135:8
)
    at tryRender (/home/ec2-
user/environment/LMS/node_modules/express/lib/application.j
s:640:10)
    at Function.render (/home/ec2-
user/environment/LMS/node_modules/express/lib/application.j
s:592:3)
    at ServerResponse.render (/home/ec2-
user/environment/LMS/node_modules/express/lib/response.js:
1008:7)
    at /home/ec2-
user/environment/LMS/controllers/admin.js:31:33
    at /home/ec2-
user/environment/LMS/models/bookModel.js:138:9
```

```

right;"><%=brwd%></span>
    </div>
    <div class="alert alert-primary" role="alert">
      Total borrowed books in last 30 days: <span
style="float: right;"><%=mb%></span>
    </div>
    <div class="alert alert-primary" role="alert">
      Most borrowed book in last 30 days: <span
style="float: right;"><%=mbb.title%> by <%=mbb.author%> |
Total: <%=mbb.magnitude%> times</span>
    </div>
    <div class="alert alert-primary" role="alert">
      Most requested book: <span style="float:
right;"><%=mrb.title%> by <%=mrb.author%> | Total:
<%=mrb.magnitude%> times</span>
    </div>
  </div>
</div>
</div>

<%-include('../partials/footer.html')%>

```

change it

ed code for `views/admin/home.ejs`.

SE checks to the last two alerts. This prevents the "Cannot read properties

your database is empty


```
Error: /home/ec2-
user/environment/LMS/views/admin/home.ejs:1
>> 1| <%-include('partials/header.html')%>
    2|   <link rel="stylesheet" href="../../css/admin.css">
    3|   <title>Admin Home</title>
    4|   </head>

Could not find the include file "partials/header.html"
    at getIncludePath (/home/ec2-
user/environment/LMS/node_modules/ejs/lib/ejs.js:162:13)
    at includeFile (/home/ec2-
user/environment/LMS/node_modules/ejs/lib/ejs.js:288:19)
    at include (/home/ec2-
user/environment/LMS/node_modules/ejs/lib/ejs.js:651:16)
    at eval (eval at compile (/home/ec2-
user/environment/LMS/node_modules/ejs/lib/ejs.js:618:12),
<anonymous>:9:16)
    at returnedFn (/home/ec2-
user/environment/LMS/node_modules/ejs/lib/ejs.js:653:17)
    at tryHandleCache (/home/ec2-
user/environment/LMS/node_modules/ejs/lib/ejs.js:251:36)
    at exports.renderFile [as engine] (/home/ec2-
user/environment/LMS/node_modules/ejs/lib/ejs.js:482:10)
    at View.render (/home/ec2-
user/environment/LMS/node_modules/express/lib/view.js:135:8
)
    at tryRender (/home/ec2-
user/environment/LMS/node_modules/express/lib/application.j
s:640:10)
    at Function.render (/home/ec2-
user/environment/LMS/node_modules/express/lib/application.j
s:592:3)
```

okay now lets take it to ecr

```
voclabs:~/environment $ cd LMS
voclabs:~/environment/LMS (master) $ (Get-
ECRLoginCommand).Password | docker login --username
AWS --password-stdin 590184061028.dkr.ecr.us-east-
1.amazonaws.com
bash: syntax error near unexpected token `.Password'
voclabs:~/environment/LMS (master) $
```

if you named your repository something other than `library-app`, update the name in commands above).

```
voclabs:~/environment/LMS (master) $ aws ecr get-login-  
password --region us-east-1 | docker login --username AWS -  
-password-stdin 590184061028.dkr.ecr.us-east-  
1.amazonaws.com
```

```
WARNING! Your password will be stored unencrypted in  
/home/ec2-user/.docker/config.json.  
Configure a credential helper to remove this warning. See  
https://docs.docker.com/engine/reference/commandline/login/  
#credentials-store
```

```
Login Succeeded
```

```
voclabs:~/environment/LMS (master) $ docker build -t library-  
app .
```

```
[+] Building 1.4s (10/10) FINISHED
```

```
docker:default
```

```
=> [internal] load build definition from Dockerfile
```

```
0.0s
```

```
=> => transferring dockerfile: 272B
```

```
0.0s
```

```
=> [internal] load metadata for docker.io/library/node:18-  
alpine
```

```
0.1s
```

```
First-time build took 1.4s
```

895e91fa25317f9f7be

0.0s

=> => naming to docker.io/library/library-app

0.0s

```
voclabs:~/environment/LMS (master) $ docker tag library-  
app:latest 590184061028.dkr.ecr.us-east-  
1.amazonaws.com/library-app:latest
```

```
voclabs:~/environment/LMS (master) $ docker push  
590184061028.dkr.ecr.us-east-1.amazonaws.com/library-  
app:latest
```

The push refers to repository [590184061028.dkr.ecr.us-east-1.amazonaws.com/library-app]

abb4ae020915: Pushed

9e13b739e9f2: Pushed

fc836e7e3ae7: Pushed

5b7c15f5aeb7: Pushed

82140d9a70a7: Pushed

f3b40b0cdb1c: Pushed

0b1f26057bd0: Pushed

08000c18d16d: Pushed

latest: digest:

sha256:c44515de2e5e90e7c3193da766118fa3a60ac1845c2ef0
457989ff67a7f76df8 size: 1995

voclabs:~/environment/LMS (master) \$

Successfully pushed your code to the AWS Cloud! 🚀

how to change a private subnet to public subnet

it's been 18 minutes now
the deployment is still in progress and :
alb dns show:
503 Service Temporarily Unavailable

IP address

Port

Zone

Health status

Health status details

Administrative override

Override details

Anomaly detection result

10.0.4.112

8080

us-east-1b (use1-az1)

Unhealthy

Request timed out

No override

Anomaly detection result

10.0.4.112

8080

us-east-1b (use1-az1)

Unhealthy

Request timed out

No override

No override is currently active on target


Normal

already assigned
same results

which traffic should allowed in inbound rules of sg of ecs

from where should i debug ?
2 tasks run at same times

Task stopped at: 2025-12-14T21:07:48.950Z
ResourceInitializationError: unable to pull secrets or registry
auth: The task cannot pull registry auth from Amazon ECR:
There is a connection issue between the task and Amazon
ECR. Check your task network configuration. operation error
ECR: GetAuthorizationToken, exceeded maximum number of
attempts, 3, https response error StatusCode: 0, RequestID: ,
request send failed, Post "https://api.ecr.us-east-
1.amazonaws.com/": dial tcp 44.213.78.97:443: i/o timeout
View troubleshooting guide

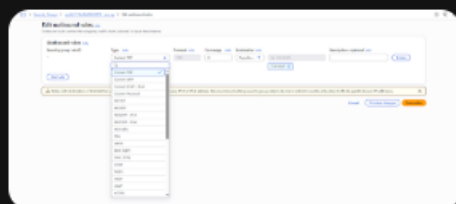

look at the s

we had also created an ec2 instance

rds should be in 1st az or in second

th.

Make a library managemnet system front page Login page that will have Don't have an account? Sign up now, it's free! and Already have an account? Sign in...
Email address
Password . make me a picture thats all

Banana Pro) ▾



```
/* 1. Import Fancy Fonts */
@import url('https://fonts.googleapis.com/css2?
family=Dancing+Script:wght@700&family=Playfair+Disp
lay:ital,wght@1,500&display=swap');

/* 2. Full Screen Background */
.bg-image {
  background-image: url('../images/images1/Bookshelf
Wallpaper Desktop HD.jpg');
  min-height: 100vh;
  min-width: 100vw;
  background-position: center;
  background-repeat: no-repeat;
  background-size: cover;
  background-attachment: fixed;
}

/* 3. The Main Login Container */
.login-box {
  /* Deep Brown/Mahogany with transparency */
  background-color: rgba(61, 30, 20, 0.85);

  /* Box Shape & Sizing */
  min-height: 30rem; /* Increased slightly to fit new
fonts */
  width: 40rem; /* Increased width so it doesn't look
cramped */
  margin: 6rem auto;
  border-radius: 15px;
  padding: 2rem;

  /* 3D Shadow and Text Color */
```

```

.sign-up {
  margin-top: 4rem; /* Spacing for the 'Create Account'
text */
  font-family: 'Playfair Display', serif;
  font-size: 1.1rem;
}

.sign-up a {
  color: #ffebcd; /* Gold color for links */
  text-decoration: underline;
}

.sign-up a:hover {
  color: white;
}

/* 7. Buttons (Black Theme) */
.btn-primary, button {
  background-color: #000000; /* Pure Black */
  color: white;
  border: 1px solid white;
  padding: 8px 30px;
  font-family: 'Playfair Display', serif;
  font-size: 1.1rem;
  border-radius: 30px;
  transition: all 0.3s ease;
  margin-top: 1rem;
}

.btn-primary:hover, button:hover {
  background-color: #333333;
  border-color: #ffebcd;
  transform: translateY(-2px);
  box-shadow: 0 5px 15px rgba(0,0,0,0.5);
}

THIS IS MY CODE CHNAGE THE FONTS AND SOZE AND
MAKE IT NICER YOU CAN CHANGE THE COLORS TOO
SINCE MY BACKGROUND IS THIS>>>CHANG THINGS
ACCORDING TO THIS BACKGROUND IMAGE

```



this is my login page please make it more prettier in this code `/* 1. Import Fancy Fonts */
@import url('https://fonts.googleapis.com/css2?family=Dancing+Script:wght@700&family=Playfair+Display:ital,wght@1,500&display=swap');`

```
/* 2. Full Screen Background */  
.bg-image {  
  background-image:  
url('../images/images1/customer.jpg');  
  min-height: 100vh;  
  min-width: 100vw;  
  background-position: center;  
  background-repeat: no-repeat;  
  background-size: cover;  
  background-attachment: fixed;  
}
```

```
/* 3. The Main Login Container */  
.login-box {  
  /* Deep Brown/Mahogany with transparency */  
  background-color: rgba(61, 30, 20, 0.85);  
  
  /* Box Shape & Sizing */  
  min-height: 30rem; /* Increased slightly to fit new  
fonts */  
  width: 40rem; /* Increased width so it doesn't look  
cramped */  
  margin: 6rem auto;  
  border-radius: 15px;  
  padding: 2rem;
```

```
/* 3D Shadow and Text Color */
```



```

form-control {
  background-color: rgba(255, 255, 255, 0.9);
  border: none;
  margin-bottom: 1rem;
}

/* 6. The Sign Up Link Section */
.sign-up {
  margin-top: 4rem; /* Spacing for the 'Create Account'
text */
  font-family: 'Playfair Display', serif;
  font-size: 1.1rem;
}

.sign-up a {
  color: #ffebcd; /* Gold color for links */
  text-decoration: underline;
}

.sign-up a:hover {
  color: white;
}

/* 7. Buttons (Black Theme) */
.btn-primary, button {
  background-color: #000000; /* Pure Black */
  color: white;
  border: 1px solid white;
  padding: 8px 30px;
  font-family: 'Playfair Display', serif;
  font-size: 1.1rem;
  border-radius: 30px;
  transition: all 0.3s ease;
  margin-top: 1rem;
}

.btn-primary:hover, button:hover {
  background-color: #333333;
  border-color: #ffebcd;
  transform: translateY(-2px);
  box-shadow: 0 5px 15px rgba(0,0,0,0.5);
}

```



This as the background image

how to upload an image to the cloud9

you didnt change the names of the varibales right?

how to give access to aws cloud9 to access your guthub repo
code and stuff

ghp_uzOHeTMqGEglyuja6G4H5bhEjvhq683XELYO (this
is the token to push changes into github one of my
groupmates made for his github repo. He will be
providing me with the github repo access to but i will
accessit from my account will this token still work if we
are working on the same AWS account

So first he should give me the access to the github repo, ^
Than in atht repo i will go and generate a token and than
clone my github repo in the cloud9 IDE and than if i
make chnages in the cloud9 env code and push the
code it will show that i made the changes right....is my
understanding and steps correct?

```
voclabs:~/environment/LMS (master) $ git config --  
global user.name "Zunaira"  
voclabs:~/environment/LMS (master) $ git config --  
global user.email "zunairaabdulaziz@gmail.com"  
voclabs:~/environment/LMS (master) $  
https://github.com/BSSE-23050/LMS-Project.git  
bash: https://github.com/BSSE-23050/LMS-Project.git:  
No such file or directory  
voclabs:~/environment/LMS (master) $
```

Do i need to login to my github