
a

How the gene-row identity of the anchor cohort was lost, detected, and recovered (all values frozen)

the anonymised deposit kept row ORDER but not row LABELS — every 'select gene by name' operation on the wrong assumption retrieved unrelated genes

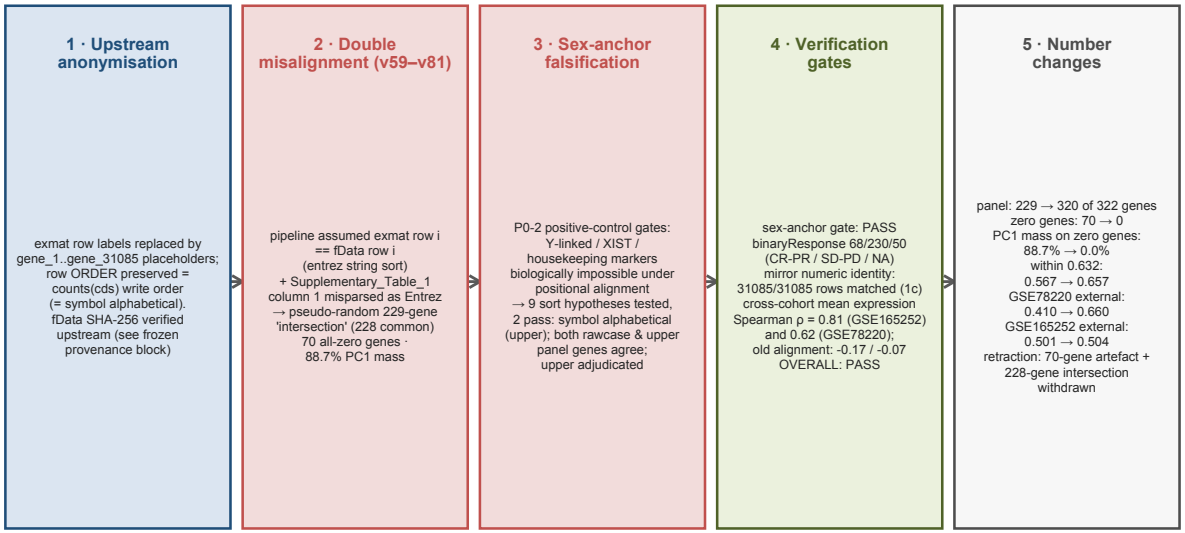

recovered key: exmat row j == j-th fData row under upper-cased symbol alphabetical sort · exported as exmat_row_key.csv (31085 rows)
anchor numeric consequences fully re-run in data/v82/v82_rerun_*.json; the WRONG-identity archives remain frozen as provenance of the error

Every affected anchor-arm number, old vs new (no cherry-picking)

b

old (wrong identity, frozen v60/v71/v74 archives) vs new (recovered key, v82 re-run)

	OLD	NEW
panel genes measurable in IMvigor210	229 (fake Entrez)	**320 / 322 (missing: IGHG1, PRKN)**
cross-cohort intersection	228	**320**
all-zero genes in anchor panel	70	**0**
PC1 loading mass on zero genes	88.7%	**0.0%**
anchor within apparent AUC	0.584	**0.666**
anchor within 0.632 AUC	0.567	**0.657**
external AUC → GSE165252	0.501	**0.504**
external AUC → GSE78220	0.410	**0.660**
calib. slope → GSE165252	0.98	**-0.53**
calib. slope → GSE78220	-2.48	**5.68**
Brier → GSE78220	0.347	**0.228**
log-loss → GSE78220	0.956	**0.648**

old external AUCs reproduce the frozen v71 values digit-for-digit (parity check in the frozen JSON) — the 'old' column is the published-wrong baseline, kept for provenance
GSE165252 barely moves (CI still spans 0.5); GSE78220 improves +0.250 but its CI still spans 0.5 at n = 25; BOTH calibration slopes move away from 1