

安裝 nodejs -> <https://nodejs.org/zh-tw/download>

最新版: 18.16.0 (包含 npm 9.5.1)

下載適合您平台的 Node.js 原始碼或安裝套件。立刻開始使用 Node.js。

LTS
建議大部分使用者使用

目前版本
最新功能

 Windows 安裝程式 node-v18.16.0-x64.msi	 macOS 安裝程式 node-v18.16.0.pkg	 原始碼 node-v18.16.0.tar.gz
--	--	--

Windows 安裝程式 (.msi)	32-bit	64-bit
Windows 二進位檔案 (.zip)	32-bit	64-bit
macOS 安裝程式 (.pkg)	64-bit / ARM64	
macOS 二進位檔案 (.tar.gz)	64-bit	ARM64

npm create-react-app my-react-app

```
命令提示字元
C:\reactjs_code>npm create-react-app my-react-app
Need to install the following packages:
  create-react-app@5.0.1
Ok to proceed? (y) y
npm WARN deprecated tar@2.2.2: This version of tar is no longer supported, and will not receive security
updates. Please upgrade asap.

Creating a new React app in C:\reactjs_code\my-react-app.

Installing packages. This might take a couple of minutes.
Installing react, react-dom, and react-scripts with cra-template...

[ ] \ reify:fsevents: sill reify mark deleted [ 'C:\reactjs_code\my-react-app\node_m
added 1422 packages in 47s

235 packages are looking for funding
  run `npm fund` for details
Git repo not initialized Error: Command failed: git --version
    at checkExecSyncError (node:child_process:885:11)
    at execSync (node:child_process:957:15)
    at tryGitInit (C:\reactjs_code\my-react-app\node_modules\react-scripts\scripts\init.js:46:5)
    at module.exports (C:\reactjs_code\my-react-app\node_modules\react-scripts\scripts\init.js:276:7)
    at [eval]:3:14
    at Script.runInThisContext (node:vm:129:12)
    at Object.runInThisContext (node:vm:307:38)
    at node:internal/process/execution:79:19
    at [eval]-wrapper:6:22 {
  status: 1,
```

```
C:\reactjs_code>cd my-react-app
C:\reactjs_code\my-react-app>dir
 磁碟區 C 中的磁碟是 w10
 磁碟區序號: 3620-321B

C:\reactjs_code\my-react-app 的目錄
2023/04/25 上午 09:53 <DIR>      .
2023/04/25 上午 09:53 <DIR>      ..
2023/04/25 上午 09:53          310 .gitignore
2023/04/25 上午 09:53 <DIR>      node_modules
2023/04/25 上午 09:53      675,436 package-lock.json
2023/04/25 上午 09:53      815 package.json
2023/04/25 上午 09:53 <DIR>      public
2023/04/25 上午 09:53      3,359 README.md
2023/04/25 上午 09:53 <DIR>      src
                4 個檔案      679,920 位元組
                5 個目錄    19,162,759,168 位元組可用
C:\reactjs_code\my-react-app>code .
C:\reactjs_code\my-react-app>
```

npm start


```
Windows PowerShell
Compiled successfully!

You can now view my-react-app in the browser.

  Local:            http://localhost:3000
  On Your Network:  http://10.10.1.157:3000

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
```

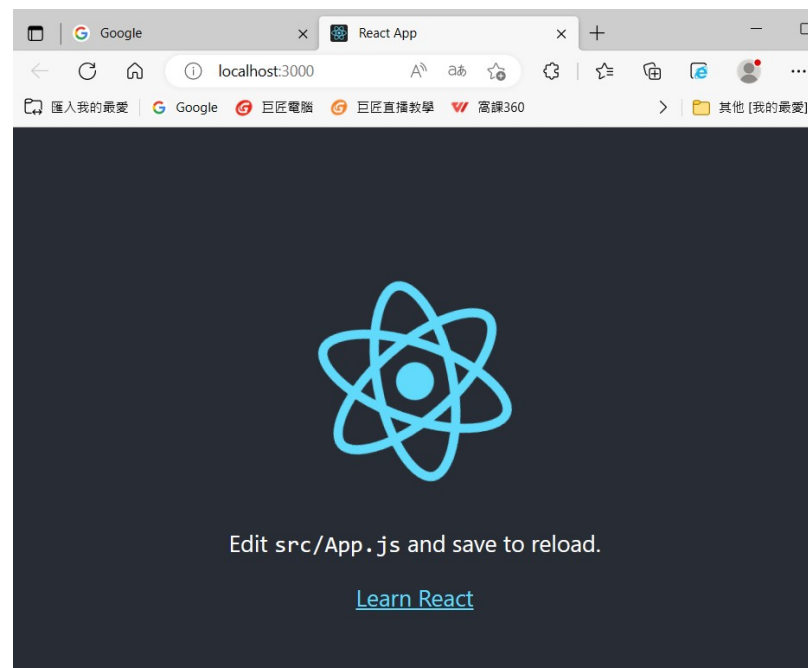

Hello.js

```
import React from "react";
import ReactDOM from "react-dom/client";

function Hello(props) {
  return <h1>Hello World!</h1>;
}

const container = document.getElementById('root');
const root = ReactDOM.createRoot(container);
root.render(<Hello />);
export default Hello;
/*
```

The examples in this tutorial are created using the

create-react-app.

Install the create-react-app,
and you will be able to run the same examples on your computer.

In this example we create a component called 'Hello'.
The component is rendered in a container called 'root'.

*/

修改 index.js

```
import React from 'react';  
import ReactDOM from 'react-dom/client';  
import './index.css';  
import App from './App';  
import Hello from './Hello';  
import reportWebVitals from './reportWebVitals';
```

```
const root = ReactDOM.createRoot(document.getElementById('root'));  
root.render(  
  <React.StrictMode>  
    <Hello />  
  </React.StrictMode>  
);
```

```
// If you want to start measuring performance in your app, pass a function  
// to log results (for example: reportWebVitals(console.log))  
// or send to an analytics endpoint. Learn more: https://bit.ly/CRA-vitals  
reportWebVitals();
```

