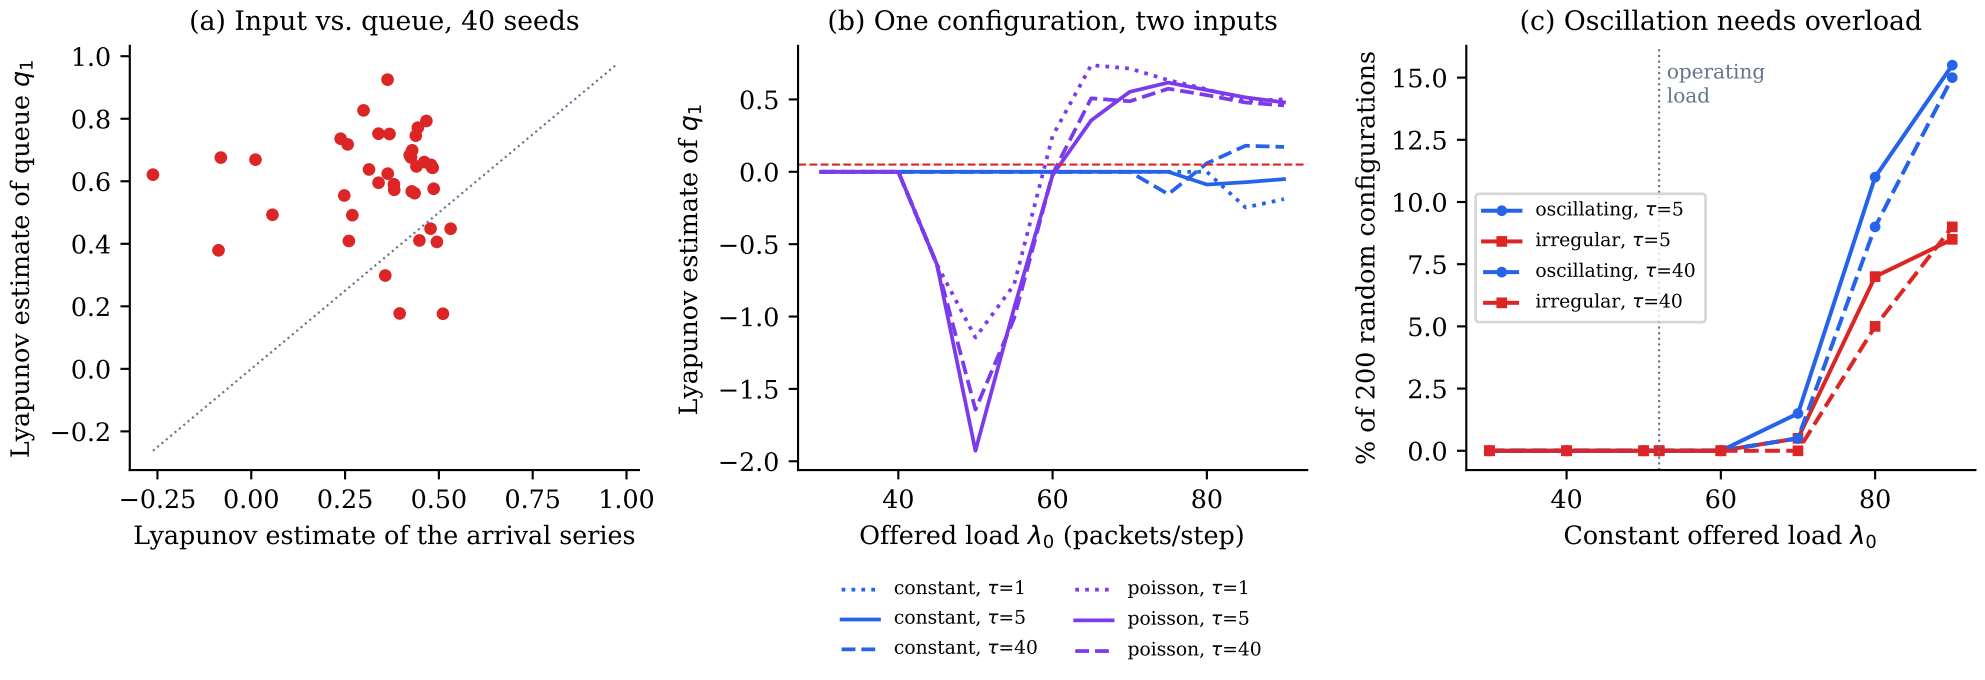
(a) Input vs. queue, 40 seeds
Lyapunov estimate of queue q_1
Lyapunov estimate of the arrival series
(b) One configuration, two inputs
Lyapunov estimate of q_1
Offered load λ_0 (packets/step)
constant, τ=1
constant, τ=5
constant, τ=40
poisson, τ=1
poisson, τ=5
poisson, τ=40
(c) Oscillation needs overload
% of 200 random configurations
operating load
oscillating, τ=5
irregular, τ=5
oscillating, τ=40
irregular, τ=40
Constant offered load λ_0