

Install the Helper plugin in Eclipse IDE


Need of JBOSS plugin (specific for Eclipse IDE)

The JBoss Tools plugin for Hibernate simplifies development by generating configuration files, entity classes, and CRUD operations automatically. It includes an HQL editor, schema visualization, and seamless Eclipse integration, saving time and enhancing productivity.


Steps to install the helper plugin (JBOSS) for Hibernate:

Step1: Click on Help and then select Eclipse Marketplace.


Choose Jboss

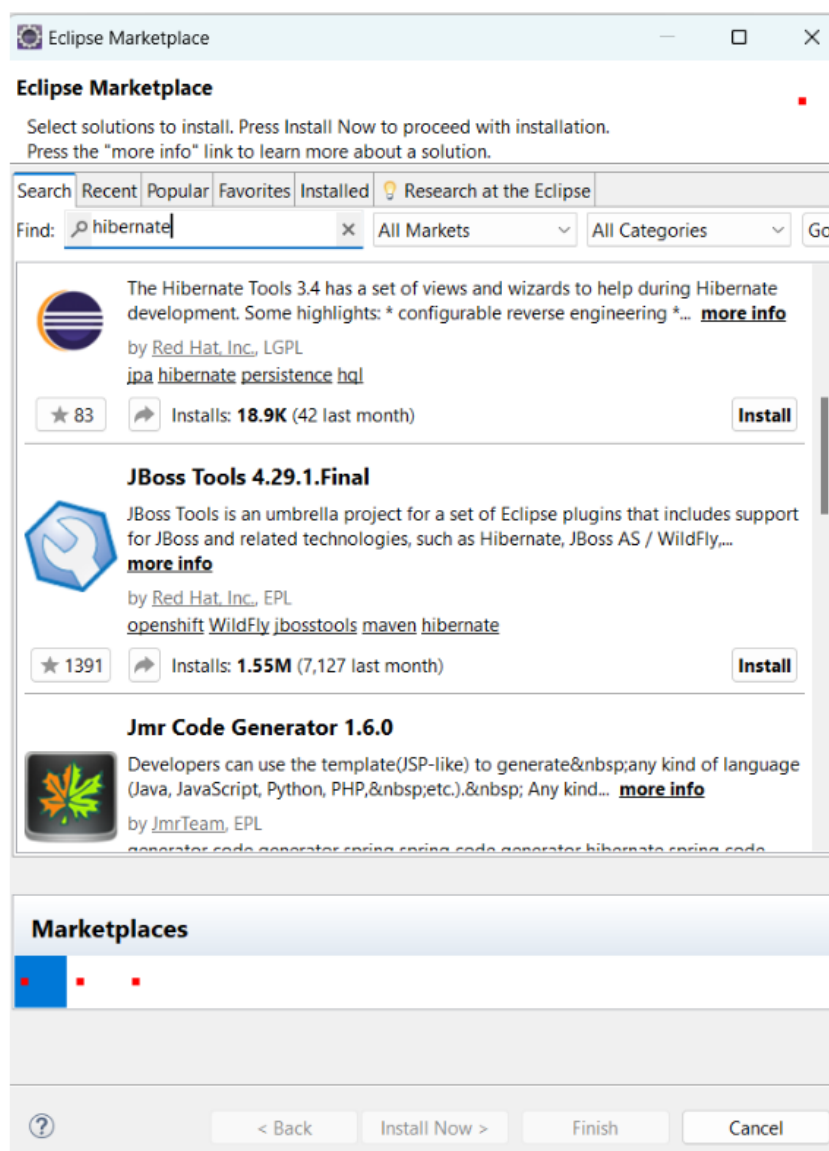


Step 2: Select only Hibernate tools.

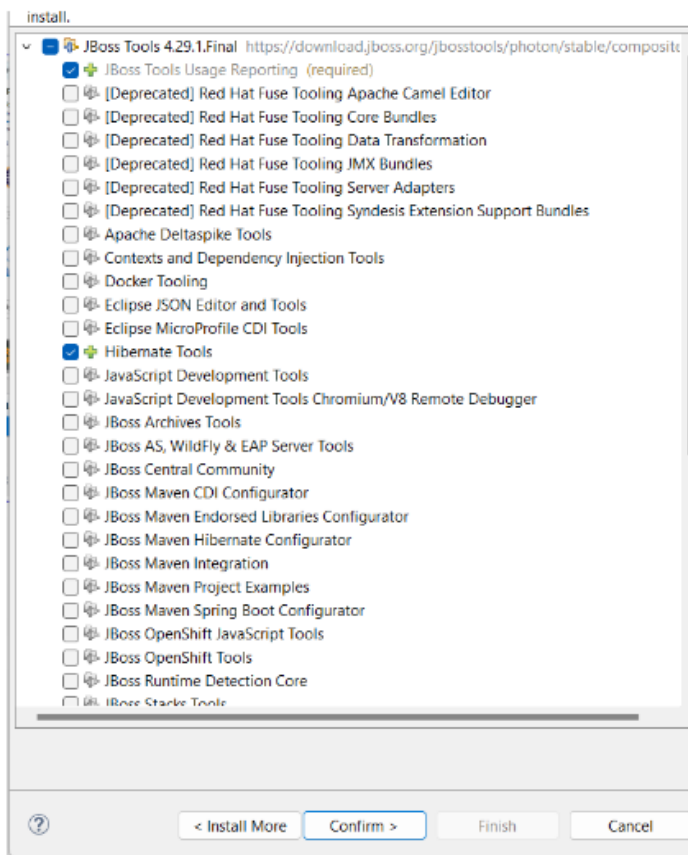


Step3: Accept license

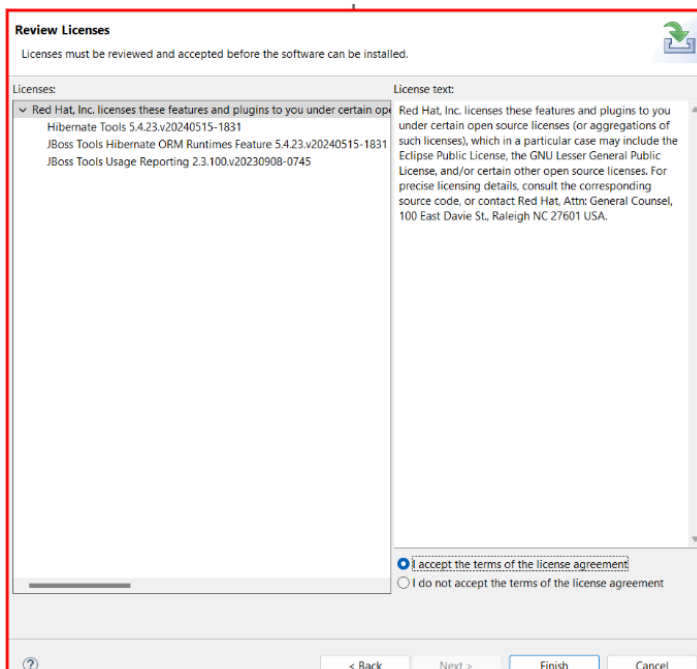


Step(optional): If you get such things, just **check the** check option and then click on **Trust selected**.

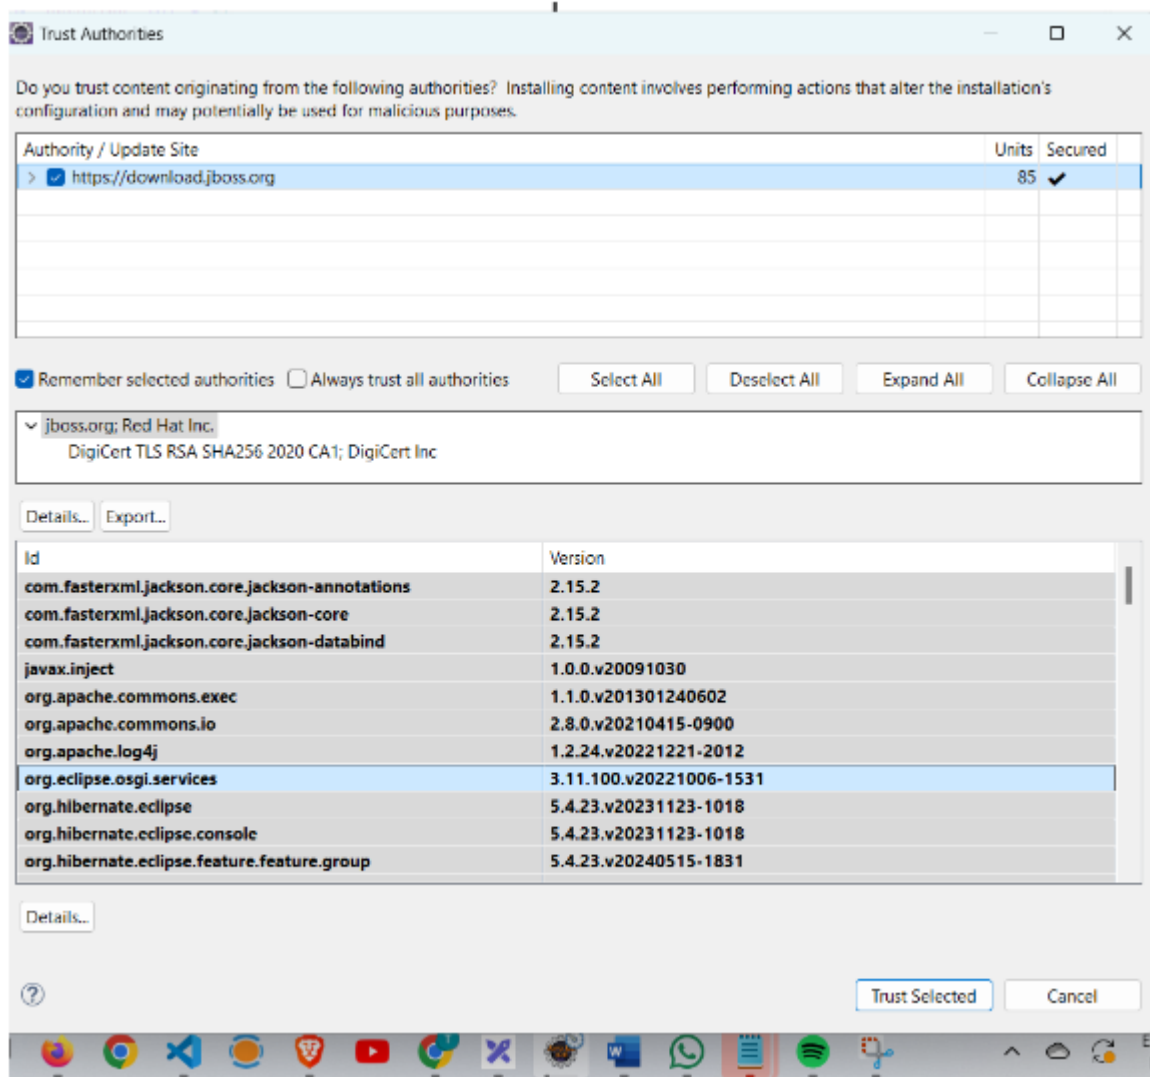


Step(Optional): If you get such things, just **check** the check option and then click on **Trust selected**.

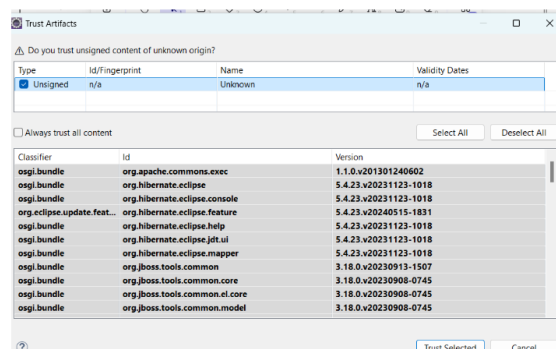

Step(final): Restart your eclipse

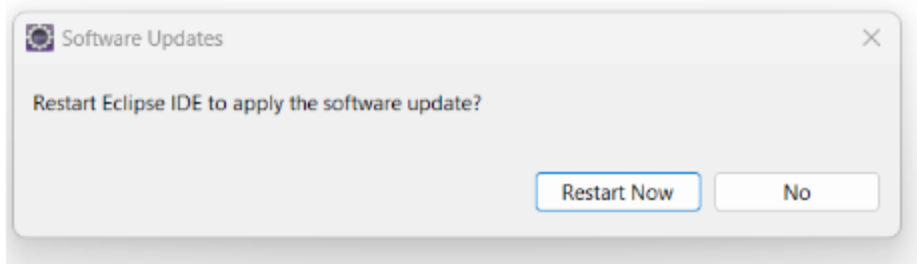



Step(Optional): If you get after restarting then select Yes.

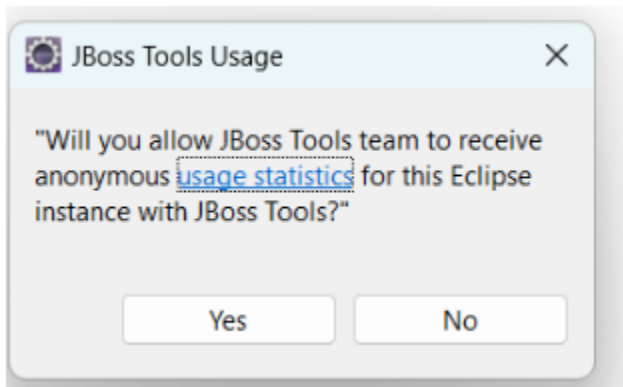

Create a hibernate.cfg.xml file using a plugin.

Step1: Search hibernate and choose cfg.xml file

Create the name of the XML file by (hibernate.cfg.xml)

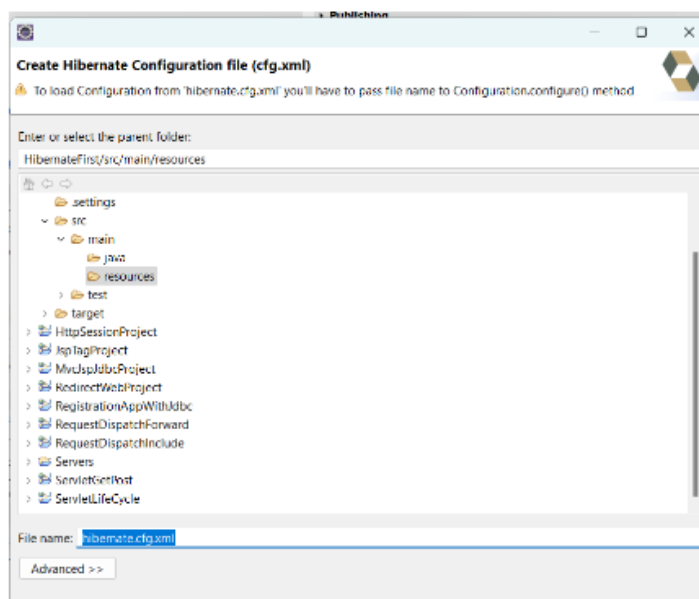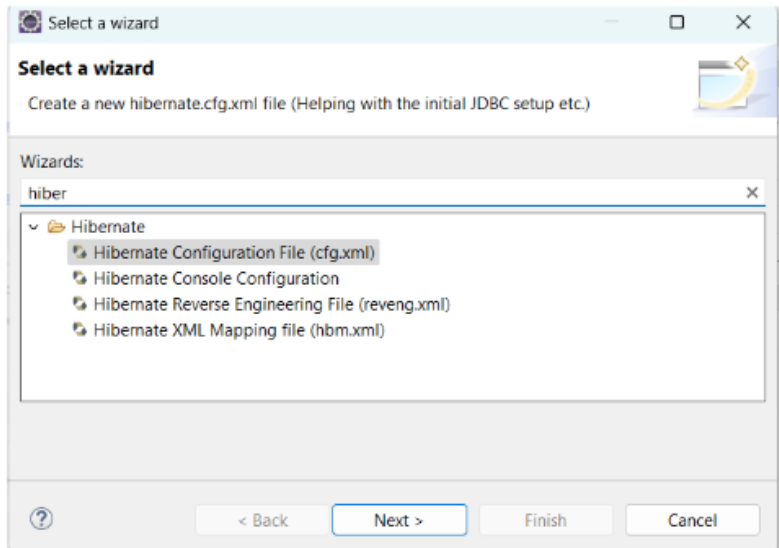

Step2: Enter details of configurations

Hibernate Configuration File (cfg.xml)
This wizard creates a new configuration file to use with Hibernate.

Container: /HibernateFirst/src/main/resources
File name: hibernate.cfg.xml
Hibernate version: 6.5
Session factory name:
[Get values from Connection](#)

Database dialect: org.hibernate.dialect.MySQL8Dialect
Driver class: com.mysql.cj.jdbc.Driver
Connection URL: jdbc:mysql://localhost:3306/telusko_db
Default Schema:
Default Catalog:
Username: root
Password: root

☐ Create a console configuration

< Back Next > Finish Cancel

Final file:

```
-//Hibernate/Hibernate Configuration DTD 3.0//EN (doctype with catalog)
1 <?xml version="1.0" encoding="UTF-8"?>
2 <!DOCTYPE hibernate-configuration PUBLIC
3   "-//Hibernate/Hibernate Configuration DTD 3.0//EN"
4   "http://www.hibernate.org/dtd/hibernate-configuration-3.0.dtd">
5 <hibernate-configuration>
6   <session-factory>
7     <property name="hibernate.connection.driver_class">com.mysql.cj.jdbc.Driver</property>
8     <property name="hibernate.connection.password">root</property>
9     <property name="hibernate.connection.url">jdbc:mysql://localhost:3306/telusko_db</property>
10    <property name="hibernate.connection.username">root</property>
11    <property name="hibernate.dialect">org.hibernate.dialect.MySQL8Dialect</property>
12  </session-factory>
13 </hibernate-configuration>
14
```