


Static Response and Dynamic Response

👉 Static Response:

- **Definition:** No change in the output for every user.
- **Process:**
 - The web browser sends a request to the web server.
 - The web server returns static files (e.g., HTML, CSS).
 - The response is the same for all users.

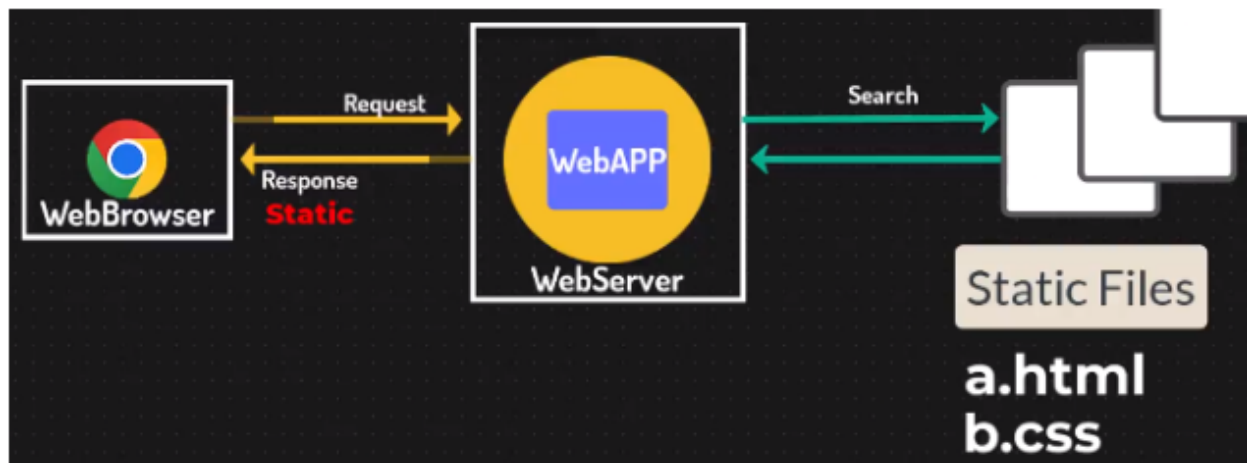

example:

- User requests a static HTML page.
- Web server serves the static HTML and CSS files.
- Response remains unchanged for all users.


index.html

Student Registration Page

Name	ABC
Address	xyz
Mob no	000

👉 Dynamic Response:

- **Definition:** Output changes based on user requests.
- **Process:**
 - The web browser sends a request to the web server.
 - The web server interacts with a helper application (e.g., a Java servlet) within a container (e.g., Apache Tomcat).
 - The web server returns dynamic content generated based on the user's request.
 - Examples of technologies used for dynamic responses: Servlet, JSP, ASP, PHP, CGI, Perl, ColdFusion.

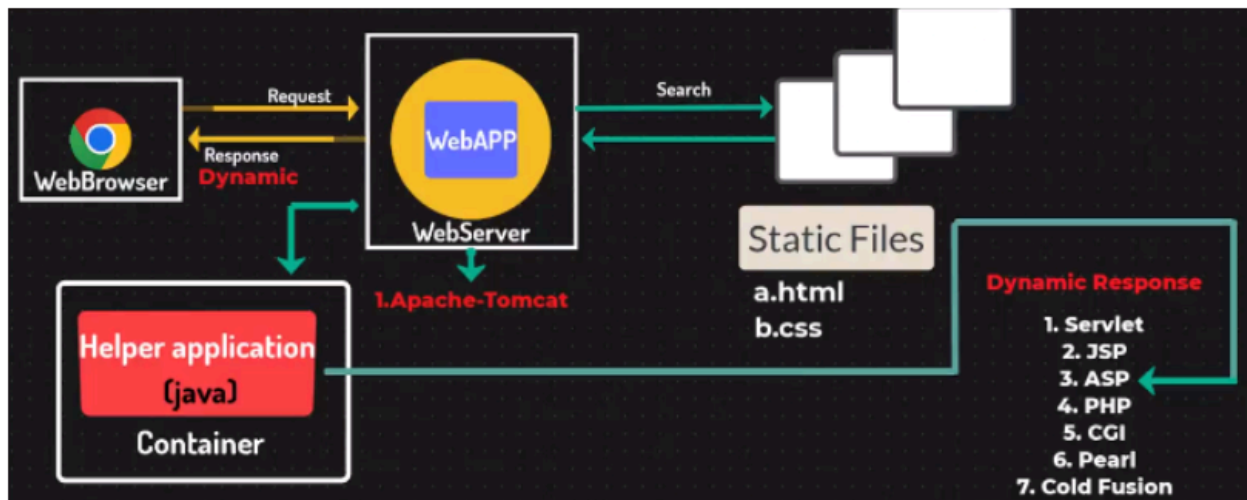

example:

- User fills out a registration form and submits it.
- Web server receives the request and forwards it to a servlet.
- The servlet processes the request (e.g., storing user details in a database).
- The servlet generates a dynamic response based on the processed data and sends it back to the web server.
- Web server returns the dynamic response to the user's browser.