

Redirecting Response to JSP or HTML

Redirecting a response in a servlet sends the client to a different resource, such as a JSP or HTML page. This is commonly done using `sendRedirect()` or `RequestDispatcher`.

1. Using `sendRedirect()`

- **Purpose:** Redirects the client to a different URL. This causes the browser to issue a new request to the specified URL.
- **How It Works:**
 - The servlet instructs the client (browser) to request a different URL.
 - A new request is created, so request attributes are not preserved.

```
response.sendRedirect("targetPage.jsp");
```

- **Use Case:** Redirecting to another domain, external website, or when you want the client to initiate a new request.

e.g

```
@WebServlet("/firstservlet")
public class FirstServletApp extends HttpServlet {

    public FirstServletApp() {
        System.out.println("Internally constructor called");
    }
}
```

```
public void doPost(HttpServletRequest request,
HttpServletRequest response) throws ServletException, IOException
{

    String name=request.getParameter("uname");
    String city=request.getParameter("ucity");
    response.sendRedirect("/FirstDynamicWebProject/success.jsp");
}
}
```

Success.jsp


```
<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Insert title here</title>
</head>
<body>
<h1> Successful Registration</h1>
</body>
</html>
```

localhost:8070/FirstDynamicWebProject/

User Information

Name:

City:

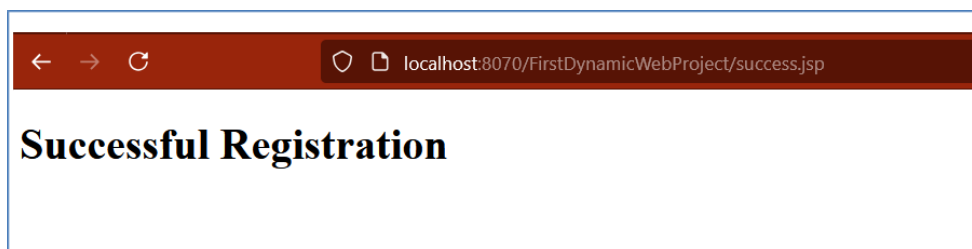

2. Using RequestDispatcher

- **Purpose:** Forwards the request to another resource (JSP or HTML) within the same application.
- **How It Works:**
 - The request is forwarded internally within the server, so the original request and response objects are preserved.
 - No new request is generated; the URL in the browser remains unchanged.

```
RequestDispatcher dispatcher =  
request.getRequestDispatcher("targetPage.jsp");  
dispatcher.forward(request, response);
```

- **Use Case:** Forwarding to a JSP for further processing or displaying results after servlet processing.

Key Differences:

- **sendRedirect():**
 - Causes a new request.
 - URL in the browser changes.
 - Slower due to the extra client-server round trip.
- **RequestDispatcher.forward():**
 - Keeps the original request and response.
 - URL in the browser does not change.
 - Faster, as it avoids an additional client-server round trip.