
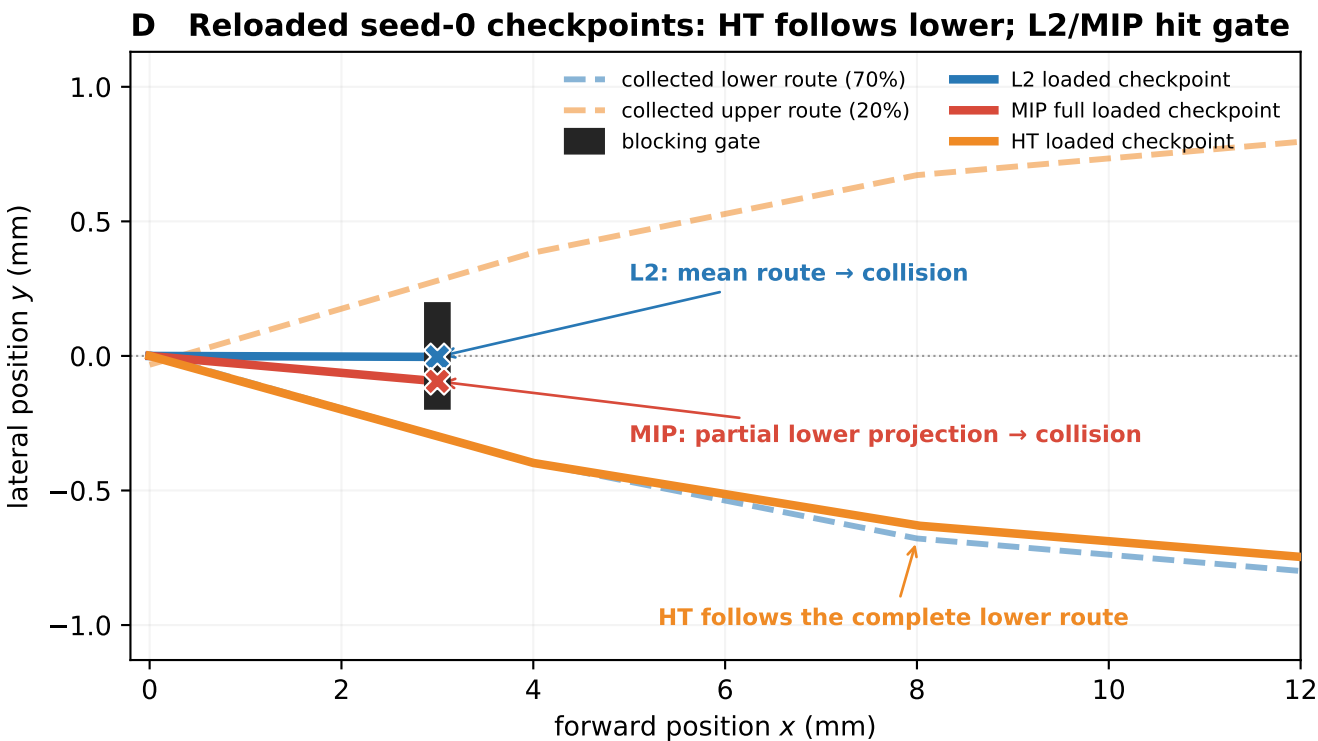
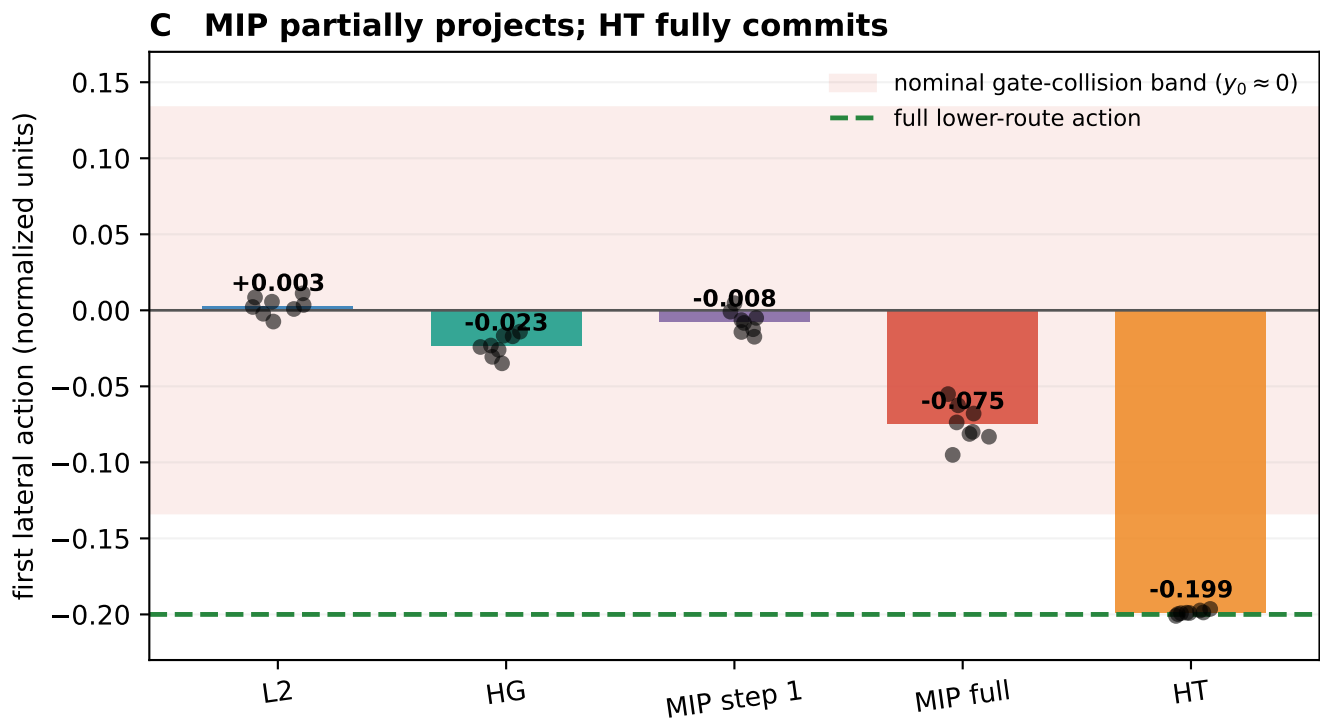
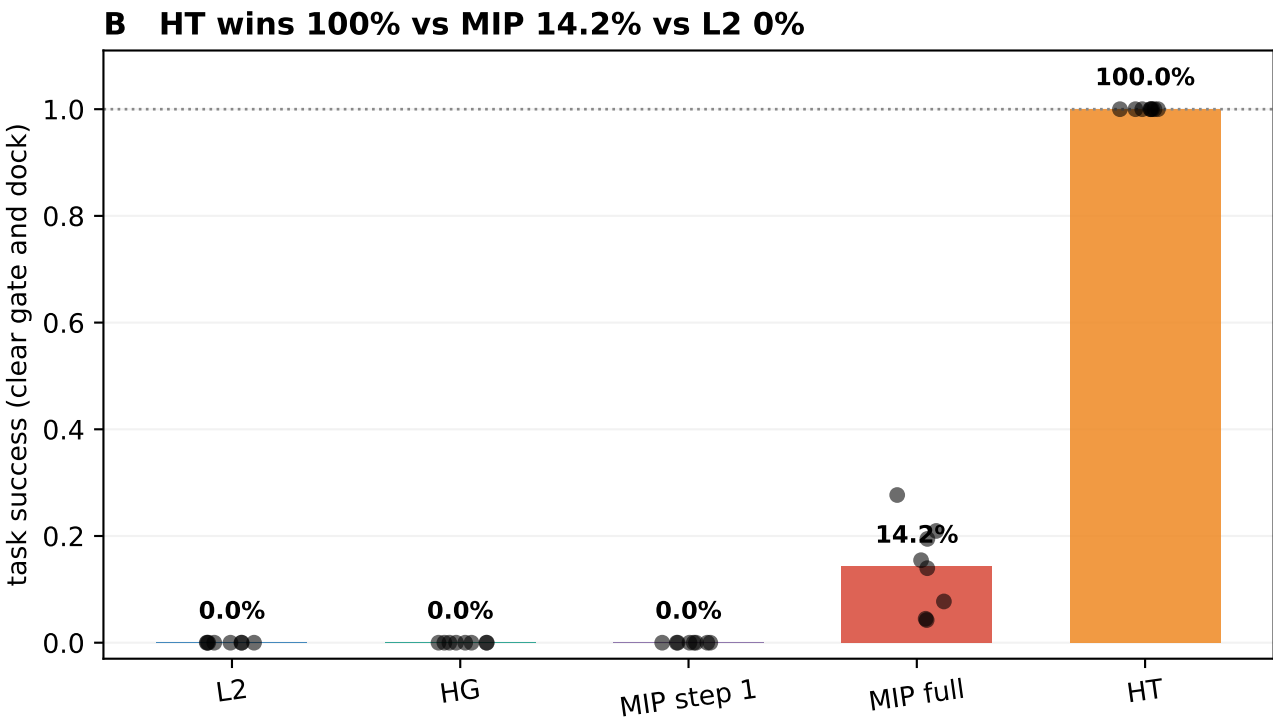


Collectable noisy paths: only HT commits far enough to clear the swept decision gate

CHECKPOINT-BACKED TRAINED MODELS — 8 seeds; 3,000 swept-collision-free routes/seed; route modes −1 (70%), +1 (20%), +5 (10%); shared decision states balanced 40×

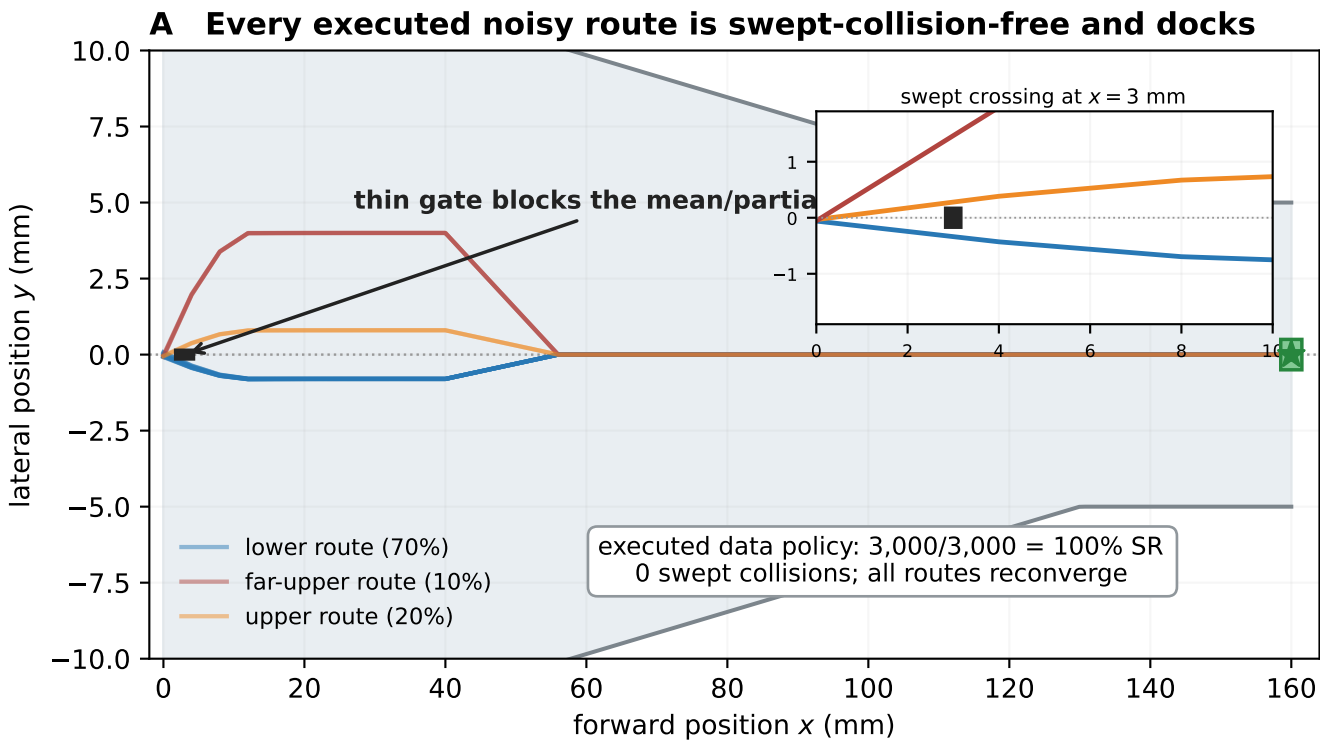

Mechanism: route mean = 0 → L2 hits the gate; MIP moves only partway toward the dominant route; HT selects the complete 70% route. Noise is temporally coherent at path level and executed during collection —not injected post hoc.