



(a) Route two requests under one effective configuration

$8 \times \text{TP1, PP1}$; same model and generation; $\tau = 1024$, $N = 128$

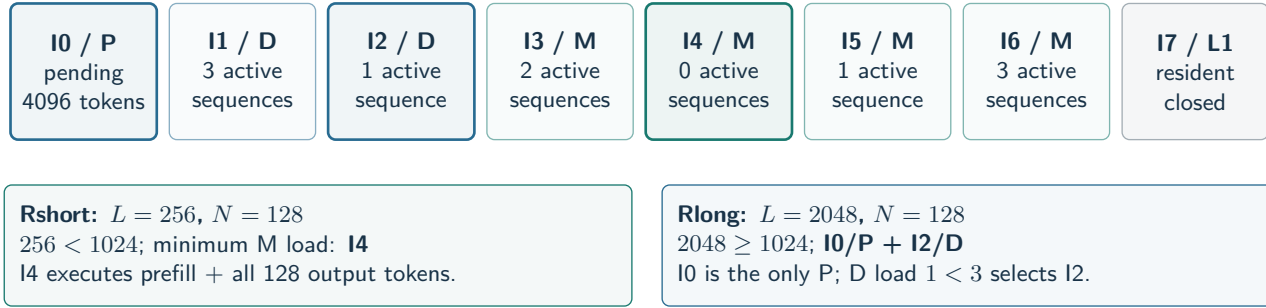

Illustrative snapshot; hold other requests unchanged when reading the counters.

(b) Execute Rlong, preserve the first token, and report events

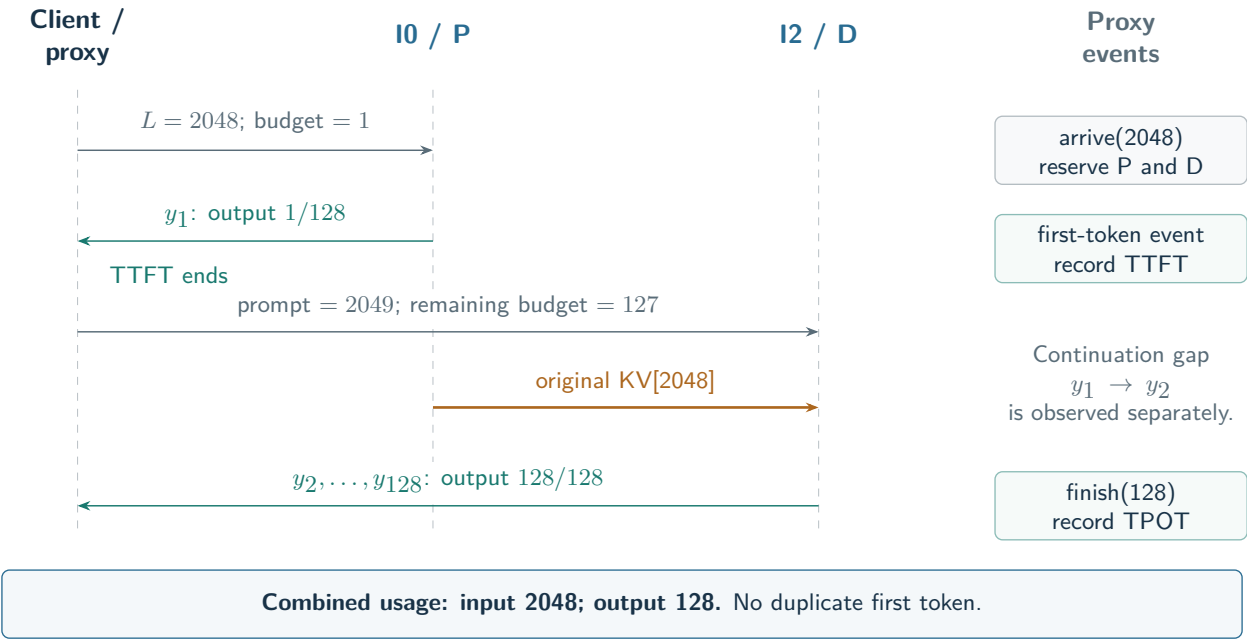

I0 pending tokens: $4096 \rightarrow 6144 \rightarrow 4096$; I2 sequences: $1 \rightarrow 2 \rightarrow 1$.