


LESSON 6

Element Types and Tables

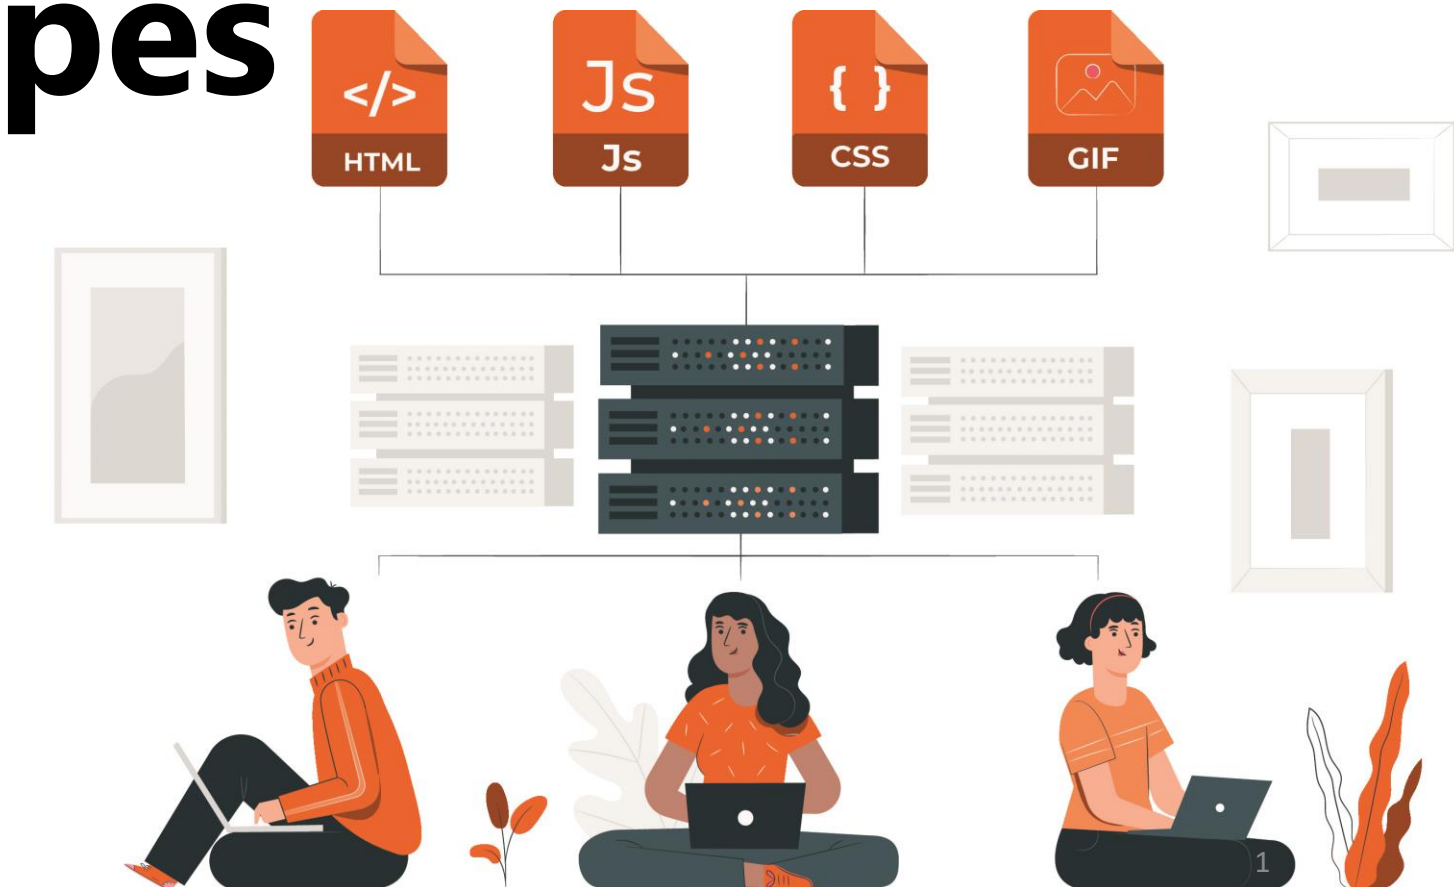

OBJECTIVES

Differentiate block level elements with inline elements

Identify the table elements

Create a table in a web page

INLINE AND BLOCK LEVEL ELEMENTS

Element Categories

Types of Elements

- In HTML, most elements are defined as block level or inline elements

Block Levels

- Start from a new line
- Example: `<h1>`, `<form>`, `<li>`, `<ol>`,
`<ul>`, `<p>`, `<pre>`, `<table>`, `<div>`, etc.

Inline Levels

- Normally displayed without line breaks
- Example: `<b>`, `<a>`, `<strong>`, `<img>`, `<input>`, `<em>`, `<span>`, etc.

Inline Levels

- Normally displayed without line breaks
- Example: `<b>`, `<a>`, `<strong>`, `<img>`, `<input>`, `<em>`, `<span>`, etc.

Types of Elements

- Other elements can be used either as block level elements or inline elements
- Example
 - APPLET – embedded JS
 - FRAME – inline frame
 - INS – inserted text
 - MAP – image map
 - OBJECT – embedded object
 - SCRIPT – script within an HTML document

CREATING TABLES

<table>

<table>

- used to **define** or **create** a **table**
- divided into **table rows** with the **<tr>**
- table rows are divided into **table columns** (table data) with the **<td>**

<table>

```
<table>
```

```
  <tr>
```

```
    <td>First Row, First Column</td>
```

```
    <td>First Row, Second Column</td>
```

```
    <td>First Row, Third Column</td>
```

```
  </tr>
```

```
  <tr>
```

```
    <td>Second Row, First Column</td>
```

```
    <td>Second Row, Second Column</td>
```

```
    <td>Second Row, Third Column</td>
```

```
  </tr>
```

```
</table>
```

Table attributes

- **border** – sets the **width** in pixels (px) of the table's border
- **bordercolor** – sets the **color** value of predefined color name of the table's border
- **cellpadding** – sets the **number of space between cell walls and its content**
 - possible values are in px or as %

Table attributes

- cellspacing – sets the **number of space between cells**
- height – sets the **height** in pixels (px) of the table
- width – sets the **width** in pixels (px) of the table

Table data attributes

- align – sets the **horizontal alignment** of the element inside the web browser, such as left, right and center
- background – provides the **URL** of an **image** file to be used as the table's background

Table data attributes

- **bgcolor** – set the **color value** of predefined color name of the **table's background**
- **bordercolor** – Sets the **color value** of predefined color name of the **table's border**

colspan

- A cell can span two or more columns

```
<table border="2">  
  <tr>  
    <td>Red</td>  
    <td>Blue</td>  
    <td>Green</td>  
  </tr>  
  <tr>  
    <td>Yellow</td>  
    <td colspan="2">Violet</td>  
  </tr>  
</table>
```


rowspan

```
<table border="2">  
  <tr>  
    <td>Red</td>  
    <td>Blue</td>  
    <td>Green</td>  
  </tr>  
  <tr>  
    <td rowspan="2">Yellow</td>  
    <td colspan="2">Orange</td>  
  </tr>  
  <tr>  
    <td>Violet</td>  
    <td>Pink</td>  
  </tr>  
</table>
```

Table header

```
<table border="2">
  <tr>
    <th>Sample 1</th>
    <th>Sample 2</th>
  </tr>
  <tr>
    <td>Red</td>
    <td>Blue</td>
    <td>Green</td>
  </tr>
  <tr>
    <td rowspan="2">Yellow</td>
    <td colspan="2">Orange</td>
  </tr>
</table>
```

caption

- used to provide a **title** into a table
- recommended to be **placed after the <table> element**

```
<table border="1">
```

```
  <caption> Sample Table</caption>
```

```
  <tr>
```

```
    <td>First Row, First Column</td>
```

```
    <td>First Row, Second Column</td>
```

```
    <td>First Row, Third Column</td>
```

```
  </tr>
```

```
</table>
```