


LESSON 7

Forms, Frames

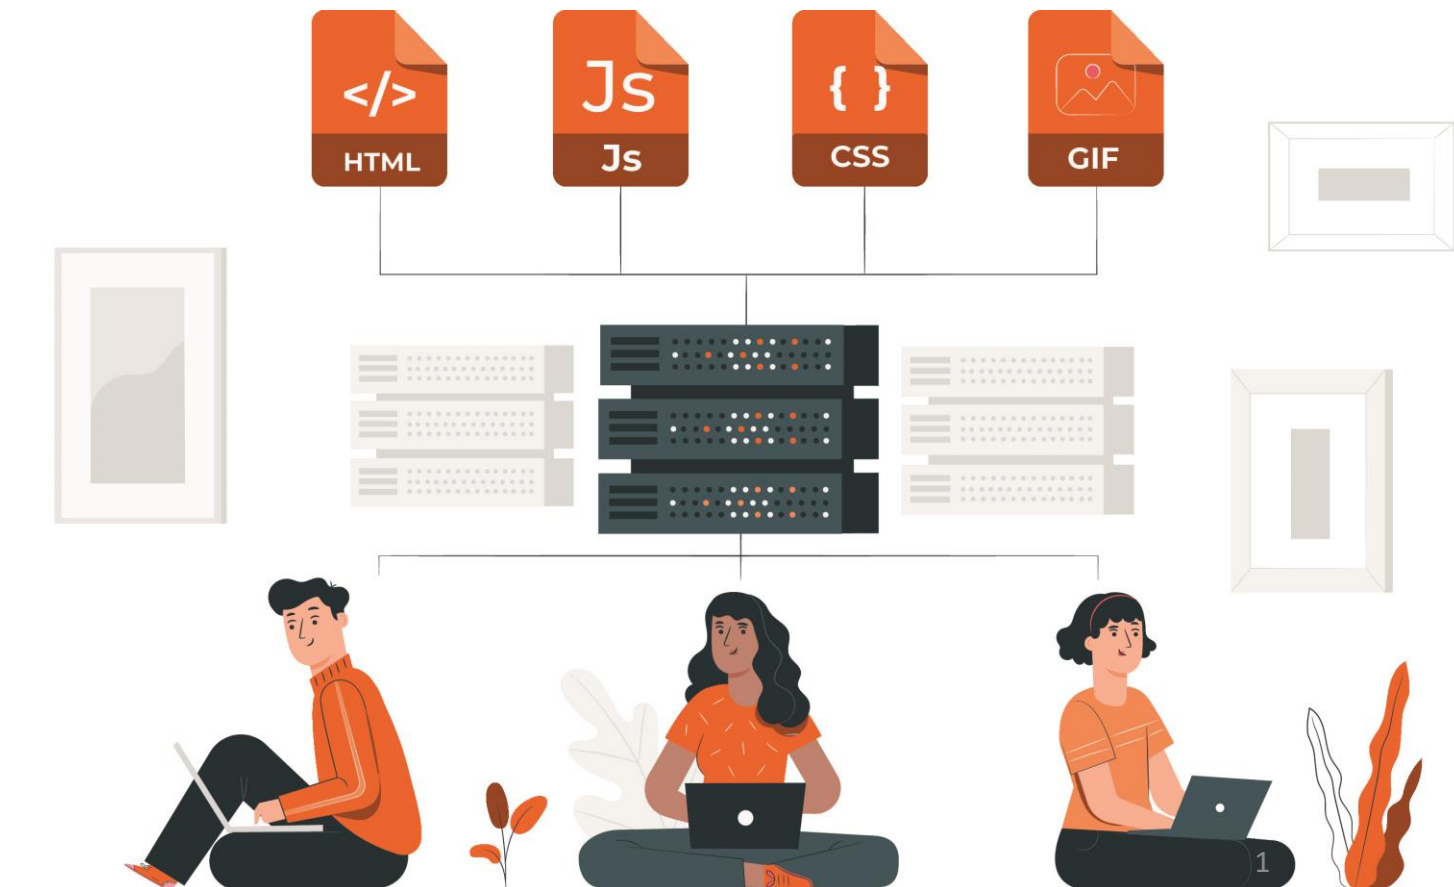

OBJECTIVES

Differentiate block level elements with inline elements

Identify the table elements

Create a table in a web page

Forms

Used to collect information from
the user

<form>

<body>

 <form>...</form>

</body>

action attribute

- used to point to a webpage that will load after the user submits the form

```
<form action="https://csucarig.edu.ph">  
</form>
```

method and name attribute

- **method attribute** – specifies **the HTTP method** (GET or POST) to be used when forms are submitted
 - **GET** – form data will be **visible** in the page address
 - **POST** – if the form is updating data, **or includes sensitive info** (passwords), offers **better security** because the submitted data is not visible in the web page address
- **name attribute** – specifies a **name** for a form

FORM ELEMENTS

Text,radio,checkbox...

<input>

- **most important** form element
- has **many variations**, depending on the type attribute

HTML Input types

Text,radio,checkbox...

Input Type: **text**

- `<input type="text">` defines a **one-line input field** for text input
- **Note:** The form itself is **not visible**.

`<form>`

First name:`<br>`

`<input type="text" name="firstname"><br>`

Last name:`<br>`

`<input type="text" name="lastname">`

`</form>`

Input Type: **password**

- `<input type="password">` defines a password field

`<form>`

User name: `<br>`

`<input type="text" name="username"><br>`

User password: `<br>`

`<input type="password" name="psw">`

`</form>`

Input Type: **radio**

- `<input type="radio">` defines a radio button
- select **ONE** of a limited number of choices

`<form>`

```
    <input type="radio" name="gender" value="male" checked> Male<br>
```

```
    <input type="radio" name="gender" value="female"> Female<br>
```

`</form>`

Input Type: **submit**

- defines a button for submitting form input to a form-handler
- the form-handler is typically a server page with a script for processing input data

Input Type: **submit**

```
<form action="action_page.php">  
  First name:<br>  
  <input type="text" name="firstname" value="M  
ickey"><br>  
  Last name:<br>  
  <input type="text" name="lastname" value="Mo  
use"><br><br>  
  <input type="submit" value="Submit">  
</form>
```

Input Type: **number**

- Used for input fields that should contain a numeric value

`<form>`

Quantity (between 1 and 5):

```
<input type="number" name="quantity" min="1" max="5">
```

`</form>`

Input Restrictions

Attribute	Description
disabled	Specifies that an input field should be disabled
max	Specifies the maximum value for an input field
maxlength	Specifies the maximum number of character for an input field
min	Specifies the minimum value for an input field
pattern	Specifies a regular expression to check the input value against
readonly	Specifies that an input field is read only (cannot be changed)
required	Specifies that an input field is required (must be filled out)
size	Specifies the width (in characters) of an input field
step	Specifies the legal number intervals for an input field
value	Specifies the default value for an input field

Example of using restrictions

```
<form>
```

Quantity:

```
  <input type="number" name="points"  
    min="0" max="100" step="10" value="30">
```

```
</form>
```

The **value** Attribute

- specifies the initial value for an input field

```
<form action="">
```

```
First name:<br>
```

```
<input type="text" name="firstname" value="John">
```

```
<br>
```

```
Last name:<br>
```

```
<input type="text" name="lastname">
```

```
</form>
```

The **readonly** Attribute

- specifies that the input field is read only (cannot be changed)

```
<form action="">
```

```
First name:<br>
```

```
<input type="text" name="firstname" value="John" readonly>
```

```
<br>
```

```
Last name:<br>
```

```
<input type="text" name="lastname">
```

```
</form>
```

The **disabled** Attribute

- specifies that the input field is disabled
- a disabled element is un-usable and un-clickable
- disabled elements will not be submitted

```
<form action="">
```

```
First name:<br>
```

```
<input type="text" name="firstname" value="John" disabled>
```

```
<br>
```

```
Last name:<br>
```

```
<input type="text" name="lastname">
```

```
</form>
```

The **size** Attribute

```
<form action="">  
First name:<br>  
<input type="text" name="firstname"  
value="John" size="40">  
<br>  
Last name:<br>  
<input type="text" name="lastname">  
</form>
```

The **maxlength** Attribute

- specifies the maximum allowed length for the input field

```
<form action="">
```

```
First name:<br>
```

```
<input type="text" name="firstname" maxlength="10">
```

```
<br>
```

```
Last name:<br>
```

```
<input type="text" name="lastname">
```

```
</form>
```

Input Type: **date**

Birthday:

```
<input type="date" name="bday">
```

Enter a date before 1980-01-01:

```
<input type="date" name="bday" max="1979-12-31"><br>
```

Enter a date after 2000-01-01:

```
<input type="date" name="bday" min="2000-01-02"><br>
```

Input Type: **color**

```
<form>
```

Select your favorite color:

```
<input type="color" name="favcolor">
```

```
</form>
```

Input Type: **range**

```
<form>  
  <input type="range" name="points"  
min="0" max="10">  
</form>
```

Input Type: **month**

```
<form>
```

 Birthday (month and year):

```
    <input type="month" name="bdaymonth">
```

```
</form>
```

Input Type: **week**

```
<form>
```

Select a week:

```
<input type="week" name="week_year">
```

```
</form>
```

Input Type: **time**

```
<form>
```

Select a time:

```
<input type="time" name="usr_time">
```

```
</form>
```

Grouping Form Data with **<fieldset>**

- groups related data in a form
- **<legend>** element defines a caption for the **<fieldset>** element

Grouping Form Data with **<fieldset>**

```
<form action="">
  <fieldset>
    <legend>Personal information:</legend>
    First name:<br>
    <input type="text" name="firstname" value="Mickey"><br>
    Last name:<br>
    <input type="text" name="lastname" value="Mouse"><br><br>
    <input type="submit" value="Submit">
  </fieldset>
</form>
```

The **<select>** Element (Drop-Down List)

```
<select name="cars">  
  <option value="volvo">Volvo</option>  
  <option value="saab">Saab</option>  
  <option value="fiat">Fiat</option>  
  <option value="audi">Audi</option>  
</select>
```

The **<select>** Element (Drop-Down List)

```
<select name="cars">  
  <option value="volvo">Volvo</option>  
  <option value="saab">Saab</option>  
  <option value="fiat" selected>Fiat</option>  
  <option value="audi">Audi</option>  
</select>
```

The `<textarea>` Element

- defines a **multi-line input field** (a text area)

```
<textarea name="message" rows="10" cols="30">  
The cat was playing in the garden.  
</textarea>
```

The **<button>** Element

- defines a clickable button

```
<button type="button" onclick="alert('Hello  
World!')">
```

Click Me!

```
</button>
```

Frame Tag

<frame>

<frame>

- defines one specific window(frame) within a <frameset>
- each can have different attributes

cols

- Specifies the number of columns or rows in the frameset, as well as what percentage or number of pixels of space each of them occupies

```
<frameset cols="100, 25%, *" > </frameset>
```

```
<frameset cols="100, 25%, *" > </frameset>
```

noresize

- specify that a user cannot resize
<frame>

<frame noresize="noresize">

src

- frame content can be defined using this

noframes

- provides a way for browsers that do not support frames to view the page
- can contain an alternative page, complete with a body tag and any other elements