


LESSON 2

Selecting Elements to Apply a Style

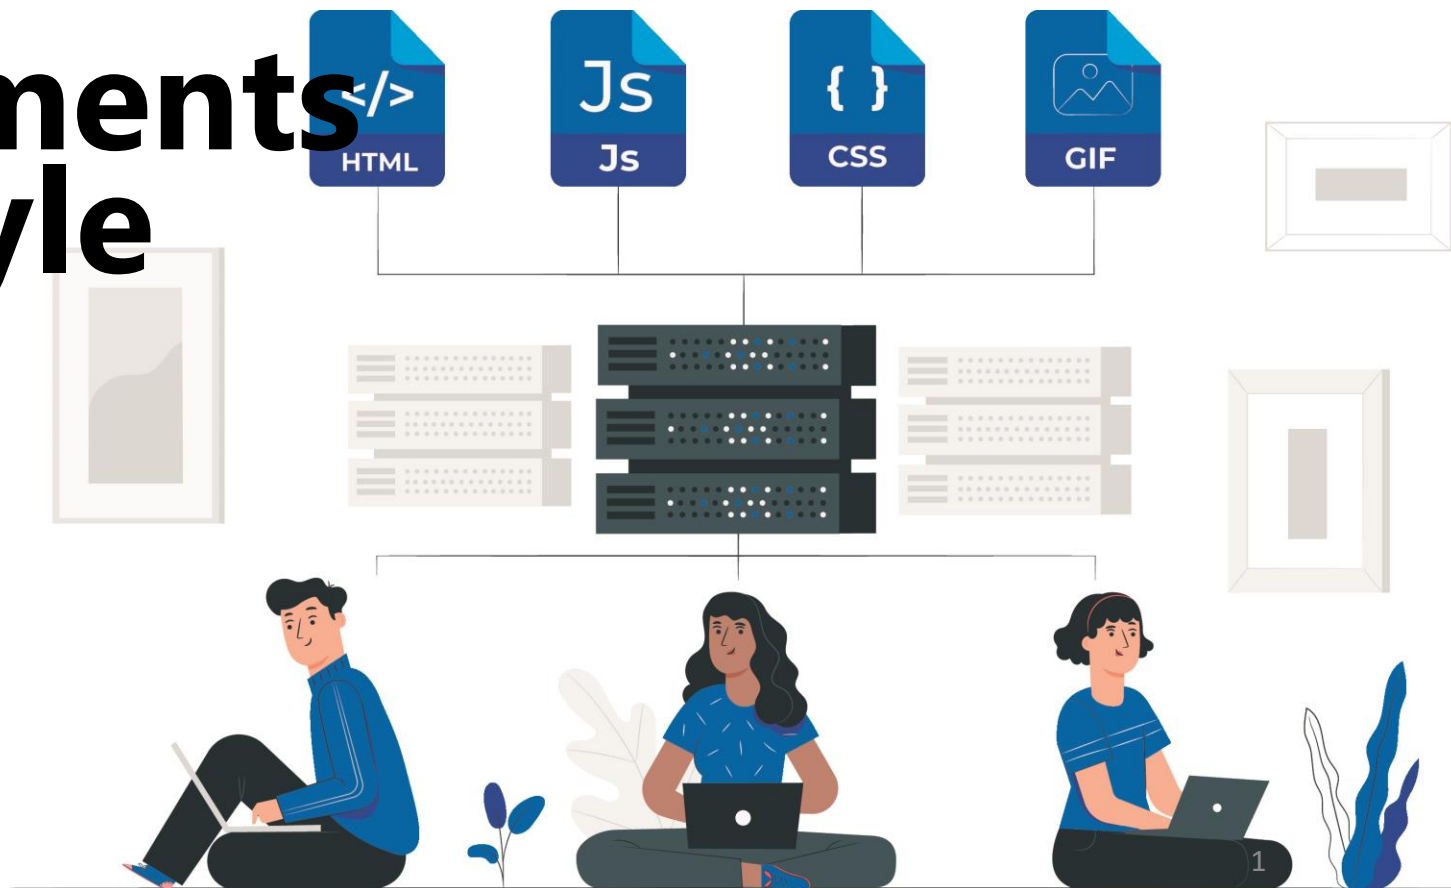

OBJECTIVES

Define CSS Selectors

Differentiate the
types of CSS
Selectors

Apply CSS
Selectors in a web
page

CSS Selectors

Element, id, class, descendant


CSS Selectors

- used to "**find**" (or select) HTML elements based on their element name, id, class, attribute, and more

CSS Selectors



Primary

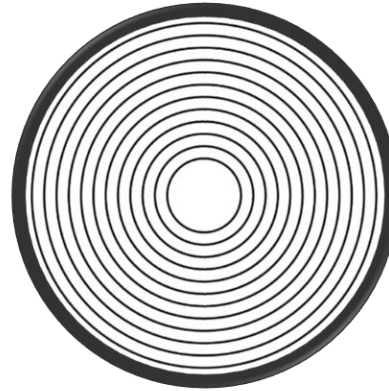

Nested



Pseudo



Primary Selectors

The Element Selector

- selects elements based on the element name

Example

```
p {  
    text-align: center;  
    color: red;  
}
```

The Id Selector

HTML

```
<div id = "intro">
```

```
    <p>This paragraph is in the intro section.</p>
```

```
    <div>
```

```
<p>This paragraph is not in the intro section.</p>
```

CSS

```
#intro {
```

```
    color: white;
```

```
    background-color: grey;
```

```
}
```


The Class Selector

- can be used as **many times** on a page as needed

The Class Selector

HTML

```
<div>
```

```
  <p class="first">This is a paragraph.</p>
```

```
  <p>This is the 2nd paragraph.</p>
```

```
</div>
```

```
<p class="first">This is not in the intro section.</p>
```

```
<p class="first">This is the 2nd paragraph in the intro section.</p>
```

CSS


```
.first { font-size: 200%; }
```

The Class Selector

- you can also specify that only specific HTML elements should be affected by a class

Example

```
p.center {  
    text-align: center;  
    color: red;  
}
```

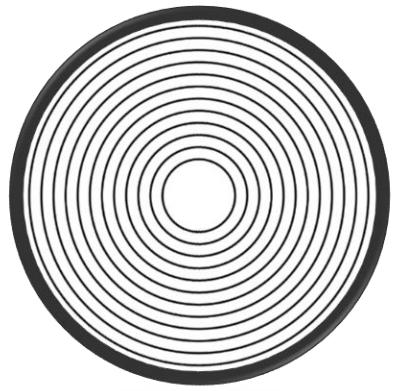

Nested Selectors

Descendant Selectors

- these are used to **select** elements that are **descending** of another element
- when selecting levels, you can select as many levels deep as you need to

Descendant Selectors

HTML


```
<div id="intro">  
    <p class="first">This is a <em> paragraph</em>.</p>  
    <p>This is the 2nd paragraph.</p>  
</div>  
<p class="first">This is not in the intro section.</p>  
<p>This is the 2nd paragraph in the intro section.</p>
```

CSS

```
#intro .first em {  
    color: pink;  
    background-color: gray;  
}
```

Adjacent Sibling

<p> coming after **<p>**

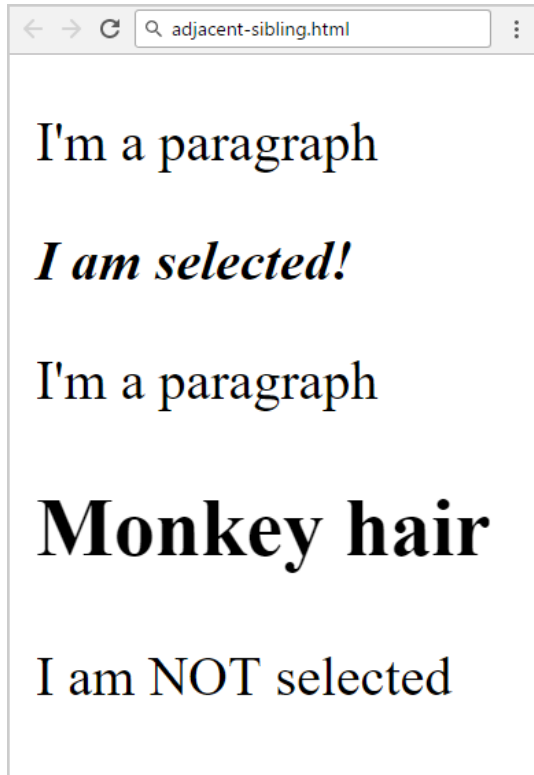

```
p + p {  
  font-style: italic;  
  font-weight: bold;  
}
```

```
<div>  
  <p>I'm a paragraph</p>  
  <p>I am selected!</p>  
</div>  
<div>  
  <p>I'm a paragraph</p>  
  <h2>Monkey hair</h2>  
  <p>I am NOT selected</p>  
</div>
```

Direct Child

** directly contained in a <div>**


```
div > span {  
  background: DodgerBlue;  
}  
span { background: #fff; }
```

Direct child of <div>

```
<div>  
  <span>Span #1, in the div.  
    <span>Span #2, in the span that's...</span>  
  </span>  
</div>  
<span>Span #3, not in the div at all.</span>
```

Span #1, in the div. Span #2,
in the span that's...
Span #3, not in the div at all.

Multiple Classes

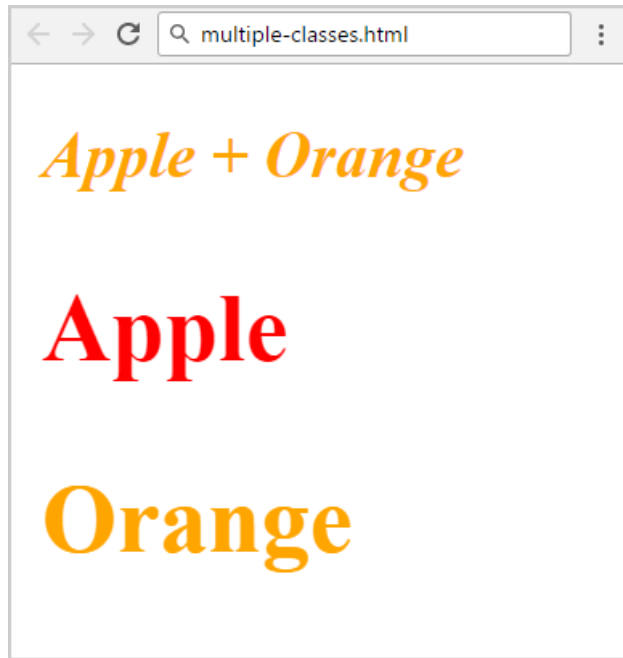

```
.apple { color: red }  
.orange { color: orange }  
.small { font-size: 16px }  
.apple.orange {  
  font-style: italic;  
}
```


Elements with
both classes

Element with
multiple classes

```
<h2 class="apple orange small">Apple + Orange</h2>  
<h2 class="apple">Apple</h2>  
<h2 class="orange">Orange</h2>
```

Attribute Selectors

Attribute
`title="menu"`

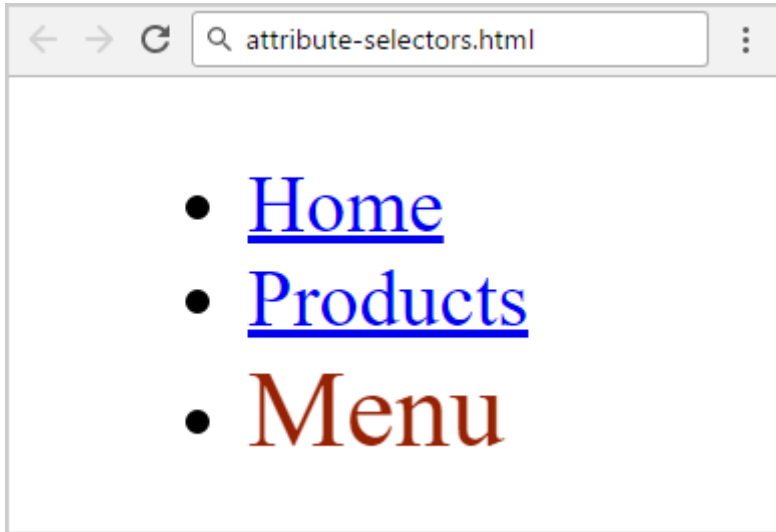

```
a[title="menu"] {  
  text-decoration: none;  
  color: #962103;  
  font-size: 22px;  
}
```

```
<ul>  
  <li><a href="#">Home</a></li>  
  <li><a href="#">Products</a></li>  
  <li><a href="#" title="menu">Menu</a></li>  
</ul>
```

Learn more about CSS selectors: <https://css-tricks.com/pseudo-class-selectors/>

Grouping Selectors

- if you have elements with the same style definitions, like this:

```
h1 {  
    text-align: center;  
    color: red;  
}
```

```
h2 {  
    text-align: center;  
    color: red;  
}
```

```
p {  
    text-align: center;  
    color: red;  
}
```

Grouping Selectors

- it will be better to group the selectors, to minimize the code

```
h1, h2, p {  
    text-align: center;  
    color: red;  
}
```

Combining Multiple Selectors

```
h1#header.intro {  
  text-decoration:  
    underline;  
  color: #C00;  
}
```



```
<h1 id="header" class="intro">HTML and CSS</h1>
```





Pseudo Selectors

Relative to Element Content or State

Pseudo Selector (:hover)


```
<a href="#">Go to Google</a>
```

```
a:hover {  
  color: #D48F29;  
  text-decoration:  
  underline overline;  
}
```

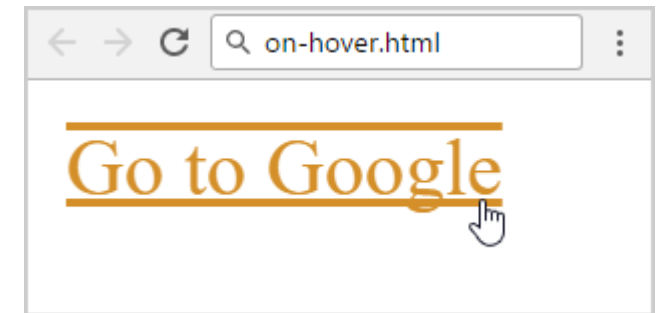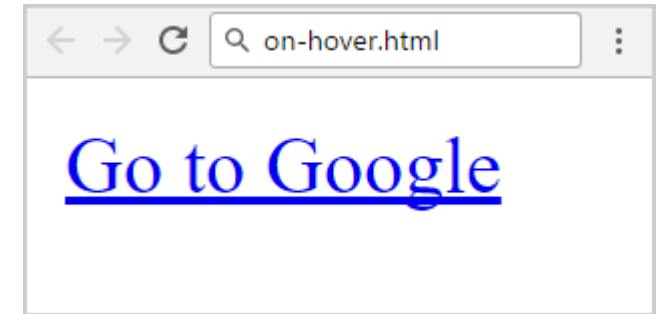


Pseudo Selector (:visited)

```
<a href="#">Go to Google</a>
```

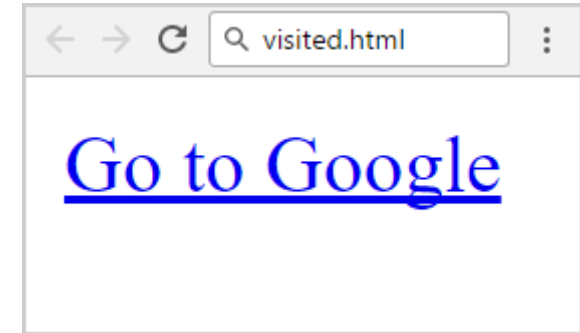

```
a:visited {  
  color:#D48F29;  
}
```

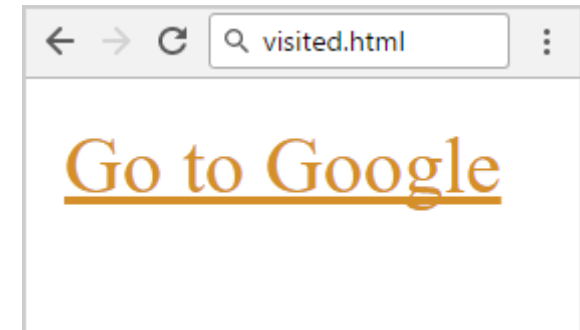


Pseudo Selector (:active)

```
<h2>click anywhere</h2>
```

```
html:active {  
  background: yellow;  
}
```



Pseudo Selector (:first line)

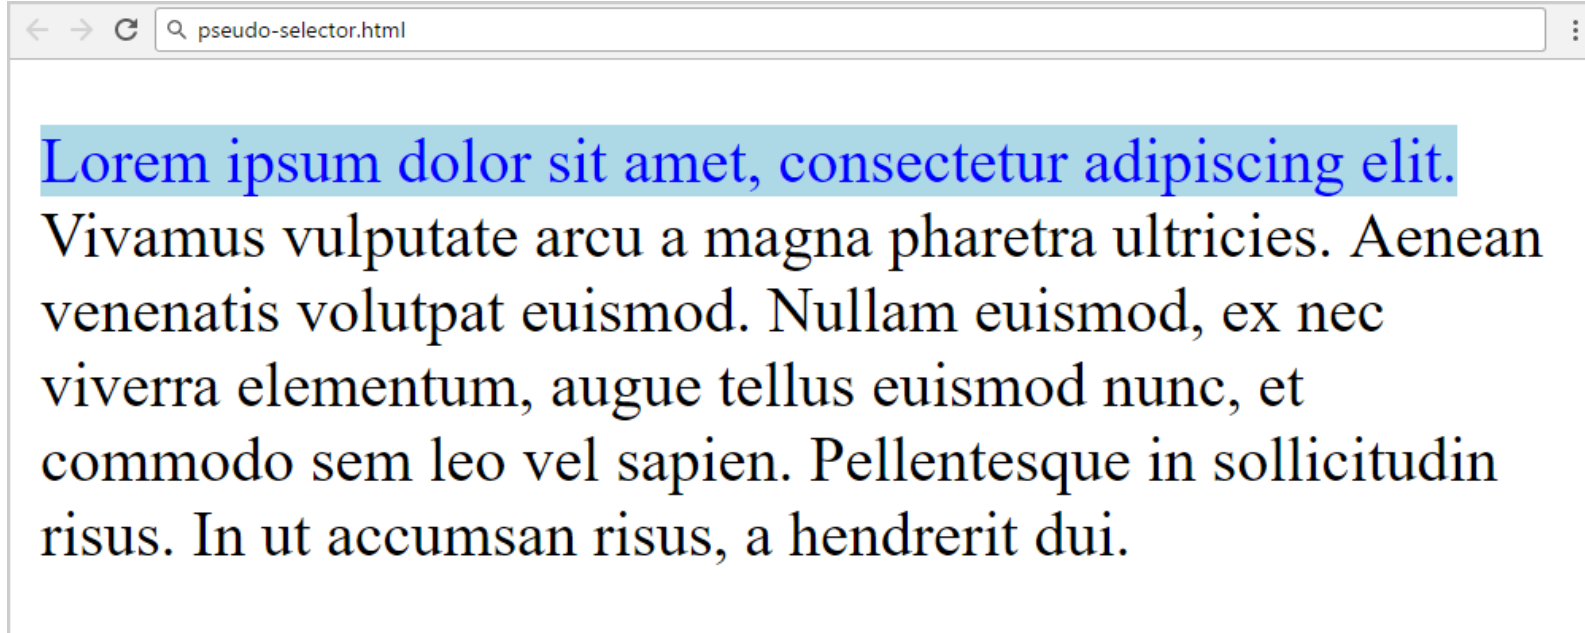

```
<p>Lorem ipsum dolor  
sit amet, consectetur  
adipiscing elit.  
</p>
```

```
p:first-line {  
    color:blue;  
    background-color: lightblue;  
}
```

Pseudo Selector (::before and ::after)

```
<h1>CSS Pseudo Selectors</h1>
```

```
h1::before { /* "« " */  
  content: "\00AB\0020"  
}
```


```
h1::after { /* " »" */  
  content: "\0020\00BB"  
}
```



Structural Pseudo-Classes: **nth-child(n)**

```
<tr><td>This is first row.</td></tr>  
<tr><td>This is second row.</td></tr>  
<tr><td>This is third row.</td></tr>  
<tr><td>This is fourth row.</td></tr>
```


```
tr:nth-child(2n) {  
    background: #953113b;  
    color: #fff;  
}
```

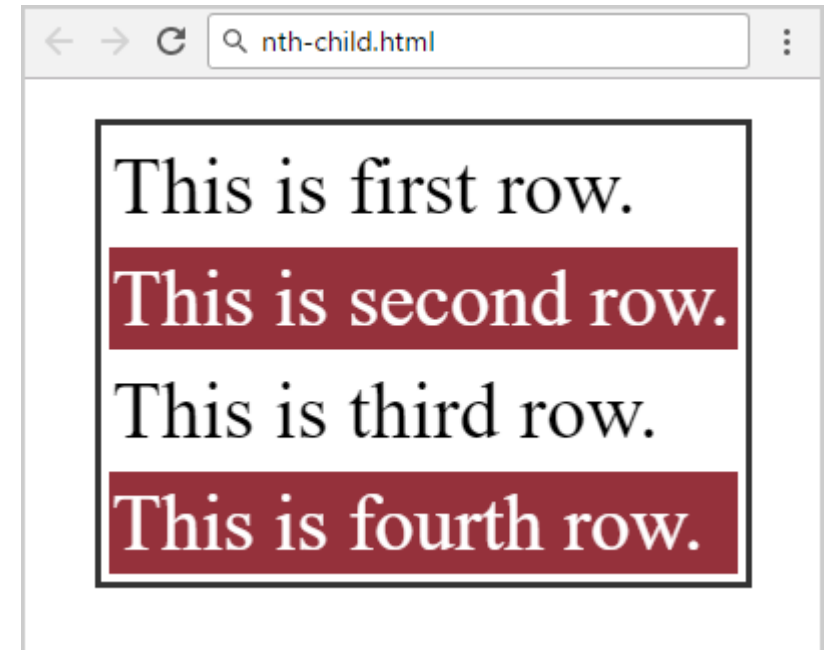

Structural Pseudo-Classes: **`nth-child(n+1)`**

```
<tr><td>This is first row.</td></tr>  
<tr><td>This is second row.</td></tr>  
<tr><td>This is third row.</td></tr>  
<tr><td>This is fourth row.</td></tr>
```


```
tr:nth-child(2n+1) {  
    background: #95313b;  
    color: #fff;  
}
```

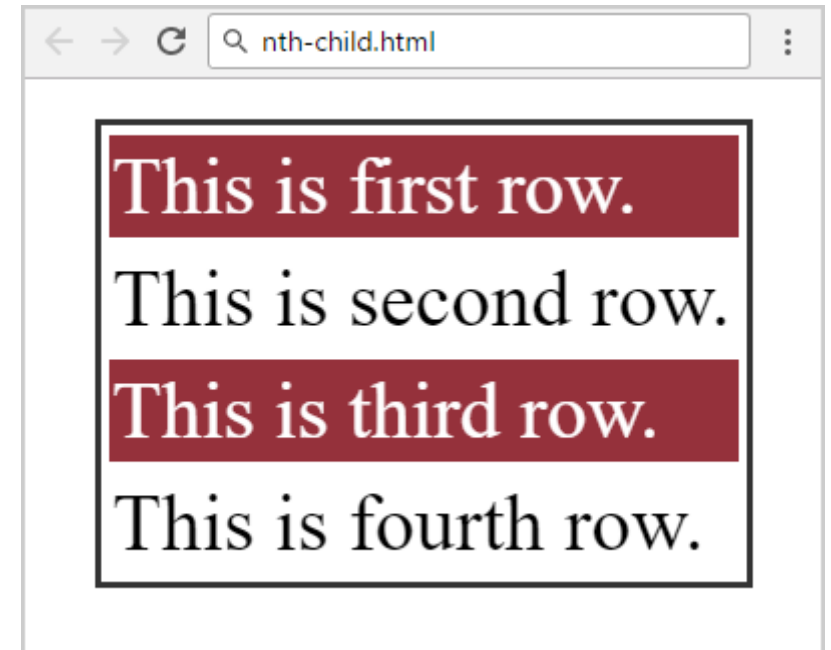

Structural Pseudo-Classes: nth-of-type(n)

```
<p>This is first paragraph</p>
<p>This is second paragraph</p>
<p>This is third paragraph</p>
<p>This is fourth paragraph</p>
<div>
  <p>This is first paragraph</p>
  <p>This is second paragraph</p>
</div>
```

```
p:nth-of-type(2) {
  background: #95313b;
  color: #fff;
}
```

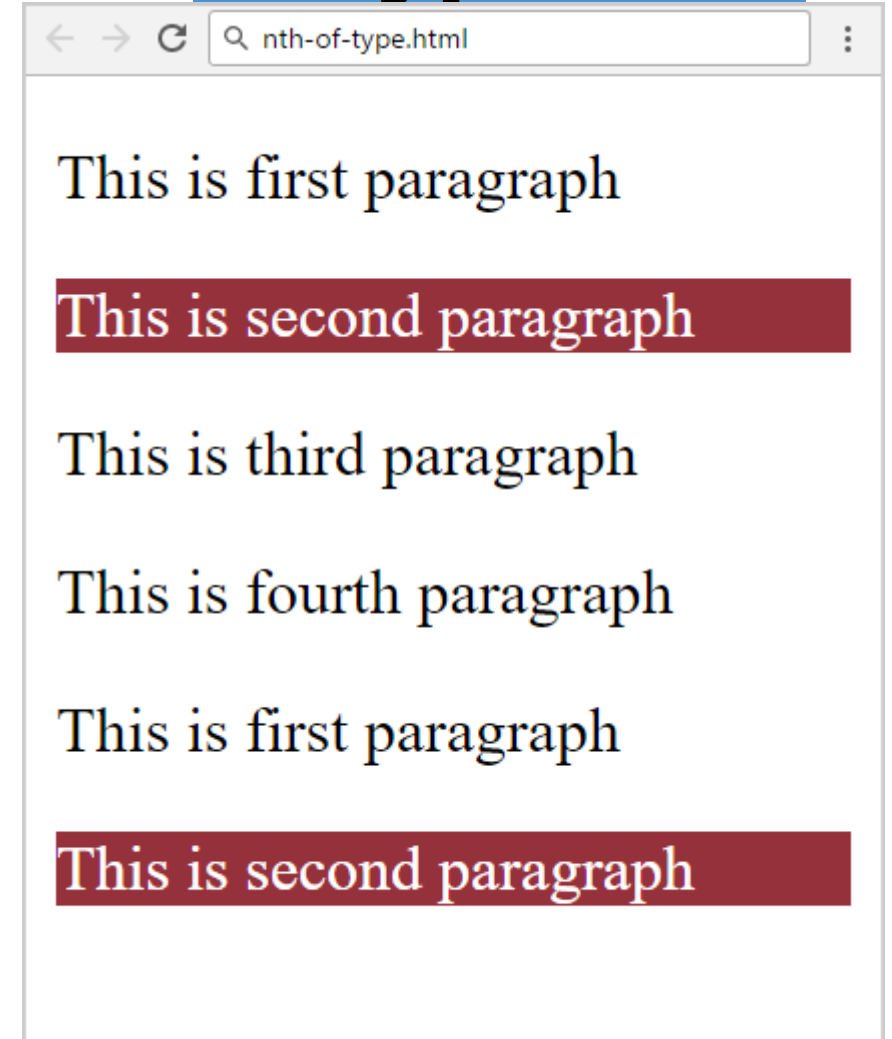

Problem: Ancient Architecture

- You are given a HTML file:
- Create a Web page like at the screenshot
 - Constraints:
 - Don't change the HTML file
 - Just write the missing CSS



Check your solution here: <https://judge.softuni.bg/Contests/608>

Prepared By: Larra Ivač Bašić

Ancient Roman architecture

Posted on 01.01.2017 by [Someone](#)



Ancient Roman architecture adopted the external language of classical Greek architecture for the purposes of the ancient Romans, but grew so different from Greek buildings as to become a new architectural style. The two styles are often considered one body of classical architecture. Roman architecture flourished in the Roman Republic and even more so under the Empire, when the great majority of surviving buildings were constructed. It used new materials, particularly concrete, and newer technologies such as the arch and the dome to make buildings that were typically strong and well-engineered. Large numbers remain in some form across the empire, sometimes complete and still in use.

0 COMMENTS

[VIEW POST](#)

Ancient Greek architecture

Posted on 01.01.2017 by [Someone](#)



The architecture of ancient Greece is the architecture produced by the Greek-speaking people (Hellenic people) whose culture flourished on the Greek mainland, the Peloponnese, the Aegean Islands, and in colonies in Anatolia and Italy for a period from about 900 BC until the 1st century AD, with the earliest remaining architectural works dating from around 600 BC.[1] Ancient Greek architecture is best known from its temples, many of which are found throughout the region, mostly as ruins but many substantially intact. The second important type of building that survives all over the Hellenic world is the open-air theatre, with the earliest dating from around 525-480 BC.

0 COMMENTS

[VIEW POST](#)

Ancient Indian Architecture

Posted on 01.01.2017 by [Someone](#)



Indian architecture is as old as the history of the civilization. The earliest remains of recognizable building activity in the India dates back to the Indus Valley cities. Among India's ancient architectural remains, the most characteristic are the temples, Chaityas, Viharas, Stupas and other religious structures. In ancient India, temple architecture of high standard developed in almost all regions. The distinct architectural style of temple construction in different parts was a result of geographical, climatic, ethnic, racial, historical and linguistic diversities. The Rock-cut structures present the most spectacular piece of ancient Indian art specimen. Most of the rock-cut structures were related to various religious communities.

0 COMMENTS

[VIEW POST](#)

Solution: Ancient Architecture – CSS

```
@import
url( ' https://fonts.googleapis.com/css?f
amily=Indie+Flower'  );
/* Also import 'Roboto' font */
body {
    font-family: Roboto,sans-serif;
    background: #e2d7aa;
    color: #000000;
    font-size: 16px;
    width: 1180px;
    line-height:24px;
```

```
margin: 0 auto; }

body>div.img-container>img{
    width: 1100px;
    height: 450px;
}

body>div.img-container {
    width: 1600px;
    height: 450px;
    margin-top: 65px;
}
```

Solution: Ancient Architecture – CSS (2)

```
h1 {  
    font-size: 60px;  
    font-family: 'Indie Flower', cursive;  
    letter-spacing: 5px;  
    text-align: center;  
    margin-top: 65px;  
}  
a {  
    text-decoration: none;  
}
```

```
nav {  
    margin: 30px;  
    text-align: center;  
}  
  
nav a {  
    text-decoration: none;  
    font-size: 28px;  
    color: #000000;  
}
```

Solution: Ancient Architecture – CSS (3)

```
nav ul li {  
    list-style: none;  
    display: inline;  
    padding: 0 12px 0 12px;}  
nav ul li:first-of-type a,  
nav ul li:last-of-type a {  
    padding-left: 0;  
    color: #0a2d4a;  
    font-weight: bold; }  
article {  
    width: 370px;  
    display: inline-block;}
```

```
main {  
    margin-top: 30px;  
}  
main > article img {  
    width: 350px;  
    height: 200px;  
    margin-bottom: 20px;  
}  
p {  
    width: 345px;  
    text-align: justify;  
    margin-bottom: 20px }
```

Solution: Ancient Architecture – CSS (4)

```
article img + p:first-letter {  
    font-family:  
        EucrosiaUPC sans-serif;  
    text-transform: uppercase;  
    font-size: 40px;}  
.readmore a, .comments a {  
    background:  
url(images/bg2.jpg);  
    color: #ffffff;  
    padding: 10px;  
    margin-top: 10px;  
    text-transform: uppercase;}
```

```
footer {  
    margin: 0;  
    padding: 10px 0 10px 0;  
    text-align: center;}  
article p:last-of-type  
span:first-of-type a::before {  
    content:  
url("images/comment.png");  
    position: relative;  
    padding: 10px;  
    right: 5px;  
    top: 7px;}
```