


LESSON 3

Values and Style Precedence



Prepared By: Larra Mae Balisi

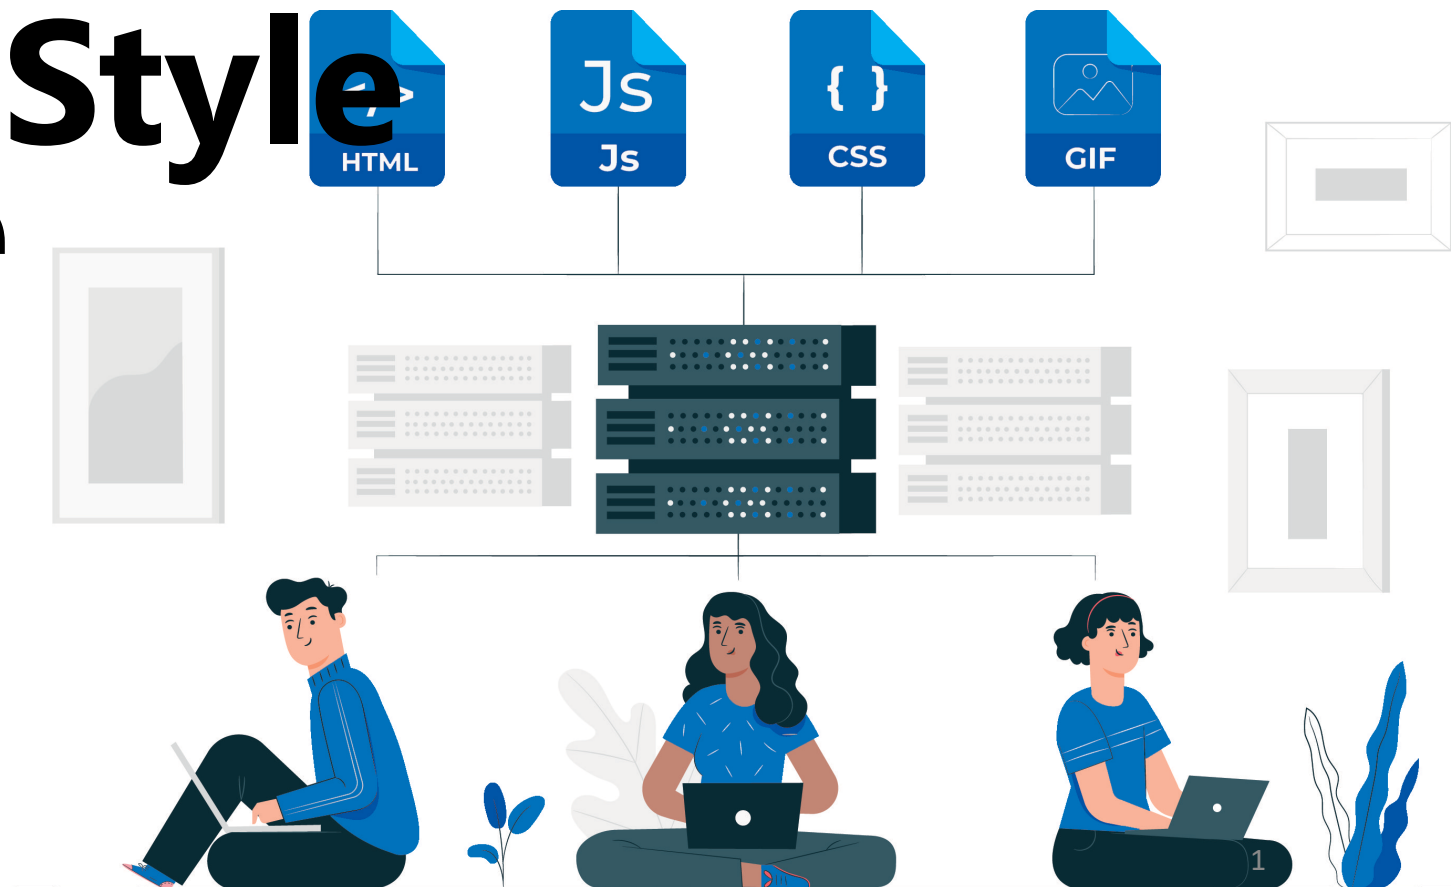

OBJECTIVES

Enumerate the Values
used in CSS

Differentiate the
CSS Style
Precedence

Design a web page
using CSS Values
and Style
Precedence

CSS Values

Types, Ranges, Units

CSS Color Values (Hex and RGB)

```
<ul>
  <li id="rgb">RGB Item</li>
  <li id="hex-rgb">Hex-RGB item</li>
</ul>
```

```
#rgb {
  color: rgb(192, 41, 2)
}
#hex-rgb {
  color: #C02902;
}
```

<red>, <green>, <blue>

#RRGGBB or #RGB where
R, G, B are hex digits (0...F)


- RGB Item
- Hex-RGB item

CSS Color Values (RGBA and HSLA)

```
<div id="wrapper">  
  <div class="opacity">Some text</div>  
</div>
```

```
#wrapper, .opacity {  
  background: rgba(87, 76, 83, 0.9)  
}  
.opacity {  
  background: hsla(344, 73%, 52%, 0.5);  
}
```

<red>, <green>,
<blue>, <alpha>

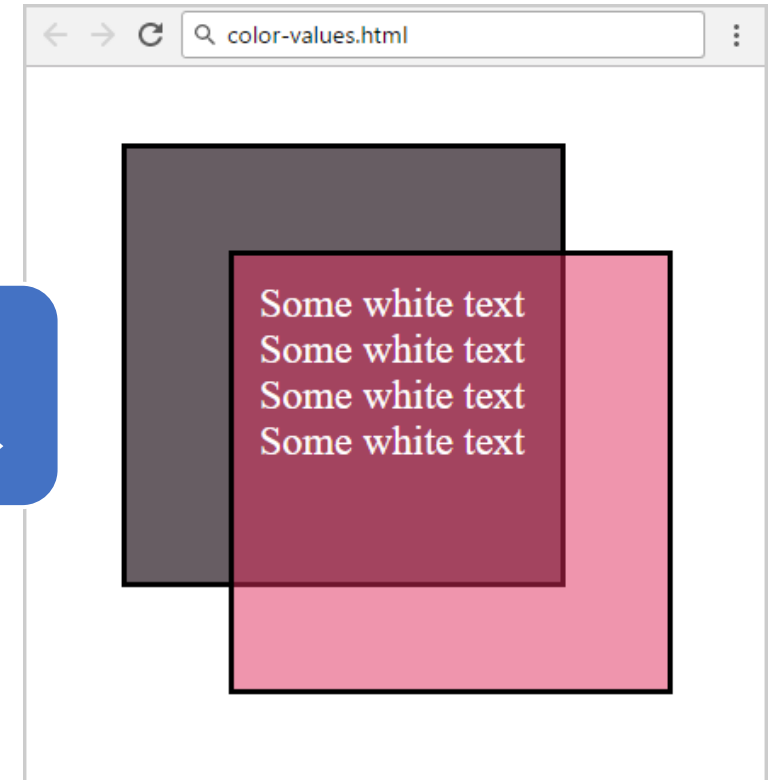


The opacity values
are from 0.0 to 1.0

Size Values (px)

- **Pixels**: fixed size units (logical pixels, not physical)

```
<div>  
  Lorem ipsum dolor  
  sit adipisicing elit.  
</div>
```

```
div {  
  font-size: 24px  
}
```

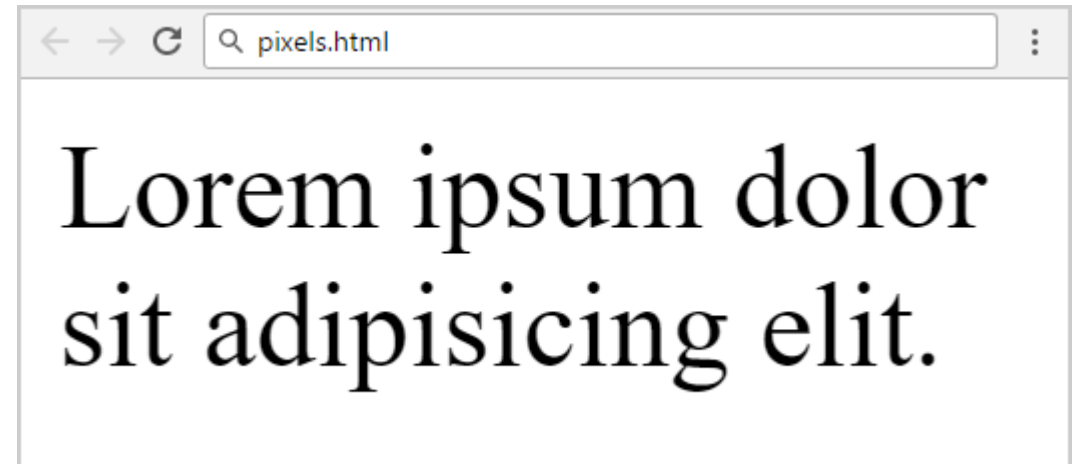


Size Values (em)

- **Em's**: scalable unit (based on the parent element)

```
<div>  
  <div class="nested-div">  
    Lorem ipsum dolor  
    sit adipisicing  
elit...  
  </div>  
</div>
```

Parent <div>
font: 24px

```
div { font-size: 24px }  
.nested-div { font-size: 1.8em  
}
```

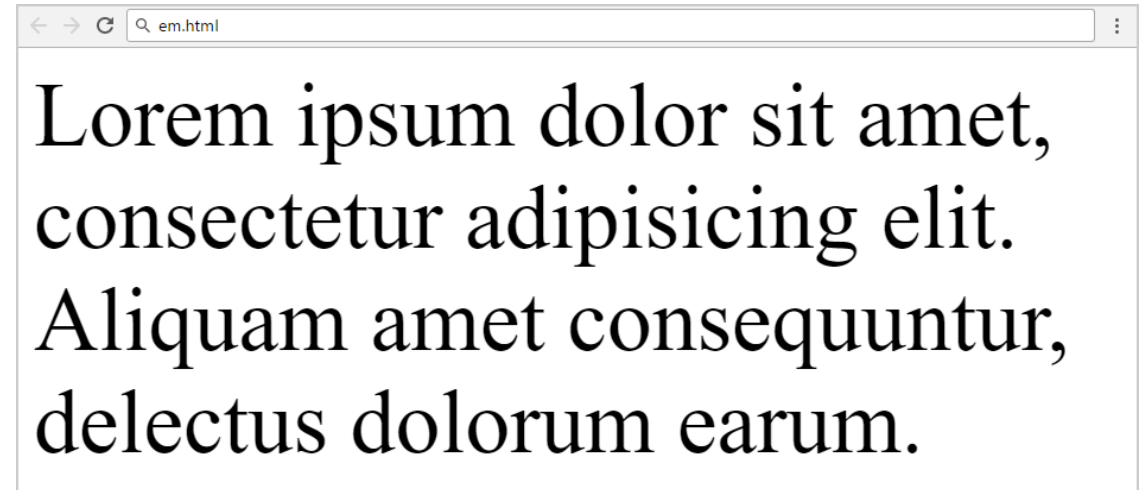

em.html

Lorem ipsum dolor sit amet,
consectetur adipisicing elit.
Aliquam amet consequuntur,
delectus dolorum earum.

$1.8\text{em} = 1.8 * 24\text{px}$
 $= 43.2\text{px}$


<http://pxtoem.com>

Size Values (rem)

- **Rem's**: scalable unit (based on the html element)

```
<div>  
  <div class="nested-div">  
    Lorem ipsum dolor  
    sit adipisicing  
elit...  
  </div>  
</div>
```

```
html { font-size: 25px }  
div { font-size: 2rem }  
.nested-div { font-size: 1.5rem }
```

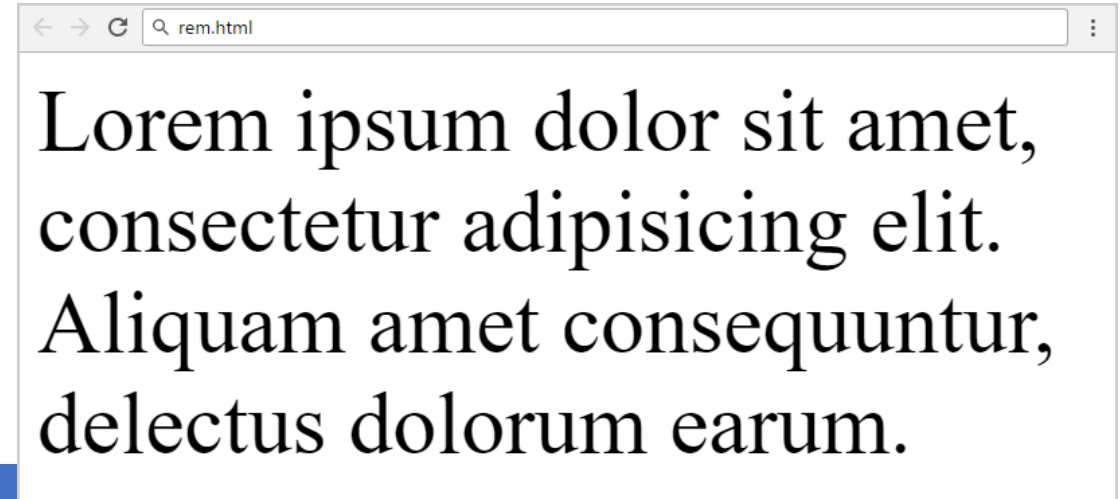


$$2\text{rem} = 2 * 25\text{px} \\ = 50\text{px}$$

$$1.5\text{rem} = 1.5 * 25\text{px} \\ = 37.5\text{px}$$

Size in % of the Parent

```
<div id="outer-div">  
  I am outer-div -> 600px  
  <div id="inner-div">  
    I am div with 50% ...  
  </div>  
</div>
```

width:
600px

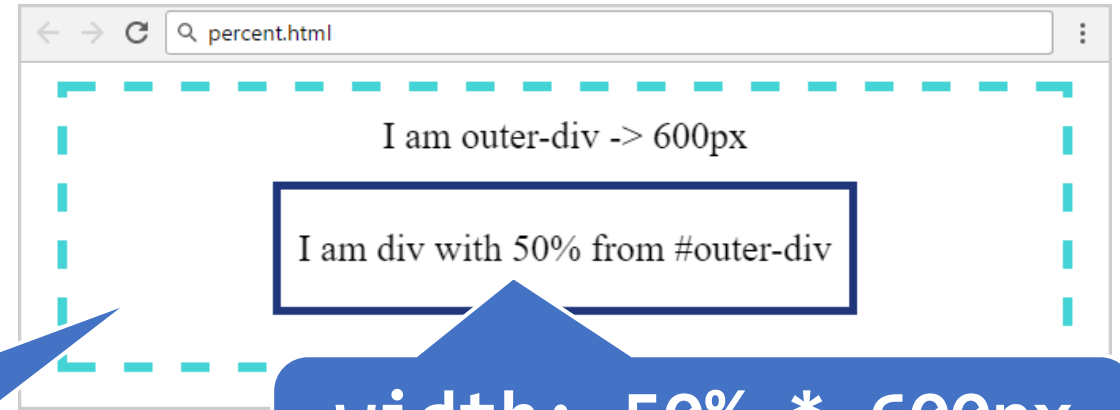

width: 50% * 600px
= 300px

```
#outer-div {  
  width: 600px;  
  text-align: center;  
}  
#inner-div {
```

```
  width: 50%;  
  text-align: center;  
  margin: 0 auto;  
  line-height: 50px;
```

```
}
```


Calculated CSS Values: calc(...) Function

```
<div id="outer-div">  
  Outer-div: 200px  
  <div id="inner-div">  
    Inner-div: 100% -  
20px  
  </div>  
</div>
```

width:
200px

width:
 $100\% * 200\text{px} - 20\text{px}$
= 180px

```
#outer-div {  
  width: 200px;  
  height: 80px;  
  text-align: center; }  
#inner-div {
```

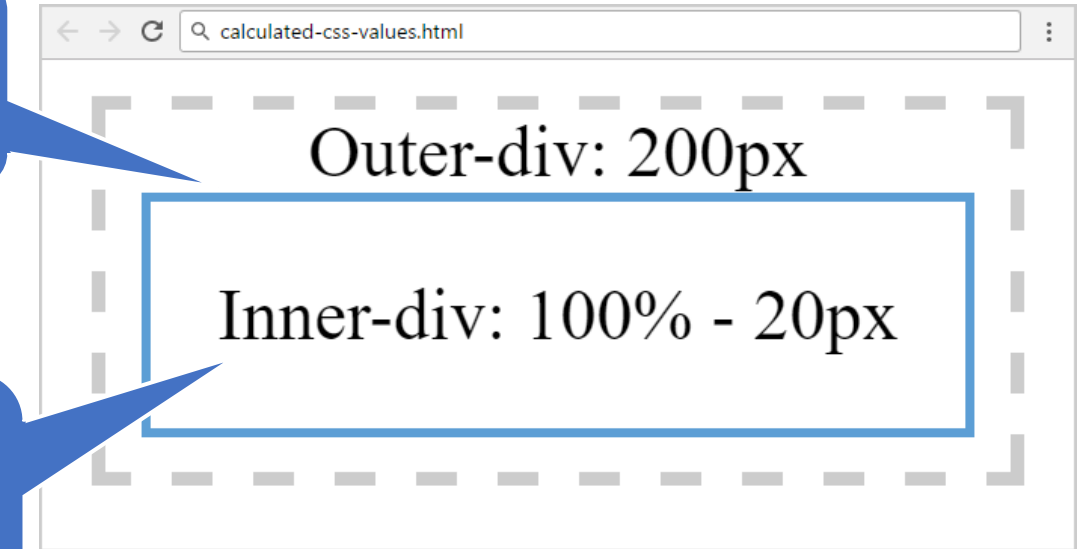

```
width: calc(100% - 20px);  
height: 50px;  
text-align: center;  
margin: 0 auto;  
line-height: 50px;}
```





Default Browser Styles and Precedence

Default Styles and CSS Style
Precedence

Default Browser Styles

- Reset the browser styles (partially or fully)

```
* { margin: 0; padding: 0; }
```

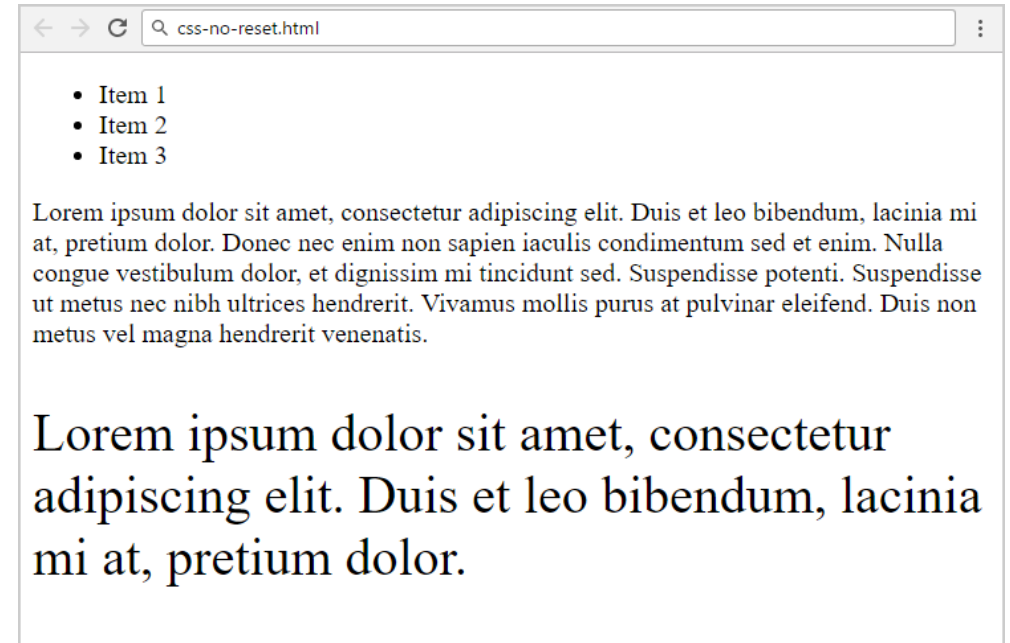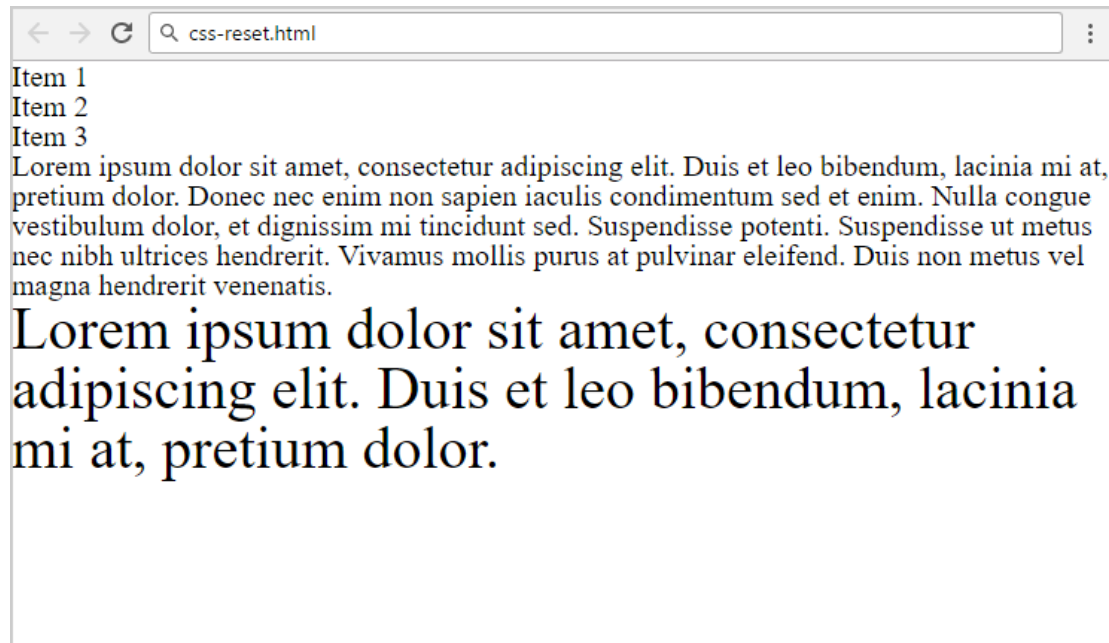

CSS reset tool: <http://meyerweb.com/eric/tools/css/reset/>

Order of Style Definitions

- Reset the browser styles (partially or fully)
 - Priorities of the CSS style definitions:
 - External `<link rel="stylesheet" href="...">`
 - Styles in the `<head> <style>...</style> </head>`
 - Inline style attributes: `<p style="...">`
 - Using **!important**
- ```
h1.big { color:red !important }
```

lowest

highest

# Selector Priority (Specificity)

- Selector priorities depend on:

0

**inline** styles

0

number of  
**id** selectors

0

number of  
**class**  
selectors

0

number of  
**element**  
selectors

# Selector Priority (Specificity) – Example

```
p { color: #FFF }
```

0, 0, 0, 1

```
.intro { color: #345678 }
```

0, 0, 1, 0

```
#header { color: #000 }
```

0, 1, 0, 0

```
<p style="color: blue">Text</p>
```

1, 0, 0, 0

```
p.intro#header { color: #FFF }
```

0, 1, 1, 1

```
p.intro.big#header { color: #FFF }
```

0, 1, 2, 1


```
p { color: #000 !important }
```

!important

# Order of Style Definitions


```
<html>
 I am HTML <div>I am DIV</div>
 <div id="main">
 I am also DIV with
SPAN
 </div>
</html>
```

```
html { background: blue }
#main { background: yellow }
div { background: red }
div > span { background: green }
```

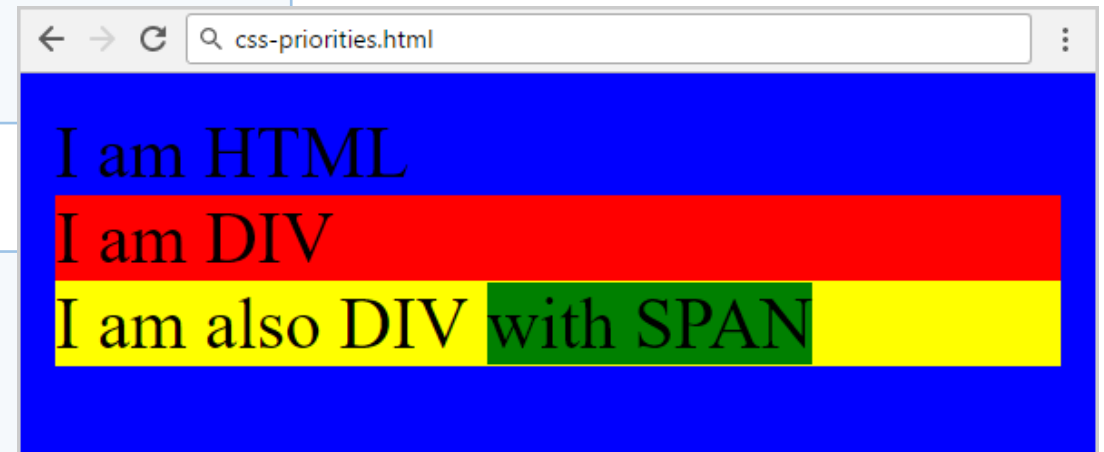



# Problem: Plan Page

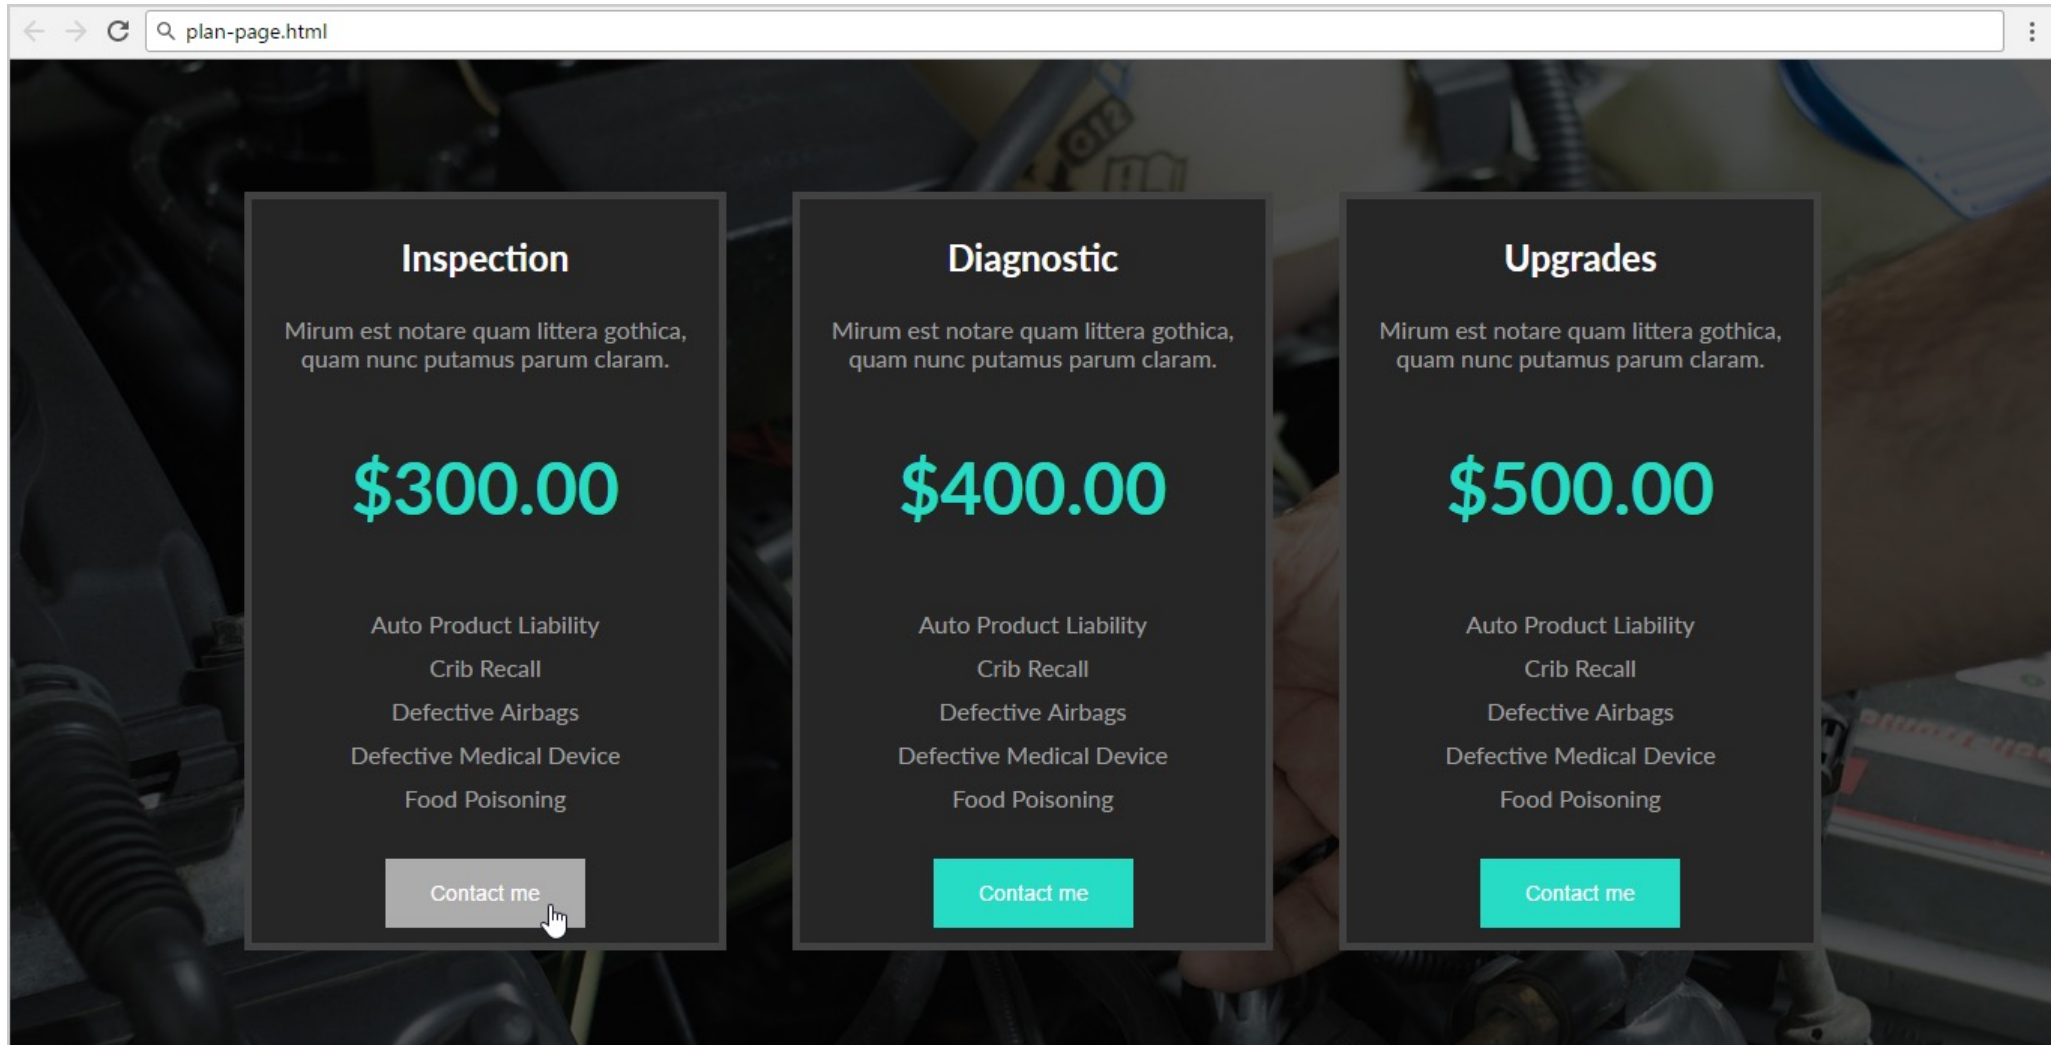

# Solution: Plan Page – CSS

```
body {
 background: url('plan-
page.jpg');
 background-size: cover;
 font-size: 16px;
 font-family: Lato, sans-
serif;
}
section {
 text-align: center;
}
```

```
article {
 background-color: #262626;
 display: inline-block;
 width: 23%;
 margin: 80px 20px 0 20px;
 border: 5px solid #424242;
 color: #a1a1a1;
}
```

# Solution: Plan Page – CSS

```
article h1 {
 font-size: 1.5em;
 color: #FFF;
}
article .price {
 font-size: 3em;
 font-weight: bold;
 color: #27dcc4;
}
article ul {
 padding: 0;
}
```

```
article button {
 background-color: #27dcc4;
 color: #FFFFFF;
 padding: 15px 30px;
 margin: 10px 0;
 font-size: 0.9em;
 cursor: pointer;
 border: none;
}
```

# Solution: Plan Page – CSS

```
article ul li {
 list-style-type: none;
 padding: 5px 0;
}
article button:hover {
 background-color: #acacac;
}
```