



**School of Computer Science and Engineering**

**Faculty of Engineering**

**The University of New South Wales**

# **pgx-lower: Productionising Database Compiler Research**

by

**Nicolaas Johannes van der Merwe**

Thesis submitted as a requirement for the degree of  
Bachelor of Computer Science (Honours)

Submitted: November 2025

Supervisor: Dr Zhengyi Yang

Student ID: z5467476

# Abstract

With the advancement of hardware research, many modern battle-tested databases underutilise their caches and disk read speeds due to being designed when I/O was the bottleneck. This thesis proposes *pgx-lower*, which demonstrates how just-in-time compilation from a research system can be retrofitted into an established database using its extension system. By integrating LingoDB’s MLIR-based JIT compiler into PostgreSQL, the work adapts columnar in-memory compilation to a disk-oriented architecture while maintaining ACID properties and MVCC support. The evaluations on TPC-H showed improved branch prediction and cache efficiency compared to the original executor. More importantly, *pgx-lower* demonstrates that a production database can adopt modern compiler techniques as third-party extensions, providing a practical pathway for database research productionisation.

# Abbreviations

**ACID** Atomicity, consistency, isolation, durability

**API** Application Programming Interface

**AQP** Adaptive Query Processing

**AST** Abstract Syntax Tree

**CPU** Central Processing Unit

**CTE** Common Table Expression

**DB** Database

**DSA** Data Structures and Algorithms

**EXP** Expression (expressions inside queries)

**GDB** GNU Debugger

**GVN** Global Value Numbering

**IR** Intermediate Representation

**IPC** Instructions Per CPU Cycle

**JIT** Just-in-time (compiler)

**JVM** Java Virtual Machine

**LICM** Loop Invariant Code Motion

**LLC** Last Level Cache

**MLIR** Multi-Level Intermediate Representation

**MVCC** Multi-Version Concurrency Control

**OLAP** Online Analytical Processing

**OLTP** Online Transaction Processing

**ORC** On-Request-Compilation

**psql** PostgreSQL

**QEP** Query Execution Plan

**RA** Relational Algebra

**RAM** Random Access Memory

**SIMD** Single Instruction, Multiple Data

**SPI** Server Programming Interface

**SROA** Scalar Replacement of Aggregates

**SQL** Structured Query Language

**SSA** Static Single Assignment

**SSD** Solid State Drive

**TPC-H** Transaction Processing Performance Council: Decision Support Benchmark  
H

**V8** JavaScript Engine (Google Chrome)

# Acknowledgements

I would like to express my sincere gratitude to Zhengyi Yang and Dong Wen for their invaluable guidance and support throughout this thesis. I am also deeply grateful to my family, whose unwavering encouragement has been instrumental in this journey.

# Contents

|          |  |           |
|----------|--|-----------|
| <b>1</b> | <b>Introduction</b>                        | <b>1</b>  |
| <b>2</b> | <b>Background</b>                          | <b>3</b>  |
| 2.1      | Database Background . . . . .              | 3         |
| 2.2      | JIT Background . . . . .                   | 6         |
| 2.3      | LLVM and MLIR . . . . .                    | 7         |
| 2.4      | WebAssembly and others . . . . .           | 8         |
| 2.5      | PostgreSQL Background . . . . .            | 9         |
| 2.6      | Database Benchmarking . . . . .            | 10        |
| <b>3</b> | <b>Related Work</b>                        | <b>11</b> |
| 3.1      | OLAP Systems . . . . .                     | 11        |
| 3.2      | PostgreSQL and Extension Systems . . . . . | 12        |
| 3.3      | System R . . . . .                         | 15        |
| 3.4      | HyPer . . . . .                            | 16        |
| 3.5      | Umbra . . . . .                            | 18        |
| 3.6      | Mutable . . . . .                          | 19        |
| 3.7      | LingoDB . . . . .                          | 21        |
| 3.8      | Benchmarking . . . . .                     | 23        |
| 3.9      | Gaps in Literature . . . . .               | 25        |

|  |           |
|--|-----------|
| 3.10 Aims . . . . .                                  | 25        |
| <b>4 Method</b>                                      | <b>27</b> |
| 4.1 Design . . . . .                                 | 27        |
| 4.2 Implementation . . . . .                         | 31        |
| 4.2.1 Integrating LingoDB to PostgreSQL . . . . .    | 31        |
| 4.2.2 Logging infrastructure . . . . .               | 32        |
| 4.2.3 Debugging Support . . . . .                    | 32        |
| 4.2.4 Data Types . . . . .                           | 33        |
| 4.2.5 LingoDB Dialect Changes . . . . .              | 35        |
| 4.2.6 Query Analyser . . . . .                       | 35        |
| 4.2.7 Runtime patterns . . . . .                     | 36        |
| 4.2.8 Plan Tree Translation . . . . .                | 39        |
| 4.2.9 Configuring JIT compilation settings . . . . . | 45        |
| 4.2.10 Profiling Support . . . . .                   | 45        |
| 4.2.11 Website . . . . .                             | 47        |
| 4.2.12 Benchmarking and Validation . . . . .         | 47        |
| <b>5 Results and Discussion</b>                      | <b>50</b> |
| 5.1 Results . . . . .                                | 50        |
| 5.2 Discussion . . . . .                             | 54        |
| 5.2.1 Test Validity . . . . .                        | 56        |
| 5.2.2 Future work . . . . .                          | 57        |
| <b>6 Conclusion</b>                                  | <b>60</b> |

|   |           |
|---|-----------|
| <b>Appendices</b>                           | <b>61</b> |
| A.1 Code URLs . . . . .                     | 61        |
| A.2 Query 20 SQL . . . . .                  | 61        |
| A.3 PostgreSQL Execution Plan . . . . .     | 62        |
| A.4 pgx-lower MLIR Execution Plan . . . . . | 62        |
| <b>Bibliography</b>                         | <b>64</b> |



# List of Figures

|      |  |    |
|------|--|----|
| 2.1  | Database Structure. . . . .  | 3  |
| 2.2  | Volcano operator model tree. . . . .                                   | 4  |
| 3.1  | Peter Eisentraut asking whether the defaults are too low. . . . .      | 13 |
| 3.2  | PGCon Dynamic Compilation of SQL Queries Profiling [ISP17]. . . . .    | 15 |
| 3.3  | HyPer OLAP performance compared to other engines. . . . .              | 16 |
| 3.4  | HyPer branching and cache locality benchmarks. . . . .                 | 17 |
| 3.5  | HyPer execution modes and compile times. . . . .                       | 17 |
| 3.6  | Umbra benchmarks. . . . .  | 18 |
| 3.7  | Umbra benchmarks after <i>adaptive query processing</i> (AQP). . . . . | 19 |
| 3.8  | Comparison of mutable to HyPer and Umbra. . . . .                      | 20 |
| 3.9  | Benchmarks produced by Mutable. . . . .                                | 21 |
| 3.10 | LingoDB architecture [JKG22]. . . . .                                  | 22 |
| 3.11 | LingoDB benchmarking. . . . .  | 23 |
| 3.12 | Benchmarking results. . . . .  | 24 |
| 3.13 | PostgreSQL’s time spent in the CPU, measured with prof. . . . .        | 24 |
| 4.1  | Internal system design with labels of component sources. . . . .       | 28 |
| 4.2  | Runtime function integration diagram. . . . .                          | 36 |
| 4.3  | PostgreSQLRuntime.h component design. . . . .                          | 38 |

|      |   |    |
|------|---|----|
| 4.4  | AST translation design and high-level steps in each function. . . . .   | 39 |
| 4.5  | PostgreSQL’s magic-trace flame chart for TPC-H query 3 at scale factor 0.05 (approximately 5 MB of data). . . . . | 46 |
| 4.6  | pgx-lower’s magic-trace flame chart for TPC-H query 3 at scale factor 0.05 before optimisation. . . . .           | 46 |
| 4.7  | pgx-lower’s magic-trace flame chart for TPC-H query 3 at scale factor 0.05 after optimisation. . . . .            | 47 |
| 5.1  | Overall benchmarking represented with box plots. . . . .  | 51 |
| 5.2  | Difference in latency benchmarks between PostgreSQL and pgx-lower. .  | 51 |
| 5.3  | Peak memory usage of queries. . . . .   | 52 |
| 5.4  | Difference in peak memory usage of queries. . . . .   | 52 |
| 5.5  | Branch miss rate. . . . .   | 53 |
| 5.6  | Number of branches. . . . .   | 53 |
| 5.7  | Last-level-cache miss plots. . . . .  | 53 |
| 5.8  | Instructions per (CPU) cycle plot. . . . .  | 54 |
| 5.9  | PostgreSQL TPC-H query 20 indexes enabled at SF = 0.16. Runtime: 15 minutes. . . . .                              | 54 |
| 5.10 | pgx-lower TPC-H query 20 indexes enabled at SF = 0.16. Runtime: 1.18 seconds. . . . .                             | 54 |

## Chapter 1

# Introduction

Databases are a heavily used type of system that rely on correctness and speed. Nowadays, they are often the primary bottleneck in many systems - especially on web servers and other large data applications [Kle19]. With modern hardware advances, the optimal way to structure these databases has drastically changed, but most databases are using architectures defined by older hardware. Older databases assume the disk operations are the vast majority of runtime, but that has shifted to the CPU for heavy queries.

Research projects typically create standalone databases. However, such approaches make distribution harder, requiring projects to implement all supporting infrastructure themselves. For production projects, supporting infrastructure requires implementing ACID, MVCC, query plan optimisation, and more. By using an established database, we can address this.

pgx-lower replaces PostgreSQL's execution engine with LingoDB's compiler to bridge the gap of modern compilers with established systems. PostgreSQL's extension system is utilised to override the executor, and shows features that can be used within PostgreSQL to assist with this research. One concern, however, is the additional complexities in implementation and testing.

Chapter 2 covers fundamental concepts and project definition. Chapter 3 provides a literature survey, followed by the solution in Chapter 4. Conclusions are drawn in Chapter 6.

## Chapter 2

# Background

### 2.1 Database Background

Most databases follow the structure shown in Figure 2.1. Database systems parse *Structured Query Language* (SQL) into *relational algebra* (RA), optimise it, execute it, and materialise the results into a table [SKS19].

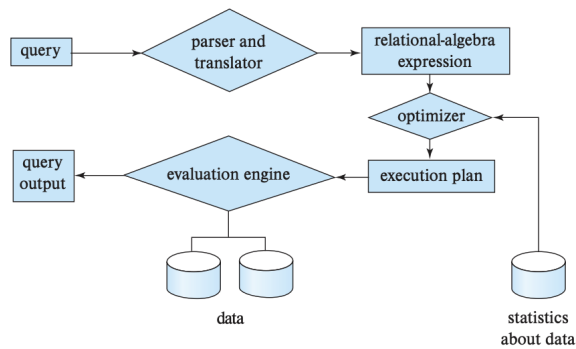


Figure 2.1: Database Structure.  
[SKS19]

Non-compiler databases use a *volcano operator model tree*, such as Figure 2.2 [ZVBB11]. A `produce()` function at the root node calls its children's `produce()`, until it calls a leaf node, which calls `consume()` on itself, then that calls its parent's `consume()`

function. In other words, a post-order traversal through the tree where tuples are dragged upwards.

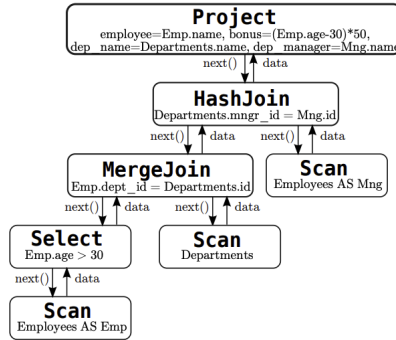


Figure 2.2: Volcano operator model tree.  
[ZVBB11]

Classical models suffer a fundamental issue: heavy under-utilisation of hardware [ADHW99].

If only a single tuple is pulled at a time, the CPU caches are barely used. An i5-760, a popular CPU in 2010, had an 8 MB L3 cache, but in 2024 an i5-14600K has a 24 MB L3 cache [Pas25], [Tec25]. For disks, in 2010 the Seagate Barracuda 7200.12 was popular, which had a sustained read of 138 MB/s, but in 2022 the Samsung V-NAND SSD 990 PRO released with a sustained read of 7450 MB/s [Sea07, Sam24]. Such dramatic increases could mean the algorithms can fundamentally change.

These observations led to the *vectorized* and *compiled execution models*. The vectorised model pulls multiple tuples up in a group rather than one at a time. A core advantage is that *instructions per CPU cycle* (IPC) can increase through *single instruction, multiple data* (SIMD) operations [KLK<sup>+</sup>18]. However, this can cause deep copy operations to be required, or more disk spillage than necessary [Zuk09]. For instance, if a sort or a join allocates new space that is too large for the cache, the handling can become poor. Section 2.2 and Chapter 3 explore compilation approaches.

Relational databases prioritise ACID requirements - Atomicity, Consistency, Isolation and Durability [SKS19]. As a critical requirement in database systems, ACID compliance is usually one of the main reasons people choose relational databases [Kle19]. Atomicity is defined as transactions are a single unit of work, while consistency means

the database must be in a valid state before and after the query. Isolation means concurrent transactions do not interact with each other, and durability is defined as once something is committed it will stay committed. [SKS19]

Most of the recent database research has focused on the optimiser, which is visible in Figure 2.1. Common optimisation techniques include reordering join statements (flipping the left and right sides), and predicate push down, where a conditional/filter on a node is moved onto a lower node [Ine21]. Additionally, extracting common subexpressions prevents recomputation, while constant folding evaluates constant operations inside the optimiser rather than at runtime. Despite these advances, query optimisers frequently produce suboptimal plans [LGM<sup>+</sup>15, LRG<sup>+</sup>17]. Another essential pattern involves genetic algorithms being used in optimisers for determining things like join orders, which can cause the outputted plan to be non-deterministic [Ute97]. A thesis could be written just to summarise the list of optimisations.

Within traditional and volcano databases, the cache is managed through buffer techniques. Fixed-size pages (such as eight kilobytes) are read and loaded into a *buffer pool* object which holds them in RAM. Memory placement in L1/L2/L3 and RAM caches depends on access patterns, and is managed by the operating system or environment [SKS19]. Buffer pools employ different caching strategies (least-recently-used, most-recently-used, etc.) based on the situation [EH84]. Cache effectiveness can be measured by *last level cache hit rate* (LLC), which represents how many instructions were served from the CPU cache [FRMK19].

Databases are commonly split into *Online Transaction Processing* (OLTP) and *Online Analytical Processing* (OLAP). OLTP focuses on supporting atomicity, running multiple queries at once, and typically handles the work profile of an online service that frequently performs key-value lookups. On the other hand, OLAP databases focus on analytical work profiles where aggregations are requested or operations span large chunks of the database [Kle19]. PostgreSQL implements a hybrid architecture supporting both OLTP and OLAP operations [HRTVVA21]. Debate continues about whether such hybrid designs remain useful, as load pressure on user-serving databases

commonly causes reliability issues [Moo24].

The layout of database tables within memory is either columnar or tuple/ row-oriented [Kle19]. In a columnar database, a table is stored as a set of arrays or lists so that when iterated over, only specific columns need to be iterated. This can improve the compression ratio, and horizontal tables can ignore a large number of columns. On the other hand, row-based means that entire-table iteration requires less round-trips and could have better caching in contexts such as joins [Kle19]. It is common to see columnar databases in OLAP systems and row-oriented in OLTP [Kle19].

## 2.2 JIT Background

*Just-in-time* (JIT) compilers work with multiple layers of compilation such as raw interpretation of bytecode, unoptimised machine code, and optimised machine code. They are primarily used in interpreted languages to improve performance [ZVBB11]. Advanced JIT compilers can run the primary program while background threads improve code optimisation and swap in the optimised version when ready [KLN18]. Such multi-stage approaches provide faster initial compilation and faster development cycles.

Due to branch-prediction optimisation, JIT compilers can be faster than ahead of time compilers. In 1999, a benchmarking paper measured four commercial databases and found 10% – 20% of their execution time was spent fixing poor predictions [ADHW99]. Modern measurements still find 50% of their query times are spent resolving hardware hazards, such as mispredictions, with improvements in this area making their queries 2.6× faster [Ker21]. Azul’s JIT compiler measurements also show that speculative optimisations in JIT can lead to 50% performance gains [Azu22].

Defining good branch prediction is difficult. A reasonable baseline is that a 1% misprediction rate is too high and should be optimised in low latency environments [Far25]. Such baselines lack formality and rest on empirical knowledge [Jos21]. Depending on the CPU, a branch mispredict can cost between 10 and 35 CPU cycles, with a typical



range being 14-25 cycles [ESE06]. With 1 branch every 10 instructions and a 5% misprediction rate, a 20 cycle penalty per misprediction translates to approximately 10% of runtime spent resolving mispredictions [ESE06].

In the context of databases, compilers fall into two categories: those that compile only *expressions* (typically called EXP), and those that compile the entire *Query Execution Plan* (QEP) [MYH<sup>+</sup>24]. Within PostgreSQL itself, they have EXP support using `llvm-jit`, but QEP is not supported. Chapter 3 examines a variety of research databases.

## 2.3 LLVM and MLIR

The *LLVM Project* is a compiler infrastructure that eliminates the need to re-implement common compiler optimisations, making it easier to build compilers [LA04]. LLVM does not stand for anything in particular, and *Multi-Level Intermediate Representation* (MLIR) is another, newer toolkit that is tightly coupled with the LLVM project [LAB<sup>+</sup>20]. It provides a framework to define custom dialects and progressively *lower* them to machine code. Developers can define high-level dialects that others can target and build upon.

LLVM defines a language-independent *intermediate representation* (IR) based on *Static Single Assignment* (SSA) form, while MLIR extends this concept [LA04]. SSA is a common layout for IRs where each variable is assigned once and immutable; thus the name. The architecture follows a three-phase design: a front-end parses source code and generates LLVM IR, an optimiser applies a series of transformation passes to improve code quality, and a back-end generates machine code for the target architecture. MLIR extends this concept by introducing a flexible dialect system that enables progressive lowering through multiple levels of abstraction [LAB<sup>+</sup>20]. This addresses software fragmentation in the compiler ecosystem, where projects were creating incompatible high-level IRs in front of LLVM, and improves compilation for heterogeneous hardware by allowing target-specific optimisations at appropriate abstraction levels.

LLVM’s *On-Request-Compilation* (ORC) JIT is a system for building JIT compilers with support for lazy compilation, concurrent compilation, and runtime optimisation [LLV25b]. ORC can compile code on-demand as it is needed, reducing startup time by deferring compilation of functions until they are first called. The JIT supports concurrent compilation across multiple threads and provides built-in dependency tracking to ensure code safety during parallel execution. This makes ORC particularly suitable for dynamic language implementations, REPLs (Read-Eval-Print Loops), and high-performance JIT compilers.

## 2.4 WebAssembly and others

The *V8* compiler used for WebAssembly has a unique architecture because it targets short-lived programs. The majority of JIT applications are used for long-running services, but this is used for web pages which are opened and closed frequently. To mitigate this, they have a two-phase architecture where code is first compiled with *Liftoff* for a quick startup, then hot functions are recompiled with *TurboFan* [HRS<sup>+</sup>17]. Liftoff aims to create machine code as fast as possible and skip optimisations.

LLVM provides a WebAssembly backend that enables compilation of C and C++ code to WebAssembly. The compilation process uses `clang` to make LLVM IR, which is then processed by the WebAssembly backend to produce WebAssembly object files. This means C/C++ functions from existing codebases (such as PostgreSQL) can be pre-compiled to LLVM IR, inlined into WebAssembly, and then lowered to WebAssembly bytecode [Goo19].

Other common JIT compilers are the *Java Virtual Machine* (JVM), SpiderMonkey (Mozilla Firefox’s JIT), JavaScriptCore/Nitro (Safari/Webkit), PyPy, various python JIT compilers, LuaJIT for Lua, HHVM for PHP, Rubinius for Ruby, RyuJIT for C#, and more [DCL25]. The JVM has also been used for compiled query execution engines [RPML06].

## 2.5 PostgreSQL Background

PostgreSQL relies on *memory contexts*, which are an extension of *arena allocators*. An arena allocator is a data structure that supports allocating memory and freeing the entire data structure. This improves memory safety by consolidating allocations into a single location. A memory context can create child contexts, and when a context is freed it also frees all the children of this context, making this a tree of arena allocators. There is a set of statically defined memory contexts: `TopMemoryContext`, `TopTransactionContext`, `CurTransactionContext`, `TransactionContext`, which are managed through PostgreSQL's *Server Programming Interface* (SPI) [Pos25b].

PostgreSQL defines *query trees*, *plan trees*, *plan nodes*, and *expression nodes*. A query tree is the initial version of the parsed SQL, which is passed through the optimiser, and the output of that is called a plan tree. The nodes in these plan trees can broadly be identified as plan nodes or expression nodes. Plan nodes include an implementation detail (aggregation, scanning a table, nest loop joins) and expression nodes consist of individual operations (binaryop, null test, case expressions) [Pos25d].

PostgreSQL provides the `EXPLAIN` command to inspect query execution plans, which is essential for understanding and optimising query performance [Pos25a]. This command displays the execution plan that the planner generates, including cost estimates and optional execution statistics, making it a useful tool for database optimisation and analysis.

PostgreSQL is released under the PostgreSQL Licence, a permissive BSD-like licence that permits free modification, distribution, and commercial use without restriction [Pos24c]. This means editing it or creating commercial extensions is fair use.

## 2.6 Database Benchmarking

Benchmarking a database is difficult because of the variety of workloads. Many systems create their own benchmarking libraries, such as `pg_bench` by PostgreSQL [Pos25c] or LinkBench [APBC13] by Facebook, but in academics the more common benchmarks are from the Transaction Processing Council, which is a group that defines benchmarks [BNE14]. Over the years they have made TPC-C for an order-entry environment, TPC-E, for a broker firm’s operations, TPC-DS for a decision support benchmark. TPC-H is the most common in research, where the H informally means “hybrid”. It has a mix of analytical and transactional elements inside it [BNE14].

When evaluating benchmark results, the *coefficient of variation* (CV) is used. This is a standardised measure of dispersion that expresses the standard deviation as a percentage of the mean [Sta25]. It is calculated as  $CV = \frac{s}{\bar{X}} \cdot 100$ , where  $s$  is the sample standard deviation and  $\bar{X}$  is the sample mean. The coefficient of variation is particularly useful when comparing datasets with different units or scales, providing a unit-free measure for variation.

## Chapter 3

# Related Work

We summarise relevant works in the compiled query space and their architectures. Compiled query engines originally dominated the database industry [CAB<sup>+</sup>81], but the volcano model subsequently took precedence due to its simpler implementation and minimal performance cost at the time. However, modern analytical engines are revisiting compilation approaches [KLK<sup>+</sup>18].

We begin with OLAP systems (Section 3.1), then examine PostgreSQL’s extension system (Section 3.2) as the foundation for our work. Section 3.3 covers System R as a classical compiled example, followed by modern compilation approaches in HyPer and Umbra (Sections 3.4 and 3.5). Research systems Mutable and LingoDB (Sections 3.6 and 3.7) provide relevant architectural insights. Section 3.8 discusses evaluation methodologies, while Section 3.9 identifies gaps in the literature and Section 3.10 clarifies the aims of this work.

### 3.1 OLAP Systems

Compiled query engines primarily benefit OLAP workloads, since OLTP workloads typically involve simpler retrieval queries [Kle19]. At scale, Apache Hive is commonly used, but it is a data warehouse system rather than a database, storing data in

Hadoop’s distributed file system, which is closer to flat storage [CRCG<sup>+</sup>19]. Common OLAP databases include MonetDB, Snowflake, ClickHouse, RedShift, and Vectorwise [SZC<sup>+</sup>24]. For our context, understanding ClickHouse, NoisePage, DuckDB and extensions that turn PostgreSQL into an OLAP database are important.

ClickHouse and NoisePage are standalone systems, while DuckDB is embedded and in-process, similar to SQLite. ClickHouse is a columnar, disk-oriented database with a vectorised execution engine and an optional LLVM compilation for expressions (EXP) [SSY<sup>+</sup>24]. The Carnegie Mellon Database group created NoisePage, a columnar, in-memory system with full query expression compilation (QEP). They targeted ML-driven self optimisation in their research, but the project was archived on February 21, 2023 [MZJ<sup>+</sup>21]. DuckDB is marketed as the SQLite for analytical loads with in-memory disk spillage, or a more sophisticated Pandas DataFrame [RM19]. Their engine supports vectorised execution rather than JIT because JIT would add too much overhead to their lightweight philosophy.

## 3.2 PostgreSQL and Extension Systems

PostgreSQL is a battle-tested system and the most popular database, with 51.9% of developers in a Stack Overflow survey reporting extensive use in 2024 [Ove24]. In the context of compiled queries, this means PostgreSQL cannot be treated as a research prototype. Direct modifications to the codebase require extensive testing, and such changes face casual code review via pull requests rather than formal peer review. These pull request reviews can take a long time, sometimes over a year.

Building extensions for PostgreSQL and making companies around these extensions is a common path. Three such examples are Citus [CEP<sup>+</sup>21], TimescaleDB [Tim24a], and Apache AGE [Apa24]. Citus aims to add more horizontal scaling through sharding, TimescaleDB, now rebranded as TigerData, transforms the engine into a time series database, and Apache AGE turns it into a graph database. All have thousands of GitHub stars, with TimescaleDB especially reporting over 500 paying customers in 2022

and claiming  $20\times$  revenue growth by 2024 [Tim24b] [Bus22]. The extension model has proven robust and well-travelled.

There have also been several extensions that attempt to make PostgreSQL more suited to OLAP workloads, with the most relevant one being `pg_duckdb` [Duc24]. `pg_duckdb` replaces PostgreSQL’s engine with DuckDB, enabling vectorised execution with reasonable popularity at roughly 2700 GitHub stars. Hydra is also worth mentioning, but this is closer to TimescaleDB [Hyd24] and makes the system columnar with compression support. ParadeDB’s `pg-analytics` initially started in the same way as `pg_duckdb`, but pivoted into supporting search functionality instead, similar to Elasticsearch [Duc24].

There has been significant discussion about HyPer and JIT in regard to PostgreSQL in 2017 [Fre16, Fre17]. However, developers expressed doubts about adding full query compilation support, with concerns that rearchitecting such a core component introduces significant risk [Fre16].

However, in September 2017 Andres Freund started implementing JIT support for expressions [Fre18]. They showed that most CPU time occurs in expression components (such as `x > 8` in `SELECT * from table WHERE x > 8;`). Furthermore, tuple deformation provides significant benefits as it interacts with the cache and has poor branch prediction. PostgreSQL’s JIT implementation is documented in the official PostgreSQL documentation [Pos24a].

```
On 3/9/18 15:42, Peter Eisentraut wrote:
> The default of jit_above_cost = 500000 seems pretty good. I constructed
> a query that cost about 450000 where the run time with and without JIT
> were about even. This is obviously very limited testing, but it's a
> good start.

Actually, the default in your latest code is 100000, which per my
analysis would be too low. Did you arrive at that setting based on testing?
```

Figure 3.1: Peter Eisentraut asking whether the defaults are too low.  
[Fre17]

In a pull request, Peter Eisentraut questioned whether the default JIT settings were too low [Fre16]. Despite this concern, PostgreSQL version 11 released with JIT disabled by default. Limited adoption prompted them to enable JIT by default in later releases to increase exposure and testing opportunities [She17]. When released, the United King-

dom’s critical service for COVID-19 dashboards automatically deployed this update and experienced a 70% failure rate, as some queries ran  $2,229\times$  slower [Xen21]. Such failures reinforced the view that JIT features should remain disabled by default, leading to negative perceptions of JIT and compiled queries.

Two implementations of QEP query compilation with PostgreSQL exist, but neither are open source, nor do they have evidence of heavy usage. Vitesse DB, the first implementation, made public posts seeking testing assistance and became generally available in 2015 [Vit15]. While the project remains active with a maintained website [Vit24], their TPC-H benchmarks utilise all available CPU cores (32-core systems with two 16-core CPUs) compared to vanilla PostgreSQL’s single-core execution, making direct performance comparisons difficult to assess. This is reasonable though because in an OLAP context, the system can use all the cores, while in an OLTP one it would be handling multiple concurrent requests. Additionally, it remains unclear whether Vitesse DB functions through an extension system allowing existing databases to easily adopt it. PgCon presented a second implementation, achieving  $5.5\times$  speedup on TPC-H query 1 with more extensive documentation [ISP17]. However, they did not publicise their implementation or show that it is easy for people to use.

In the presentation, full JIT implementation was preceded by profiling work showing different TPC-H benchmarks pressure in different nodes (Figure 3.2), enabling informed decisions about optimisation priorities. Their core method is generating a function that represents a node in the plan tree, then inlining the function into the final LLVM IR [ISP17] in a push-based model. Another interesting method that was used is pre-compiling the C code into LLVM, then inlining that into the LLVM IR. This avoids runtime linking back to the C code [ISP17], similar to approaches taken by HyPer [Neu11].



| Function       | TPC-H<br>Q1 | TPC-H<br>Q2 | TPC-H<br>Q3 | TPC-H<br>Q6 | TPC-H<br>Q22 |
|----------------|-------------|-------------|-------------|-------------|--------------|
| ExecQual       | 6%          | 14%         | 32%         | 3%          | 72%          |
| ExecAgg        | 75%         | -           | 1%          | 1%          | 2%           |
| SeqNext        | 6%          | 1%          | 33%         | -           | 13%          |
| IndexNext      | -           | 57%         | -           | -           | 13%          |
| BitmapHeapNext | -           | -           | -           | 85%         | -            |

Figure 3.2: PGCon Dynamic Compilation of SQL Queries Profiling [ISP17].  
[Fre17]

Other database systems also support extensions. MySQL, ClickHouse, DuckDB, Oracle Extensible Optimizer all support similar operations. More than just PostgreSQL can be extended in this manner, avoiding the need to create databases from scratch.

### 3.3 System R

System R is a flagship paper in the database space that introduced SQL, compiling engines, and ACID [CAB<sup>+</sup>81]. Their vision described ACID requirements, but was explained as seven dot points as it was not a concept yet. Their goal was to run at a “level of performance comparable to existing lower-function database systems.” Reviewers commented that the compiler is the most important part of the design.

Due to the implementation overhead of parsing, validity checking, and access path selection, a compiler was appealing to them. These features were not supported within the running transactions by default, and they leveraged pre-compiled fragments of Cobol for the reused functions to improve their compile times. Such custom implementation was necessary at the time due to the lack of compiler writing tools. System R shows the idea of compiled queries is as old as databases, and over time the priorities of the systems changed.

### 3.4 HyPer

HyPer was a flagship system, and Umbra supersedes it. These are important systems in the JIT-database space as they developed many of the core features. Both were made by Thomas Neumann, and a core sign of its viability is that Tableau purchased HyPer in 2016 for production use [Tab18], proving that in-memory JIT databases can scale to production workloads. Development began in 2010, with their flagship paper releasing in 2011 for the compiler component [Neu11], and in 2018 they released another flagship paper about adaptive compilation [KLN18]. However, commercialisation poses research challenges since the source code is not accessible, but a binary is available on their website for benchmarking.

Their 2011 paper on the compiler identifies that translating queries into C or C++ introduced significant overhead compared to compiling into LLVM. As a result, they suggested using pre-compiled C++ objects of common functions then inlining them into the LLVM IR, which is similar to System R’s approach. LLVM’s JIT executor then executes the IR. By utilising LLVM IR, they can take advantage of overflow flags and strong typing which prevented numerous bugs in their original C++ approach.

|                   | Q1   | Q2   | Q3    | Q4   | Q5    |
|-------------------|------|------|-------|------|-------|
| HyPer + C++ [ms]  | 142  | 374  | 141   | 203  | 1416  |
| compile time [ms] | 1556 | 2367 | 1976  | 2214 | 2592  |
| HyPer + LLVM      | 35   | 125  | 80    | 117  | 1105  |
| compile time [ms] | 16   | 41   | 30    | 16   | 34    |
| VectorWise [ms]   | 98   | -    | 257   | 436  | 1107  |
| MonetDB [ms]      | 72   | 218  | 112   | 8168 | 12028 |
| DB X [ms]         | 4221 | 6555 | 16410 | 3830 | 15212 |

Figure 3.3: HyPer OLAP performance compared to other engines.  
[Neu11]

Figure 3.3 demonstrates that HyPer reduced compile time by many times. Figure 3.4 shows they achieved many times fewer branches and branch mispredictions compared to their MonetDB baseline [BZN05]. Such improvements resulted from HyPer’s output containing less code in the compiled queries.

|             | Q1         |             | Q2         |             | Q3         |             | Q4         |             | Q5         |             |
|-------------|------------|-------------|------------|-------------|------------|-------------|------------|-------------|------------|-------------|
|             | LLVM       | MonetDB     | LLVM       | MonetDB     | LLVM       | MonetDB     | LLVM       | MonetDB     | LLVM       | MonetDB     |
| branches    | 19,765,048 | 144,557,672 | 37,409,113 | 114,584,910 | 14,362,660 | 127,944,656 | 32,243,391 | 408,891,838 | 11,427,746 | 333,536,532 |
| mispredicts | 188,260    | 456,078     | 6,581,223  | 3,891,827   | 696,839    | 1,884,185   | 1,182,202  | 6,577,871   | 639        | 6,726,700   |
| l1 misses   | 2,793      | 187,471     | 1,778      | 146,305     | 791        | 386,561     | 508        | 290,894     | 490        | 2,061,837   |
| D1 misses   | 1,764,937  | 7,545,432   | 10,068,857 | 6,610,366   | 2,341,531  | 7,557,629   | 3,480,437  | 20,981,731  | 776,417    | 8,573,962   |
| L2d misses  | 1,689,163  | 7,341,140   | 7,539,400  | 4,012,969   | 1,420,628  | 5,947,845   | 3,424,857  | 17,072,319  | 776,229    | 7,552,794   |
| I refs      | 132 mil    | 1,184 mil   | 313 mil    | 760 mil     | 208 mil    | 944 mil     | 282 mil    | 3,140 mil   | 159 mil    | 2,089 mil   |

Figure 3.4: HyPer branching and cache locality benchmarks.  
[Neu11]

In 2018, HyPer separated the compiler into multiple rounds. An interpreter executes byte code generated from LLVM IR, allowing unoptimised machine code execution in initial stages and optimised machine code in later stages. Figure 3.5 visualises compilation times for each stage. However, they had to create the byte code interpreter themselves to enable this.

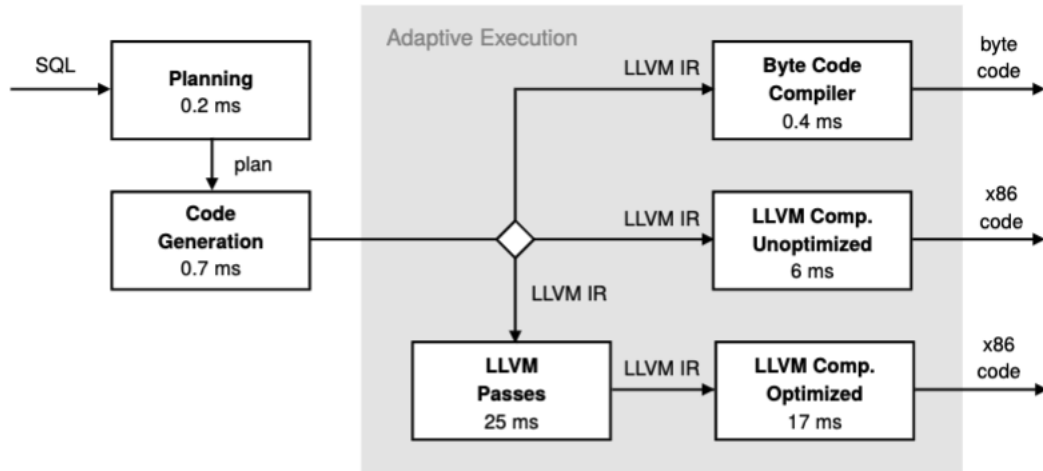


Figure 3.5: HyPer execution modes and compile times.  
[KLN18]

The 2018 paper also improved their query optimisation by adding a dynamic measurement for how long-lived queries are taking. The optimiser’s cost model did not lead to accurate enough measurements for compilation timing. Instead, they introduced an execution stage for workers, then in a *work-stealing* stage they log how long the last job took. With a combination of the measurements and the query plan, they could calculate estimates for jobs and optimal levels to compile them to.

They evaluated this approach using TPC-H Query 11 with 4 threads. The adaptive execution strategy outperformed bytecode-only execution by 40%, unoptimised compilation by 10%, and optimised compilation by 80%. This improvement occurs because the single-threaded compilation can run in parallel with the query executing on another thread.

Utilising additional LLVM compiler stages, improved cost models, and multi-threaded compilation/execution created a viable JIT compiled-query application. The primary criticism is they effectively wrote the JIT compiler from scratch, requiring substantial engineering effort. Most additions are not unique to database JIT compilers; they mostly improved compiler latency.

### 3.5 Umbra

Umbra, created in 2020 by Thomas Neumann (HyPer’s creator), demonstrates that HyPer’s in-memory concepts apply to on-disk systems as well [NF20]. Recent SSD improvements and buffer management advances made this possible. Umbra integrates LeanStore’s concepts for buffer management and latching, combined with HyPer’s multi-version concurrency, compilation, and execution strategies. A hybrid approach produced an on-disk database that is scalable, flexible, and faster than HyPer itself. Figure 3.6 shows this.

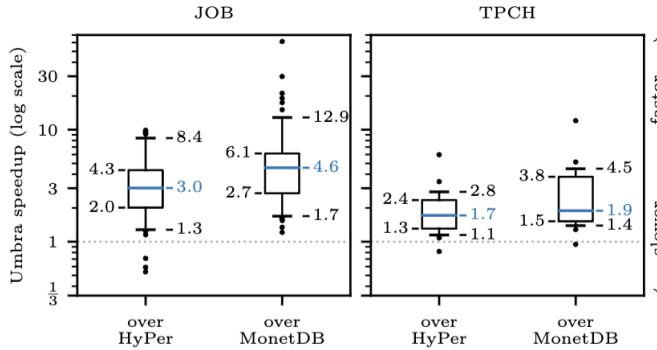


Figure 3.6: Umbra benchmarks.  
[NF20]

They introduced an optimisation enabling the compiler to dynamically change the query plan [SFN22]. Using metrics collected during execution, they swap join order or join types. Such dynamic planning improved data-centric query runtimes by a factor of 2. Other databases achieve this by invoking the query optimiser multiple times; Umbra’s approach of invoking the compiler once while measuring runtime performance provides additional benefits.

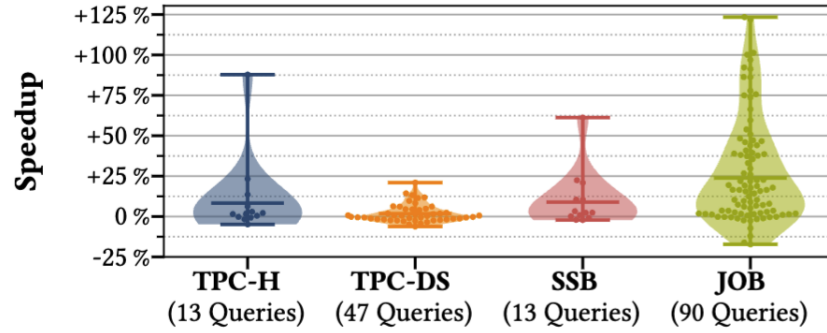


Figure 3.7: Umbra benchmarks after *adaptive query processing* (AQP). [SFN22]

Umbra is currently ranked as the most effective database on ClickHouse’s benchmarks [Cli24]. Compiler overhead remains a criticism, but direct JIT compiler access enabling adaptive compilation for optimisation provides distinct advantages. Additionally, Umbra supports user-defined operators, enabling efficient custom algorithm integration [SN22].

### 3.6 Mutable

In 2023, Mutable presented the concept of using a low-latency JIT compiler (WebAssembly) rather than a heavy one in their initial paper [HD23a]. Its primary purpose, however, is to serve as a framework for implementing other concepts in database research so that their team does not need to rewrite the framework later [HD23b]. However, using WebAssembly meant they can omit most of the optimisations that Hyper did while maintaining high performance. Furthermore, they have a minimal query

optimiser and instead rely on the V8 engine.

V8’s Liftoff component adds early-stage execution to reduce query startup overhead [Ham18]. Liftoff produces machine code quickly while skipping optimisations; TurboFan then provides second-stage compilation in the background during execution.

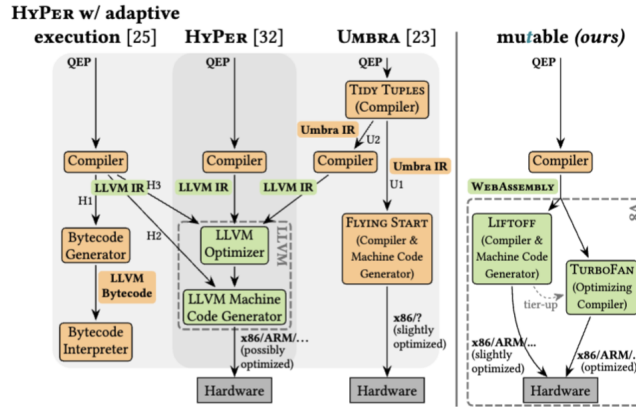


Figure 3.8: Comparison of mutable to HyPer and Umbra. [HD23b]

Mutable’s benchmarks show they achieve similar compile and execution times to HyPer, and outperform them in many cases [HD23b]. While improving Mutable to the same performance as HyPer or Umbra would require re-architecting, achieving this performance within the implementation effort is a significant outcome.

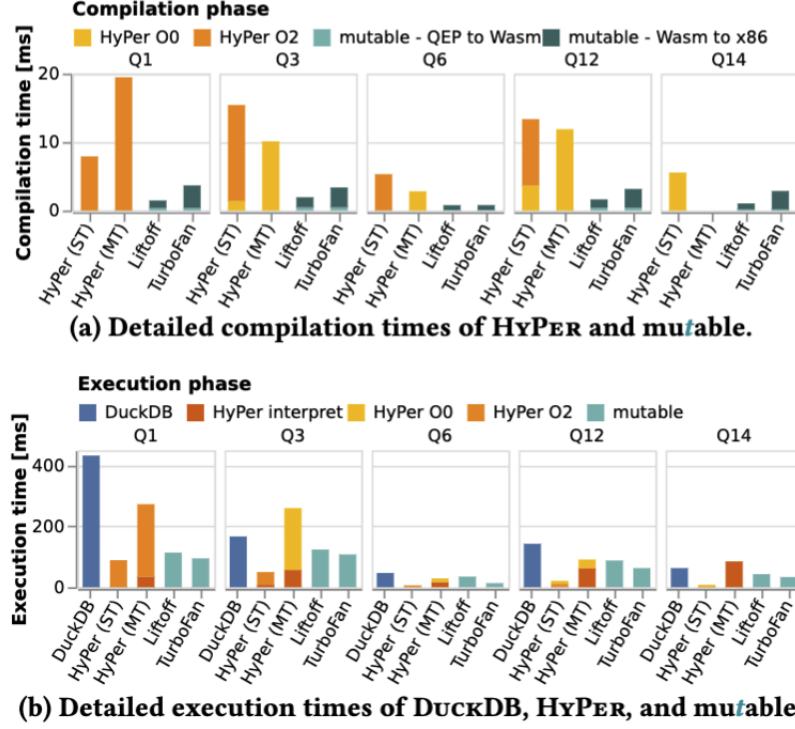


Figure 3.9: Benchmarks produced by Mutable.  
[HD23b]

### 3.7 LingoDB

LingoDB, introduced in 2022, proposed using the MLIR framework for optimisation layers [JKG22]. Traditional databases follow a standard pipeline: parsing SQL into a query tree, converting to relational algebra, optimising using manual implementations, creating a plan tree, and either executing or compiling to a binary. MLIR streamlines this by parsing directly to a high-level MLIR dialect, applying optimisation passes to the dialect, and using LLVM compilation directly without intermediate conversions.

The LingoDB architecture can be seen in Figure 3.10, which begins by parsing SQL into a relational algebra dialect. MLIR’s dialect system and code generation define these dialects. The compiler consists of multiple dialect layers: a relational algebra dialect for high-level queries, a database dialect for database-specific types and operations,

a DSA dialect for data structures and algorithms, and a utility dialect for support functions. This multi-stage design splits the intermediate representation into three levels: relational algebra, a mixed dialect layer, and finally LLVM code [JKG22].

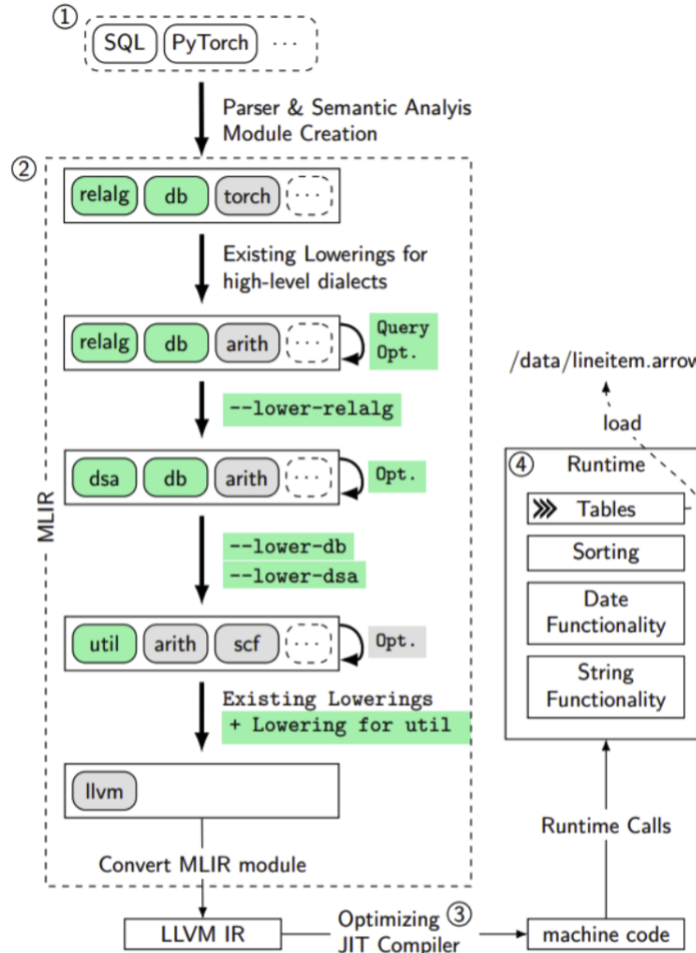


Figure 3.10: LingoDB architecture [JKG22].  
[JKG22]

Results in figure 3.11 show worse performance than HyPer but better than DuckDB [JKG22]. Performance was not the primary focus; rather, implementing standard optimisation patterns within the compiler was key. Notably, LingoDB uses approximately 10,000 lines of code for query execution model, while Mutable uses 22,944 lines despite skipping query optimisation. Comparisons show LingoDB uses three times less code than DuckDB and  $5\times$  less than NoisePage.



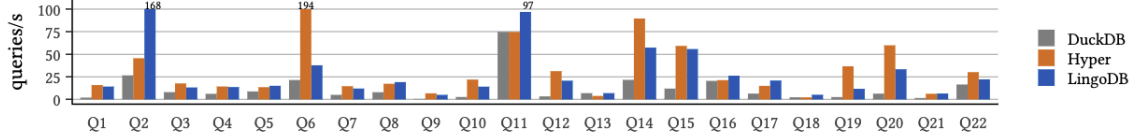


Figure 9: Query execution performance (compilation not included) for DuckDB, Hyper and LingoDB (SF=1)

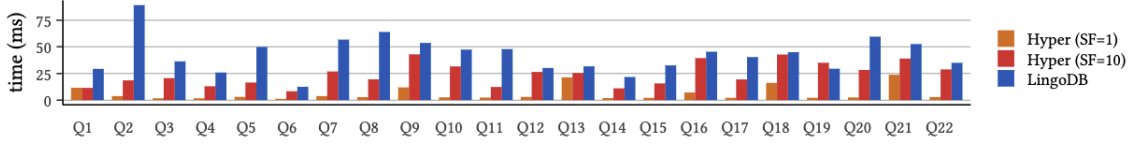


Figure 3.11: LingoDB benchmarking.  
[JKG22]

In later research, LingoDB also explores obscure operations such as GPU acceleration, using the Torch-MLIR project’s dialect, representing queries as sub-operators for acceleration, non-relational systems, and more [JG23]. For our purposes, the appealing part of their architecture is that they use `pg_query` to parse the incoming SQL, which means their parser is the closest to PostgreSQL’s. Section 4.1 explores this in the design.

### 3.8 Benchmarking

These systems produced their own benchmarks and could selectively pick which systems to involve, so a recreation of the benchmarks was done. DuckDB, HyPer, Mutable, LingoDB and PostgreSQL were all compared to one another, and is visible in Figure 3.12. These benchmarks used TPC-H because most of the related works used it themselves [BNE14], and docker containers were chosen to make deploying it easier. These benchmarks were created by relying on the Mutable codebase as they had significant infrastructure to support this, and is visible at <https://github.com/zyros-dev/benchmarking-dockers>.

The benchmarks in Figure 3.12 show that PostgreSQL is significantly slower than the rest, likely because it is an on-disk database and most of the others are in-memory. With PostgreSQL removed from the graph, HyPer and DuckDB are the fastest, but

with a single core DuckDB is the slowest.

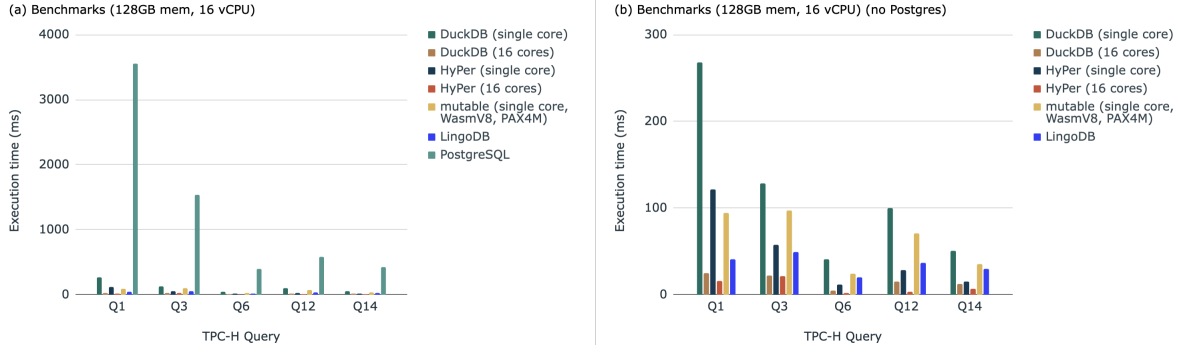


Figure 3.12: Benchmarking results.

To identify how much potential gain there is in a major on-disk database, An analysis used **perf** on PostgreSQL during TPC-H queries 1, 3, 6, 12 and 14 in Figure 3.13 [Linnd]. These queries were chosen because the Mutable code infrastructure directly supported them. This showed that the CPU time varied from between 34.87% and 76.56%, with an average of 49.32%. These metrics were identified using **prof**'s output graph. With this much time in the CPU, it is clear that the queries can become several times faster if optimised.

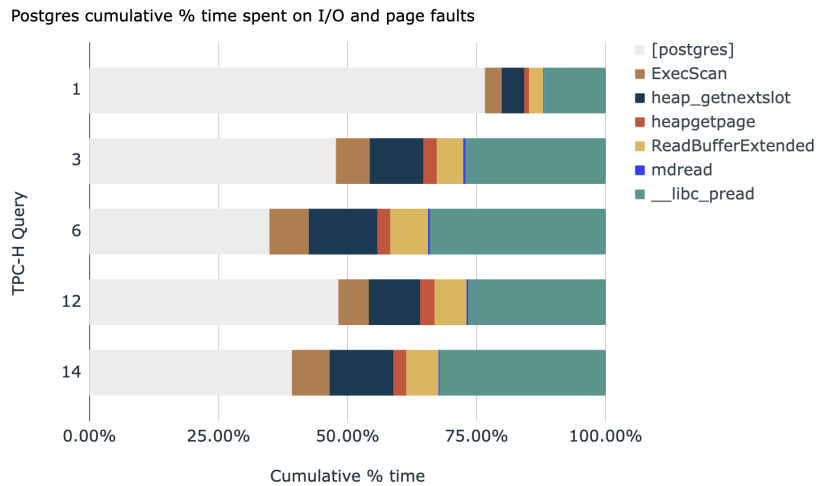


Figure 3.13: PostgreSQL's time spent in the CPU, measured with **prof**.

### 3.9 Gaps in Literature

A core gap is the extension system within an existing database. HyPer and Umbra managed to commercialise their systems, but the other databases are strictly research systems and some do not support ACID, multithreading, or other core requirements such as index scans. Michael Stonebraker, a Turing Award recipient and the founder of PostgreSQL, writes that a fundamental issue in modern research is that they have forgotten the use case of the systems and target the 0.01% of users [Sto18]. These commercial databases reaching high performance is a symptom of this. Testing the wide variety of ACID requirements is a significant undertaking.

The other issue is writing these compiled query engines is a large significant amount of work, and the core reason why vectorised execution has gained more popularity in production systems. Debugging a compiled program within a database is challenging, and while solutions have been offered, such as Umbra’s debugger [KN20], it is still challenging and questionable how transferable those tools are.

Relying on an extension system such that it is an optional feature means users can install the optimisations, and testing can occur with production systems without requesting pull requests into the system itself. Since these are large source code changes, it adds political complexity to get the solution added to the official system without production proof of it being used. The result of this would be a usable database compiler accelerator, that can easily be installed into existing systems, and once it is used in many scenarios it will be easier to add to the official system.

### 3.10 Aims

Tying this together, this piece aims to integrate a research compiler into a battle-tested system by using an extension system. This addresses the gap of these systems being difficult to use widely, and potential to integrate it into the original system once stronger correctness and speed optimisations have been shown. Accomplishing

this would show a way to rely on previous ACID-compliant code and supporting code infrastructure. Users can install the extension, have faster queries with rollbacks, and the implementation effort is lowered since core systems and algorithms can be skipped.

A key output is showing that the system can operate within the same order of magnitude as the base system. The purpose of this is to ensure other optimisations can be applied to fit the surrounding database later, but the expectation is not to be faster than it.

One concern is these databases are large systems while the research systems are smaller. This increases the testing difficulty because a complete system has more variables, such as genetic algorithms in the query optimiser that makes performance non-deterministic. To counter this, benchmarks can be executed multiple times, and a standard deviation can be calculated.

## Chapter 4

# Method

In Section 4.1 the overarching design is described, then Section 4.2 goes over the implementation.

### 4.1 Design

The database and compiler selection requires several criteria: strong extension support, wide-spread usage, high performance, and a volcano execution model in the base database. For the compiler, ideally it would use a similar interface as the base database when parsing SQL, demonstrate strong performance results, and is open source. Such criteria eliminates HyPer, Umbra, and System R, leaving Mutable and LingoDB. LingoDB parses inputs with `pg-query`, which matches PostgreSQL well.

As a result, PostgreSQL and LingoDB were selected. PostgreSQL offers strong extension support, enabling runtime hook-based execution engine overrides. TimescaleDB (now TigerData), was discussed in Section 3.2, exemplifies such approaches [Tim24a]. A significant challenge arose: LingoDB’s columnar, in-memory architecture required substantial adjustments. Additionally, LingoDB lacks index support, potentially biasing benchmarks against PostgreSQL. LingoDB’s recent versions contain numerous

unrequired features and optimisations, so the 2022 version from their initial paper was selected to simplify implementation effort.

An alternative to this could have been a more productionised system such as NoisePage, but this would have increased implementation complexity significantly.

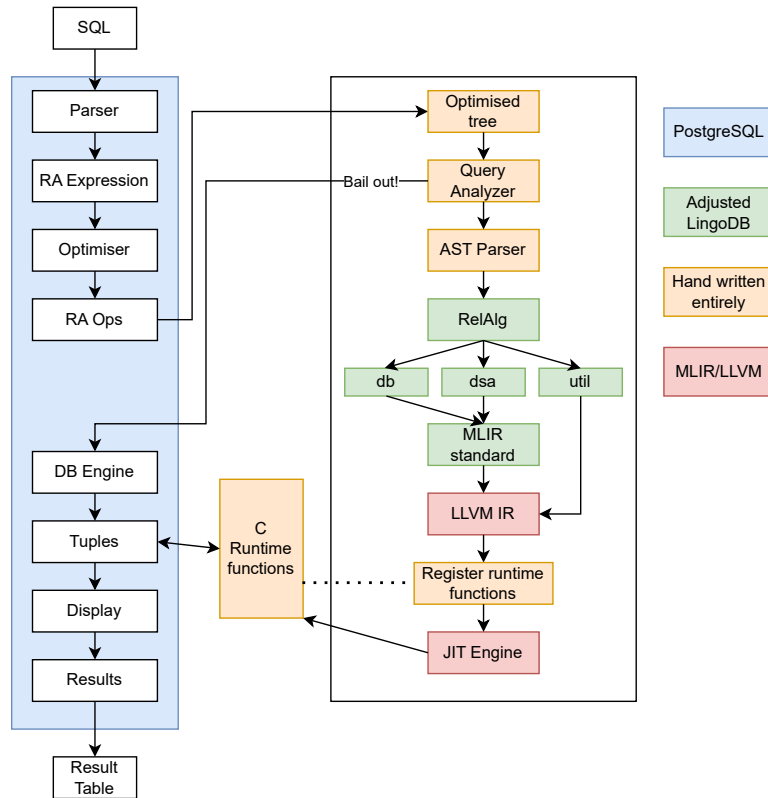


Figure 4.1: Internal system design with labels of component sources.

LingoDB is integrated into PostgreSQL as seen in Figure 4.1. Blue components represent PostgreSQL, with the left pipeline showing the entire PostgreSQL execution flow. Queries reach runtime hooks, where a handwritten analyser determines executability before parsing. Handwritten components appear in light-peach. Processing continues through LingoDB code with custom runtime hooks and minor edits, annotated in green. Finally, compilation produces LLVM IR with embedded runtime hooks for PostgreSQL data access.

Query failures should still allow results to return and graceful fallback to PostgreSQL. A try-catch pattern at the AST parser entrance routes failed queries back to PostgreSQL. However, such protection does not prevent system panics such as segmentation faults. When the system does fail from a runtime error, it dumps any accumulated results and completely falls back to PostgreSQL.

AST Parser implementation is expected to be most time-consuming, as it receives the optimised plan tree from PostgreSQL and needs to parse it into the RelAlg dialect. LingoDB was designed to parse query trees from the Parser stage in Figure 4.1. The implementation includes 18 plan nodes and 14 expression nodes for TPC-H.

TPC-H query support is the final goal. Test-driven development drove implementation using PostgreSQL’s `pg_regress` module for SQL query creation and expected output definition. A progressive test set built from basic queries up to TPC-H queries. Such progression enabled incremental node implementation during development and quick validation of safe changes. Table 4.1 shows the complete regression test suite, organised to progressively build complexity from single-row operations to full TPC-H queries.

Table 4.1: Regression test suite files and their aims.

| File Name                  | Aim  |
|----------------------------|--|
| 1_one_tuple.sql            | Single row insertion and selection             |
| 2_two_tuples.sql           | Multiple row retrieval                         |
| 3_lots_of_tuples.sql       | Large dataset handling (5000 rows)             |
| 4_two_columns_ints.sql     | Multiple integer columns                       |
| 5_two_columns_diff.sql     | Mixed column types (INTEGER, BOOLEAN)          |
| 6_every_type.sql           | All supported data types with projections      |
| 7_sub_select.sql           | Column subsetting across Boolean columns       |
| 8_subset_all_types.sql     | Column subsets from multi-type tables          |
| 9_basic_arithmetic_ops.sql | Arithmetic operators (+, -, *, /, %)           |
| 10_comparison_ops.sql      | Comparison operators (=, <, !=, >, <=, >=, <=) |
| 11_logical_ops.sql         | Logical operators (AND, OR, NOT)               |
| 12_null_handling.sql       | NULL operations (IS NULL, COALESCE)            |
| 13_text_operations.sql     | Text operations (LIKE,   )                     |

*Continued on next page*

Table 4.1 – *Continued from previous page*

| File Name                          | Aim   |
|------------------------------------|---|
| 14.aggregate_functions.sql         | Aggregates without GROUP BY (SUM, COUNT, AVG, MIN, MAX) |
| 15.special_operators.sql           | BETWEEN, IN, CASE WHEN                                  |
| 16.debug_text.sql                  | CHAR(10) with LPAD                                      |
| 17.where_simple_conditions.sql     | WHERE with simple comparisons                           |
| 18.where_logical_combinations.sql  | WHERE with AND/OR/NOT combinations                      |
| 19.where_null_patterns.sql         | WHERE with NULL checks and COALESCE                     |
| 20.where_pattern_matching.sql      | WHERE with LIKE and IN operators                        |
| 21.order_by_basic.sql              | ORDER BY single columns (integers, strings, decimals)   |
| 22.order_by_multiple_columns.sql   | ORDER BY multiple columns with mixed directions         |
| 23.order_by_expressions.sql        | ORDER BY expressions (not supported - placeholder)      |
| 24.order_by_with_where.sql         | ORDER BY combined with WHERE                            |
| 25.group_by_simple.sql             | GROUP BY with aggregations and ORDER BY                 |
| 26.before_check_types.sql          | All PostgreSQL types with casts and aggregations        |
| 27.group_by_having.sql             | GROUP BY with HAVING clause                             |
| 28.group_by_with_where.sql         | GROUP BY with WHERE filtering                           |
| 29.expressions_in_aggregations.sql | Expressions in aggregates (arithmetic, ABS)             |
| 30.test_missing_expressions.sql    | PostgreSQL expression types coverage                    |
| 31.distinct_statement.sql          | DISTINCT in SELECT and aggregates                       |
| 32.decimal_maths.sql               | Decimal arithmetic operations                           |
| 33.basic_joins.sql                 | INNER JOIN  |
| 34.advanced_joins.sql              | LEFT, RIGHT, SEMI, ANTI joins                           |
| 35.nested_queries.sql              | Nested and correlated subqueries                        |
| 36.tpch_minimal.sql                | TPC-H minimal schema variant 1                          |
| 37.tpch_minimal_2.sql              | TPC-H minimal schema variant 2                          |
| 38.tpch_minimal_3.sql              | TPC-H minimal schema variant 3                          |
| 39.tpch_minimal_4.sql              | TPC-H minimal schema variant 4                          |
| 40.tpch_not_lowered.sql            | TPC-H queries without lowering                          |
| 41.sorts.sql                       | Sorting with joins                                      |
| 42.test_realg_function.sql         | Direct RelAlg MLIR execution                            |
| init_tpch.sql                      | TPC-H table initialization                              |
| tpch.sql                           | Full TPC-H benchmark in pgx-lower                       |
| tpch_no_lower.sql                  | TPC-H inside pure PostgreSQL for validation             |

Node implementation ordering followed the dependency analysis. That is, foundational



nodes such as the sequential scan and projection are in virtually every query, while other nodes build on top. By implementing in the dependency order, each new node could be tested using the previously implemented nodes, and bugs can be isolated.

## 4.2 Implementation

The primary system this project was developed on was a Ryzen 3600, a x86\_64 CPU and on Ubuntu 25.04. The database was not tested on MacOS or Windows, and this may lead to issues when installing it independently.

### 4.2.1 Integrating LingoDB to PostgreSQL

The project was started from [https://github.com/mkindahl/pg\\_extension](https://github.com/mkindahl/pg_extension), then `ExecutorRun_hook` inside of `executor.h` in PostgreSQL was used [https://doxygen.postgresql.org/executor\\_8h\\_source.html](https://doxygen.postgresql.org/executor_8h_source.html) as the entrance.

The `QueryDesc` pointer, containing the query request, was passed from C to C++. A design decision arose from this requirement: Good practice would be to use smart pointers to prevent memory leaks, but `QueryDesc` is large and the source of truth about the request. Furthermore, the memory is handled by the PostgreSQL memory contexts. It was decided that these objects will remain as raw pointers, causing the C++ to break conventions.

LingoDB is cloned as a git submodule in `pgx-lower` and set to a read-only permission. This is maintained for reference purposes only, and the compilation phases are extracted from it. LingoDB used LLVM 14, but is upgraded to LLVM 20 to modernise it and bring slightly better support with C++20 (some workarounds were required with LLVM 14 that could be skipped with LLVM 20). However, since this is the C++ API for LLVM, a large amount of the LingoDB code had to be adjusted to compile.

## 4.2.2 Logging infrastructure

PostgreSQL has its own logging infrastructure that routes through its `elog` command, but a two-layer logging infrastructure was required for `pgx-lower`. The first layer is the level, (`DEBUG`, `IR`, `TRACE`, `WARNING_LEVEL`, `ERROR_LEVEL`, and more), and the second represents which layer of the design the log is inside of (`AST_TRANSLATE`, `RELALG_LOWER`, `DB_LOWER`, and more). This means when the AST translation is run, all the logs in only that section of the codebase could be enabled. The core benefit of this is that the logs are lengthy so it becomes easier to navigate.

Lastly, for error handling mostly `std::runtime_error` was utilised. This served as a global way to log the stack trace and roll back to PostgreSQL's execution. If an error is thrown in `pgx-lower`, the progress in compiling is dumped then it fully falls over to PostgreSQL, even if the result is half-complete.

## 4.2.3 Debugging Support

An important property of PostgreSQL is that each client connection creates a new process. Debugging requires navigating several layers: the PostgreSQL postmaster, the client connection, the runtime hook entrance, C++ code, and the JIT runtime. Bugs can occur at any of these levels, making debugging challenging. This poses a particular difficulty when dealing with segmentation faults and other errors that lack logging information.

This was solved with a combination of the regression tests, unit testing, and a script to connect `gdb` to dump the stack. The regression tests were already explained, but the unit tests test components had to be uncoupled from PostgreSQL. The issue is that this extension creates a `pgx-lower.so` which is loaded into PostgreSQL, and the PostgreSQL libraries are used from that context. This means if we run without being inside PostgreSQL, no `psql` libraries can be used. As a result, unit tests can only test MLIR functions. Most of the unit tests were highly situational, and are used when a proper interactive GDB connection was required within the IDE. Furthermore, unit

tests allow the `stderr` to be visible, which assists greatly with MLIR/LLVM errors that go to `stderr` and nowhere else.

For the stack-frame dumping, `debug-query.sh` was written, which proved to be the most useful approach for complex issues. It has the ability to create a `psql` connection, get the process ID of the client connection, then connect GDB, run a desired query, and dump the stack trace. In this way, the majority of errors were tackled.

#### 4.2.4 Data Types

PostgreSQL has a large set of data types (<https://www.postgresql.org/docs/current/datatype.html>), and LingoDB has significantly less. However, for TPC-H we only require a subset of these. Table 4.2 shows which of the LingoDB types are used, and Table 4.3 shows the type mappings. The two main changes were to handle decimals and the various types of strings. For decimals, `i128` provides enough precision for most TPC-H tests, which is what LingoDB was using. However, adjustments had to be made to prevent precisions that cannot be allocated within an `i128` from appearing, so the precision was capped at `<32, 6>`. That is, 32 digits in the integer part and 6 digits in the decimal places.

For date types, when `pgx-lower` receives a date with a month field it will be turned into the average number of days in a month. This is inaccurate, but since the TPC-H queries never use month intervals, this is acceptable.

| DB Dialect Type            | LLVM Type  | Used by pgx-lower?       |
|----------------------------|------------|--------------------------|
| !db.date<day>              | i64        | Yes                      |
| !db.date<millisecond>      | i64        | No                       |
| !db.timestamp<second>      | i64        | Only if typmod specifies |
| !db.timestamp<millisecond> | i64        | Only if typmod specifies |
| !db.timestamp<microsecond> | i64        | Yes (default)            |
| !db.timestamp<nanosecond>  | i64        | Only if typmod specifies |
| !db.interval<months>       | i64        | No                       |
| !db.interval<daytime>      | i64        | Yes                      |
| !db.char<N>                | {ptr, i32} | No (uses !db.string)     |
| !db.string                 | {ptr, i32} | Yes                      |
| !db.decimal<p,s>           | i128       | Yes                      |
| !db.nullable<T>            | {T, i1}    | Yes                      |

Table 4.2: LingoDB type system full capabilities.

| PostgreSQL Type         | DB Dialect Type                 | LLVM Type  |
|-------------------------|---------------------------------|------------|
| <i>Integers</i>         |                                 |            |
| INT2 (SMALLINT)         | i16                             | i16        |
| INT4 (INTEGER)          | i32                             | i32        |
| INT8 (BIGINT)           | i64                             | i64        |
| <i>Floating Point</i>   |                                 |            |
| FLOAT4 (REAL)           | f32                             | f32        |
| FLOAT8 (DOUBLE)         | f64                             | f64        |
| <i>Boolean</i>          |                                 |            |
| BOOL                    | i1                              | i1         |
| <i>String Types</i>     |                                 |            |
| TEXT / VARCHAR / BPCHAR | !db.string                      | {ptr, i32} |
| BYTEA                   | !db.string                      | {ptr, i32} |
| <i>Numeric</i>          |                                 |            |
| NUMERIC(p,s)            | !db.decimal<p,s>                | i128       |
| <i>Date/Time</i>        |                                 |            |
| DATE                    | !db.date<day>                   | i64        |
| TIMESTAMP               | !db.timestamp<s ms  $\mu$ s ns> | i64        |
| INTERVAL                | !db.interval<daytime>           | i64        |
| <i>Nullable</i>         |                                 |            |
| Any nullable column     | !db.nullable<T>                 | {T, i1}    |

Table 4.3: PostgreSQL type translation through DB dialect to LLVM.

#### 4.2.5 LingoDB Dialect Changes

The MLIR dialects from LingoDB required modifications to support LLVM 20 and pgx-lower’s specific needs. Table 4.4 summarizes the key changes across the DB, DSA, RelAlg, and Util dialects. The changes were primarily API compatibility updates with minimal semantic modifications. The scope included 94 operations in total across all dialects (93 in LingoDB, 94 in pgx-lower) and 21 types (identical count), with most changes addressing LLVM 20 API compatibility.

| Category                 | Count         | Description   |
|--------------------------|---------------|---|
| MLIR API Updates         | 30 changes    | NoSideEffect $\rightarrow$ Pure, Optional $\rightarrow$ std::optional, added OpaqueProperties |
| Include Path Changes     | 100% of files | mlir/Dialect/ $\rightarrow$ lingodb/mlir/Dialect/   |
| Dialect Renames          | 1             | Arithmetic $\rightarrow$ Arith (MLIR core change)   |
| New Operations           | 1             | SetDecimalScaleOp in DSA  |
| Modified Operations      | 2             | DSA.SortOp (supports collections), BaseTableOp (added column_order)                           |
| Namespace Clarifications | 6 interfaces  | Added explicit cppNamespace declarations  |
| Convenience Features     | 4 dialects    | Added useDefaultTypePrinterParser = 1   |
| Fastmath Support         | 2 patterns    | Added fastmath flags to arithmetic canonicalization   |
| Code Cleanup             | 5 locations   | Removed comments, simplified logic  |

Table 4.4: Summary of key differences between LingoDB and pgx-lower dialects.

#### 4.2.6 Query Analyser

While the query analyser is fully written, in the final state it routes all queries through pgx-lower for testing. This enables testing new features and identifying where failures occur. It functions by doing a depth-first search through the plan tree and validating that the nodes are supported by the engine. In the future, this component could be enhanced to decide whether a query is worth running based on its cost metrics.

This defines most of the supporting details. The main two components of the implementation are the runtime patterns and the plan tree translation.

### 4.2.7 Runtime patterns

Runtime functions are used in LingoDB for methods that are difficult to implement in LLVM, such as sorting algorithms. `pgx-lower` adds several custom runtime implementations: reading tuples from PostgreSQL and storing them for streaming, modifying LingoDB’s runtime implementations, and replacing the sort and hash table implementations to use PostgreSQL’s API.

Figure 4.2 shows the high-level components in a runtime function. During SQL translation to MLIR, the frontend creates `db.runtimecall` operations with a function name and arguments. These operations are registered in the runtime function registry, which maps each function name to either a `FunctionSpec` containing the mangled C++ symbol name, or a custom lowering lambda. During the DBToStd lowering pass, the `RuntimeCallLowering` pattern looks up each runtime call in the registry and replaces it with a `func.call` operation targeting the mangled C++ function. The JIT engine then links these function calls to the actual compiled C++ runtime implementations, which handle PostgreSQL-specific operations like tuple access, sorting via `tuplesort`, and hash table management using PostgreSQL’s memory contexts. This pattern allows complex operations to be implemented once in C++ and reused across all queries, while maintaining type safety and null handling semantics through the MLIR type system.

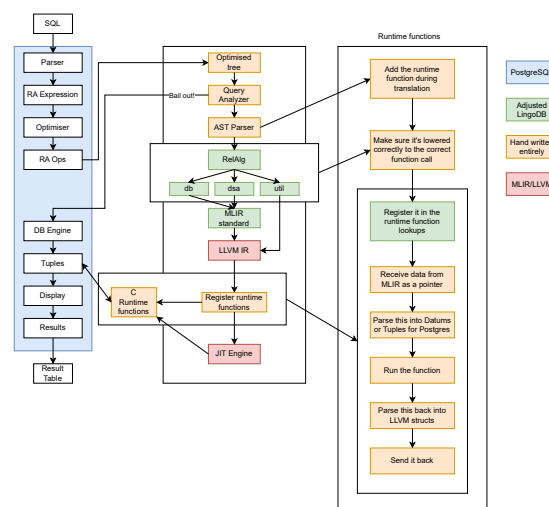


Figure 4.2: Runtime function integration diagram.

LingoDB had a code generation step in their CMakeLists, `gen_rt_def`, which supports generating boilerplate code. It parses a given C++ file, then generates a header file in the build files which has the mangled name lookup, so that the developer does not need to reimplement those sections repeatedly.

The PostgreSQL runtime implements zero-copy tuple access for reading, and result accumulation for output. When scanning a table, `open_postgres_table()` creates a heap scan using `heap_begin_scan()`, and `read_next_tuple_from_table()` stores a pointer (not a deep copy) to each tuple in the global `g_current_tuple_passthrough` structure. JIT code extracts fields via `extract_field()`, which uses `heap_get_attr()` and converts PostgreSQL `Datum` values to native types. For results, `table_builder_add()` accumulates computed values as `Datum` arrays in `ComputedResultStorage`. When a result tuple completes, `add_tuple_to_result()` streams it back through PostgreSQL's `TupleStreamer` by populating a `TupleTableSlot` and calling the destination receiver, enabling direct integration with PostgreSQL's tuple pipeline.

The PostgreSQL runtime allows the JIT runtime to read from the psql tables, and the design of it is visible in Figure 4.3. Generated JIT code invokes runtime functions implemented in the C++ layer, including table operations (`open_psql_table()`), field extraction (`extract_field<T>()`), result building (`table_builder_add()`), and type conversions between PostgreSQL's `Datum` representation and native LLVM types. These runtime functions interface with PostgreSQL's C API layer, which handles heap access for reading tuples, memory management through PostgreSQL's context system, and tuple streaming for returning results to the executor. An important part is that when tuples are read from Postgres, only the pointers are stored within the C++ storage layer to maintain zero-copy semantics.

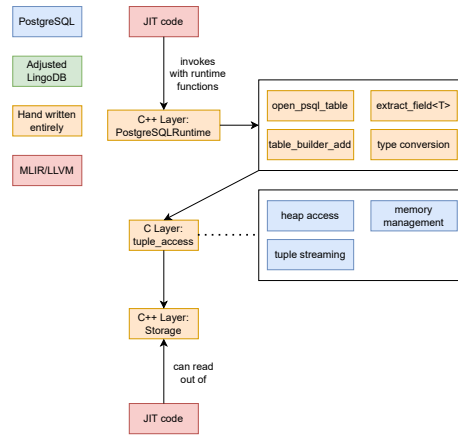


Figure 4.3: PostgreSQLRuntime.h component design.

Once stored, the JIT code can read from the batch and stream tuples back through the output pipeline as well. Streaming the tuples out from JIT means that the entire table does not build up in RAM, and instead tuples are returned one by one. This was tested by doing larger table scans as avoiding this buildup is essential.

LingoDB’s sort and hashtable runtimes were relying on `std::sort` and `std::unordered_map` respectively. This is problematic because as an on-disk database we need to handle disk spillage in these scenarios. Rather than reinventing these, leaning on psql’s implementation of these solves these issues and creates a blueprint for further implementations.

Most of the LingoDB lowerings bake metadata (such as table names) into the compiled binary by JSON-encoding it as a string. Instead of that, for the sort and hash table runtimes a specification pointer was used. Inside the plan translation stage, a struct was built and allocated with the transaction memory context, then the pointer to this was baked into the compiled binary instead. This enabled these runtimes to trigger without doing JSON serialisation and deserialisation. This is something that a regular compiler would be incapable of doing, because the binary needs to be a standalone program, but in this context it can be relied upon.



### 4.2.8 Plan Tree Translation

The plan tree translation converts PostgreSQL’s execution plan nodes into RelAlg MLIR operations. Figure 4.4 shows where this fits into the broader design. Within the AST Parser component, we examine the PostgreSQL tag on the node to determine the plan node type, then a recursive descent parser starts translating. Each translation function follows a consistent pattern. First, children of the plan are translated using post-order traversal. Then, the node is translated into the MLIR relational algebra dialect, and a translation result is built then returned.

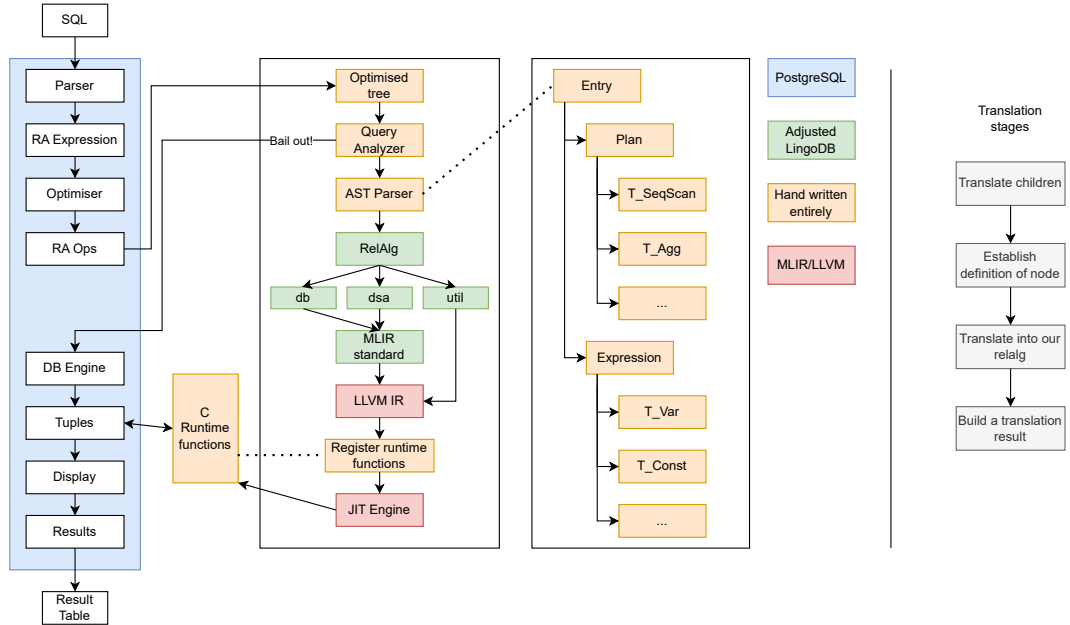


Figure 4.4: AST translation design and high-level steps in each function.

The translation functions follow a consistent pattern, as shown in Listing 4.1. Each function takes the query context and a PostgreSQL plan node pointer, performs the translation, and returns a `TranslationResult`. The `QueryCtxT` object is passed down the tree, and when mutated, a new instance is created for child nodes. Meanwhile, `TranslationResults` flow upward to represent each node’s output, providing strong type-correctness in theory. However, this pattern is not strictly enforced in practice.

Listing 4.1: Plan node translation method signatures. The expression nodes follow the

same pattern.

```

1 auto translate_plan_node(QueryCtxT& ctx, Plan* plan) -> TranslationResult;
2 auto translate_seq_scan(QueryCtxT& ctx, SeqScan* seqScan) -> TranslationResult;
3 auto translate_index_scan(QueryCtxT& ctx, IndexScan* indexScan) -> TranslationResult;
4 auto translate_index_only_scan(QueryCtxT& ctx, IndexOnlyScan* indexOnlyScan) -> TranslationResult;
5 auto translate_bitmap_heap_scan(QueryCtxT& ctx, BitmapHeapScan* bitmapScan) -> TranslationResult;
6 auto translate_agg(QueryCtxT& ctx, const Agg* agg) -> TranslationResult;
7 auto translate_sort(QueryCtxT& ctx, const Sort* sort) -> TranslationResult;
8 auto translate_limit(QueryCtxT& ctx, const Limit* limit) -> TranslationResult;
9 auto translate_gather(QueryCtxT& ctx, const Gather* gather) -> TranslationResult;
10 auto translate_gather_merge(QueryCtxT& ctx, const GatherMerge* gatherMerge) -> TranslationResult;
11 auto translate_merge_join(QueryCtxT& ctx, MergeJoin* mergeJoin) -> TranslationResult;
12 auto translate_hash_join(QueryCtxT& ctx, HashJoin* hashJoin) -> TranslationResult;
13 auto translate_hash(QueryCtxT& ctx, const Hash* hash) -> TranslationResult;
14 auto translate_nest_loop(QueryCtxT& ctx, NestLoop* nestLoop) -> TranslationResult;
15 auto translate_material(QueryCtxT& ctx, const Material* material) -> TranslationResult;
16 auto translate_memoize(QueryCtxT& ctx, const Memoize* memoize) -> TranslationResult;
17 auto translate_subquery_scan(QueryCtxT& ctx, SubqueryScan* subqueryScan) -> TranslationResult;
18 auto translate_cte_scan(QueryCtxT& ctx, const CteScan* cteScan) -> TranslationResult;

```

The 14 expression node types are documented in Table 4.5, and the 18 plan node types in Table 4.6. The subsections explain these more specifically.

| File      | Node Tag            | Implementation Note                                |
|-----------|---------------------|--|
| basic     | T.BoolExpr          | Boolean AND/OR/NOT - with short-circuit evaluation |
| basic     | T.Const             | Constant value - converts Datum to MLIR constant   |
| basic     | T.CoalesceExpr      | COALESCE(...) - first non-null using if-else       |
| basic     | T.CoerceViaIO       | Type coercion - calls PostgreSQL cast functions    |
| basic     | T.NullTest          | IS NULL checks - generates nullable type tests     |
| basic     | T.Param             | Query parameter - looks up from context            |
| basic     | T.RelabelType       | Type relabeling - transparent wrapper              |
| basic     | T.Var               | Column reference - resolves varattno to column     |
| complex   | T.Aggref            | Aggregate functions - creates AggregationOp        |
| complex   | T.CaseExpr          | CASE WHEN ... END - nested if-else operations      |
| complex   | T.ScalarArrayOpExpr | IN/ANY/ALL with arrays - loops over elements       |
| complex   | T.SubPlan           | Subquery expression - materializes and uses result |
| functions | T.FuncExpr          | Function calls - maps PostgreSQL functions to MLIR |
| operators | T.OpExpr            | Binary/unary operators                             |

Table 4.5: Expression node translations.

| File  | Node Tag          | Implementation Note                                   |
|-------|-------------------|---|
| agg   | T_Agg             | Aggregation - AggregationOp with grouping keys        |
| joins | T_HashJoin        | Hash join - InnerJoinOp with hash implementation      |
| joins | T_MergeJoin       | Merge join - InnerJoinOp with merge semantics         |
| joins | T_NestLoop        | Nested loop join - CrossProductOp or InnerJoinOp      |
| scans | T_BitmapHeapScan  | Bitmap heap scan - SeqScan with quals                 |
| scans | T_CteScan         | CTE scan - looks up CTE and creates BaseTableOp       |
| scans | T_IndexOnlyScan   | Index-only scan - treated as SeqScan                  |
| scans | T_IndexScan       | Index scan - treated as SeqScan                       |
| scans | T_SeqScan         | Sequential scan - BaseTableOp with optional Selection |
| scans | T_SubqueryScan    | Subquery scan - recursively translates subquery       |
| utils | T_Gather          | Gather workers - pass-through (no parallelism)        |
| utils | T_GatherMerge     | Gather merge - pass-through (no parallelism)          |
| utils | T_Hash            | Hash node - pass-through to child                     |
| utils | T_IncrementalSort | Incremental sort - delegates to Sort                  |
| utils | T_Limit           | Limit/offset - LimitOp with count and offset          |
| utils | T_Material        | Materialize - pass-through (no explicit op)           |
| utils | T_Memoize         | Memoize - pass-through to child                       |
| utils | T_Sort            | Sort operation - SortOp with sort keys                |

Table 4.6: Plan node translations.

There are several common node definitions which are helpful to understand. Nodes commonly have an `InitPlan` parameter, which is a function called before the node executes and initialises variables such as parameters and catalogue lookups. `targetlist` contains the output of the node, and `qual` specifies which tuples should pass through. Join nodes have left and right child trees, typically referred to as *inner* and *outer* children. These signify the inner and outer loops of the nested for-loop that is created.

### Expression Translation - Variables, Constants, Parameters

PostgreSQL identifies values using variable nodes and parameter nodes. These are tracked in a schema/column manager class and the `QueryCtxT` object. Variables are typically defined within scans, while parameters are intermediate products. Identifying them presented challenges due to multiple interacting identifiers (`varno`, `varattno`, and special values for index joins). To handle this complexity, a generic function was added to the `QueryCtxT` object: `resolve_var`. This function is used extensively throughout the translation logic.

Parameters are mostly defined within the `InitPlan`, and one key type is the cached scalar type.

## **Plan translation - Scans**

PostgreSQL supports multiple scan types: sequential scans, subquery scans, index scans, index-only scans, bitmap heap scans, and CTE scans. However, all scan types except subquery and CTE scans route to sequential scans in this implementation. This trade-off reduces implementation complexity at the cost of query performance, particularly for index scans.

Index scans use special annotations for variables via `INDEX_VAR`, which requires custom variable resolution. Additionally, we handle the qualifiers (scan filters) `indexqual` and `recheckqual` as generic filters. In PostgreSQL, these qualify at different stages, but since we skip index implementation, both become generic filters.

CTE scan plans are defined within the `InitPlan` of nodes, but still route through the primary plan switch statement logic. Neither CTE plans nor subqueries currently offer de-duplication to simplify implementation. That is, if a query uses the same CTE reference or writes the same subquery twice, they will currently be lowered into two different LLVM chunks of code rather than congregated and referenced.

## **Plan translation - Aggregations**

Aggregation is a complicated node type with many properties. It includes an aggregation strategy (ignored in `pgx-lower` in favour of a simpler algorithm), splitting specification (not utilised), and group columns. The node tracks the number of groups it produces and manages its own operators such as `COUNT`, `SUM`, and more. Additionally, it uses special varnos for variable lookups (represented as `-2`), requiring a new context object, and supports `DISTINCT` statements.

Most of the pain was with specific edge cases that arise in the simplification. For

instance, `COUNT(*)` behaves differently in combining mode where parallel workers provide partial counts rather than raw rows, requiring translation to `SUM` instead of `CountRowsOp`. Similarly, `HAVING` clauses can reference aggregates not present in the `SELECT` list, necessitating a discovery pass with `find_all_aggrefs()` to ensure all required aggregates are computed before filtering. The use of `varno=-2` to identify aggregate references, while necessary to distinguish them from regular column references, breaks the normal variable resolution flow and requires special handling throughout the expression translator.

### **Plan translation - Joins**

For joins, two layers exist for translation: the type of join, and the algorithm used by the join. The type of join refers to inner, semi, anti, right-anti, left/right joins, and full joins. The semi and anti join types are not specifically translated, and instead rely on `EXISTS`/`NOT EXISTS` translations because they are semantically the same operation.

The algorithm used by the join refers to merge, nestloop, or hash joins. Following LingoDB's pattern, the merge joins are turned into hash joins so that there does not have to be additional lowering code. A challenge was that nest loops can carry parameters, so a new query context has to be created, the parameter has to be registered and inserted into the lookups.

One issue in the joins implementation is preventing double computations. LingoDB handles this by computing the inner join separately, building a vector of results, and then iterating over the outer operation while reusing the pre-computed inner section. This approach prevents duplicated computation at the cost of increased memory usage. While theoretically acceptable, the vector would need to implement disk spillage. In practice, memory usage did not become problematic enough to require this feature.

## Expression Translation - Nullability

PostgreSQL tracks nullability information in the plan tree passed to `pgx-lower`. However, LingoDB's lowering operations can create situations where previously non-null objects become nullable through outer joins, aggregations, unions, and predicate evaluation. Since nullability propagates like not-a-number (affecting everything it touches), this introduces significant implementation complexity.

One note to be aware of is that LingoDB and PostgreSQL have inverted null flags. That is, in LingoDB 1 means valid, and in PostgreSQL 1 means null. This causes confusion with the runtime functions needing to invert the flags back and forth.

## Expression Translation - Operators and OID strings

Within operators, the primary challenge is the type conversions and quirks. Comparing two `BPCCHARs` requires adding padding for the surrounding space. To implement implicit upcasting, a class was extracted from LingoDB's DB dialect: `SQLTypeInference`. Rather than relying on PostgreSQL's OID system for finding operations, operators are converted to strings (e.g., `>` and `<`) for lookups. This prevents issues with OID precision specifications that lead to unidentified operations. The same approach is used in function nodes, aggregation functions, sort operations, and scalar maths. When performing operations on different types, `SQLTypeInference` upcasts the smaller operand to the larger datatype. For example, with `i16 + i32`, `i16` is cast to `i32`.

## Translation - Others

Many of these nodes are pass through nodes or delegated to another, sibling node, such as `T.Hash`, `T.Material`, `T.Memoize`, and `T.RelabelType`. Furthermore, nodes also come with executor hints and cost metrics which were skipped over rather than dragged through LingoDB, as the optimisations were already done by Postgres. `IN/ANY` operations are also converted into `EXISTS` operations, several operations such as scalar

subqueries are always marked as nullable, and CastOps are also made frequently to defer casting to later layers.

#### 4.2.9 Configuring JIT compilation settings

Not much tinkering was done with the JIT optimisation flags; the minimum optimisation passes were used so that it can run end-to-end, and `llvm::CodeGenOptLevel::Default` was used as the optimisation level. These optimisation passes consist of SROA, InstCombinePass, PromotePass, LICM pass, reassociation pass, GVN pass, and simplify GVN pass.

These passes perform fundamental optimisations [LLV25a]. SROA (Scalar Replacement of Aggregates) promotes stack-allocated structures into SSA registers. That is, an allocation on the stack is hoisted up into global space so that the space is reused rather than reallocated every time. InstCombine simplifies instructions through algebraic transformations, while PromotePass elevates memory operations to register operations. LICM (Loop Invariant Code Motion) moves loop-independent code outside of loops by hoisting to preheaders or sinking to exit blocks. The reassociation pass reorders expressions to enable further optimisations. GVN (Global Value Numbering) eliminates redundant computations by identifying values that must be equal.

The community consensus appeared to be that `-O2` should be used on it and moved on. This means it is possible to do more tuning work on this.

#### 4.2.10 Profiling Support

Code infrastructure was written to support magic-trace for profiling and isolating issues. A dedicated machine was configured for this purpose: an Intel i5-6500T with 16 GB of RAM and a Samsung MZVLB256HAHQ-000L7 NVMe disk. This was particularly useful for isolating obvious bottlenecks within the system and understanding the latency when compared to PostgreSQL. Figure 4.5 represents the flame chart for query 3, and

has a runtime of approximately 260 milliseconds. The functions that it calls are clear, and you can see how the query runs over time.

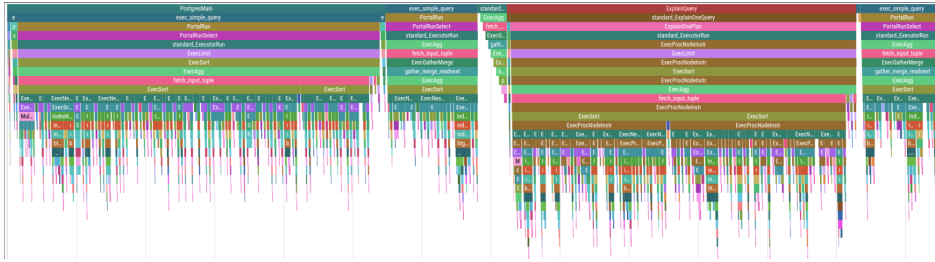


Figure 4.5: PostgreSQL’s magic-trace flame chart for TPC-H query 3 at scale factor 0.05 (approximately 5 MB of data).

The flame chart before any optimisations were applied is visible in Figure 4.6. In that chart it is visible that too much time is spent inside the LLVM execution (those spikes in the last 2/3rds are table reads). After adjusting how tuples are read, ensuring joins go to the correct algorithm, introducing Postgres’s tuple-slot reading API, and disabling logs, the chart looks like Figure 4.7. These adjustments improved the latency from 4.5 seconds to approximately 400 milliseconds.

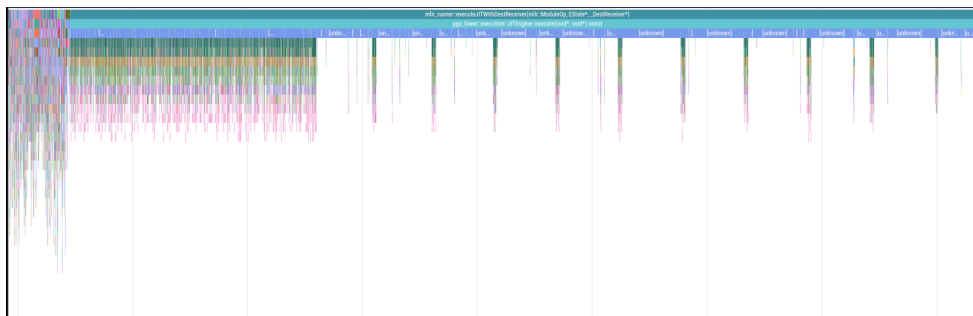


Figure 4.6: pgx-lower’s magic-trace flame chart for TPC-H query 3 at scale factor 0.05 before optimisation.



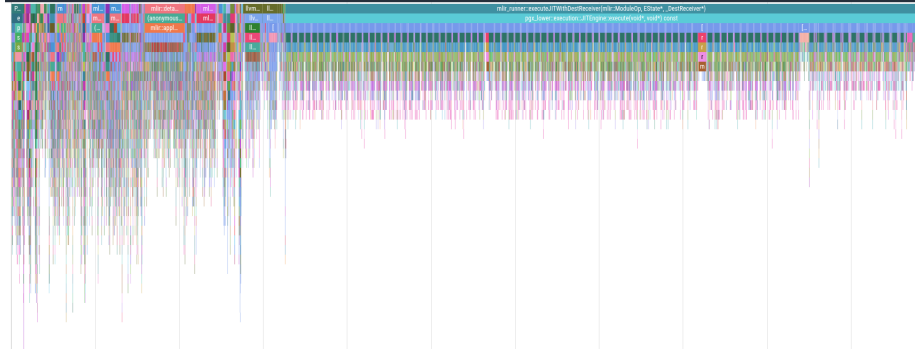


Figure 4.7: pgx-lower’s magic-trace flame chart for TPC-H query 3 at scale factor 0.05 after optimisation.

Subsection 4.2.12 explains the specifics of running profiling jobs in a stable way.

#### 4.2.11 Website

A small website was prepared so that users can interact with the lowerings and the compiler without installing the system themselves at <https://pgx.zyros.dev/query>. Keep in mind that it relies on caching the results, it has a scale factor of 0.01 (10 MB of data), and the pgx-lower system there is (as of writing), running a debug build which has significantly longer runtimes. The implementation for this is at <https://github.com/zyros-dev/pgx-lower-addons>. The implementation uses several technologies: Python for the backend server, SQLite for query caching, and React for the frontend. Docker containers support the reverse proxy with Nginx, while a private Grafana dashboard provides health monitoring.

#### 4.2.12 Benchmarking and Validation

A challenge is that PostgreSQL contains a non-deterministic optimiser, and many small factors can affect runs. For this reason, a python script was created that reads from a YAML file, and does a benchmark run. This means we can specify runs beforehand, and run them robustly over a long period. Also, this benchmarking run computes a hash of the outputs between PostgreSQL and pgx-lower to validate the outputs are

correct between all the runs, and the hashes were compared. This avoids storing large amounts of data over time, while issues can still be rediscovered in a large batch of runs.

The benchmark configurations used are displayed in Listing 4.2. These configurations allow testing across different scale factors, with and without indexes, and with varying iteration counts to understand performance characteristics. With multiple iterations, graphs that contain distributions can be created. These were decided by bucketing queries into small scale factor (0.01; 1 MB of data) to show the overhead cost of the JIT compiler, medium scale factor (0.16) to show how Postgres scales while still keeping all the queries enabled with indexes, and lastly scale factor 1 with the very time-consuming queries completely disabled. These disabled queries would take on the order of hours in PostgreSQL, so benchmarking them for multiple iterations was too time-consuming.

To disable indexes, `cur.execute("SET enable_indexscan = off;")` and `cur.execute("SET enable_bitmapscan = off;")` were used in conjunction. This means when the benchmarks say index scan is disabled, the bit map scan is as well.

Listing 4.2: Benchmark configurations for TPC-H testing

```
1 full:
2   runs:
3     - container: benchmark
4       scale_factor: 0.01
5       iterations: 5
6       profile: false
7       indexes: false
8       skipped_queries: ""
9       label: "SF=0.01, indexes disabled, 5 iterations"
10
11    - container: benchmark
12      scale_factor: 0.01
13      iterations: 100
14      profile: false
15      indexes: false
16      skipped_queries: "q07,q20"
17      label: "SF=0.01, indexes disabled - excluding postgres {q07,q20}, 100 iterations"
18
19    - container: benchmark
20      scale_factor: 0.01
21      iterations: 100
22      profile: false
23      indexes: true
24      skipped_queries: ""
25      label: "SF=0.01, indexes enabled, 100 iterations"
26
```

```
27     - container: benchmark
28       scale_factor: 0.16
29       iterations: 5
30       profile: false
31       indexes: true
32       skipped_queries: ""
33       label: "SF=0.16, indexes enabled, 5 iterations"
34
35     - container: benchmark
36       scale_factor: 0.16
37       iterations: 100
38       profile: false
39       indexes: true
40       skipped_queries: "q17,q20"
41       label: "SF=0.16, indexes enabled, excluding {q17,q20}, 100 iterations"
42
43     - container: benchmark
44       scale_factor: 1
45       iterations: 100
46       profile: false
47       indexes: false
48       skipped_queries: "q02,q17,q20,q21"
49       label: "SF=1, indexes disabled, excluding {q02,q17,q20,q21}, 100 iterations"
```

The magic trace profiling also functions through this script, which is what the `profile` tag there is for.

One thing to note here is that it was decided that only PostgreSQL and pgx-lower would be compared, rather than all the databases mentioned in Chapter 3. As Section 3.8 showed that the impact of PostgreSQL’s architecture being on disk makes it significantly slower than any of the other databases.

## Chapter 5

# Results and Discussion

### 5.1 Results

Results using the method from Subsection 4.2.12 are presented as follows. Box plots overlaid on graphs represent the 5th, 25th, 50th, 75th, and 95th percentiles. Hollow circles mark outliers, and when inconvenient to display (as in Figure 5.4), arrows mark them instead. Matplotlib and Seaborn were used in Python to create all visualisations.

Another result worth mentioning is the integrated LingoDB code (including `./src/lingodb` and `./include/lingodb`) contains 13,875 lines of C++, while the `pgx-lower` section (`./src/pgx-lower` and `./include/pgx-lower`) contains 12,324 lines of C++. This was measured with `tokei` commands, a command line utility for counting lines of code. In comparison, the official PostgreSQL executor is roughly 82,875 lines of code, and LingoDB is roughly 30,000 lines of code [JKG22, Pos24b].

The calculated hashes from all benchmarks matched between PostgreSQL and `pgx-lower`, confirming that the repeated tests produced consistent results. Smaller datasets were additionally compared directly to prevent hash collision errors.

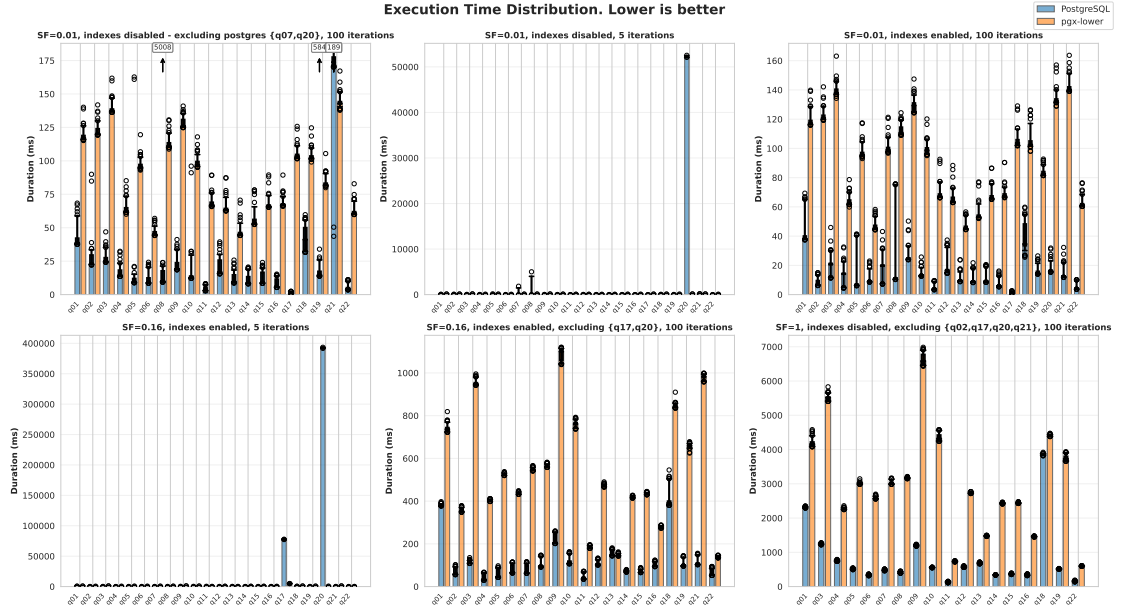


Figure 5.1: Overall benchmarking represented with box plots.

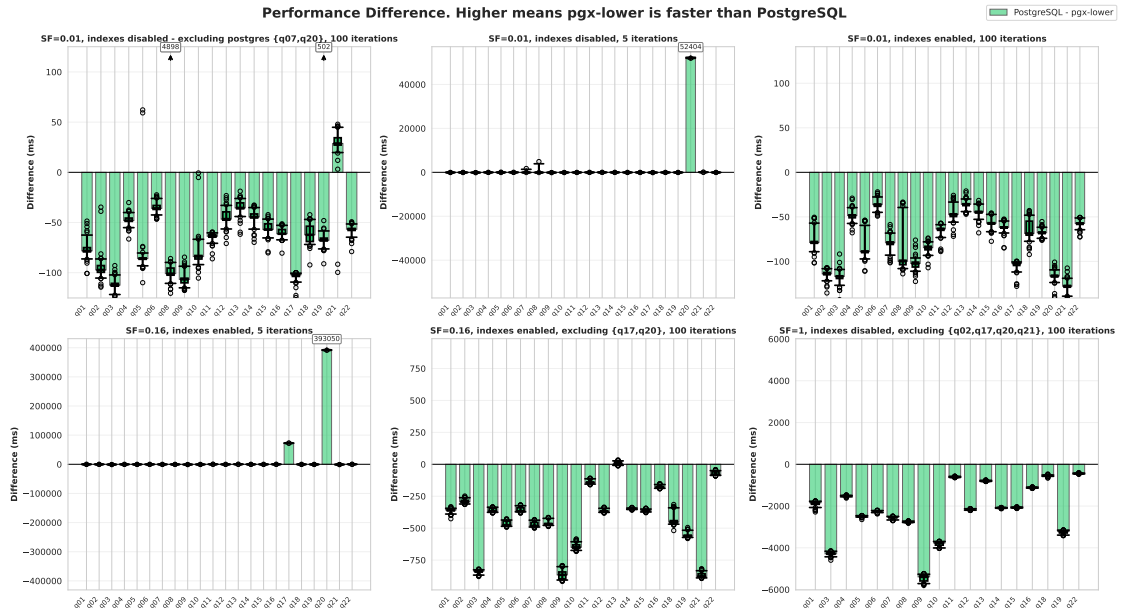


Figure 5.2: Difference in latency benchmarks between PostgreSQL and pgx-lower.

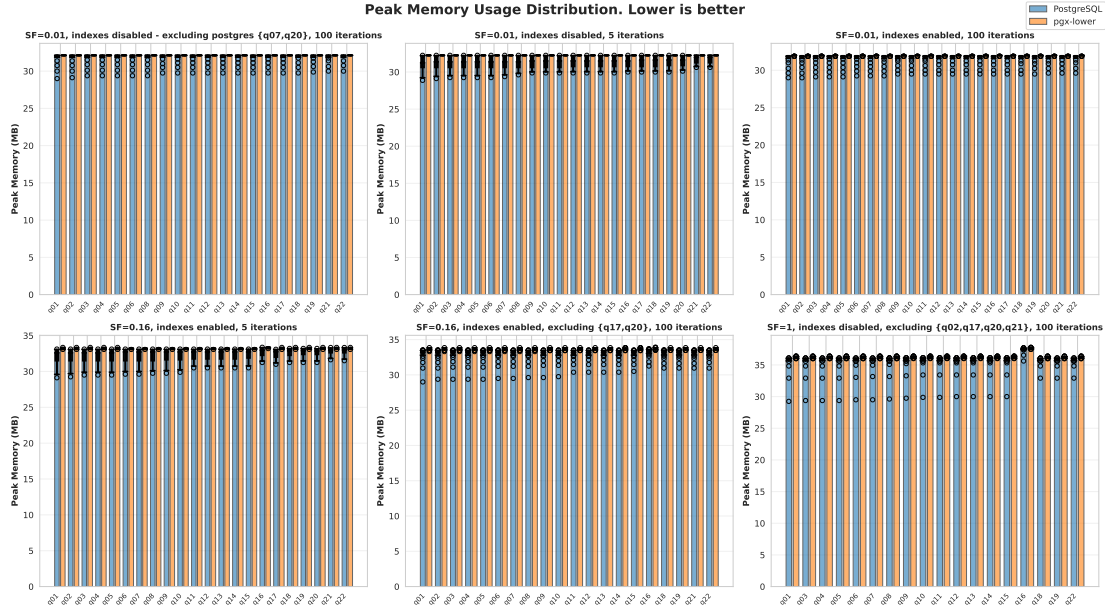


Figure 5.3: Peak memory usage of queries.

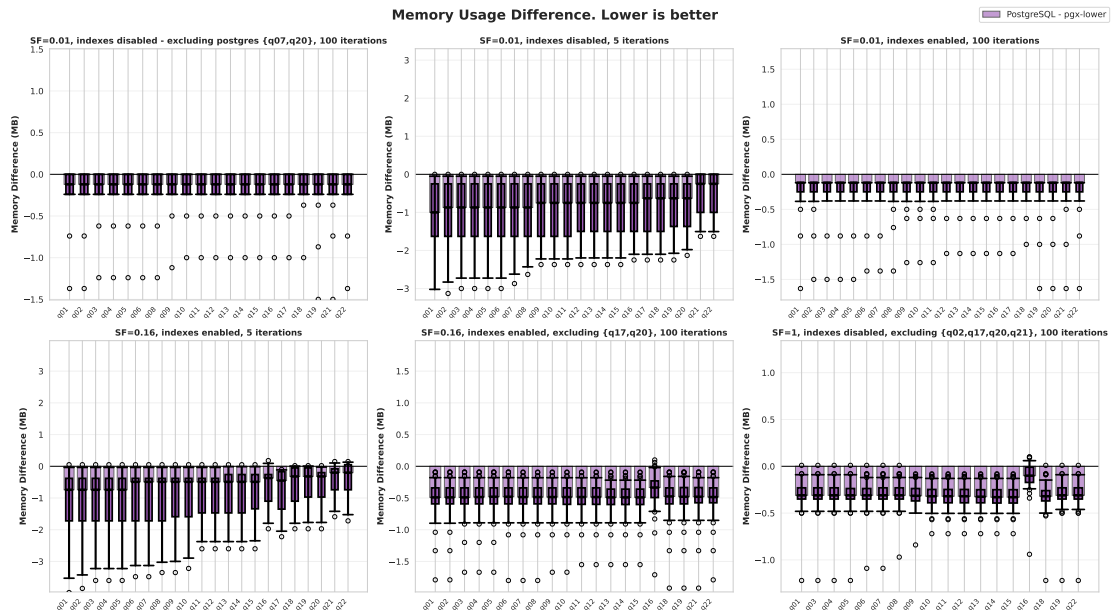


Figure 5.4: Difference in peak memory usage of queries.

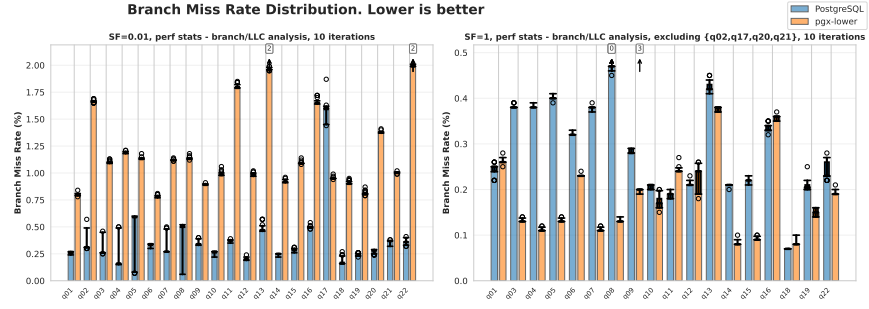


Figure 5.5: Branch miss rate.

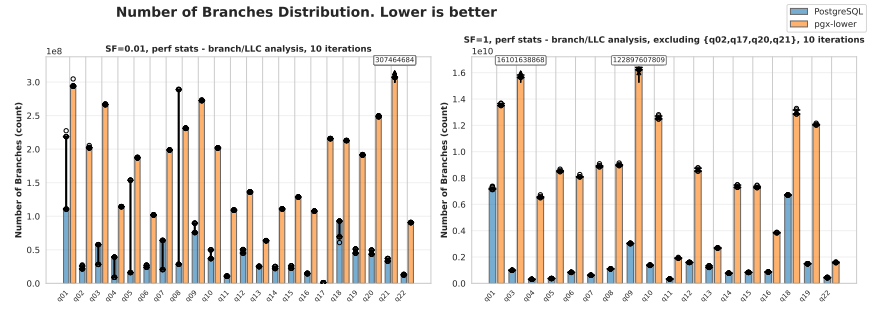


Figure 5.6: Number of branches.

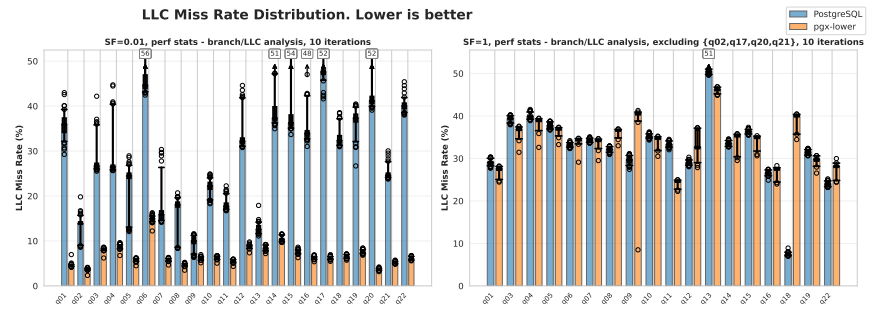


Figure 5.7: Last-level-cache miss plots.

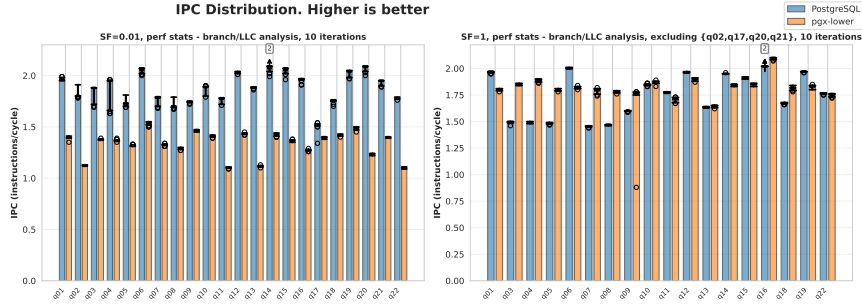


Figure 5.8: Instructions per (CPU) cycle plot.



Figure 5.9: PostgreSQL TPC-H query 20 indexes enabled at SF = 0.16. Runtime: 15 minutes.

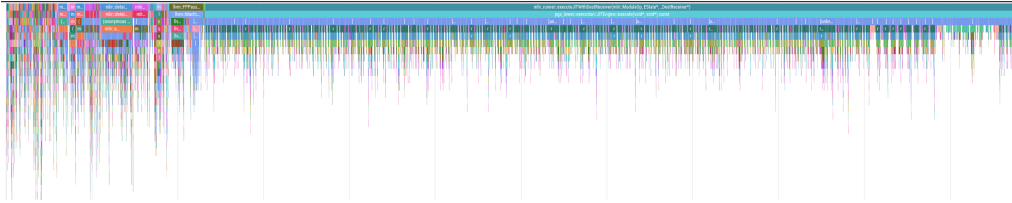


Figure 5.10: pgx-lower TPC-H query 20 indexes enabled at SF = 0.16. Runtime: 1.18 seconds.

## 5.2 Discussion

To reiterate, the goal is to show that using the extension system is a viable approach to introduce compiled queries into battle-tested databases while maintaining their ACID properties. Previous studies have already found compiled queries have speed benefits.

In terms of latency, results are mixed. Figures 5.1 and 5.2 show that without indexes at scale factor 0.01, queries 7 and 20 are orders of magnitude slower than other queries. Such patterns repeat at scale factor 0.16 even with indexes enabled. In contrast, pgx-



lower shows consistent performance across these queries. Visible in Figures 5.9 and 5.10, the difference appears: PostgreSQL uses nested loop joins while pgx-lower uses hash joins. Appendices A.2, A.3, and A.4 show the query and both systems’ plan trees. In pgx-lower’s output, joins are annotated with “hash”, indicating hash join usage. This means comparison is not entirely fair because pgx-lower uses a hash join while PostgreSQL uses a nested loop join (NestLoop\_T), which would benefit from indexing.

Figure 5.10 reveals minimal time spent in LLVM code generation. Of the 1.18 second total query execution time, only 14.93 milliseconds occurs in

`llvm::SelectionDAGISel::runOnMachineFunction`, the LLVM IR to machine code conversion step. Total compilation time reaches 236.32 milliseconds, with most spent in MLIR passes. These results suggest MLIR optimisation is more expensive than LLVM code generation. Possibly the LLVM ORC JIT does initial minimal work for each query, spreading compilation across background execution.

RAM usage appears similar between pgx-lower and PostgreSQL (Figures 5.3 and 5.4). Such similarity demonstrates successful adaptation of LingoDB’s in-memory operations to PostgreSQL’s disk-oriented architecture. Maximum difference is just over 3 MB, with a mean difference of 0.34 MB across all queries.

Branch prediction potential appears in Figure 5.5. At scale factor 1, pgx-lower achieved a median branch miss rate of 0.16%, compared to PostgreSQL’s 0.28%. However, smaller scale factors with smaller queries inverted this: PostgreSQL had 0.38% and pgx-lower had 1.09%. Such results suggest the compiled JIT runtime has better branch prediction at larger scale factors, but the compilation stage or initialisation code has worse prediction at smaller scales. Number of branches explains part of the difference (Figure 5.6): PostgreSQL had a median of 28,430,465, while pgx-lower had 195,299,021.50 ( $6.87\times$  more). Higher branch counts could indicate more optimisation opportunities.

For the last level cache miss rate, pgx-lower appears to perform better than PostgreSQL at smaller scale factors and appears similar to PostgreSQL at larger ones, which can be seen in Figure 5.7. PostgreSQL has a median 31.20% miss rate at scale factor 0.01, while pgx-lower has a median of 6.19%. When increased to a scale factor of 1,

PostgreSQL has a median of 33.16%, and pgx-lower has a median of 34.81%. A likely explanation is that the LLVM compiler stage uses its cache much more effectively, but the actual JIT runtime performs comparably. Expected with the current approach, improvements would emerge if the JIT stage dynamically changed the plan, similar to HyPer’s approach.

In the instructions per CPU cycle plot in Figure 5.8 it is visible that for a large scale factor (1), PostgreSQL and pgx-lower are more aligned, but on a smaller scale factor pgx-lower has a worse IPC. Still, they are in the same magnitude which means neither are using SIMD operations heavily. In the future, it should be possible to support more SIMD operations in pgx-lower and improve this because the tuples are read in batches.

LingoDB code was modified and pgx-lower introduced 13,875 lines of C++, totalling approximately 16,000 lines directly changed. This represents substantially less effort than creating LingoDB from scratch or implementing full ACID support from scratch as required for a production database.

### 5.2.1 Test Validity

Increasing the number of iterations to make the outputs more reliable succeeds, and the variation is not too large. Some queries, such as in scale factor 0.01 with indexes disabled, in Figure 5.1, show the outliers do become extreme. On query 8, PostgreSQL had an outlier of 5008 milliseconds while the median was 12.42 milliseconds. However, the coefficient of variation was only 0.4% overall during the latency measurements in the scale factor 0.01. It is stable overall, but vital to do repeated tests to identify these outliers from the system.

These variations will primarily be caused by PostgreSQL’s optimiser containing genetic algorithms, as mentioned in Section 2.5. It can cause plans to change significantly and makes them non-deterministic. While these tests were done on an isolated docker container in a Linux machine running minimal processes, system interrupts can also affect the results.

The system produces correct results for all TPC-H queries when compared to PostgreSQL, demonstrating that the extension system provides a viable method to safely integrate research compilers into production databases. This approach can be installed through the extension system to enhance existing databases without modifying PostgreSQL’s source. While performance is generally slower, results fall within the same order of magnitude; previous research has shown JIT compilers have significant performance potential. The minimal variation across runs enables fair comparison with the baseline. With only 16,000 lines of code changed, this demonstrates that the approach does not require excessive complexity. Overall, this means the aim of the thesis has been achieved.

### 5.2.2 Future work

Replacing PostgreSQL’s execution engine with a JIT-focused approach offers multiple research directions. Improvements can be made by fully implementing the plan nodes and optimising further. However, ensuring the final product remains useful requires considering other base databases, compilers, languages, and compatible execution engines.

Full extension implementation would require complete plan tree node implementation and query analyser improvements. Only the minimum for TPC-H was implemented, but full implementation would require `pg_bench` and `isolationtester` validation as well. Needed additions include indexes, WINDOW functions, the other 22 missing plan nodes, and missing execution nodes.

Core optimisation work involves leveraging existing research and clearer PostgreSQL API usage. Key potential improvements include: pre-compiling PostgreSQL functions into LLVM, then inlining instead of crossing the LLVM-C++ boundary; adaptive compilation/query planning; and Umbra’s LeanStore-style buffering. Most optimisations apply specifically to LLVM/MLIR systems; WebAssembly alternatives could skip many of these. Broader improvements include parallelism enhancement, JIT tuning, cross-platform support, subquery deduplication, and more.

Research impact remains vital in database systems, reflecting Michael Stonebraker’s concern about the field’s progress [Sto18]. For successful projects in the world, database costs are typically minor relative to overall profitability, making higher throughput less critical. Practically, latency gains more often come from application-level caching (such as Redis) than database optimisation. Complex OLAP queries often run on large-scale systems that migrate away from PostgreSQL to more scalable databases such as ClickHouse or Apache Hive. Alternative systems may provide better development platforms for this architecture.

PostgreSQL was selected for its large popularity; LingoDB was chosen because it matched PostgreSQL’s interfaces while remaining open source. While PostgreSQL works reasonably for this approach and addresses real problems, better alternatives may exist. Most dedicated OLAP systems already employ JIT or vectorised approaches.

Development with LingoDB provided helpful constraints and faster development iteration due to its established nature. However, LingoDB’s columnar, in-memory architecture required extensive modifications. Additionally, its query optimisation engine was unnecessary since PostgreSQL already provides thorough optimisation. A better approach would involve building the engine from scratch or selecting a more suitable base system. Umbra would be ideal based on its description, but its closed-source status prevents use. Alternative approaches could integrate an established OLAP system’s engine (such as ClickHouse), and routing queries based on analyser rules instead of using PostgreSQL’s executor.

MLIR was useful to give a strong set of dialect systems, but the main reason LingoDB used MLIR was to give plan optimisations clear layers. Furthermore, the LLVM/MLIR ecosystem targets ahead of time compilation or longer-running JIT systems, and not short-lived queries. WebAssembly is appealing here because it targets short-lived processes, and as stated in Section 2.4 it is possible to compile C/C++ into WebAssembly. Meaning, C/C++ functions from PostgreSQL can be pre-compiled and inlined into a WebAssembly compiler [Goo19]. Switching to a different compiler or away from C++ into C or Rust is appealing. With C, the LLVM API is more stable and in Rust the

memory safety and correctness can be improved.

Multiple promising research directions emerge from this work. Most appealing is integrating NoisePage, ClickHouse or Mutable into PostgreSQL as a drop-in engine replacement. Such an approach provides a more complete ecosystem; primary work will focus on adapters to adjust queries. Furthermore, `pg_duckdb` has already done this, but it is a vectorised engine. Alternatively, research compilers like Mutable can be integrated, or a WebAssembly-based compiler for PostgreSQL can be built from scratch using these techniques.

## Chapter 6

# Conclusion

pgx-lower demonstrates that JIT-compiled query execution can be integrated into production databases via extensions. The implementation retrofits LingoDB’s compiler into PostgreSQL while maintaining ACID properties, achieving improved branch prediction and cache efficiency on TPC-H. The key contribution is methodological. Extension mechanisms provide a practical pathway for productionising database research without rewrites or official integration.

While the implementation covers only part of the query space and performance is mixed, pgx-lower validates that production databases can adopt modern compiler techniques through extensions rather than from-scratch implementations. This bridges the gap between academic prototypes and production systems, suggesting a more realistic research methodology.

Future work includes implementing all the plan and expression nodes in the executor, improving the runtime, or pivoting and targeting a different database system, compiler, or language, as discussed in Subsection 5.2.2.

# Appendices

This appendix contains the execution plans for TPC-H Query 20, demonstrating the differences between PostgreSQL’s traditional query execution plan and pgx-lower’s MLIR-based compilation approach.

## A.1 Code URLs

- Primary codebase <https://github.com/zyros-dev/pgx-lower>
- Deployed website <https://pgx.zyros.dev/query>
- This report’s LaTeX files <https://github.com/zyros-dev/pgx-lower-report>
- The website’s code <https://github.com/zyros-dev/pgx-lower-addons>
- Benchmarking from the literature review of this project <https://github.com/zyros-dev/benchmarking-dockers>

## A.2 Query 20 SQL

```
1 select
2     s_name,
3     s_address
4 from
5     supplier,
6     nation
7 where
8     s_suppkey in (
9         select
10             ps_suppkey
11         from
12             partsupp
13         where
14             ps_partkey in (
15                 select
16                     p_partkey
17                 from
```

```

18                                     part
19                                     where
20                                     p_name like 'forest%'
21                                 )
22                                 and ps_availqty > (
23                                     select
24                                         0.5 * sum(l_quantity)
25                                     from
26                                         lineitem
27                                     where
28                                         l_partkey = ps_partkey
29                                         and l_suppkey = ps_suppkey
30                                         and l_shipdate >= date '1994-01-01'
31                                         and l_shipdate < date '1995-01-01'
32                                 )
33        )
34        and s_nationkey = n_nationkey
35        and n_name = 'CANADA'
36    order by
37        s_name

```

### A.3 PostgreSQL Execution Plan

```

1  Sort (cost=46847.99..46848.00 rows=1 width=52) (actual time=69.713..69.728 rows=1 loops=1)
2    Sort Key: supplier.s_name
3    Sort Method: quicksort  Memory: 25kB
4    -> Nested Loop Semi Join (cost=0.42..46847.98 rows=1 width=52) (actual time=68.025..69.569 rows=1 loops=1)
5      -> Nested Loop (cost=0.14..29.27 rows=1 width=56) (actual time=0.493..0.667 rows=3 loops=1)
6        Join Filter: (nation.n_nationkey = supplier.s_nationkey)
7        Rows Removed by Join Filter: 97
8        -> Index Scan using supplier_pkey on supplier (cost=0.14..15.64 rows=100 width=60) (actual time
9          =0.029..0.131 rows=100 loops=1)
10       -> Materialize (cost=0.00..12.13 rows=1 width=4) (actual time=0.004..0.005 rows=1 loops=100)
11         -> Seq Scan on nation (cost=0.00..12.12 rows=1 width=4) (actual time=0.414..0.421 rows=1 loops=1)
12           Filter: (n_name = 'CANADA'::bpchar)
13           Rows Removed by Filter: 24
14       -> Nested Loop (cost=0.28..46818.70 rows=1 width=4) (actual time=22.958..22.958 rows=0 loops=3)
15         -> Seq Scan on part (cost=0.00..66.00 rows=20 width=4) (actual time=0.111..1.250 rows=16 loops=3)
16           Filter: ((p_name)::text ~ 'forest% '::text)
17           Rows Removed by Filter: 1973
18         -> Index Scan using partsupp_pkey on partsupp (cost=0.28..2337.63 rows=1 width=8) (actual time=1.355..1.355
19           rows=0 loops=48)
20           Index Cond: ((ps_partkey = part.p_partkey) AND (ps_suppkey = supplier.s_suppkey))
21           Filter: ((ps_availqty)::numeric > (SubPlan 1))
22           Rows Removed by Filter: 0
23           SubPlan 1
24             -> Aggregate (cost=2330.51..2330.52 rows=1 width=32) (actual time=31.616..31.617 rows=1 loops=2)
25               -> Seq Scan on lineitem (cost=0.00..2330.50 rows=1 width=5) (actual time=25.850..31.589 rows
26                 =2 loops=2)
27                 Filter: ((l_shipdate >= '1994-01-01'::date) AND (l_shipdate < '1995-01-01'::date) AND (
28                   l_partkey = partsupp.ps_partkey) AND (l_suppkey = partsupp.ps_suppkey))
29                 Rows Removed by Filter: 60173
26 Planning Time: 16.634 ms
27 Execution Time: 70.580 ms

```

### A.4 pgx-lower MLIR Execution Plan

```

1  // MLIR Module Debug Dump: Phase 3a AFTER: RelAlg -> Optimised RelAlg
2  // Generated: 2025-11-22 23:21:32
3  // Total Operations: 120
4  // Module Valid: YES
5
6  module {
7    func.func @main() -> !dsa.table {
8      %true = arith.constant true

```



```

9      %0 = relalg.basetable {column_order = ["l_orderkey", "l_partkey", "l_suppkey", "l_linenum", "l_quantity", "
      l_extendedprice", "l_discount", "l_tax", "l_returnflag", "l_linestatus", "l_shipdate", "l_commitdate", "
      l_receiptdate", "l_shipinstruct", "l_shipmode", "l_comment"], rows = 0.000000e+00 : f64, table_identifier = "
      lineitem|oid:16425"} columns: {l_comment => @lineitem::l_comment({type = !db.string}), l_commitdate =>
      @lineitem::l_commitdate({type = !db.date<day>}), l_discount => @lineitem::l_discount({type = !db.decimal<12,
      2>}), l_extendedprice => @lineitem::l_extendedprice({type = !db.decimal<12, 2>}), l_linenum => @lineitem::
      l_linenum({type = i32}), l_linestatus => @lineitem::l_linestatus({type = !db.string}), l_orderkey =>
      @lineitem::l_orderkey({type = i32}), l_partkey => @lineitem::l_partkey({type = i32}), l_quantity => @lineitem
      ::l_quantity({type = !db.decimal<12, 2>}), l_receiptdate => @lineitem::l_receiptdate({type = !db.date<day>}),
      l_returnflag => @lineitem::l_returnflag({type = !db.string}), l_shipdate => @lineitem::l_shipdate({type = !db.
      date<day>}), l_shipinstruct => @lineitem::l_shipinstruct({type = !db.string}), l_shipmode => @lineitem::
      l_shipmode({type = !db.string}), l_suppkey => @lineitem::l_suppkey({type = i32}), l_tax => @lineitem::l_tax({
      type = !db.decimal<12, 2>})}
10     %1 = relalg.selection %0 (%arg0: !relalg.tuple){
11     %39 = relalg.getcol %arg0 @lineitem::l_shipdate : !db.date<day>
12     %40 = db.constant(-2191 : i32) : !db.date<day>
13     %41 = db.constant(-1826 : i32) : !db.date<day>
14     %42 = db.between %39 : !db.date<day> between %40 : !db.date<day>, %41 : !db.date<day>, lowerInclusive : true,
      upperInclusive : false
15     relalg.return %42 : i1
16   } attributes {cost = 1.000000e+00 : f64, rows = 1.000000e+00 : f64}
17   %2 = relalg.basetable {column_order = ["ps_partkey", "ps_suppkey", "ps_availqty", "ps_supplycost", "ps_comment"], rows
      = 0.000000e+00 : f64, table_identifier = "partsupp|oid:16410"} columns: {ps_availqty => @partsupp::ps_availqty
      ({type = i32}), ps_comment => @partsupp::ps_comment({type = !db.string}), ps_partkey => @partsupp::ps_partkey
      ({type = i32}), ps_suppkey => @partsupp::ps_suppkey({type = i32}), ps_supplycost => @partsupp::ps_supplycost({
      type = !db.decimal<12, 2>})}
18   %3 = relalg.basetable {column_order = ["n_nationkey", "n_name", "n_regionkey", "n_comment"], rows = 0.000000e+00 : f64
      , table_identifier = "nation|oid:16395"} columns: {n_comment => @nation::n_comment({type = !db.string}), n_name
      => @nation::n_name({type = !db.string}), n_nationkey => @nation::n_nationkey({type = i32}), n_regionkey =>
      @nation::n_regionkey({type = i32})}
19   %4 = relalg.selection %3 (%arg0: !relalg.tuple){
20   %39 = relalg.getcol %arg0 @nation::n_name : !db.string
21   %40 = db.constant("CANADA" : !db.string
22   %41 = db.compare eq %39 : !db.string, %40 : !db.string
23   relalg.return %41 : i1
24   } attributes {cost = 1.000000e-01 : f64, rows = 1.000000e-01 : f64}
25   %5 = relalg.basetable {column_order = ["s_suppkey", "s_name", "s_address", "s_nationkey", "s_phone", "s_acctbal", "
      s_comment"], rows = 0.000000e+00 : f64, table_identifier = "supplier|oid:16405"} columns: {s_acctbal =>
      @supplier::s_acctbal({type = !db.decimal<12, 2>}), s_address => @supplier::s_address({type = !db.string}),
      s_comment => @supplier::s_comment({type = !db.string}), s_name => @supplier::s_name({type = !db.string}),
      s_nationkey => @supplier::s_nationkey({type = i32}), s_phone => @supplier::s_phone({type = !db.string}),
      s_suppkey => @supplier::s_suppkey({type = i32})}
26   %6 = relalg.join %4, %5 (%arg0: !relalg.tuple){
27   %39 = relalg.getcol %arg0 @nation::n_nationkey : i32
28   %40 = relalg.getcol %arg0 @supplier::s_nationkey : i32
29   %41 = db.compare eq %39 : i32, %40 : i32
30   relalg.return %41 : i1
31   } attributes {cost = 1.110000e+00 : f64, impl = "hash", rows = 0.010000000000000002 : f64}
32   %7 = relalg.projection all [@supplier::s_name, @supplier::s_address, @supplier::s_suppkey] %6
33   %8 = relalg.tmp %7 [@supplier::s_address, @supplier::s_name, @supplier::s_suppkey]
34   %9 = relalg.projection distinct [@supplier::s_suppkey] %8
35   %10 = relalg.tmp %9 [@supplier::s_suppkey]
36   %11 = relalg.join %2, %10 (%arg0: !relalg.tuple){
37   %39 = relalg.getcol %arg0 @partsupp::ps_suppkey : i32
38   %40 = db.as_nullable %39 : i32 -> <i32>
39   %41 = relalg.getcol %arg0 @supplier::s_suppkey : !db.nullable<i32>
40   %42 = db.compare eq %40 : !db.nullable<i32>, %41 : !db.nullable<i32>
41   %43 = db.derive_truth %42 : !db.nullable<i1>
42   relalg.return %43 : i1
43   } attributes {cost = 2.100000e+00 : f64, impl = "hash", rows = 1.000000e-01 : f64}
44   %12 = relalg.basetable {column_order = ["p_partkey", "p_name", "p_mfgr", "p_brand", "p_type", "p_size", "p_container",
      "p_retailprice", "p_comment"], rows = 0.000000e+00 : f64, table_identifier = "part|oid:16400"} columns: {
      p_brand => @part::p_brand({type = !db.string}), p_comment => @part::p_comment({type = !db.string}),
      p_container => @part::p_container({type = !db.string}), p_mfgr => @part::p_mfgr({type = !db.string}), p_name
      => @part::p_name({type = !db.string}), p_partkey => @part::p_partkey({type = i32}), p_retailprice => @part::
      p_retailprice({type = !db.decimal<12, 2>}), p_size => @part::p_size({type = i32}), p_type => @part::p_type({
      type = !db.string})}
45   %13 = relalg.selection %12 (%arg0: !relalg.tuple){
46   %39 = relalg.getcol %arg0 @part::p_name : !db.string
47   %40 = db.constant("forest") : !db.string
48   %41 = db.runtime_call "Like"(%39, %40) : (!db.string, !db.string) -> i1
49   relalg.return %41 : i1
50   } attributes {cost = 1.000000e-01 : f64, rows = 1.000000e-01 : f64}
51   %14 = relalg.tmp %13 [@part::p_partkey]
52   %15 = relalg.projection distinct [@part::p_partkey] %14
53   %16 = relalg.tmp %15 [@part::p_partkey]
54   %17 = relalg.join %11, %16 (%arg0: !relalg.tuple){
55   %39 = relalg.getcol %arg0 @partsupp::ps_partkey : i32
56   %40 = db.as_nullable %39 : i32 -> <i32>
57   %41 = relalg.getcol %arg0 @part::p_partkey : !db.nullable<i32>
58   %42 = db.compare eq %40 : !db.nullable<i32>, %41 : !db.nullable<i32>
59   %43 = db.derive_truth %42 : !db.nullable<i1>
60   relalg.return %43 : i1
61   } attributes {cost = 3.110000e+00 : f64, impl = "hash", rows = 0.010000000000000002 : f64}
62   %18 = relalg.tmp %17 [@partsupp::ps_availqty, @partsupp::ps_suppkey, @supplier::s_suppkey, @part::p_partkey, @partsupp
      ::ps_partkey]
63   %19 = relalg.projection distinct [@partsupp::ps_suppkey, @partsupp::ps_partkey] %18
64   %20 = relalg.join %1, %19 (%arg0: !relalg.tuple){
65   %39 = relalg.getcol %arg0 @lineitem::l_suppkey : i32

```

```

66      %40 = relalg.getcol %arg0 @partsupp::@ps_supkey : i32
67      %41 = db.compare eq %39 : i32, %40 : i32
68      %42 = relalg.getcol %arg0 @lineitem::@l_partkey : i32
69      %43 = relalg.getcol %arg0 @partsupp::@ps_partkey : i32
70      %44 = db.compare eq %42 : i32, %43 : i32
71      %45 = db.and %44, %41 : i1, i1
72      relalg.return %45 : i1
73 } attributes {cost = 2.010000e+00 : f64, impl = "hash", rows = 0.010000000000000002 : f64}
74 %21 = relalg.crossproduct %20, %10
75 %22 = relalg.crossproduct %21, %16
76 %23 = relalg.aggregation %22 [ @partsupp::@ps_supkey, @partsupp::@ps_partkey, @part::@p_partkey, @supplier::@s_supkey ]
      computes : [ @agg0::@agg_0 { type = !db.nullable<!db.decimal<32, 6>> } ] (%arg0: !relalg.tuplstream, %arg1: !
      relalg.tuple) {
77     %39 = relalg.aggrfn sum @lineitem::@l_quantity %arg0 : !db.nullable<!db.decimal<32, 6>>
78     relalg.return %39 : !db.nullable<!db.decimal<32, 6>>
79 }
80 %24 = relalg.map %23 computes : [ @postmap::@postproc_1 { type = !db.nullable<!db.decimal<32, 6>> } ] (%arg0: !relalg.
      tuple) {
81     %39 = db.constant("0.5") : !db.decimal<32, 6>
82     %40 = db.as_nullable %39 : !db.decimal<32, 6> -> <!db.decimal<32, 6>>
83     %41 = relalg.getcol %arg0 @agg0::@agg_0 : !db.nullable<!db.decimal<32, 6>>
84     %42 = db.mul %40 : !db.nullable<!db.decimal<32, 6>>, %41 : !db.nullable<!db.decimal<32, 6>>
85     relalg.return %42 : !db.nullable<!db.decimal<32, 6>>
86 }
87 %25 = relalg.renaming %24 renamed : [ @renaming::@renamed0 { type = i32 } ] = [ @partsupp::@ps_partkey ], @renaming::@renamed1 {
      type = i32 } = [ @partsupp::@ps_partkey ]
88 %26 = relalg.renaming %25 renamed : [ @renaming1::@renamed0 { type = i32 } ] = [ @part::@p_partkey ]
89 %27 = relalg.renaming %26 renamed : [ @renaming3::@renamed0 { type = i32 } ] = [ @supplier::@s_supkey ]
90 %28 = relalg.singlejoin %18, %27 (%arg0: !relalg.tuple) {
91     %39 = relalg.getcol %arg0 @partsupp::@ps_supkey : i32
92     %40 = relalg.getcol %arg0 @renaming::@renamed0 : i32
93     %41 = db.compare eq %39 : i32, %40 : i32
94     %42 = relalg.getcol %arg0 @partsupp::@ps_partkey : i32
95     %43 = relalg.getcol %arg0 @renaming::@renamed1 : i32
96     %44 = db.compare eq %42 : i32, %43 : i32
97     %45 = relalg.getcol %arg0 @part::@p_partkey : i32
98     %46 = relalg.getcol %arg0 @renaming1::@renamed0 : i32
99     %47 = db.compare eq %45 : i32, %46 : i32
100    %48 = relalg.getcol %arg0 @supplier::@s_supkey : i32
101    %49 = relalg.getcol %arg0 @renaming3::@renamed0 : i32
102    %50 = db.compare eq %48 : i32, %49 : i32
103    %51 = db.and %50, %44, %41, %47 : i1, i1, i1, i1
104    relalg.return %51 : i1
105 } mapping: { @singlejoin::@sjattr { type = !db.nullable<!db.decimal<32, 6>> } = [ @postmap::@postproc_1 ] } attributes { cost
      = 3.000000e+00 : f64, impl = "hash", rows = 1.000000e+00 : f64 }
106 %29 = relalg.selection %28 (%arg0: !relalg.tuple) {
107     %39 = relalg.getcol %arg0 @partsupp::@ps_availqty : i32
108     %40 = db.cast %39 : i32 -> !db.decimal<38, 0>
109     %41 = db.cast %40 : !db.decimal<38, 0> -> !db.decimal<32, 6>
110     %42 = db.as_nullable %41 : !db.decimal<32, 6> -> <!db.decimal<32, 6>>
111     %43 = relalg.getcol %arg0 @singlejoin::@sjattr : !db.nullable<!db.decimal<32, 6>>
112     %44 = db.compare gt %42 : !db.nullable<!db.decimal<32, 6>>, %43 : !db.nullable<!db.decimal<32, 6>>
113     %45 = db.derive_truth %44 : !db.nullable<i1>
114     relalg.return %45 : i1
115 } attributes { cost = 3.000000e+00 : f64, rows = 1.000000e+00 : f64 }
116 %30 = relalg.renaming %29 renamed : [ @renaming2::@renamed0 { type = i32 } ] = [ @part::@p_partkey ]
117 %31 = relalg.join %14, %30 (%arg0: !relalg.tuple) {
118     %39 = relalg.getcol %arg0 @part::@p_partkey : i32
119     %40 = relalg.getcol %arg0 @renaming2::@renamed0 : i32
120     %41 = db.compare eq %39 : i32, %40 : i32
121     %42 = db.and %41, %41 : i1, i1
122     relalg.return %42 : i1
123 } attributes { cost = 2.100000e+00 : f64, impl = "hash", rows = 1.000000e-01 : f64 }
124 %32 = relalg.projection all [ @partsupp::@ps_supkey, @supplier::@s_supkey ] %31
125 %33 = relalg.map %32 computes : [ @map::@tmp_attr0 { type = i32 } ] (%arg0: !relalg.tuple) {
126     %39 = db.constant(1 : i32) : i32
127     relalg.return %39 : i32
128 }
129 %34 = relalg.renaming %33 renamed : [ @renaming4::@renamed0 { type = i32 } ] = [ @supplier::@s_supkey ]
130 %35 = relalg.semijoin %8, %34 (%arg0: !relalg.tuple) {
131     %39 = relalg.getcol %arg0 @supplier::@s_supkey : i32
132     %40 = relalg.getcol %arg0 @renaming4::@renamed0 : i32
133     %41 = db.compare eq %39 : i32, %40 : i32
134     relalg.return %41 : i1
135 } attributes { cost = 2.100000e+00 : f64, impl = "hash", rows = 1.000000e-01 : f64 }
136 %36 = relalg.projection all [ @supplier::@s_name, @supplier::@s_address ] %35
137 %37 = relalg.sort %36 [ (@supplier::@s_name, asc) ]
138 %38 = relalg.materialize %37 [ @supplier::@s_name, @supplier::@s_address ] => [ "s_name", "s_address" ] : !dsa.table
139 return %38 : !dsa.table
140 }
141 }

```

# Bibliography

- [ADHW99] Anastassia Ailamaki, David J DeWitt, Mark D Hill, and David A Wood. Dbmss on a modern processor: Where does time go? In *VLDB'99, Proceedings of 25th International Conference on Very Large Data Bases, September 7-10, 1999, Edinburgh, Scotland, UK*, pages 266–277, 1999.
- [Apa24] Apache Software Foundation. Apache age: Graph extension for postgresql, 2024. Accessed: 2025-11-19.
- [APBC13] Timothy G. Armstrong, Vamsi Ponnkanti, Dhruba Borthakur, and Mark Callaghan. Linkbench: a database benchmark based on the facebook social graph. In *Proceedings of the 2013 ACM SIGMOD International Conference on Management of Data*, SIGMOD '13, pages 1185–1196, New York, NY, USA, 2013. ACM.
- [Azu22] Azul. Jit performance: Ahead-of-time versus just-in-time. <https://www.azure.com/blog/jit-performance-ahead-of-time-versus-just-in-time/>, 2022. Accessed: 2025-11-08.
- [BNE14] Peter Boncz, Thomas Neumann, and Orri Erling. *TPC-H Analyzed: Hidden Messages and Lessons Learned from an Influential Benchmark*, volume 8391 of *Lecture Notes in Computer Science*, pages 61–76. Springer International Publishing, 2014.
- [Bus22] Business Wire. Timescale valuation rockets to over \$1b with \$110m round, marking the explosive rise of time-series data, February 2022. Accessed: 2025-11-19.
- [BZN05] Peter Boncz, Marcin Zukowski, and Niels Nes. Monetdb/x100: Hyperpipelining query execution. In *2nd Biennial Conference on Innovative Data Systems Research (CIDR 2005)*, Asilomar, CA, USA, January 2005.
- [CAB<sup>+</sup>81] Donald D Chamberlin, Morton M Astrahan, Michael W Blasgen, James N Gray, W Frank King, Bruce G Lindsay, Raymond Lorie, James W Mehl, Thomas G Price, Franco Putzolu, et al. A history and evaluation of system r. *Communications of the ACM*, 24(10):632–646, 1981.

- [CEP<sup>+</sup>21] Umur Cubukcu, Taner Erdogan, Rishab Patel, Amulya Dey, Jake Collins, et al. Citus: Distributed postgresql for data-intensive applications. In *Proceedings of the 2021 International Conference on Management of Data*, SIGMOD '21, pages 2461–2476, Virtual Event, China, 2021. ACM.
- [Cli24] ClickHouse. Clickbench — a benchmark for analytical dbms, 2024. Accessed: 2024-11-17.
- [CRCG<sup>+</sup>19] Jesús Camacho-Rodríguez, Ashutosh Chauhan, Alan Gates, Eugene Koifman, et al. Apache hive: From mapreduce to enterprise-grade big data warehousing. In *Proceedings of the 2019 International Conference on Management of Data*, SIGMOD '19, pages 1773–1786, Amsterdam, Netherlands, 2019. ACM.
- [DCL25] Quentin Ducasse, Pascal Cotret, and Loïc Lagadec. War on jits: Software-based attacks and hybrid defenses for jit compilers – a comprehensive survey. *ACM Computing Surveys*, 57(9):1–36, May 2025.
- [Duc24] DuckDB Foundation. pg\_duckdb: Duckdb-powered postgres for high performance apps & analytics, 2024. Open-source PostgreSQL extension. Accessed: 2025-11-23.
- [EH84] Wolfgang Effelsberg and Theo Haerder. Principles of database buffer management. *ACM Transactions on Database Systems*, 9(4):560–595, 1984.
- [ESE06] Stijn Eyerman, James E. Smith, and Lieven Eeckhout. Characterizing the branch misprediction penalty. In *2006 IEEE International Symposium on Performance Analysis of Systems and Software (ISPASS)*, pages 48–58, Austin, Texas, USA, March 2006. IEEE.
- [Far25] John Farrier. Branch prediction: The definitive guide for high-performance c++, March 2025. Accessed: 2025-11-18.
- [Fre16] Andres Freund. Discussion on postgresql performance optimizations. <https://www.postgresql.org/message-id/flat/20161206034955.bh33paeralxbtluv@alap3.anarazel.de>, 2016. Accessed: 2024-11-17.
- [Fre17] Andres Freund. Further insights into postgresql optimization techniques. <https://www.postgresql.org/message-id/flat/20170901064131.tazjxwus3k2w3ybh@alap3.anarazel.de>, 2017. Accessed: 2024-11-17.
- [Fre18] Andres Freund. Postgresql 11 beta 2 released, 2018. Accessed: 2024-11-17.
- [FRMK19] Alireza Farshin, Amir Roozbeh, Gerald Q. Maguire, and Dejan Kostić. Make the most out of last level cache in intel processors. In *Proceedings of the Fourteenth EuroSys Conference 2019*, EuroSys '19, pages 1–17, Dresden, Germany, 2019. ACM.

- [Goo19] Google V8 Blog. Emscripten and the llvm webassembly backend, 2019. Describes LLVM’s C/C++ to WebAssembly compilation process and optimization capabilities including function inlining. Accessed: 2025-11-26.
- [Ham18] Clemens Hammacher. Liftoff: a new baseline compiler for webassembly in v8. *V8 JavaScript engine*, 2018.
- [HD23a] Immanuel Haffner and Jens Dittrich. mutable: A modern dbms for research and fast prototyping. In *CIDR*, 2023.
- [HD23b] Immanuel Haffner and Jens Dittrich. A simplified architecture for fast, adaptive compilation and execution of sql queries. In *EDBT*, pages 1–13, 2023.
- [HRS<sup>+</sup>17] Andreas Haas, Andreas Rossberg, Derek L. Schuff, Ben L. Titzer, et al. Bringing the web up to speed with WebAssembly. In *Proceedings of the 38th ACM SIGPLAN Conference on Programming Language Design and Implementation, PLDI ’17*, pages 185–200, Barcelona, Spain, 2017. ACM.
- [HRTVVA21] José A. Herrera-Ramírez, Marlen Treviño-Villalobos, and Leonardo Viquez-Acuña. Hybrid storage engine for geospatial data using nosql and sql paradigms. *Revista Tecnología en Marcha*, 34(1):40, January–March 2021.
- [Hyd24] Hydra Database Inc. Hydra columnar: Postgres-native columnar storage extension, 2024. Open-source PostgreSQL extension. Accessed: 2025-11-23.
- [Ine21] Elizabeth Inersjö. Comparing database optimisation techniques in postgresql: Indexes, query writing and the query optimiser. Bachelor’s thesis, KTH Royal Institute of Technology, Stockholm, Sweden, 2021. TRITA-EECS-EX 2021:821.
- [ISP17] ISPRAS. Dynamic compilation of sql queries in postgresql using llvm jit. In *PGCon 2017*, Ottawa, Canada, May 2017. Accessed: 2025-11-19.
- [JG23] Michael Jungmair and Jana Giceva. Declarative sub-operators for universal data processing. *Proceedings of the VLDB Endowment*, 16(11):3461–3474, 2023.
- [JKG22] Michael Jungmair, André Kohn, and Jana Giceva. Designing an open framework for query optimization and compilation. *Proceedings of the VLDB Endowment*, 15(11):2389–2401, 2022.
- [Jos21] Rinu Joseph. A survey of deep learning techniques for dynamic branch prediction. *arXiv preprint arXiv:2112.14911*, 2021.
- [Ker21] Timo Kersten. *Optimizing Relational Query Engine Architecture for Modern Hardware*. PhD thesis, Technische Universität München, 2021.

- [Kle19] Martin Kleppmann. Designing data-intensive applications, 2019.
- [CLK<sup>+</sup>18] Timo Kersten, Viktor Leis, Alfons Kemper, Thomas Neumann, et al. Everything you always wanted to know about compiled and vectorized queries but were afraid to ask. *Very Large Data Bases*, 11(13):2209–2222, 9 2018.
- [KLN18] André Kohn, Viktor Leis, and Thomas Neumann. Adaptive execution of compiled queries. In *2018 IEEE 34th International Conference on Data Engineering (ICDE)*, pages 197–208, 2018.
- [KN20] Timo Kersten and Thomas Neumann. On another level: how to debug compiling query engines. In *Proceedings of the workshop on Testing Database Systems*, pages 1–6, 2020.
- [LA04] Chris Lattner and Vikram S. Adve. Llm: A compilation framework for lifelong program analysis & transformation. In *Proceedings of the 2004 International Symposium on Code Generation and Optimization, CGO '04*, pages 75–88, Palo Alto, California, 2004. IEEE Computer Society.
- [LAB<sup>+</sup>20] Chris Lattner, Mehdi Amini, Uday Bondhugula, Albert Cohen, et al. Mlir: A compiler infrastructure for the end of moore’s law. *arXiv*, 2020.
- [LGM<sup>+</sup>15] Viktor Leis, Andrey Gubichev, Atanas Mirchev, Peter Boncz, et al. How good are query optimizers, really? *Proceedings of the VLDB Endowment (PVLDB)*, 9(3), 2015.
- [Linnd] Linux man-pages project. *perf(1) - Linux Manual Page*, n.d. Accessed: 2024-11-20.
- [LLV25a] LLVM Project. Llm’s analysis and transform passes, 2025. Accessed: 2025-11-23.
- [LLV25b] LLVM Project. Orc design and implementation. <https://llvm.org/docs/ORCv2.html>, 2025. Accessed: 2025-11-18.
- [LRG<sup>+</sup>17] Viktor Leis, Bernhard Radke, Andrey Gubichev, Atanas Mirchev, et al. Query optimization through the looking glass, and what we found running the join order benchmark. *VLDB Journal*, 2017.
- [Moo24] MoonCake. HTAP is dead, 2024. Accessed: 2025-11-18.
- [MYH<sup>+</sup>24] Miao Ma, Zhengyi Yang, Kongzhang Hao, Liuyi Chen, Chunling Wang, and Yi Jin. An empirical analysis of just-in-time compilation in modern databases. In Zhifeng Bao, Renata Borovica-Gajic, Ruihong Qiu, Farhana Choudhury, and Zhengyi Yang, editors, *Databases Theory and Applications*, pages 227–240, Cham, 2024. Springer Nature Switzerland.
- [MZJ<sup>+</sup>21] Lin Ma, William Zhang, Jie Jiao, Wuwen Wang, Matthew Butrovich, Wan Shen Lim, Prashanth Menon, and Andrew Pavlo. Mb2: Decomposed behavior modeling for self-driving database management systems.

- In *Proceedings of the 2021 International Conference on Management of Data*, SIGMOD '21, pages 1248–1261, Virtual Event, China, 2021. ACM.
- [Neu11] Thomas Neumann. Efficiently compiling efficient query plans for modern hardware. *Proceedings of the VLDB Endowment*, 4(9):539–550, 2011.
- [NF20] Thomas Neumann and Michael J. Freitag. Umbra: A disk-based system with in-memory performance. In *10th Conference on Innovative Data Systems Research, CIDR 2020, Amsterdam, The Netherlands, January 12-15, 2020, Online Proceedings*. www.cidrdb.org, 2020.
- [Ove24] Stack Overflow. Technology: Databases, 2024. Stack Overflow Developer Survey 2024.
- [Pas25] PassMark Software. Intel core i5-760 @ 2.80ghz benchmark, 2025. Accessed: 2025-11-17.
- [Pos24a] PostgreSQL Global Development Group. *Just-in-Time Compilation (JIT) - PostgreSQL Documentation*, 2024. Accessed: 2024-11-17.
- [Pos24b] PostgreSQL Global Development Group. PostgreSQL database management system, 2024. Version 17.0, Accessed: 2025-11-23.
- [Pos24c] PostgreSQL Global Development Group. PostgreSQL license, 2024. PostgreSQL is released under the PostgreSQL License, a permissive BSD-like license. Accessed: 2025-11-26.
- [Pos25a] PostgreSQL Global Development Group. Explain — show the execution plan of a statement, 2025.
- [Pos25b] PostgreSQL Global Development Group. Memory management, 2025. Server Programming Interface.
- [Pos25c] PostgreSQL Global Development Group. *pgbench*. The PostgreSQL Global Development Group, 2025. PostgreSQL Documentation.
- [Pos25d] PostgreSQL Global Development Group. The query tree, 2025.
- [RM19] Mark Raasveldt and Hannes Mühleisen. Duckdb: an embeddable analytical database. In *Proceedings of the 2019 International Conference on Management of Data*, SIGMOD '19, pages 1981–1984, Amsterdam, Netherlands, 2019. ACM.
- [RPML06] Jun Rao, H. Pirahesh, C. Mohan, and G. Lohman. Compiled query execution engine using jvm, 2006.
- [Sam24] Samsung Electronics. *Samsung NVMe SSD 990 PRO Datasheet*, 2024. Rev. 1.0, Accessed: 2025-11-18.
- [Sea07] Seagate Technology LLC. *Barracuda 7200.12 Serial ATA Product Manual*, May 2007. Rev. H, Accessed: 2025-11-18.

- [SFN22] Tobias Schmidt, Philipp Fent, and Thomas Neumann. Efficiently compiling dynamic code for adaptive query processing. In *ADMS@ VLDB*, pages 11–22, 2022.
- [She17] Arseny Sher. [gsoc] push-based query executor discussion. PostgreSQL Mailing List, March 2017. Accessed: 2024-11-20.
- [SKS19] Abraham Silberschatz, Henry Korth, and S Sudarshan. *Database System Concepts*. McGraw-Hill, New York, NY, 7 edition, 2019.
- [SN22] Moritz Sichert and Thomas Neumann. User-defined operators: Efficiently integrating custom algorithms into modern databases. *Proceedings of the VLDB Endowment*, 15(5):1119–1131, 2022.
- [SSY<sup>+</sup>24] Robert Schulze, Tom Schreiber, Ilya Yatsishin, Ryadh Dahimene, and Alexey Milovidov. Clickhouse - lightning fast analytics for everyone. *Proceedings of the VLDB Endowment*, 17(12):3731–3744, 2024.
- [Sta25] Statistics LibreTexts. Coefficient of variation, 2025. Accessed: 2025-11-23.
- [Sto18] Michael Stonebraker. My top ten fears about the dbms field. In *2018 IEEE 34th International Conference on Data Engineering (ICDE)*, pages 24–28. IEEE, 2018.
- [SZC<sup>+</sup>24] Haoze Song, Wenchao Zhou, Heming Cui, Xiang Peng, and Feifei Li. A survey on hybrid transactional and analytical processing. *The VLDB Journal*, 33(5):1485–1515, June 2024.
- [Tab18] Tableau. Welcome hyper team to the tableau community, 2018. Accessed: 2024-11-17.
- [Tec25] TechPowerUp. Intel core i5-14600k specs, 2025. Accessed: 2025-11-18.
- [Tim24a] Timescale Inc. Timescaledb: Time-series database for high-performance real-time analytics, 2024. Accessed: 2025-11-19.
- [Tim24b] Timescale/Tiger Data. Year of the tiger: \$110 million to build the future of data for developers worldwide, February 2024. Accessed: 2025-11-19.
- [Ute97] Martin Utesch. Genetic query optimization in database systems. Technical report, Institute of Automatic Control, University of Mining and Technology, Freiberg, Germany, February 1997.
- [Vit15] Vitesse DB. Vitesse db - jit compiled query engine for postgresql, 2015. Initial announcement of Vitesse DB as a PostgreSQL JIT compilation implementation.
- [Vit24] Vitesse DB. Vitesse db - enhanced postgresql olap solution, 2024. PostgreSQL-based analytical database system with LLVM JIT and data path optimization. Accessed: 2025-11-26.



- [Xen21] Xenatisch. Cascade of doom, jit, and how a postgres update led to 70% failure on a critical national service, 2021. Accessed: 2024-11-17.
- [Zuk09] Marcin Zukowski. *Balancing Vectorized Query Execution with Bandwidth-Optimized Storage*. 2009.
- [ZVBB11] Marcin Zukowski, BV VectorWise, Peter Boncz, and Henri Bal. Just-in-time compilation in vectorized query execution. 2011.