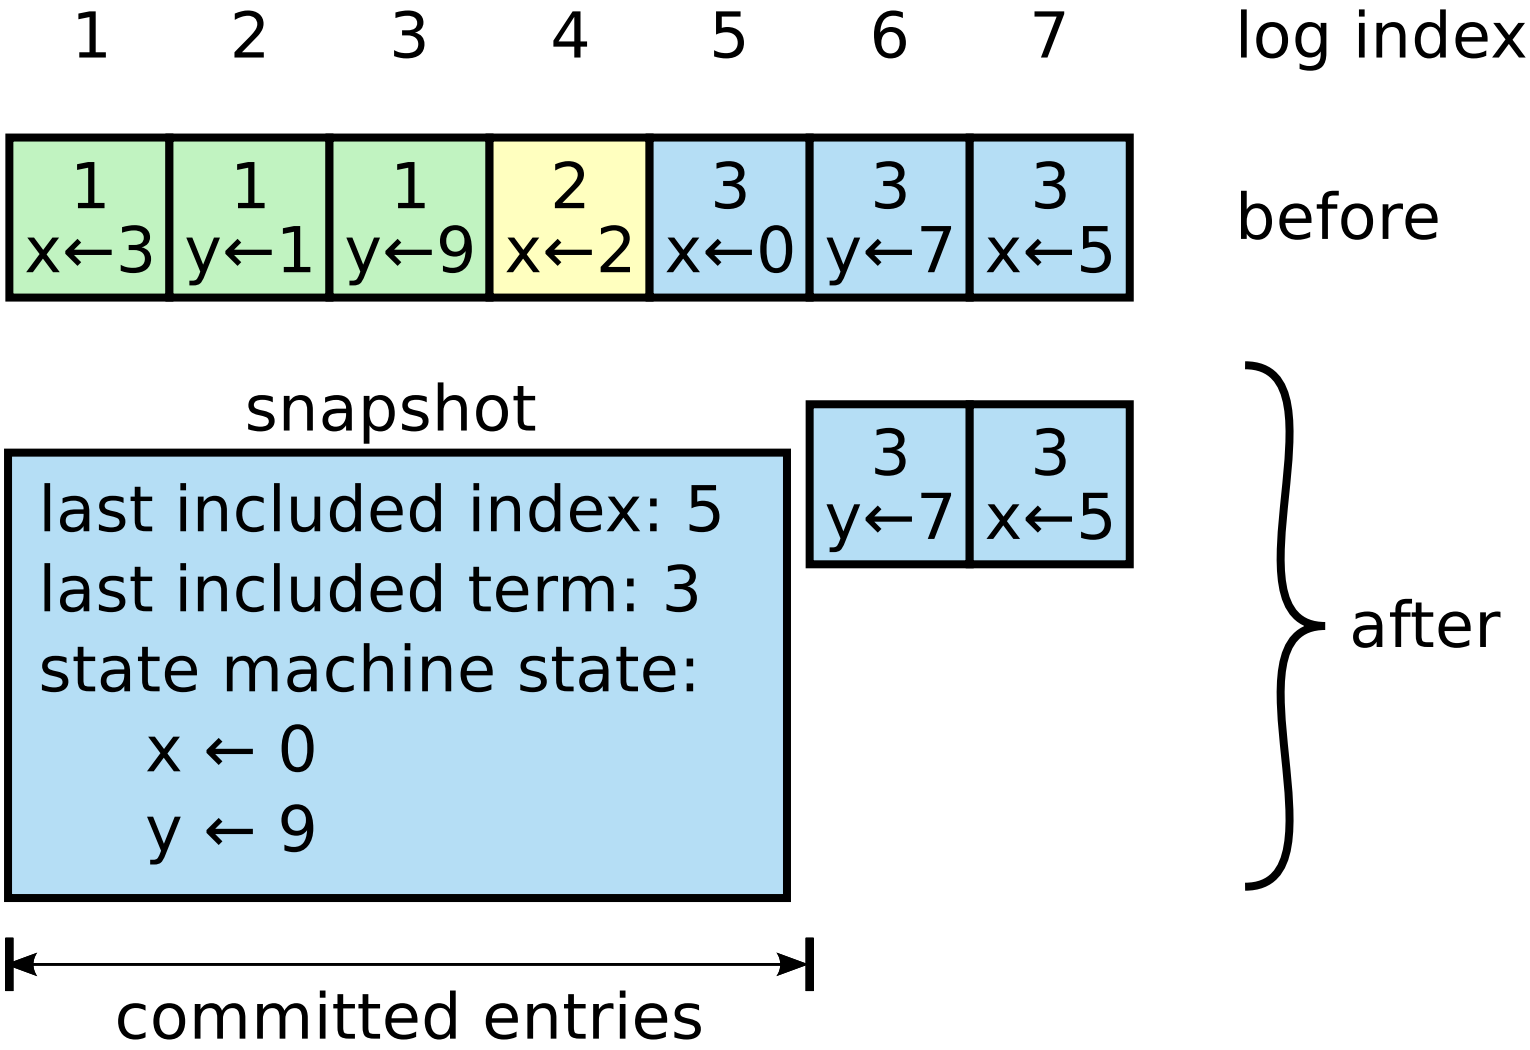


Figure 12: A server replaces the committed entries in its log (indexes 1 through 5) with a new snapshot, which stores just the current state (variables *x* and *y* in this example). The snapshot's last included index and term serve to position the snapshot in the log preceding entry 6.